



MAESTRO 3.0

PROFESSIONAL ARCHITECTURAL LIGHTING

REV.02

i-LÈD

MAESTRO 3.0

PROFESSIONAL ARCHITECTURAL LIGHTING

linealightgroup

LINEA LIGHT GROUP


From the time of its establishment in 1985 to the present, Linea Light Group has grown to the point of becoming and being known as one of the major players in technical and decorative lighting. These two spirits co-exist and fuel one another thanks to the group's constant and continuous technological research.

With the recent acquisition of the historic Stilnovo brand, famous for its innovative and experimental products, Linea Light Group's decorative range is enriched. From Stilnovo, we inherited lighting items designed by Ettore Sottsass and De Pas D'urbino Lomazzi, as well as Joe Colombo, and we brought new lights alongside these icons, developed entirely in-house. The acquisition completes the Decòrative collection made up of products with great personality and a strong dramatic presence.

Linea Light Group simultaneously maintains its presence as a leader in professional lighting with the i-LèD brand, acknowledged as one of the major innovators in the LED area. From 2019, we have been in the urban & industrial lighting segment with dedicated products, reinforcing our presence in the technical lighting market with efficient and innovative products.

The completeness of our catalogues allows us to be present and active on diversified sales channels, so we are able to supply all our customers optimally and quickly. Precision, speed and reliability are the characteristics that have always defined Linea Light Group.



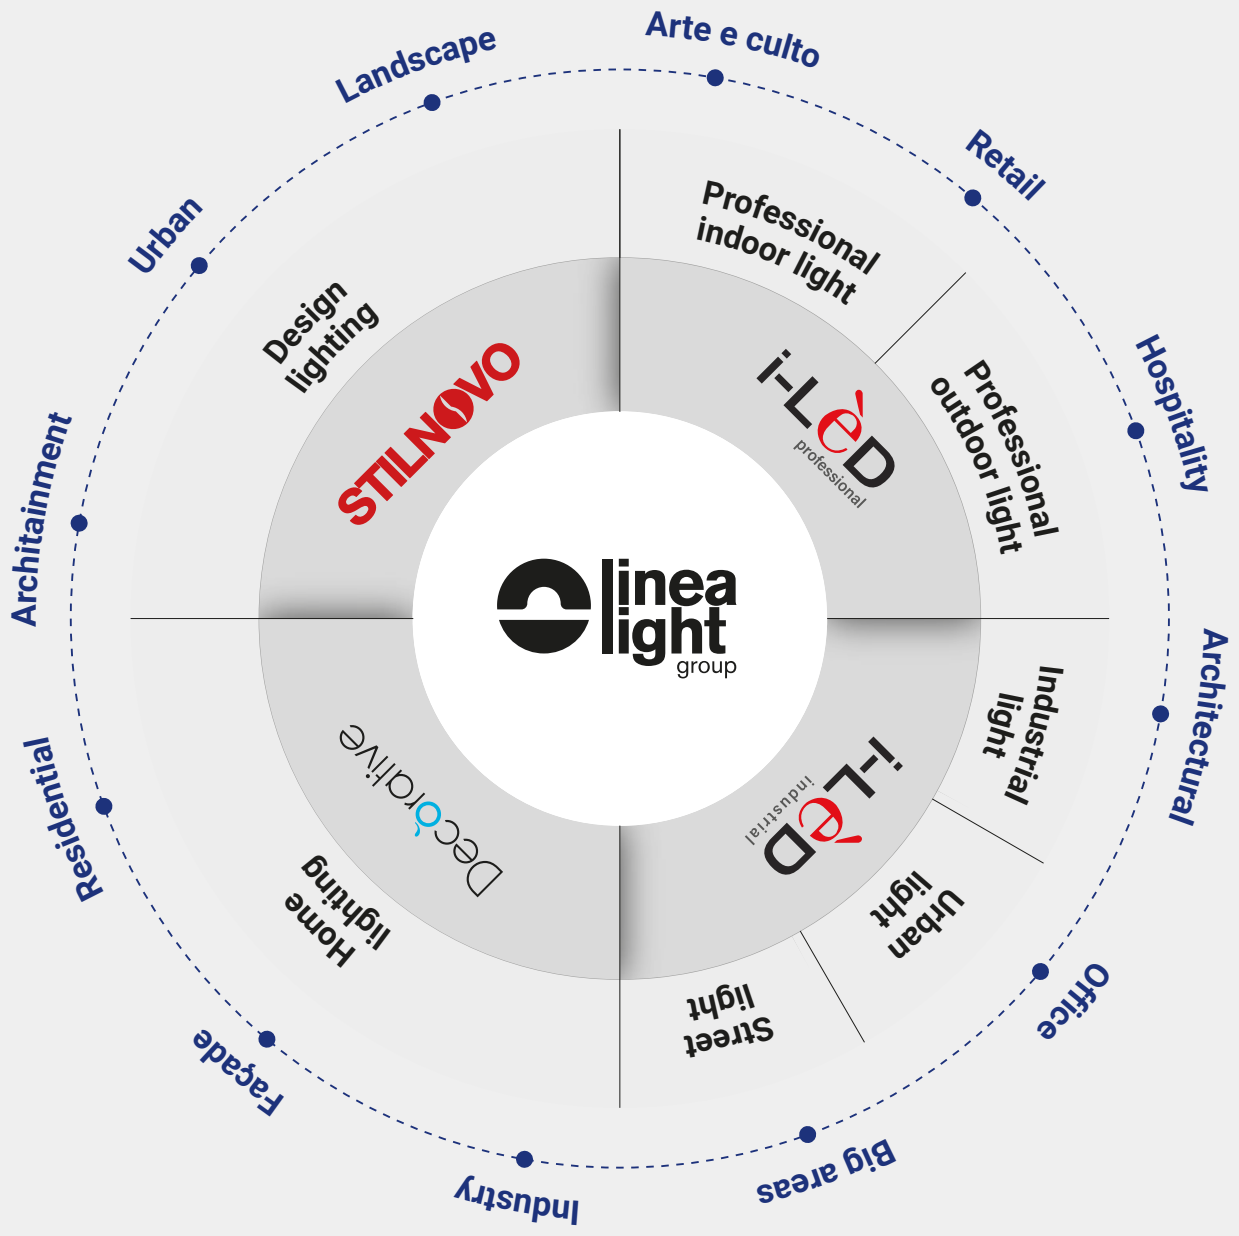




INTERNATIONAL COMPANY

Three production hubs to guarantee
tailored global service at the disposal of
lighting professionals



-  Headquarter
-  Hub-Branches
-  Branches



Linea Light Group is a unique group specialised in a diverse range of domains within the world of lighting. It is independent yet coordinated at the same time. Its formula allows for the creation of complete, unique solutions in any given context: from integrated systems for large residential or public buildings to outdoors or underwater lighting; from home environments to commercial, industrial, institutional or public spaces.

Linea Light Group stands out thanks to a market approach that is attentive to specific requirements and to the demands of local partners. Its "Think Global, Act Local" vision focusses on making connections between different areas and on managing services from a shorter distance. Today, Linea Light Group is a company with a strong international presence and an extensive network: wherever their projects may take them, their partners will be right by their side.





linea
light
group

SUSTAINABILITY, QUALITY AND GUARANTEE

Linea Light Group invests in and continues to pursue a green-oriented philosophy for all company departments, from offices to production to the warehouse. The company has dedicated resources to containing the environmental impact of the various operations for many years, thanks to measures in favour of sustainable development such as the use of almost entirely self-produced renewable energies, the reduction of consumption and CO2 emissions, as well as the recovery and recycling of production scrap and raw materials. These are just a few of the eco-compatible operations undertaken to grow a virtuous economic model. Waste disposal and recycling are two important issues for the Group: all company waste is correctly disposed of, following precise regulations and strict protocols in order to avoid any dispersal into the soil or waterways. This is why, as a Group, our efforts are constantly focused on the research and development of solutions intended to reduce environmental impact to a minimum.

One example is the use of new organic oils as lubricants for our production machinery such as C.N.C. machines and cutting lines. For this instrumentation, we use plant-origin lubricating coolants (synthetic esters-based) and free of mineral oil, chlorine, secondary amines, formaldehyde-releasing preservatives, boron and derivatives thereof. At the end of the production cycle, the depleted oils are recovered and recycled by specialised and certified companies. In addition to this, we also manage other aspects that have led us to an increasingly lower environmental impact. In the first place, the replacement of obsolete and energy-intensive machinery with new, more efficient and therefore more effective equipment. Secondly, the use of special air filters which significantly reduce the emissions of the laser-cutting machinery. The work stations in the individual departments have also been designed to reduce and optimise energy consumption.



MADE IN ITALY

Linea Light Group is a manufacturing organisation which, along with its industrial capacity, has skilfully preserved a measure of that manual craftsmanship which has always characterised "Made in Italy" products. From conception to creation and all the way to assembly, our products are the combination of high technology, research and know-how, a recipe that has made Italian companies unique the world over.

Alongside traditional machines, we have added new, high-performance technologies that allow us to carry out all the processes in-house that have made our products unique. Like the PMMA laser micro-etching machine that is fundamental to OptiLight Technology®.


Linea light Group has equipped itself with systems for waterproofing the luminaires with features for permanent immersion, for perfect sealing of the diffusers and for ultrasonic welding by creating dedicated departments. We have gone beyond construction, a perfect product must also be tested and certified, which is why Linea Light Group has its own in-house laboratory. All tests can be carried out here, from heat resistance, impact resistance, up light carriage ability testing to IP classes for immersion products.




Autostore headquarter, Treviso, Italy



DESIGN COMPLETENESS

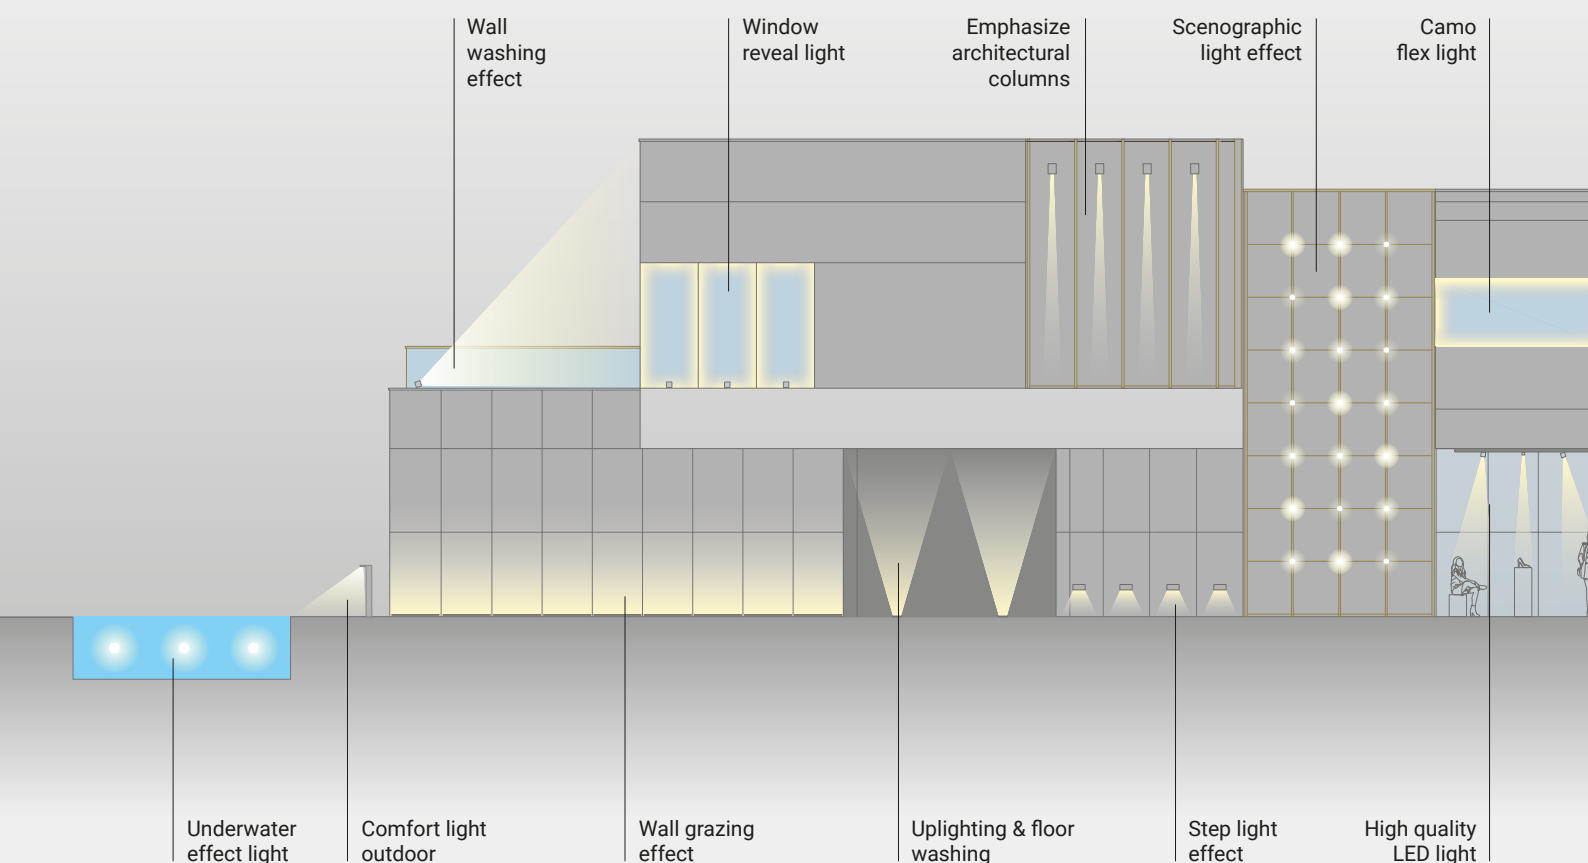

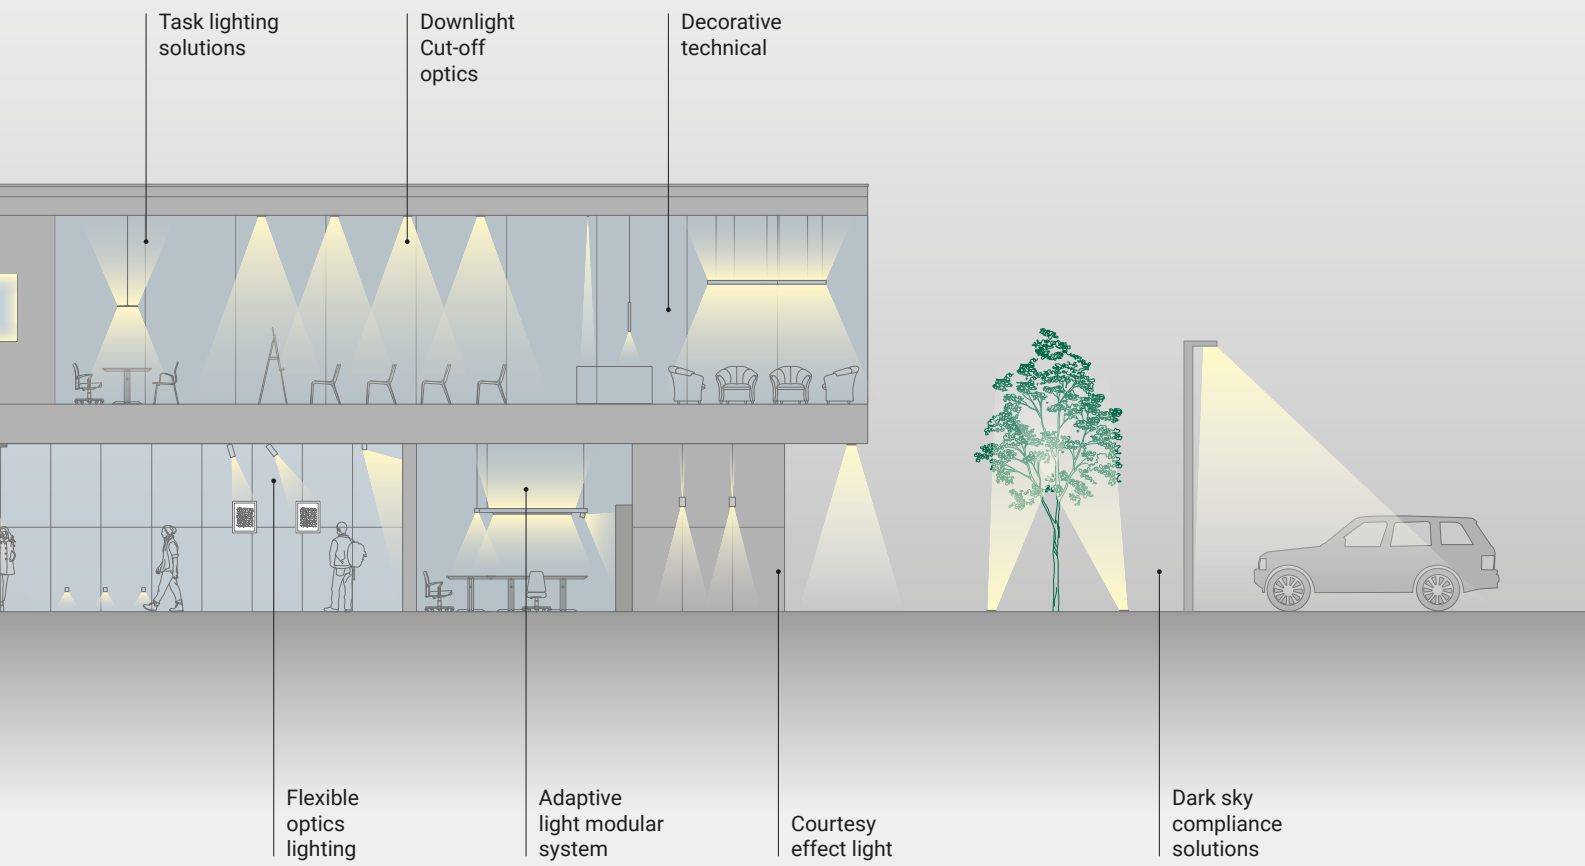

SOLUTIONS FOR EVERY DESIGN CATEGORY

With more than 40,000 product codes, Linea Light Group manages to meet any and all demands from the global Market, guaranteeing and delivering devices designed for any inhabited environment. The company's extensive sales network and 15 locations around the world have enabled it to grow and develop into one of the best known and most appreciated lighting companies among professionals. Our i-LèD section ranges from entertainment to architectural, hospitality and retail to residential.



Architainment

Linea Light Group has designed products conceived to best meet even the particular demands of the Entertainment market, successfully making light a dramatic and decorative material, in addition to being functional. Thanks to the use of personalised devices and dedicated management protocols, it has become a point of reference in this sector as well. Lighting solutions from i-LèD enhance details and geometry, making environments and colours vivid and sharp.

Damac Tower, UAE



Art & Worship

i-LèD has always accompanied Linea Light Group in its most challenging projects, such as those aimed at illuminating art and places of worship. In order to provide the right light for Art, high performance devices and LED sources capable of enhancing shapes and colours are needed. Our light sources are designed to correctly illuminate frescoes and works of art with full respect for the artist and his work. The great versatility of our lighting solutions makes it easy to design lighting for the various stages of the liturgy. Thanks to the near-invisibility of our products, sacred architecture can be illuminated effectively and discreetly.


Museum des Arts Décoratifs, France



Architectural

i-LèD, a complete collection of technical luminaires for indoor and outdoor architectural lighting design, provides every designer with products with sources and technologies capable of satisfying even the most demanding customers. Linear profiles, downlights and uplights with ever smaller dimensions and high performance make it possible to solve the most complex and delicate situations. With i-LèD, architecture finds a new expressive form, capable of enhancing the details and the materials.

Vida residence, UAE

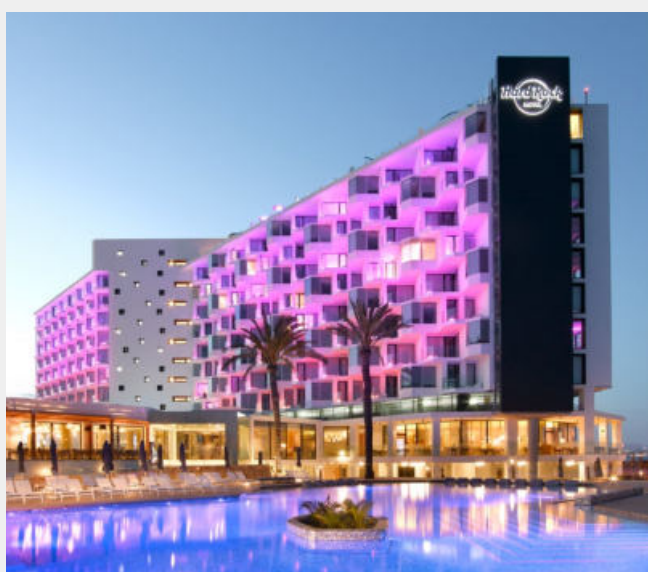

Hospitality

Our hospitality products transform hotels, resorts, and restaurants into magical places to experience haute cuisine, wellness, and relaxation.

Thanks to invisible luminaires that perfectly integrate their light with the architecture, Linea Light Group can create the right atmosphere in spaces by perfectly balancing light and shadow.

i-LèD offers lighting solutions that respect the specific needs of the different areas to be illuminated, offering products with perfect colours and excellent visual comfort.

Hard Rock Hotel, Spain



Office

The modern Office environment is a functional mixture of open and closed spaces. Our i-LèD products combine power, visual comfort, and glare control and, thanks to their great versatility, perfectly meet all the needs expressed by our customers.

Suspended, recessed and modular systems incorporate light sources designed to avoid eye strain in front of the video terminals to achieve comfortable lighting that enhances occupancy and productivity and stimulates creativity and operability.


NGC Medical HQ, Italy



Retail

Every retail project has its own light, which has to give prominence and consistency to the products on display. We have designed LED sources with technological characteristics that are ideal for lighting any space, from small shops to large shopping centres. Our engineers work alongside the designers on a case-by-case basis and solve the complexities and special requests presented to them. Linea Light Group offers architects and lighting designers tailored products that can be modelled based on the various display needs. This allows the end customer to enjoy the shopping experience in a more conscious and functional way.

Timinis Store, Cyprus

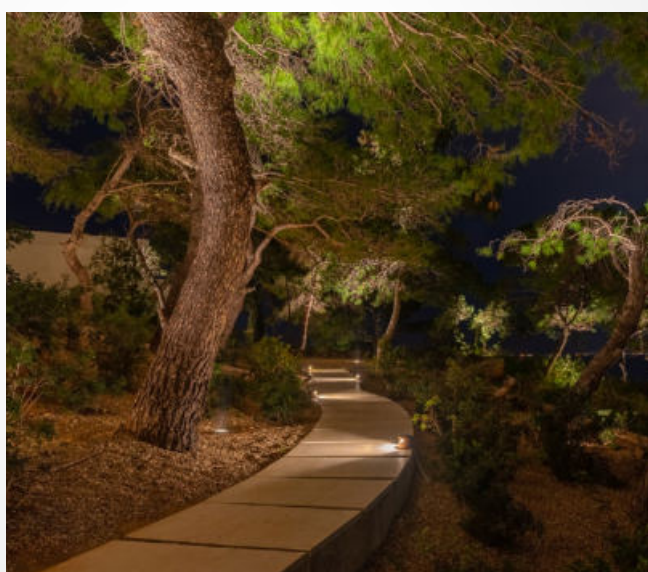

Landscape

Landscape lighting, natural or urban, has transformed and evolved. From purely functional, it has taken on significant aesthetic characteristics. Outdoor living has become increasingly more enjoyable and safer. LED technology has expanded the designer's levels of freedom and favoured greater customisation of products and spaces. LED has allowed Linea Light Group to make high performance fixtures and it has allowed designers to bring all of their lighting ideas to life. With the right lighting, a garden or a street become places to experience even at night, in complete safety and visibility.

Four Season Hotel, Greece



Residential

For all residential realisations, Decòrative is the catalogue of reference. This expansive collection of designer lights is categorised by type and material, designed to offer the perfect illumination for the home. The Decòrative catalogue is flanked by the products of the recently-acquired historic brand, Stilnovo. Focused on research and experimentation, the collection is able to offer innovative and surprising products. Recently, this has been achieved with new products bearing an elevated aesthetic and technological profile that complete the offer. Both collections utilise warm LED light sources, ideal for all domestic, indoor and outdoor environments, and for all styles of living.

Private House, Italy



Industrial

Light in the workplace and, more specifically, in industrial settings is a key issue for human well-being. Working in proper lighting and visual comfort improves efficiency, operability, and productivity. Thanks to IP69 protection, the latest protocols, and ultra-technological materials such as nano polymers, Linea Light Group offers robust and durable solutions. Our luminaires i-LèD in fact can be used in even the most extreme industrial sectors, including Atex, in complete safety and compliance with regulations.

Zeche Zollverein, Germany



Urban light

Lighting every corner of the cities in the right way and with the right hierarchy is also a way of protecting them. From the street to the garden to the historic building, every urban object we illuminate meets all the aesthetic and regulatory requirements demanded by its surroundings. At Linea Light Group, we design and engineer every single technological, aesthetic, and electronic detail of our luminaires i-LèD, from the electronic boards to the optics. At Linea Light Group, we design products to last over time, maintaining performance and technological management to meet all designers' needs.

Capricorn Bridge, Germany

CUSTOM

Thanks to 35 years of experience, Linea Light is able to meet any and all needs of designers, placing skills and creativity and their disposal. Our history has allowed us to project ourselves into the future, listening and developing unique solutions. Linea Light was one of the first companies to use and understand the great potential of LED, a technology that offers infinite customisation possibilities.

This is an on-demand service that Linea Light Group makes available to all professionals. Customisation of one of our products follows a precise path. This allows us to provide the maximum guarantee of feasibility and reliability depending on the type of fixture. All the requests we receive are carefully assessed and measured, estimating feasibility and quantity. The latter are important elements for correct time and cost management, both decisive factors for a correct design.

Following these indications, we have fine tuned three customisation levels to meet the needs of designers.

Adapting catalogue products:



We can adapt the products in our catalogue with your finishes and sizes. You choose the fixture and we'll make it following your specifications.

Personalising the sources:

We can outfit products with customised sources and performance. Correctly lighting a space is fundamental. With our skills, you will be able to shape your light.

Designing unique products:

We can make a product following your light idea, packaging a unique and exclusive luminous item.

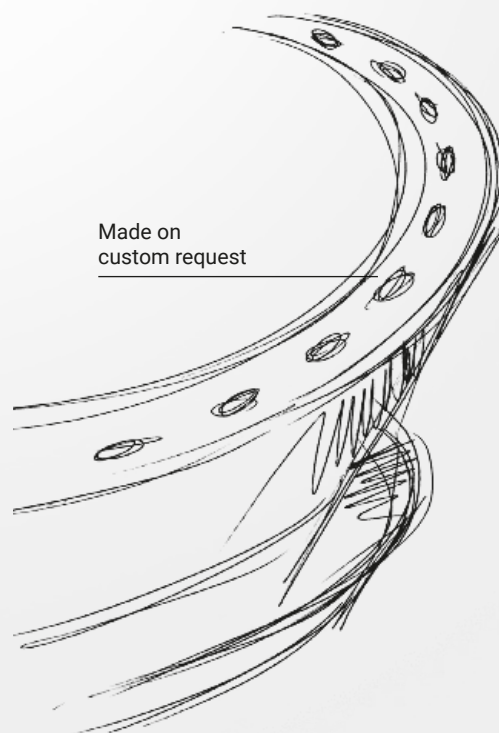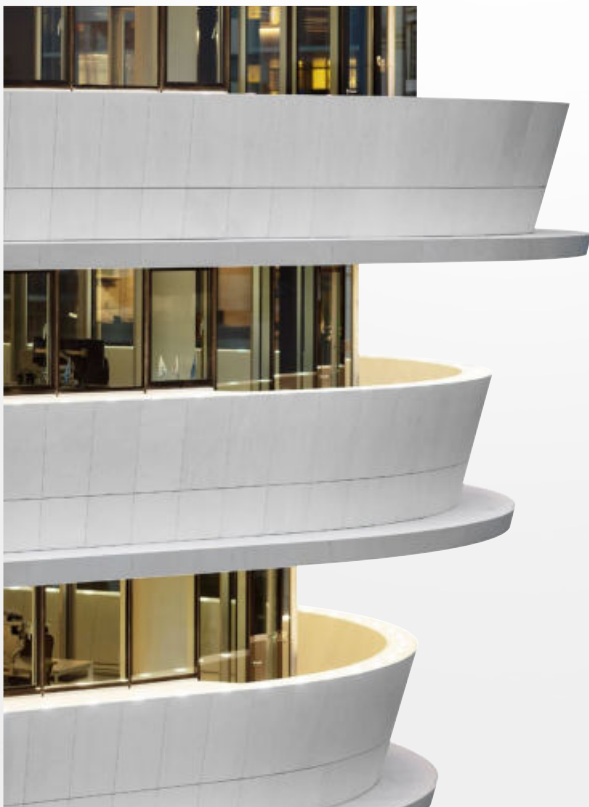



CONNECTED WITH THE FUTURE

Bluetooth Mesh is the new frontier for the fast connection of wireless hubs. It is a fundamentally different technology from any Wi-Fi system implemented in lighting control. Based on an **international standard** and developed by Bluetooth SIG (Special Interest Group), the mesh network allows **interoperability** between devices from different manufacturers, allowing our products to be used on any network of this type. Bluetooth 5.0 is the most advanced version of the standard on the market. It streamlines the presence of multiple devices in the same environment thanks to the drastic reduction of interference compared with the previous versions. Furthermore, using a broader band, Bluetooth 5.0 registers an increase in data transfer capacity and provides wider and stabler coverage, maintaining low energy consumption.



Stability, reliability and security are the three main benefits guaranteed by using the new protocol adopted by Linea Light Group. **Stability**, a single, faulty element does not compromise the correct operation of the rest of the network. **Reliability**, managing and inspecting any hub on the network is easy. **Security**, advanced features have been incorporated in the protocol stack.


Technology Partner

SILVAIR

Linea Light Group has chosen Silvair as the control and management solution for the system. You can configure your network in a few, simple steps (page 920), using the Silvair App, you can configure the settings of systems in multi-purpose rooms, office areas, large-scale organised distribution areas, public facilities and residential areas.

Constant monitoring from anywhere

Using the cloud-based API service provided by Silvair, it is possible to interface with third-party bms or monitoring systems, allowing control of energy, consumption, detection of presence in the areas in order to adjust the system's lighting based on the activity and operation of the specific areas.

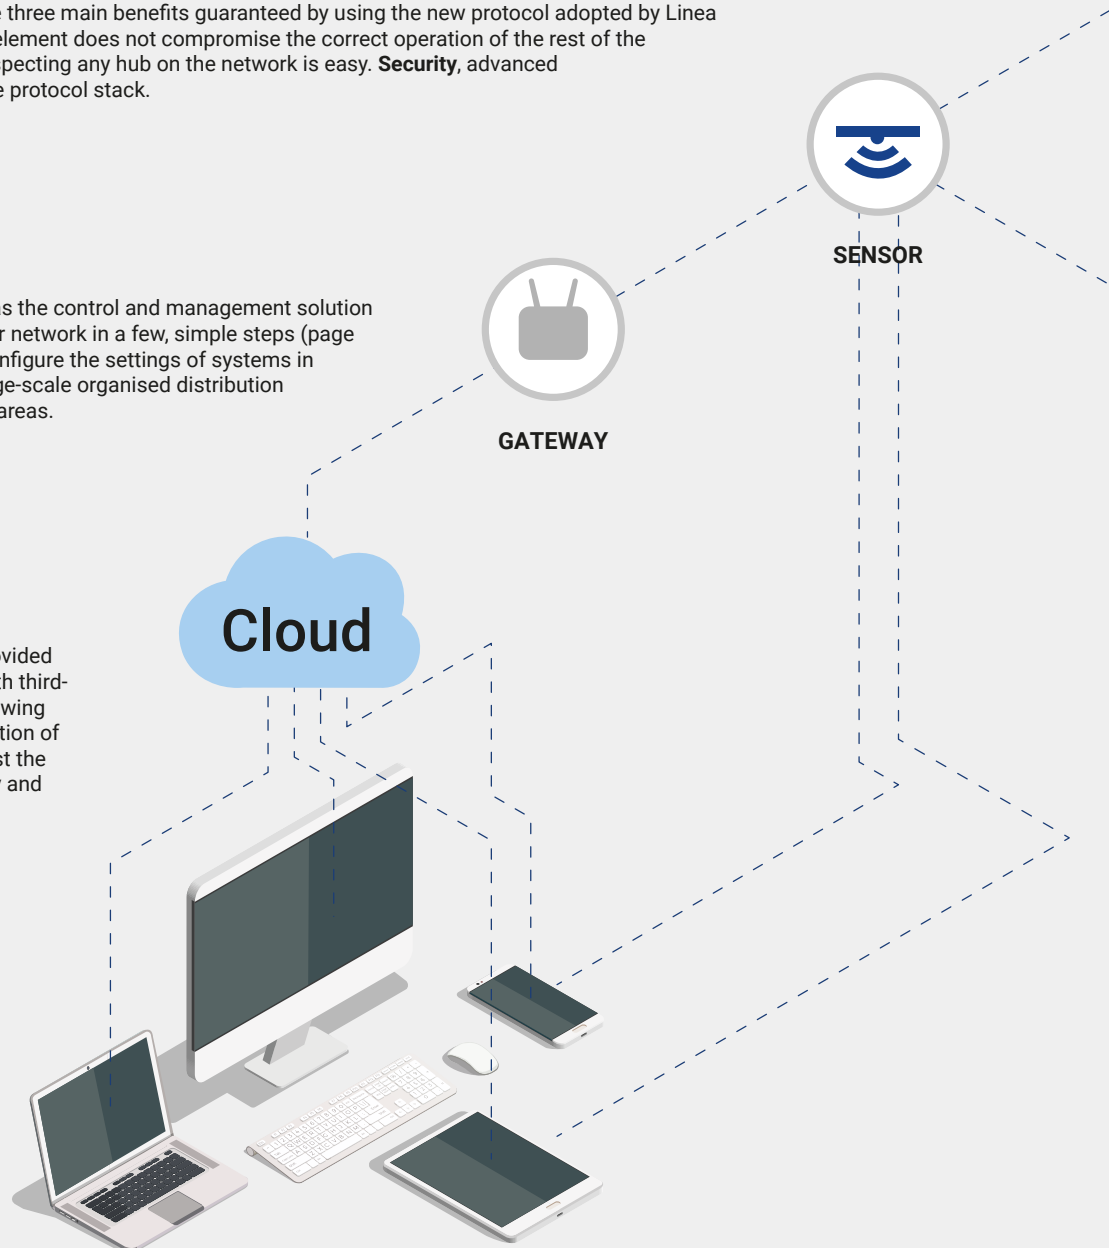

Scalability of the system

Each point of the network acts as an extender for the next, simplifying the implementation and updating of the network. The extraordinary versatility of this technology allows installation of the fixtures up to 25 metres from one another in ideal conditions.

Easy to configure

As vast as it may be, a mesh network can be managed with extreme precision, facilitating programming, directing the scenes and simplifying maintenance operations. Two significant features complete the Bluetooth Mesh protocol: being futureproof and using an advanced cloud computing service to remotely monitor the status of the network.










ALL INFORMATION JUST A CLICK AWAY

Always and everywhere, the website is a container of information and news on the whole world of Linea Light Group. A constantly updated tool where it is possible to find project references, training articles, but also advanced code search systems, as well as offering "comparison" solutions for comparing product families. In short, everything you need for the development of your project!

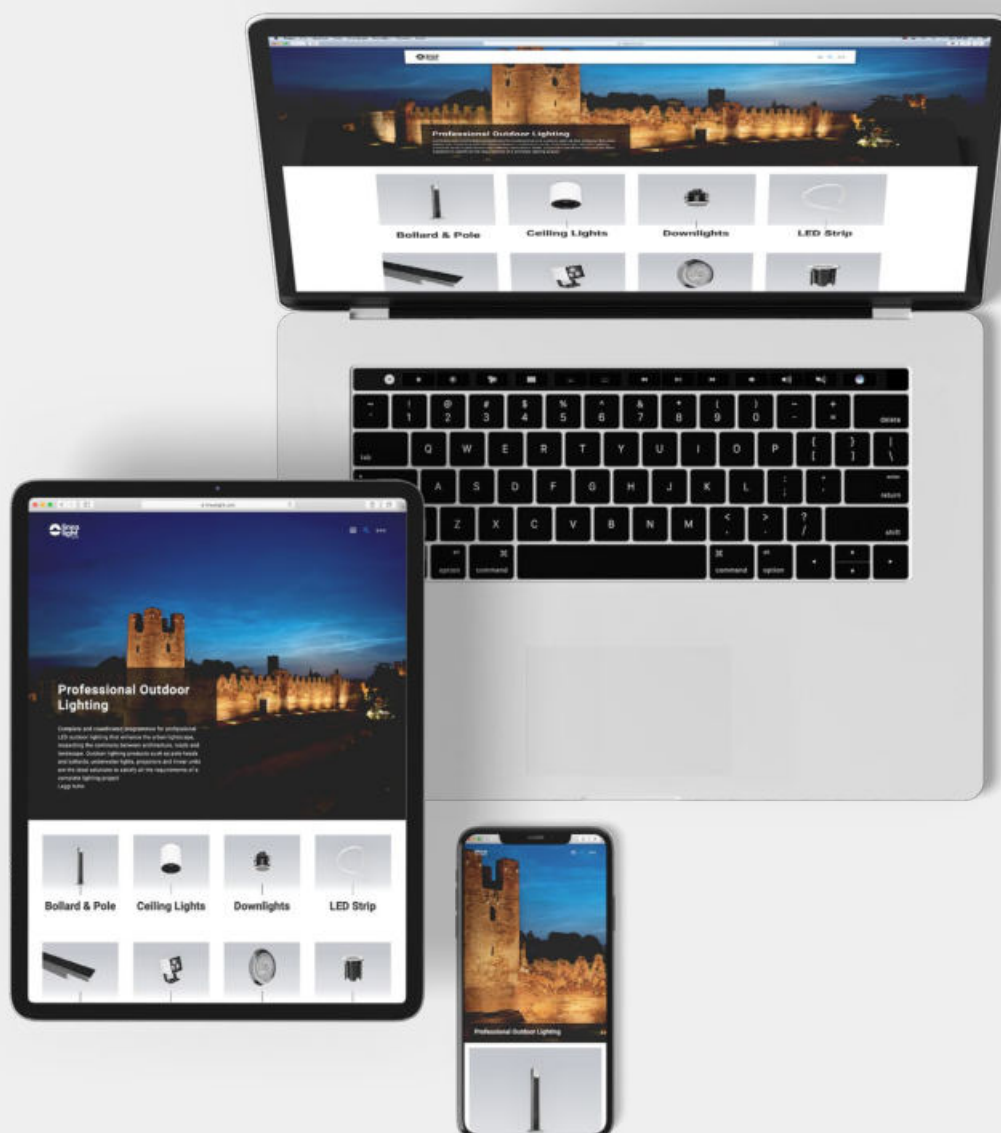

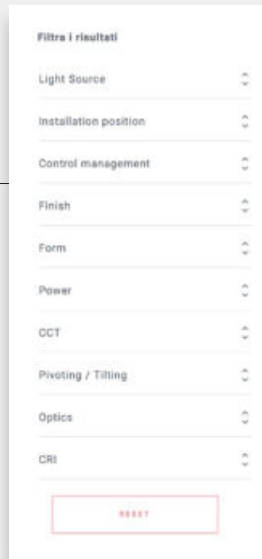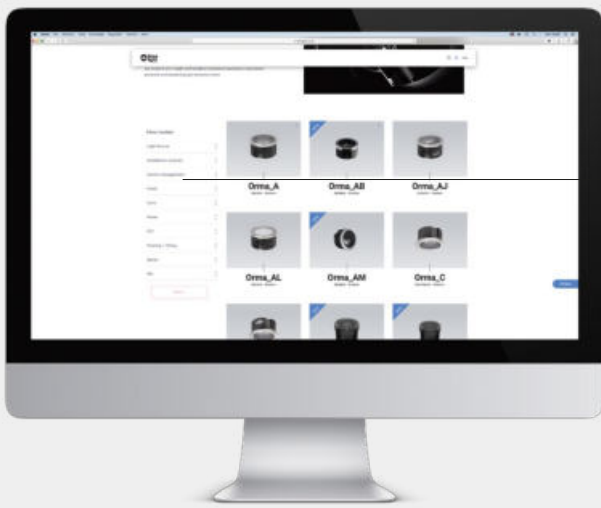


Search using filters

On all the product family pages, there are filters on the side that let you narrow down your search by entering the characteristics (type of source, installation position, control management, etc.). Use this function to arrive at the selection of the desired product.

If you are undecided, compare the products!


You can compare up to 5 products by simply moving the cursor over the product images and clicking the "add to comparison" icon at the top right. A blue tick will indicate that the products have been added to the comparison.

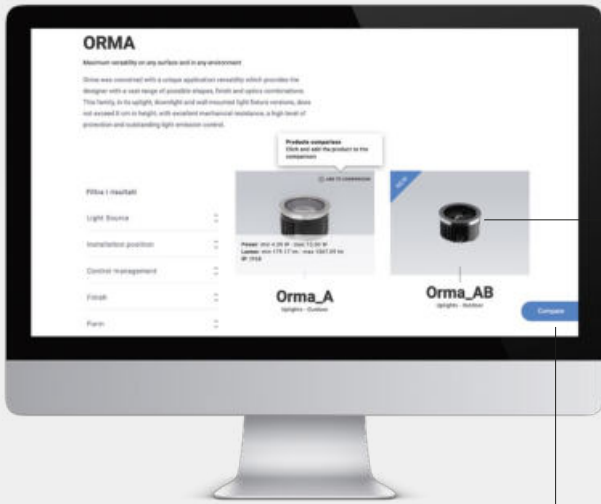


Orma



Orma_AB



When the blue "Compare" button anchored on the right side of the screen is clicked, a page will open with a comparison of the selected product families.

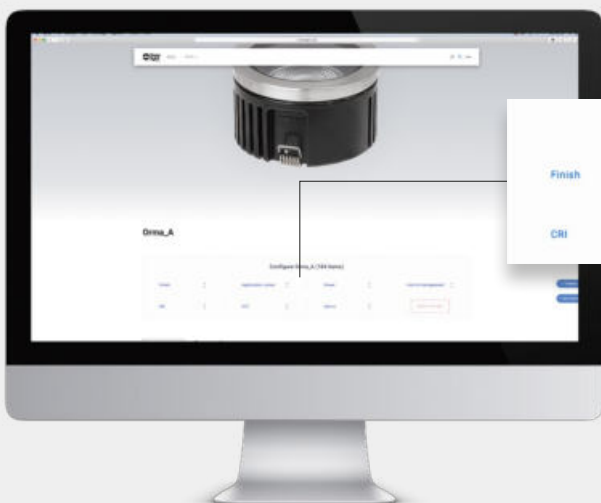

Configure your code

Use the code configurator found on every product page. This tool will help you find the exact code based on your needs.

HOW TO READ PRODUCTS

Vos_R | Downlight | powerLED 1,5 W 500 mA

Family Name | Chapter | L.E.D. Type | Power | Electronics Characteristic



Pictograms
How to read symbols
see Page 968

Light emission

Image of the product with relative technical dimension drawing plus information on the hole to be drilled on the ceiling

| Finish | Product code | Internal equipment | Colour Rendering Index |
|--------|---------------|--------------------|------------------------|
| | CRI 92 | CRI 92 HC | CRI 80 HC |
| White | 90638 | 90646 | 90416 |
| Black | 90639 | 90647 | 90417 |

| | Cct | Im-S - D CRI 92 | Im-S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|----------------------------|
| M | 2700 | 395 - 163 | 490 - 202 | 15 Spot (15°) |
| W | 3000 | 423 - 174 | 490 - 202 | 30 Flood (29°) |
| N | 4000 | 456 - 188 | 529 - 218 | 60 Wide Flood (50°) |

Code and Colour temperature | **Im-S** Lumen Source | **Im-D** Lumen Delivery | Code Optics | Angle of opening of the light beam

The effective flux (**Im-D**) is detected, taking as a reference the Flood optics and a neutral colour finish. For more in-depth details, please consult the technical data sheets on the website: linealight.com

How to configure a product: guide to the composition of the finished code

$$90638 + M + 60 = 90638M60$$

1st product code | 2nd temperature code | 3rd optics code | Composed finished code

| Code Electronics | Electronic and dimensional information | Code composition for converter | | |
|---|---|--|---|--|
| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 138 x l 22 x h 21 | 0/1-10V converter 1 art. p 138 x l 22 x h 21 | DALI converter 1 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Recessed casing code | Recessed casing dimensional

Vos_R | Downlight | powerLED 1,5 W DC 500 mA



| | CRI 92 | CRI 80 |
|-------|--------|--------|
| White | 90622 | 90408 |
| Black | 90623 | 90409 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|----------------|
| M | 2700 | 134 - 79 | 187 - 104 | 20 Spot (23°) |
| W | 3000 | 153 - 85 | 199 - 110 | 35 Flood (34°) |
| N | 4000 | - | 213 - 118 | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|--|--|--|--|---|-------------------------|
| ON/OFF 1 - 3 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |
| ★ | ★ | ★ | ★ | ★ | ★ |

Vos_R | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------|-----------|--------|-----------|
| White | 90638 | 90646 | 90416 | 90644 |
| Black | 90639 | 90647 | 90417 | 90645 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|------------------|
| M | 2700 | 395 - 163 | 490 - 202 | 15 Spot (15°) |
| W | 3000 | 423 - 174 | 490 - 202 | 30 Flood (30°) |
| N | 4000 | 456 - 188 | 529 - 218 | 60 W.Flood (50°) |


Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|--|--|---|--|-------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |
| | | | ★ | |

Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Vos_R | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------|-----------|--------|-----------|
| White | 90626 | 90634 | 90412 | 90632 |
| Black | 90627 | 90635 | 90413 | 90633 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|------------------|
| M | 2700 | 157 - 69 | 219 - 96 | 15 Spot (21°) |
| W | 3000 | 179 - 78 | 233 - 102 | 30 Flood (26°) |
| N | 4000 | - | 249 - 109 | 60 W.Flood (52°) |


Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC |
|--|--|---|--|---|-------------------------|
| ON/OFF 1 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |
| | | ★ | | ★ | |

Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Vos_R | Downlight | powerLED 6 W DC 500 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------|-----------|--------|-----------|
| White | 90650 | 90658 | 90420 | 90656 |
| Black | 90651 | 90659 | 90421 | 90657 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|------------------|
| M | 2700 | 532 - 231 | 659 - 287 | 15 Spot (15°) |
| W | 3000 | 569 - 248 | 659 - 287 | 30 Flood (30°) |
| N | 4000 | 614 - 267 | 711 - 309 | 60 W.Flood (50°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |
| | | | ★ |

Recessed casing Pag. 21

99848 H. 28 - Ø. 41


RTG 90650W30 / 90650W60 / 90420W30 / 90420W60

Private House | Lodi, Italy




indoor range index


Downlights

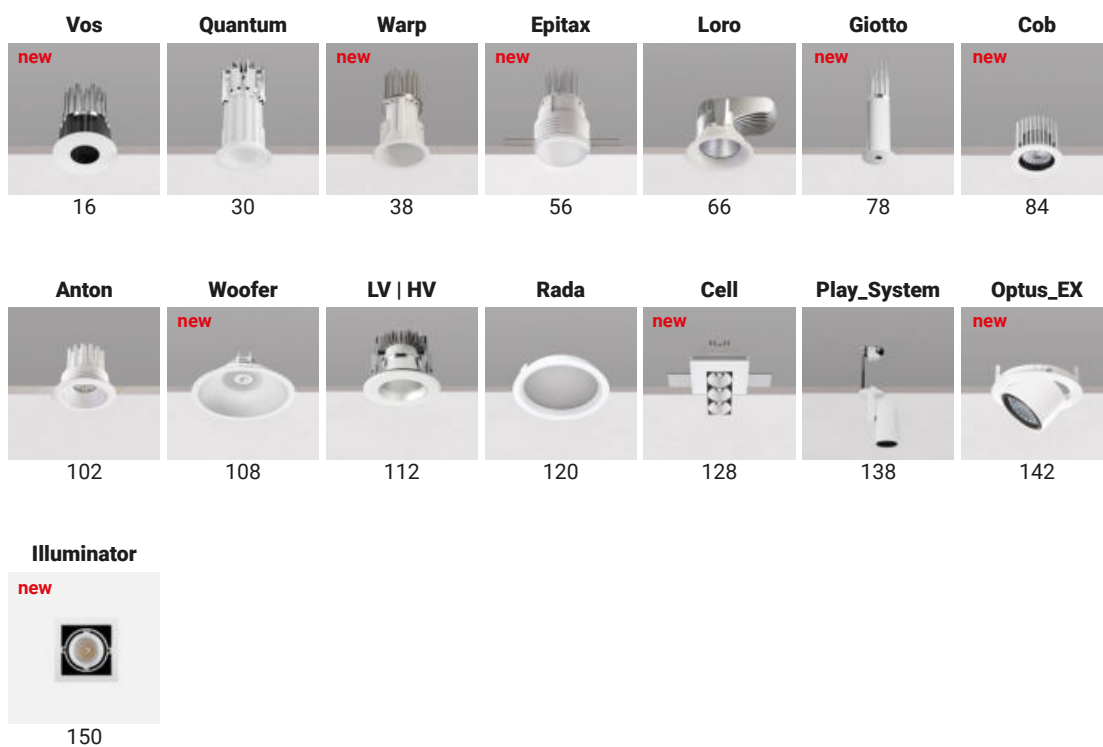


Projectors

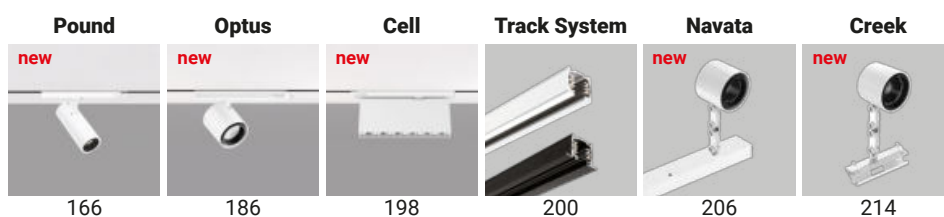

Ceiling

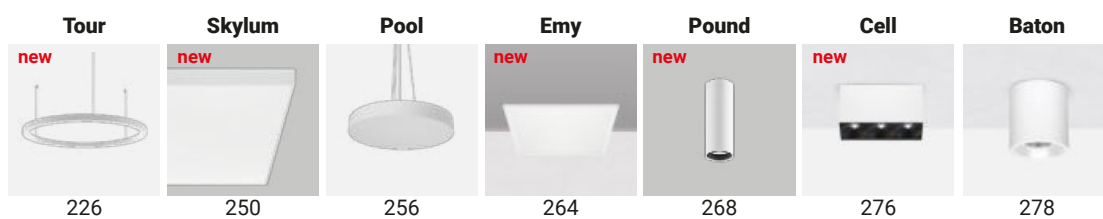

Linear systems

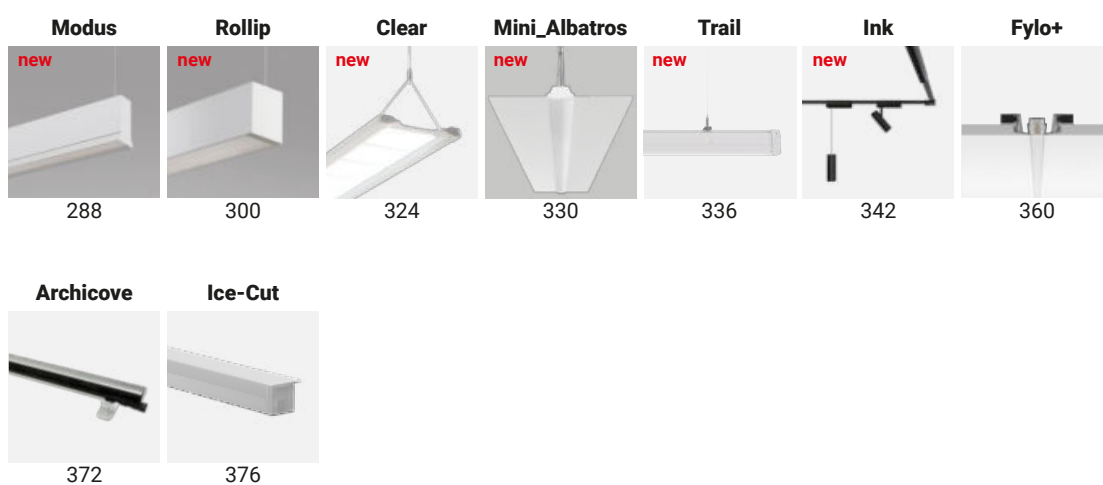

Path markers



Small spotlights




Small projectors



Environment care lighting



Emergency




outdoor range index


Ceiling lamps




Wall lamps

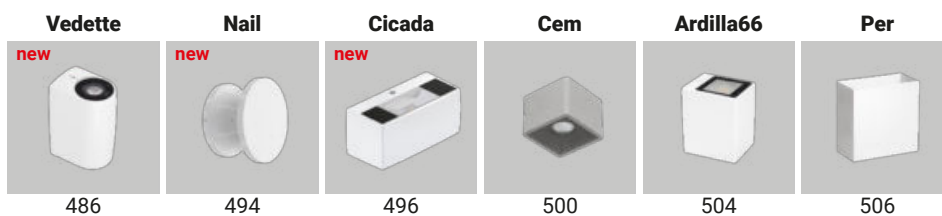



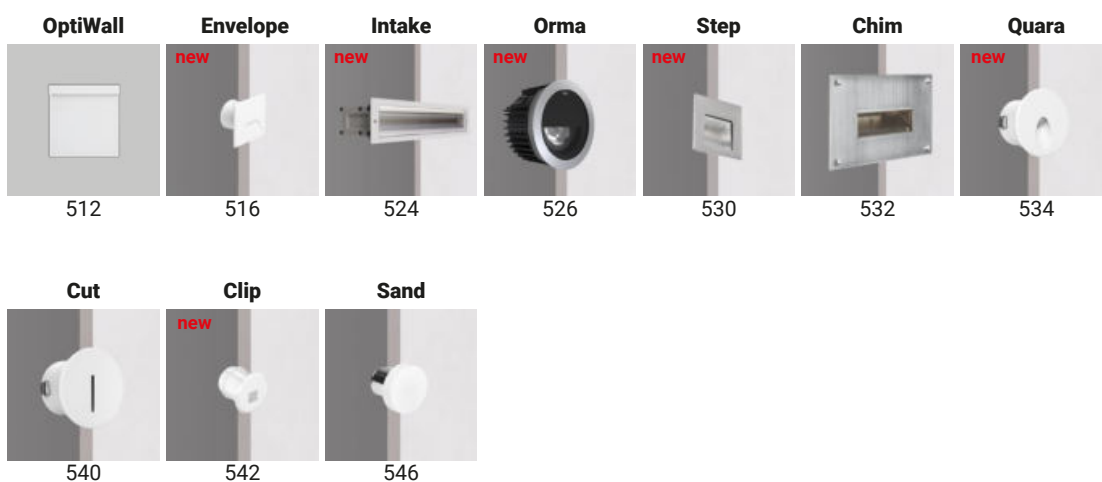



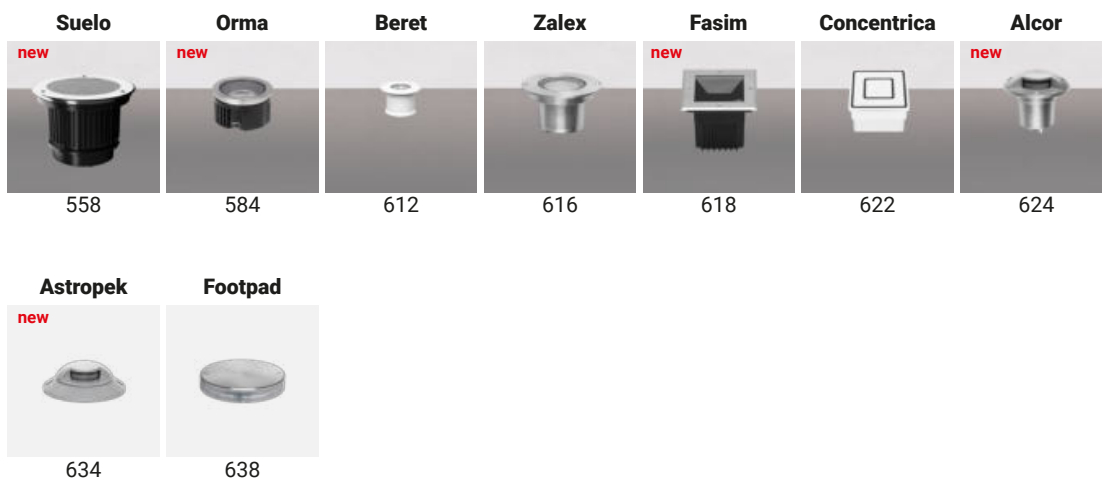





Wall path markers











Uplights & inground lamps




Bollards & poles

| | | | | | | |
|---|---|---|--|---|---|---|
| Ryo  646 | Joe  652 | Bond Pro  658 | Puro  662 | Opti-Pole  664 | Peak <i>new</i>  668 | Nail <i>new</i>  676 |
| Apache <i>new</i>  678 | Blum <i>new</i>  682 | Pilos  686 | Stalk  688 | Lino <i>new</i>  690 | | |

Linear light









| | | | | | | |
|--|--|--|---|--|---|---|
| Archiline <i>new</i>  700 | Xenia <i>new</i>  722 | Paseo <i>new</i>  744 | Thin66  758 | Ice-cut66  762 | Skin <i>new</i>  764 | Dirigo  770 |
| Fylo+ Outdoor  778 | | | | | | |

Accent lighting

| | | | | | | |
|---|--|---|---|--|--|---|
| Eyelet65  788 | Periskop  790 | Shaker <i>new</i>  800 | Gardener  802 | Narcissus  806 | Clivo <i>new</i>  810 | Iris67 <i>new</i>  812 |
| Vuelta  816 | Prolamp <i>new</i>  818 | Archiline-twin  822 | | | | |

outdoor range index

Light effects






| | | | | | | |
|---|---|--|---|---|---|--|
| Arcada  830 | Xenia new  836 | Orma new  838 | Myia  840 | Loop66  842 | Xenia_Pixel new  846 | Pixie  848 |
| Paseo_Pixel new  850 | | | | | | |

Underwater

| | | | | | |
|--|---|--|--|---|--|
| Nautilus new  860 | Suelo Underwater  870 | MK68 new  872 | Sub  874 | Rodix new  876 | Rubber new  878 |
|--|---|--|--|---|--|










flex light range index

Flex light

| | | | | | | |
|--|--|---|--|--|---|--|
| Rubber new  884 | Ribbon Plus  900 | PU_C  902 | Ribbon new  906 | Dropper  908 | Silicone_C  909 | Accessories  912 |
|--|--|---|--|--|---|--|

electronics range index

Electronics

| | | | | | | |
|--|---|---|---|---|---|--|
| Bluetooth new  922 | Over Voltage  923 | Driver C.C. INDOOR  924 | Control C.C.  930 | Driver C.V. INDOOR  932 | Control C.V.  935 | Driver C.C. OUTDOOR  936 |
| Driver C.V. OUTDOOR  940 | Other  945 | | | | | |

Bosco Verticale | Milan, Italy
2015 BEST TALL BUILDING WORLDWIDE - Council on Tall Buildings and Urban Habitat
2018 RIBA AWARD FOR INTERNATIONAL EXCELLENCE - Royal Institute Of British Architects





LIGHT UP NEW IDEAS!



Indoor

Downlight

Projectors

Ceiling and
pendant lamps

Linear system

Path markers

Small spotlights

Small projectors

Environment care lighting

Environment care lighting

Emergency

Emergency

Outdoor

Ceiling lamps

Wall lamps

Wall path markers

Uplights

Bollards & poles

Linear lights

Accent lighting

Light effects

Underwater

Flex light

Flex light

Electronics


Electronics

Info

Index / Credits



Downlight

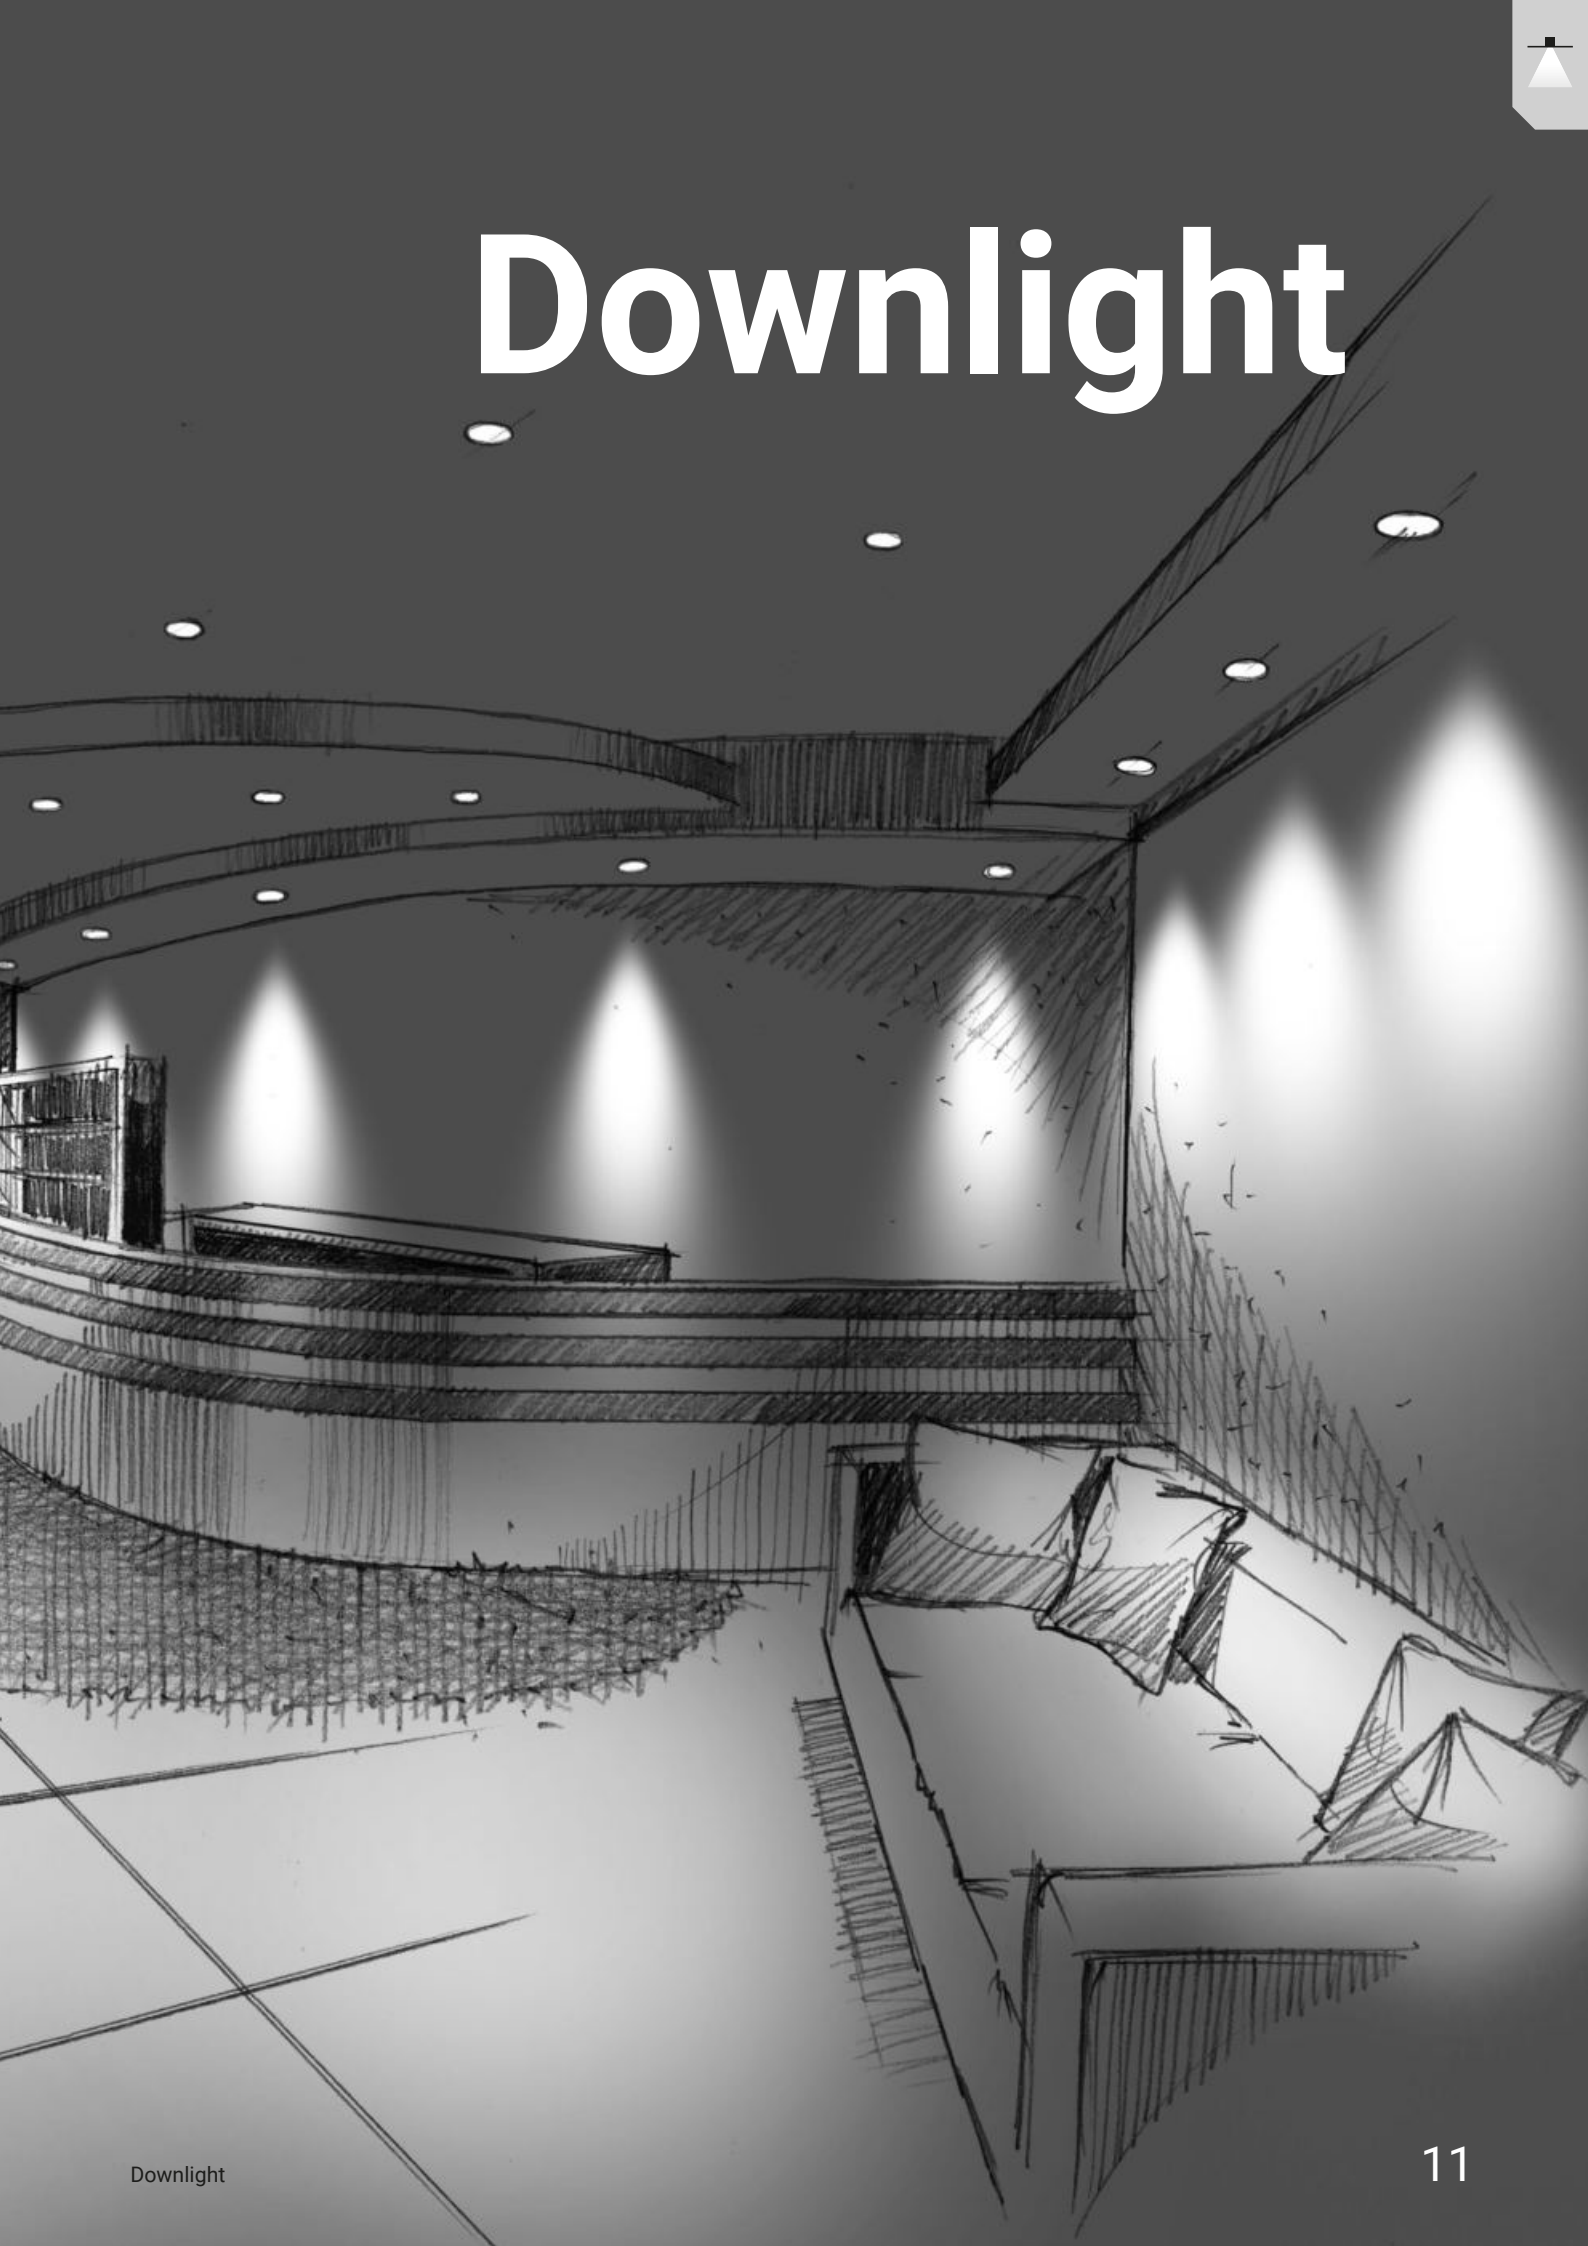


downlight range index


Vos




Quantum



Warp

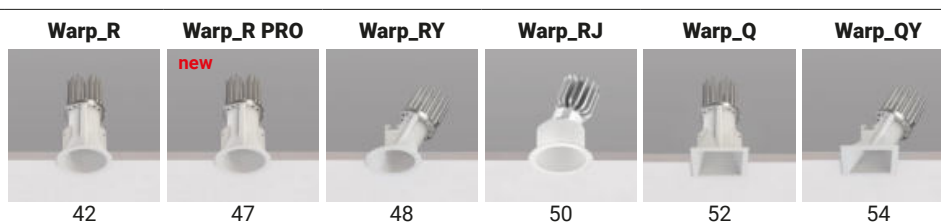


Epitax




Loro





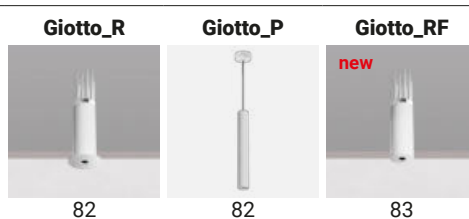



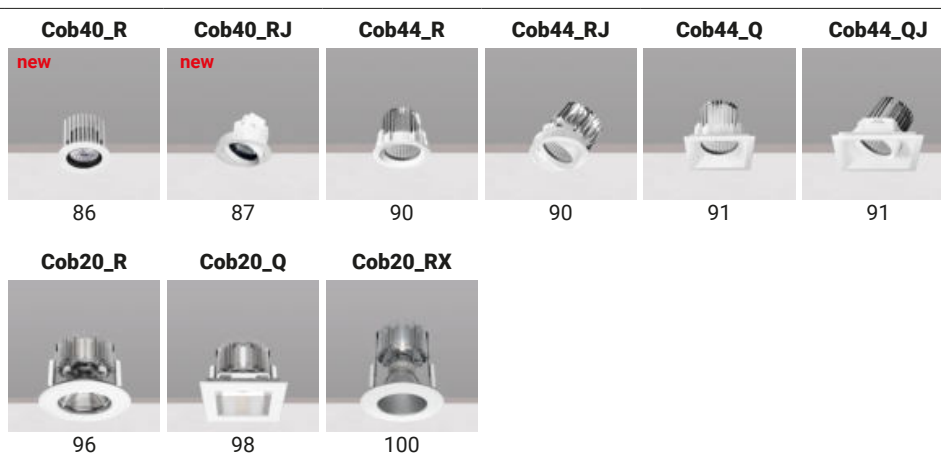

















Giotto



Cob



| | | | | | |
|--------------------|---|--|--|---|--|
| Anton | Anton_R  103 | AntonX  105 | Anton_RJ  106 | | |
| Woofers | Woofers_R <i>new</i>  110 | Woofers_RX <i>new</i>  111 | | | |
| LV HV | LV44_RD  114 | LV54_RS  117 | LV54_QS  118 | HV44  119 | |
| Rada | Rada_R  124 | Rada_Q  126 | | | |
| Cell | Gypsum Cell  132 | Cell  134 | Cell_Ww <i>new</i>  136 | | |
| Play_System | Play_Navata  140 | Play_Quantum  140 | Play_S  140 | Play_P  141 | Play_Giotto  141 |
| Optus_EX | Optus_EX <i>new</i>  146 | Optus_EX  147 | | | |
| Illuminator | Illuminator  152 | Illuminator <i>new</i>  153 | Illuminator <i>new</i>  154 | | |





MONDO CONSCIO
PER IL BENE-HEALTHCARE
FURTHER, TOGETHER

MISSIONE
CONTRIBUIRE
TO THE WELL-BEING
OF HUMANITY
THROUGH
INNOVATION
AND
EXCELLENCE
IN
HEALTHCARE


FURTHER,
TOGETHER

LA NOSTRA

Contribuire al benessere
l'ingegneria biomedica
alla produzione e alla dis
apparecchiature che all
salute e prolungano qu

Dirigere la nostra crescita
bioingegneria nelle qual
nostra forza e capacità;
che tendono a far cresce
attraverso l'istruzione e
la partecipazione in aree
dare un contributo unico

Mantenere senza riserve
e qualità dei nostri prod
riferimento ed essere ric
istituzionalmente seria e
suoi servizi.

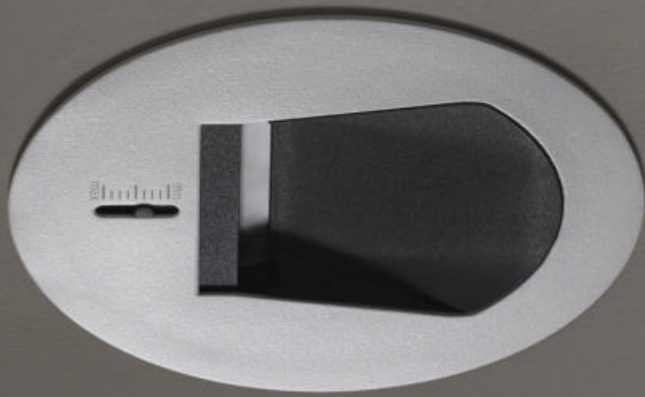


VOS

Materials

Aluminium body

Aluminium flange

Black-painted optics compartment

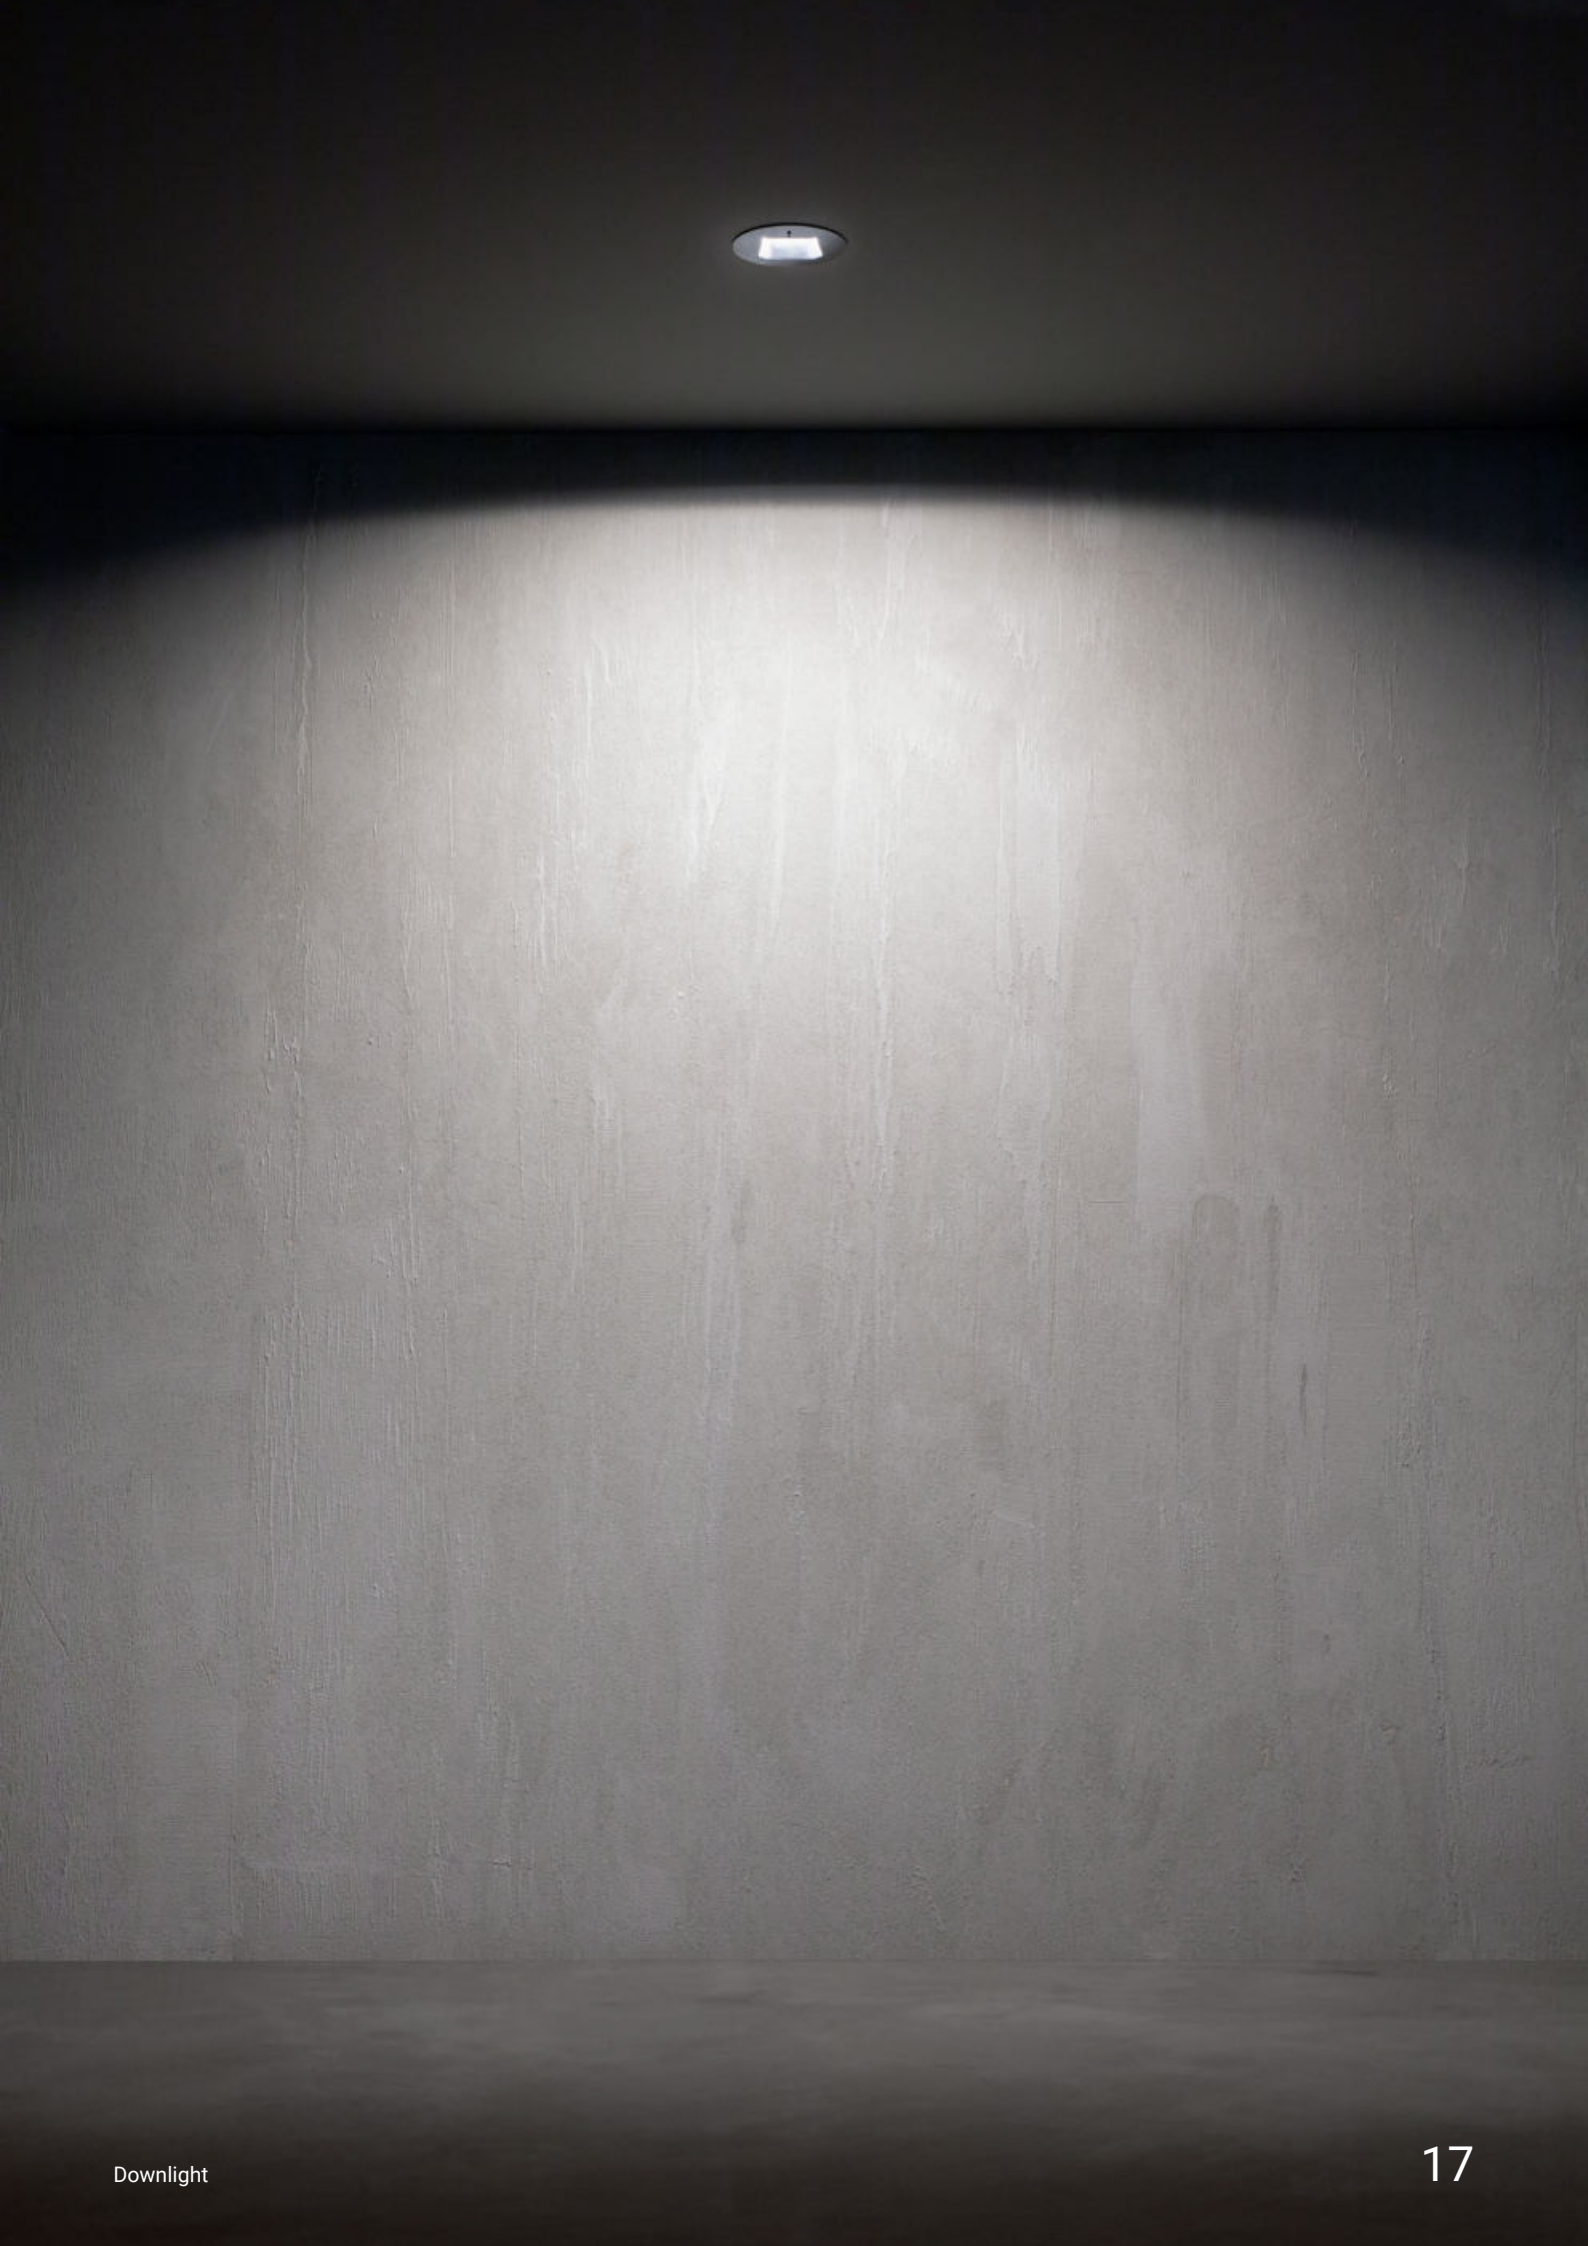

vos range



| | _R Round | _RJ Round Adjustable | _Q Square | _QJ Square Adjustable | _Ww Wall Washer |
|------------------------------------|---|---|---|---|---|
| 1,5 W | Ø 20 mm | - | □ 20 mm | - | - |
| 2 W | Ø 35 mm | - | □ 35 mm | - | - |
| 4 W | Ø 35 mm | Ø 60 mm | □ 35 mm | □ 60 mm | - |
| 6 W | Ø 42 mm | - | □ 42 mm | - | - |
| 8 W | Ø 71 mm | Ø 75 mm | □ 71 mm | □ 75 mm | - |
| 15 W | Ø 105 mm | Ø 100 mm | □ 105 mm | □ 100 mm | - |
| 17 W | - | - | - | - | Ø 135 mm |
| 25 W | Ø 135 mm | - | □ 135 mm | - | - |
| HC Accessories | 2W - 4W - 6W 8W - 15W - 25W | 4W - 8W | 2W - 4W - 6W 8W - 15W - 25W | 4W - 8W | - |
| Finish | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black |
| Balance CRI 92 | (1,5W, 2W) 2700K - 3000K 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | (1,5W, 2W) 2700K - 3000K 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Efficiency CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood | Asymmetric |
| Driver | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI |
| | 15 mm / 29 mm / 35 mm 64 mm / 95 mm / 121 mm | 56 mm / 70 mm / 95 mm | 15 mm / 29 mm / 35 mm 64 mm / 95 mm / 121 mm | 56 mm / 70 mm / 95 mm | 121 mm |

HC Visual comfort

The honeycomb-like filter integrated in the Honeycomb versions allows to shield the source further. The hexagonal microcells forming the grid contribute towards shielding the secondary light beam, thus almost eliminating the glaring altogether.



Honeycomb (optional)

LED

Black side




IP44
IP65

A Pinhole

The optics compartment applies the pin-hole camera concept, thus guaranteeing reflectance control. The source is positioned on a receded plane with respect to the opening of the compartment: the photons forming the primary light beam project without being hindered; on the contrary, the outermost photons bounce in the compartment, painted black to obtain maximum degree of absorption, progressively dimming up to complete exhaustion.

Pin-hole

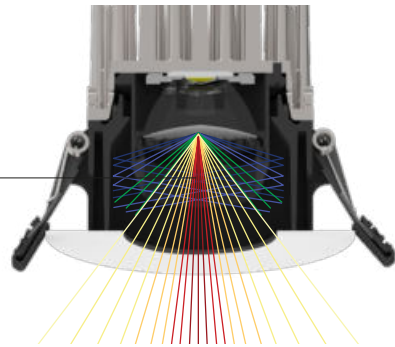


Tilting version

The Vos_RJ and Vos_QJ range of products come with a 360° mobility on the horizontal axis and a 35° tilt on the vertical axis.

Shielding of the optics compartment


The downlight structure was designed to avoid rear light dispersion and for shielding the internal of the dropped ceiling.

No spill light

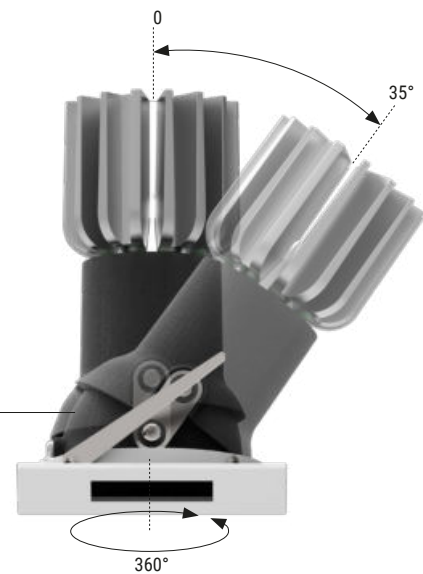

Contoured wall washer


The new technology revolutionises the standards established until now for wall washer lighting. The diaphragm positioned on the optics compartment allows the breadth of the light beam to be adjusted, for versatile and high performance wall lighting. The beam always reaches the peak near the edge of the ceiling, usually narrow and difficult to light, whereas, acting on the opening of the diaphragm, the angle of emission can be changed and therefore the beam can be narrowed or widened, allowing Vos_Ww to be positioned at any distance from the wall and maintaining an immediate, precise and perfect wash to emphasise great works exhibited.

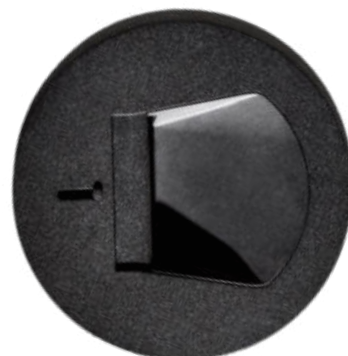

Vos_R | Downlight | powerLED 1,5 W DC 500 mA



15



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 90622 | 90408 |
| Black | 90623 | 90409 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|-----------------------|
| M | 2700 | 134 - 79 | 187 - 104 | 20 Spot (23°) |
| W | 3000 | 153 - 85 | 199 - 110 | 35 Flood (34°) |
| N | 4000 | - | 213 - 118 | |

Electronics


| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Vos_R | Downlight | powerLED 2 W DC 630 mA



29



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90626 | 90634 | 90412 | 90632 |
| Black | 90627 | 90635 | 90413 | 90633 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|-------------------------|
| M | 2700 | 157 - 69 | 219 - 96 | 15 Spot (21°) |
| W | 3000 | 179 - 78 | 233 - 102 | 30 Flood (26°) |
| N | 4000 | - | 249 - 109 | 60 W.Flood (52°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |




Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Vos_R | Downlight | powerLED 4 W DC 350 mA



29



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90638 | 90646 | 90416 | 90644 |
| Black | 90639 | 90647 | 90417 | 90645 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 163 | 490 - 202 | 15 Spot (15°) |
| W | 3000 | 423 - 174 | 490 - 202 | 30 Flood (29°) |
| N | 4000 | 456 - 188 | 529 - 218 | 60 W.Flood (50°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | 0/1-10V converter 1 art. p 138 x l 22 x h 21 | DALI converter 1 art. p 138 x l 22 x h 21 | |




Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Vos_R | Downlight | powerLED 6 W DC 500 mA



35



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90650 | 90658 | 90420 | 90656 |
| Black | 90651 | 90659 | 90421 | 90657 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 231 | 659 - 287 | 15 Spot (15°) |
| W | 3000 | 569 - 248 | 659 - 287 | 30 Flood (30°) |
| N | 4000 | 614 - 267 | 711 - 309 | 60 W.Flood (50°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|---|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 138 x l 22 x h 21 | DALI 1 art. p 138 x l 22 x h 21 |




Recessed casing Pag. 21

99848 H. 28 - Ø. 47,5

RTG 90650W30 / 90650W60 / 90420W30 / 90420W60

Vos_RJ | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 81266 | 81114 | 81268 | 81118 |
| Black | 81267 | 81115 | 81269 | 81119 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 395 - 176 | 490 - 217 | 15 Spot (15°) |
| W | 3000 | 423 - 186 | 490 - 217 | 30 Flood (31°) |
| N | 4000 | 457 - 192 | 529 - 223 | 60 Flood (42°) |

Electronics


| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Recessed casing

| | |
|------------------------------|------------------------------|
| 83063 H. 12 - Ø. 68 | 89373 H. 113 - Ø. 200 |
| 89374 H. 120 - Ø. 200 | |

Vos_RJ | Downlight | arrayLED 15 W DC 400 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 81282 | 81320 |
| Black | 81283 | 81285 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 1568 - 679 | 1932 - 898 | 15 Spot (22°) |
| W | 3000 | 1677 - 780 | 1932 - 898 | 30 Flood (34°) |
| N | 4000 | 1804 - 839 | 2078 - 966 | 60 Flood (45°) |

Electronics


| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Recessed casing

| |
|-----------------------------|
| 83065 H. 12 - Ø. 109 |
|-----------------------------|

RTG 81282W30 / 81282W60

Vos_RJ | Downlight | powerLED 8 W DC 700 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 81274 | 81122 | 81276 | 81126 |
| Black | 81275 | 81123 | 81277 | 81127 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 689 - 260 | 854 - 323 | 15 Spot (16°) |
| W | 3000 | 738 - 278 | 854 - 323 | 30 Flood (32°) |
| N | 4000 | 796 - 302 | 922 - 348 | 45 W.Flood (49°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PSUH 1 - 3 art. p 210 x 148 x h 25 |


Recessed casing

| |
|----------------------------|
| 83064 H. 12 - Ø. 83 |
|----------------------------|

RTG 81274W30 / 81274W45



description
83063 Recessed casing for flush installation
suitable for: Vos_RJ 4W




description
83064 Recessed casing for flush installation
suitable for: Vos_RJ 8W



description
83065 Recessed casing for flush installation
suitable for: Vos_RJ 15W




description
89373 Recessed casing
suitable for: Vos_RJ 4W



description
89374 Recessed casing
suitable for: Vos_RJ 4W





| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 82469 | 82467 |
| Black | 82470 | 82468 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|--------------------|
| M | 2700 | 2026 - On req | 2447 - On req | 07 Asymm. - |
| W | 3000 | 2174 - On req | 2520 - On req | |
| N | 4000 | 2520 - On req | 2717 - On req | |

Electronics


| 99106 | 99115 | 99344 |
|---------------------|---------------------|---------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x l 58 x h 27 | p 210 x l 48 x h 28 | p 210 x l 48 x h 28 |

Example with Wall washer at a fixed distance from the wall


Height 2,75 m | Distance 1 m | Sliding Flap Closed




Height 2,75 m | Distance 1 m | Sliding Flap Open

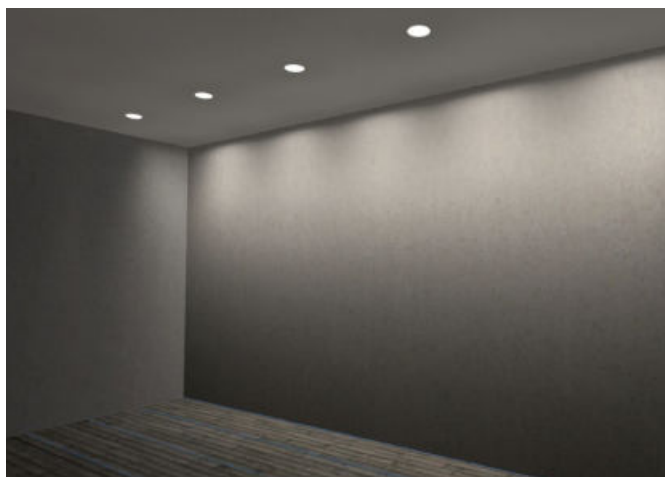


Example with Wall washer at a variable distance from the wall

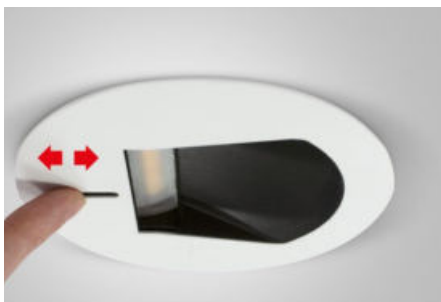


Height 2,75 m | Distance 0,5 m | Sliding Flap Open



Height 2,75 m | Distance 1 m | Sliding Flap Semi-Open



Height 2,75 m | Distance 1,5 m | Sliding Flap Closed



Vos_Q | Downlight | powerLED 1,5 W DC 500 mA



15



□20

| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 90620 | 90406 |
| Black | 90621 | 90407 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 134 - 69 | 187 - 91 | 20 Spot (21°) |
| W | 3000 | 153 - 74 | 199 - 97 | 35 Flood (35°) |
| N | 4000 | - | 213 - 103 | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|--|--|--|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Vos_Q | Downlight | powerLED 2 W DC 630 mA



29



□35

| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90624 | 90630 | 90410 | 90628 |
| Black | 90625 | 90631 | 90411 | 90629 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 157 - 50 | 219 - 70 | 15 Spot (22°) |
| W | 3000 | 179 - 57 | 233 - 75 | 30 Flood (25°) |
| N | 4000 | - | 249 - 80 | 60 W.Flood (46°) |

Electronics


| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Vos_Q | Downlight | powerLED 4 W DC 350 mA



29



□35

| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90636 | 90642 | 90414 | 90640 |
| Black | 90637 | 90643 | 90415 | 90641 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 130 | 490 - 161 | 15 Spot (15°) |
| W | 3000 | 423 - 139 | 490 - 161 | 30 Flood (27°) |
| N | 4000 | 456 - 150 | 529 - 173 | 60 W.Flood (46°) |

Electronics


| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Vos_Q | Downlight | powerLED 6 W DC 500 mA



35



□42



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90648 | 90654 | 90418 | 90652 |
| Black | 90649 | 90655 | 90419 | 90653 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 225 | 659 - 278 | 15 Spot (14°) |
| W | 3000 | 569 - 240 | 659 - 278 | 30 Flood (28°) |
| N | 4000 | 614 - 259 | 711 - 300 | 60 W.Flood (46°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |

Vos_Q | Downlight | powerLED 8 W DC 700 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 90660 | 90666 | 90428 | 90664 |
| Black | 90661 | 90667 | 90429 | 90665 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 689 - 458 | 854 - 458 | 15 Spot (15°) |
| W | 3000 | 738 - 458 | 854 - 458 | 30 Flood (30°) |
| N | 4000 | 796 - 494 | 922 - 494 | 45 W.Flood (52°) |

Electronics



| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PSUH 1 - 3 art. p 210 x 148 x h 25 |

Recessed casing

| | |
|------------------------------|------------------------------|
| 89373 H. 113 - Ø. 200 | 89374 H. 120 - Ø. 200 |
|------------------------------|------------------------------|

* with recessed casing for brick power reduction to 6W DC 500mA

Vos_Q | Downlight | arrayLED 25 W DC 700 mA





| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 80726 | 90686 | 80728 | 90684 |
| Black | 80727 | 90687 | 80729 | 90685 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 2598 - 1340 | 3210 - 1655 | 15 Spot (21°) |
| W | 3000 | 2794 - 1441 | 3431 - 1769 | 30 Flood (34°) |
| N | 4000 | 2990 - 1542 | 3431 - 1769 | 60 Flood (42°) |

Electronics

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Vos_Q | Downlight | arrayLED 15 W DC 400 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 90672 | 90678 | 90438 | 90676 |
| Black | 90673 | 90679 | 90439 | 90677 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1568 - 868 | 1932 - 1070 | 15 Spot (20°) |
| W | 3000 | 1677 - 929 | 1932 - 1070 | 30 Flood (33°) |
| N | 4000 | 1804 - 999 | 2078 - 1151 | 60 W.Flood (49°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |




description

89373 Recessed casing*

suitable for: Vos_Q 8W

Driver: **99377** (On/Off 1art.) - **99106** (On/Off 2-3art.)
99714 (0/1-10V 1art.) - **99715** (DALI 1art.)



description


89374 Recessed casing*

suitable for: Vos_Q 8W

Driver: **99377** (On/Off 1art.) - **99106** (On/Off 2-3art.)
99714 (0/1-10V 1art.) - **99715** (DALI 1art.)

* with recessed casing for brick power reduction to 6W DC 500mA

Vos_QJ | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 81270 | 80478 | 81272 | 80476 |
| Black | 81271 | 80479 | 81273 | 80477 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 395 - 143 | 490 - 178 | 15 Spot (15°) |
| W | 3000 | 423 - 154 | 490 - 178 | 30 Flood (26°) |
| N | 4000 | 457 - 166 | 529 - 192 | 60 Flood (38°) |

Electronics


| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Recessed casing

| | |
|------------------------------|------------------------------|
| 89373 H. 113 - Ø. 200 | 89374 H. 120 - Ø. 200 |
|------------------------------|------------------------------|

Vos_QJ | Downlight | arrayLED 15 W DC 400 mA




| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 81286 | 81288 |
| Black | 81287 | 81289 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 1568 - 586 | 1932 - 776 | 15 Spot (22°) |
| W | 3000 | 1677 - 674 | 1932 - 776 | 30 Flood (33°) |
| N | 4000 | 1804 - 725 | 2078 - 835 | 60 Flood (42°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Vos_QJ | Downlight | powerLED 8 W DC 700 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 81278 | 80490 | 81280 | 80488 |
| Black | 81279 | 80491 | 81281 | 80489 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 689 - 298 | 854 - 370 | 15 Spot (15°) |
| W | 3000 | 738 - 320 | 854 - 370 | 30 Flood (32°) |
| N | 4000 | 796 - 346 | 922 - 400 | 45 W.Flood (45°) |


Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PSUH 1 - 3 art. p 210 x 148 x h 25 |



description

89373 Recessed casing
suitable for: Vos_QJ 4W



description

89374 Recessed casing
suitable for: Vos_QJ 4W





quantum

Materials
Aluminium body



quantum range



| | _R Round | _RJ Round Adjustable |
|-----------------------|---|--------------------------------|
| 1,5 W | Ø 18 mm | - |
| 2 W | Ø 24 mm | Ø 50 mm |
| 4 W | Ø 35 mm | Ø 50 mm |
| 6 W | Ø 42 mm | Ø 55 mm |
| 10 W | Ø 60 mm | Ø 70 mm |
| 15 W | Ø 83 mm | Ø 80 mm |
| 25 W | Ø 135 mm | - |
| HC Accessories | 4W - 6W - 10W 15W - 25W | 2W - 4W - 6W 10W - 15W |
| Finish | White Black Gold | White Black |
| Balance | (1,5W/2W) 2700K - 3000K | (2W) 2700K - 3000K |
| CRI 92 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Efficiency | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood |
| Driver | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI |
| | 15 mm - 20 mm - 29 mm - 35 mm 52 mm - 75 mm - 125 mm | 44 mm - 49 mm 64 mm - 73 mm |

● F.O.L.

The optics group consists of a polycarbonate lens combined with F.O.L. (Filtering Optical Layers) filters: a 1-filter system made of polyethylene terephthalate with different levels of opacity to safeguard the clarity of the light beam and it guarantees optimal optical efficiency.




reddot award 2015
winner

HC Visual comfort

The honeycomb-like filter integrated in the Honeycomb versions allows to shield the source further. The hexagonal microcells forming the grid contribute towards shielding the secondary light beam, thus almost eliminating the glaring altogether.

Organic design

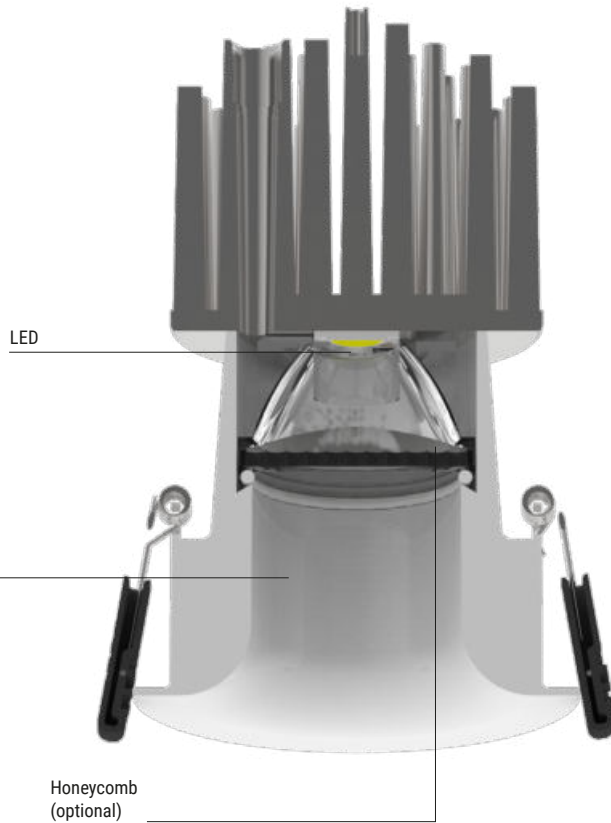


Adjustable

The articles in the Quantum_RJ range are characterised by a 35° inclination on the vertical axis.



Quantum_R | Downlight | powerLED 1,5 W DC 500 mA




| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80009 | 90554 |
| Black | 80010 | 90555 |
| Gold | 82865 | 82866 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|-----------------------|
| M | 2700 | 134 - 50 | 187 - 69 | 20 Spot (24°) |
| W | 3000 | 153 - 58 | 199 - 74 | 35 Flood (35°) |
| N | 4000 | - | 213 - 80 | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|--|--|--|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |
| | | | | | |

Quantum_R | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80011 | 90556 |
| Black | 80012 | 90557 |
| Gold | 82867 | 82868 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|------------------------|
| M | 2700 | 157 - 65 | 219 - 91 | 15 Spot (19°) |
| W | 3000 | 179 - 74 | 233 - 96 | 30 Flood (25°) |
| N | 4000 | - | 249 - 103 | 45 W.Flood(45°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |
| | | | | | |

RTG 90556W15 / 90556W30 / 90556W45

Quantum_R | Downlight | powerLED 4 W DC 350 mA





| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 80017 | 80021 | 90558 | 80019 |
| Black | 80018 | 80022 | 90559 | 80020 |
| Gold | 82869 | 82870 | 82871 | 82872 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|------------------------|
| M | 2700 | 395 - 210 | 490 - 260 | 15 Spot (15°) |
| W | 3000 | 423 - 224 | 490 - 260 | 30 Flood (29°) |
| N | 4000 | 456 - 242 | 529 - 281 | 45 W.Flood(50°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |
| | | | | |

Quantum_R | Downlight | powerLED 6 W DC 500 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 80023 | 80027 | 90560 | 80025 |
| Black | 80024 | 80028 | 90561 | 80026 |
| Gold | 82873 | 82874 | 82875 | 82876 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|------------------------|
| M | 2700 | 532 - 300 | 659 - 374 | 15 Spot (15°) |
| W | 3000 | 569 - 321 | 659 - 374 | 30 Flood (30°) |
| N | 4000 | 614 - 346 | 711 - 401 | 45 W.Flood(49°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |
| | | | |

RTG 90560W15 / 90560W30 / 90560W45

Quantum_R | Downlight | powerLED 10 W DC 800 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 80029 | 80033 | 90562 | 80031 |
| Black | 80030 | 80034 | 90563 | 80032 |
| Gold | 82877 | 82878 | 82879 | 82880 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | 960 - 657 | 1108 - 760 | 15 Spot (18°) |
| W | 3000 | 1034 - 709 | 1194 - 819 | 30 Flood (25°) |
| N | 4000 | 1108 - 762 | 1280 - 880 | 45 W.Flood(47°) |


Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |



RTG 90562W15 / 90562W30 / 90562W45

Quantum_R | Downlight | arrayLED 25 W DC 700 mA




| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 80041 | 80045 | 90609 | 80043 |
| Black | 80042 | 80046 | 90610 | 80044 |
| Gold | 82885 | 82886 | 82887 | 82888 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 2598 - 1563 | 3210 - 1928 | 15 Spot (21°) |
| W | 3000 | 2794 - 1679 | 3431 - 2061 | 30 Flood (31°) |
| N | 4000 | 2990 - 1792 | 3431 - 2061 | 45 Flood (34°) |

Electronics

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Quantum_R | Downlight | arrayLED 15 W DC 400 mA




| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 80035 | 80039 | 90564 | 80037 |
| Black | 80036 | 80040 | 90565 | 80038 |
| Gold | 82881 | 82882 | 82883 | 82884 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 1568 - 880 | 1932 - 1085 | 15 Spot (20°) |
| W | 3000 | 1677 - 942 | 1932 - 1085 | 30 Flood (30°) |
| N | 4000 | 1804 - 1014 | 2078 - 1167 | 45 Flood (40°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Quantum_RJ | Downlight | powerLED 2 W DC 630 mA



44

| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 80047 | 80051 | 90566 | 80049 |
| Black | 80048 | 80052 | 90567 | 80050 |



| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 157 - 66 | 219 - 92 | 15 Spot - |
| W | 3000 | 179 - 75 | 233 - 98 | 30 Flood - |
| N | 4000 | - | 249 - 104 | 45 Flood - |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Quantum_RJ | Downlight | powerLED 4 W DC 350 mA



44

| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 80053 | 80057 | 90568 | 80055 |
| Black | 80054 | 80058 | 90569 | 80056 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 395 - 183 | 490 - 227 | 15 Spot - |
| W | 3000 | 423 - 196 | 490 - 227 | 30 Flood - |
| N | 4000 | 456 - 211 | 529 - 245 | 45 Flood - |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Quantum_RJ | Downlight | powerLED 6 W DC 500 mA



49

| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 80059 | 80063 | 90570 | 80061 |
| Black | 80060 | 80064 | 90571 | 80062 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 532 - 252 | 659 - 312 | 15 Spot - |
| W | 3000 | 569 - 269 | 659 - 312 | 30 Flood - |
| N | 4000 | 614 - 291 | 711 - 336 | 45 Flood - |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |



Quantum_RJ | Downlight | powerLED 10 W DC 800 mA



64


| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 80065 | 80069 | 90572 | 80067 |
| Black | 80066 | 80070 | 90573 | 80068 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 960 - 668 | 1108 - 770 | 15 Spot - |
| W | 3000 | 1034 - 718 | 1194 - 830 | 30 Flood - |
| N | 4000 | 1108 - 770 | 1280 - 889 | 45 Flood - |

Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Quantum_RJ | Downlight | arrayLED 15 W DC 400 mA



| | CRI 92 | CRI 92 <small>HC</small> | CRI 80 | CRI 80 <small>HC</small> |
|--------------|---------------|---------------------------------|---------------|---------------------------------|
| White | 80071 | 80075 | 90574 | 80073 |
| Black | 80072 | 80076 | 90575 | 80074 |

| | Cct | lm S - D CRI 92 | | lm S - D CRI 80 | | Optic |
|----------|------------|------------------------|-----|------------------------|------|-------------------|
| M | 2700 | 1568 | 830 | 1932 | 1023 | 15 Spot - |
| W | 3000 | 1677 | 888 | 1932 | 1023 | 30 Flood - |
| N | 4000 | 1804 | 955 | 2078 | 1100 | 45 Flood - |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Ferro Wine | Castelfranco V.to, Italy





warp

Materials
Aluminium body




warp range



| | _R Round | _R PRO Round | _RY Round Asymmetric | _RJ Round Adjustable | _Q Square | _QY Square Asymmetric |
|---------------------------------------|--|--|--|--|--|--|
| 2 W | Ø 35 mm | - | Ø 50 mm | - | □ 35 mm | □ 50 mm |
| 4 W | Ø 35 mm | - | Ø 50 mm | - | □ 35 mm | □ 50 mm |
| 6 W | Ø 42 mm | - | - | - | □ 42 mm | - |
| 8 W | - | - | - | Ø 80 mm | - | - |
| 10 W | Ø 71 mm | - | Ø 71 mm | - | □ 71 mm | □ 71 mm |
| 11 W | - | Ø 71 mm | - | - | - | - |
| 15 W | Ø 100 mm | Ø 100 mm | Ø 100 mm | Ø 120 mm | □ 100 mm | □ 100 mm |
| 25 W | Ø 135 mm | Ø 135 mm | Ø 134 mm | - | □ 135 mm | □ 134 mm |
| 45 W | Ø 135 mm | - | - | - | - | - |
| HC Accessories | 2W - 4W - 6W 10W - 25W - 45W | - | 2W - 4W - 6W 10W - 25W | - | 2W - 4W - 6W 10W - 25W | 2W - 4W - 6W 10W - 25W |
| Finish | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black |
| Balance CRI 92 | (2W) 2700K - 3000K 2700K - 3000K - 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K |
| Efficiency CRI 80 | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K | 2700K - 3000K 4000K |
| WarmTune 1800K/3000K | 25W | - | - | - | - | - |
| DynamicWhite 2700K - 5700K | Ø 71 mm - Ø 100 mm Ø 135 mm | - | - | Ø 80 mm Ø 120 mm | □ 71 mm - □ 100 mm □ 135 mm | - |
| Optics | Spot - Flood Wide Flood | Spot - Flood | Spot - Flood Wide Flood | Spot - Flood Wide Flood | Spot - Flood Wide Flood | Spot - Flood Wide Flood |
| Driver | On/Off - 1/10V - DALI - Fase-Cut | On/Off - 1/10V DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI - Fase-Cut | On/Off - 1/10V - DALI |
| | 29 mm - 35 mm - 64 mm 92 mm - 127 mm | 64 mm 92 mm - 127 mm | 46 mm - 64 mm 92 mm - 128 mm | 70 mm - 105 mm | 29 mm □ 35 mm - □ 64 mm □ 91 mm - □ 126 mm | □ 46 mm - □ 64 mm □ 92 mm - □ 128 mm |


HC Visual comfort

The honeycomb-like filter integrated in the Honeycomb versions allows to shield the source further. The hexagonal microcells forming the grid contribute towards shielding the secondary light beam, thus almost eliminating the glaring altogether.

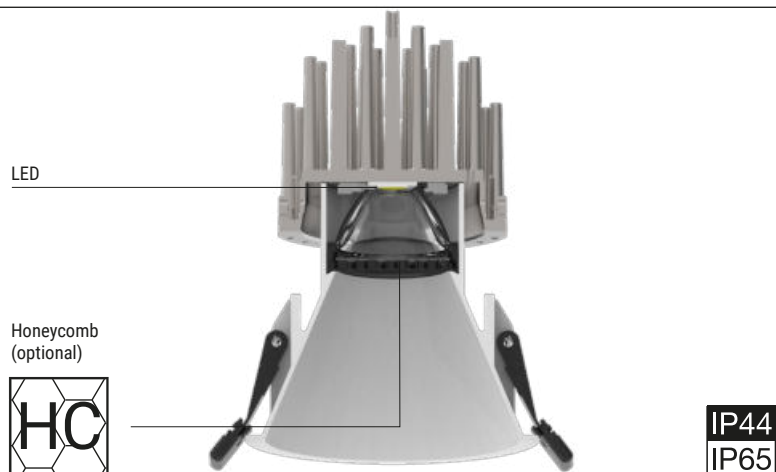

Asymmetric version

The articles of the Warp_RY and Warp_QY range of products are slanted by 25° and offer an asymmetric emission, ideal for the uniform distribution of light on lateral surfaces. The slanted configuration of the lamp body allows to conceal the light source, thus eliminating direct glaring.

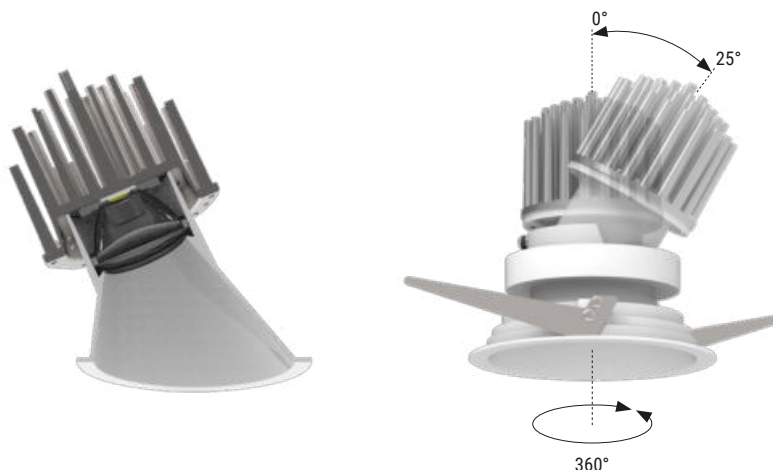


Tilting version

The Warp_RJ range of products come with a 360° mobility on the horizontal axis and a 25° tilt on the vertical axis.


Glass Optics

Thanks to the special glass optics, designed specifically to be positioned inside the Warp_R PRO optics compartment, the distribution is significantly improved, guaranteeing uniformity and cleanliness of the light beam.

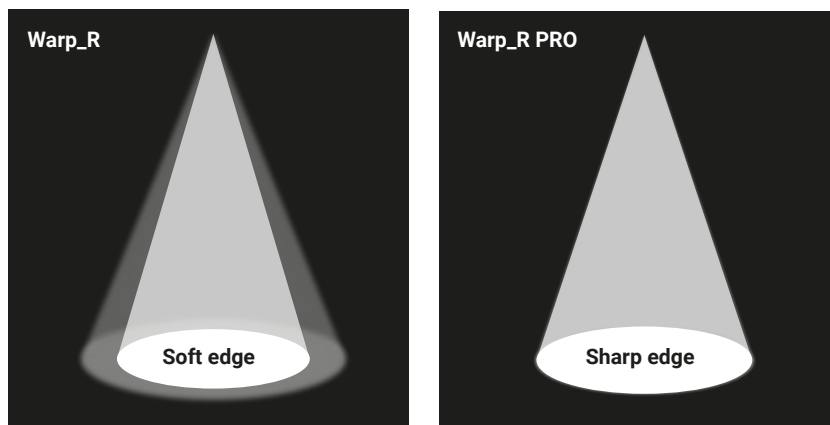

Smart lighting


The Dynamic White modules, combined with the new, specifically developed management systems, allow the mixture of whites from Warm White and Cold White. With a single product, it is therefore possible to reproduce all the colour temperatures from 2700K to 5700K, maintaining the same luminous flow. Recent studies on the circadian cycles have shown how the temperature variations of natural light, from dawn to dusk, influence the well-being of humans.

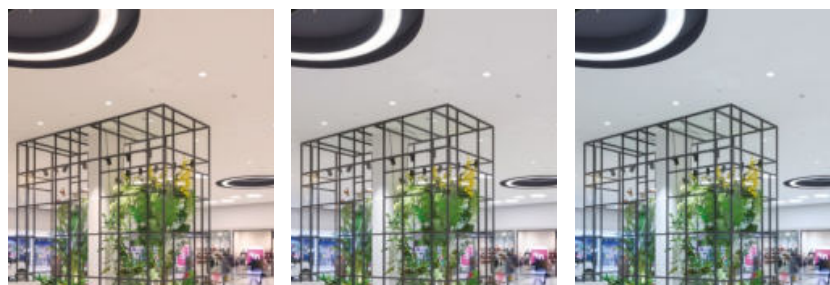

2700K

5700K

Warp_R | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90542 | 90722 | 90544 | 90720 |
| Black | 90543 | 90723 | 90545 | 90721 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 157 - 81 | 219 - 113 | 15 Spot (21°) |
| W | 3000 | 179 - 93 | 233 - 121 | 30 Flood (25°) |
| N | 4000 | - | 249 - 129 | 60 W.Flood (46°) |


Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



RTG 90544W15 / 90544W30 / 90544M15 / 90544M30

Warp_R | Downlight | powerLED 6 W DC 500 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90748 | 90752 | 90548 | 90750 |
| Black | 90749 | 90753 | 90549 | 90751 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 331 | 659 - 410 | 15 Spot (14°) |
| W | 3000 | 569 - 354 | 659 - 410 | 30 Flood (32°) |
| N | 4000 | 614 - 382 | 711 - 442 | 60 W.Flood (50°) |


Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |



RTG 90548W30 / 90548W60 / 90548M30 / 90548M60

Warp_R | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90740 | 90744 | 90546 | 90742 |
| Black | 90741 | 90745 | 90547 | 90743 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 219 | 490 - 273 | 15 Spot (16°) |
| W | 3000 | 423 - 236 | 490 - 273 | 30 Flood (30°) |
| N | 4000 | 457 - 254 | 529 - 295 | 60 W.Flood (49°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Warp_R | Downlight | powerLED 10 W DC 800 mA



| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 90762 | 90766 | 90550 | 90764 |
| Black | 90763 | 90767 | 90551 | 90765 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 960 - 693 | 1108 - 800 | 15 Spot (17°) |
| W | 3000 | 1034 - 746 | 1194 - 861 | 30 Flood (27°) |
| N | 4000 | 1108 - 800 | 1280 - 924 | 60 Flood (39°) |

Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |



RTG 90550M15 / 90550M30 / 90550M60 / 90550W15 / 90550W30 / 90550W60

DW ^{DALI2} ^{NEW} powerLED 4W DC 700 mA


| | Dynamic White | ^{HC} Dynamic White |
|-------|---------------|-----------------------------|
| White | 84083 | 84085 |
| Black | 84084 | 84086 |

| CRI90 | Optic |
|--------------------------------------|-------------------|
| D 2700K - 5700K Dynamic White | 15 Spot - |
| | 30 Flood - |
| | 60 Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|---------------------------|------------------------------|-------------------|
| DALI DT8 4 - 8 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 10 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |

Warp_R | Downlight | arrayLED 15 W DC 400 mA



| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 90776 | 90780 | 90552 | 90778 |
| Black | 90777 | 90781 | 90553 | 90779 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1568 - 1145 | 1932 - 1409 | 15 Spot (21°) |
| W | 3000 | 1677 - 1223 | 1932 - 1409 | 30 Flood (38°) |
| N | 4000 | 1804 - 1316 | 2078 - 1516 | 60 W.Flood (52°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

DW ^{DALI2} ^{NEW} powerLED 8W DC 700 mA

| | Dynamic White | ^{HC} Dynamic White |
|-------|---------------|-----------------------------|
| White | 84087 | 84089 |
| Black | 84088 | 84090 |

| CRI90 | Optic |
|--------------------------------------|---------------------|
| D 2700K - 5700K Dynamic White | 15 Spot - |
| | 30 Flood - |
| | 60 W.Flood - |


Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 2 - 3 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 6 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |





Warp_R | Downlight | arrayLED 25 W DC 700 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90790 | 90794 | 90612 | 90792 |
| Black | 90791 | 90795 | 90613 | 90793 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 2598 - 1827 | 3210 - 2257 | 15 Spot (21°) |
| W | 3000 | 2794 - 1965 | 3431 - 2413 | 30 Flood (34°) |
| N | 4000 | 2990 - 2103 | 3431 - 2413 | 60 Flood (39°) |

Electronics

| 99112 | 83066 | 99330 |
|---|--|--|
| ON/OFF 1 art. p 103 x 1 58 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 1 79 x h 22 | DALI PUSH 1 art. p 210 x 1 48 x h 28 |

DW **DALI2** **NEW** **powerLED 15W DC 700 mA**

| | Dynamic White | HC Dynamic White |
|-------|---------------|-------------------------|
| White | 84091 | 84093 |
| Black | 84092 | 84094 |

| | CRI90 | Optic |
|----------|-----------------------------|--|
| D | 2700K - 5700K Dynamic White | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|---|--------------------------|-------------------------------|--------------------|
| DALI DT8 1 - 2 art. p 202 x 1 58 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

WT **25 W DC 700 mA**


| | WarmTune |
|-------|--------------|
| White | 91926 |
| Black | 91927 |

| | Optic |
|----------|---|
| S | 1800K>3000K WarmTune 2100lm 15 Spot (21°) 30 Flood (34°) 60 Flood (39°) |

Electronics

| 99360 | 99361 | 99362 |
|---|--|---------------------------------------|
| Triac + IGBT 1 art. p 150 x 1 43 x h 29 | 0/1-10V 1 art. p 150 x 1 43 x h 29 | DALI 1 art. p 150 x 1 43 x h 29 |

Warp_R | Downlight | arrayLED 45 W DC 1250 mA





| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 81487 | 81491 | 81485 | 81489 |
| Black | 81488 | 81492 | 81486 | 81490 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-----------------------|
| M | 2700 | 4884 - 3410 | 6002 - 4191 | 15 Spot (27°) |
| W | 3000 | 5223 - 3647 | 6002 - 4191 | 30 Flood (34°) |
| N | 4000 | 5612 - 3919 | 6452 - 4504 | 60 Flood (43°) |

Electronics

| 83114 | 83066 |
|---|--|
| ON/OFF 1 art. p 160 x 1 70 x h 36 | 0/1-10V DALI PUSH 1 art. p 124 x 1 79 x h 22 |

Warp_R PRO | Downlight | arrayLED 11 W DC 300 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 83766 | 83764 |
| Black | 83767 | 83765 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 1165 - On req | 1384 - On req | 15 Spot - |
| W | 3000 | 1220 - On req | 1442 - On req | 30 Flood - |
| N | 4000 | 1311 - On req | 1523 - On req | 60 Flood - |

Electronics

| 99734 | 99732 | 99730 |
|---------------------------------------|---|---|
| ON/OFF 1 art. p 88 x 138 x h 23 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI_PUSH 1 art. p 134 x 137 x h 31 |



Warp_R PRO | Downlight | arrayLED 15 W DC 400 mA




| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 83770 | 83768 |
| Black | 83771 | 83769 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 1568 - On req | 1932 - On req | 15 Spot - |
| W | 3000 | 1677 - On req | 1932 - On req | 30 Flood - |
| N | 4000 | 1804 - On req | 2078 - On req | 60 Flood - |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI_PUSH 1 art. p 134 x 137 x h 31 |

Warp_R PRO | Downlight | arrayLED 25 W DC 700 mA




| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 83774 | 83772 |
| Black | 83775 | 83773 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------|
| M | 2700 | 2598 - On req | 3210 - On req | 15 Spot - |
| W | 3000 | 2794 - On req | 3431 - On req | 30 Flood - |
| N | 4000 | 2990 - On req | 3431 - On req | 60 Flood - |

Electronics

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI_PUSH 1 art. p 124 x 179 x h 22 | DALI_PUSH 1 art. p 210 x 148 x h 28 |

Warp_RY | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 90814 | 90818 | 90812 | 90816 |
| Black | 90815 | 90819 | 90813 | 90817 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 157 - 76 | 219 - 107 | 15 Spot - |
| W | 3000 | 179 - 87 | 233 - 113 | 30 Flood - |
| N | 4000 | - | 249 - 121 | 60 W.Flood - |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Warp_RY | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 90830 | 90834 | 90828 | 90832 |
| Black | 90831 | 90835 | 90829 | 90833 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 395 - 218 | 490 - 270 | 15 Spot - |
| W | 3000 | 423 - 233 | 490 - 270 | 30 Flood - |
| N | 4000 | 456 - 251 | 529 - 291 | 60 W.Flood - |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Warp_RY | Downlight | powerLED 10 W DC 800 mA




| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 90846 | 90850 | 90844 | 90848 |
| Black | 90847 | 90851 | 90845 | 90849 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 960 - 673 | 1108 - 777 | 15 Spot - |
| W | 3000 | 1034 - 725 | 1194 - 837 | 30 Flood - |
| N | 4000 | 1108 - 777 | 1280 - 898 | 60 W.Flood - |

Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Warp_RY | Downlight | arrayLED 15 W DC 400 mA




| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------------|--------------|------------------------|
| White | 90862 | 90866 | 90860 | 90864 |
| Black | 90863 | 90867 | 90861 | 90865 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 1568 - 1006 | 1932 - 1239 | 15 Spot - |
| W | 3000 | 1677 - 1075 | 1932 - 1239 | 30 Flood - |
| N | 4000 | 1804 - 1157 | 2078 - 1333 | 60 W.Flood - |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Warp_RY | Downlight | arrayLED 25 W DC 700 mA




| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|---|---------------|--|---------------|--|
| White | 90878 | 90882 | 90876 | 90880 |
| Black | 90879 | 90883 | 90877 | 90881 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------------|------------------------|------------------------|---------------------|
| M | 2700 | 2598 - 1796 | 3210 - 2219 | 15 Spot - |
| W | 3000 | 2794 - 1932 | 3431 - 2309 | 30 Flood - |
| N | 4000 | 2990 - 2067 | 3431 - 2309 | 60 W.Flood - |

Electronics

| 99112 | 83066 | 99330 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V DALI PUSH | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 124 x 179 x h 22 | p 210 x 148 x h 28 |

Warp_RJ | Downlight | powerLED 8 W DC 700 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 81258 | 81260 |
| Black | 81259 | 81261 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 689 - 417 | 854 - 517 | 15 Spot (15°) |
| W | 3000 | 738 - 446 | 854 - 517 | 30 Flood (31°) |
| N | 4000 | 796 - 482 | 922 - 558 | 60 W.Flood (58°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PSUH 1 - 3 art. p 210 x 148 x h 25 |

DW **DALI2** **NEW** **powerLED 4W DC 700 mA**


| Dynamic White | |
|---------------|--------------|
| White | 84107 |
| Black | 84108 |

| CRI90 | | | Optic |
|----------|---------------|---------------|--|
| D | 2700K - 5700K | Dynamic White | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|---------------------------|------------------------------|-------------------|
| DALI DT8 4 - 8 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 10 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |

Warp_RJ | Downlight | arrayLED 15 W DC 400 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 81262 | 81264 |
| Black | 81263 | 81265 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1568 - 1060 | 1932 - On req | 15 Spot (23°) |
| W | 3000 | 1677 - 1133 | 1932 - On req | 30 Flood (36°) |
| N | 4000 | 1804 - 1287 | 2078 - On req | 60 W.Flood (56°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

DW **DALI2** **NEW** **powerLED 8W DC 700 mA**

| Dynamic White | |
|---------------|--------------|
| White | 84109 |
| Black | 84110 |


| CRI90 | | | Optic |
|----------|---------------|---------------|--|
| D | 2700K - 5700K | Dynamic White | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 2 - 3 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 6 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |



Warp_Q | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90726 | 90730 | 90724 | 90728 |
| Black | 90727 | 90731 | 90725 | 90729 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 157 - 77 | 219 - 107 | 15 Spot (21°) |
| W | 3000 | 179 - 88 | 233 - 114 | 30 Flood (28°) |
| N | 4000 | - | 249 - 122 | 60 W.Flood (50°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Warp_Q | Downlight | powerLED 6 W DC 500 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90756 | 90760 | 90754 | 90758 |
| Black | 90757 | 90761 | 90755 | 90759 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 335 | 659 - 415 | 15 Spot (15°) |
| W | 3000 | 569 - 358 | 659 - 415 | 30 Flood (32°) |
| N | 4000 | 614 - 386 | 711 - 448 | 60 W.Flood (52°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |



Warp_Q | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90734 | 90738 | 90732 | 90736 |
| Black | 90735 | 90739 | 90733 | 90737 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 212 | 490 - 264 | 15 Spot (15°) |
| W | 3000 | 423 - 228 | 490 - 264 | 30 Flood (30°) |
| N | 4000 | 456 - 245 | 529 - 285 | 60 W.Flood (50°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Warp_Q | Downlight | powerLED 10 W DC 800 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 90770 | 90774 | 90768 | 90772 |
| Black | 90771 | 90775 | 90769 | 90773 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 960 - 681 | 1108 - 785 | 15 Spot (18°) |
| W | 3000 | 1034 - 734 | 1194 - 847 | 30 Flood (28°) |
| N | 4000 | 1108 - 785 | 1280 - 907 | 60 W.Flood (46°) |

Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

DW DALI2 NEW powerLED 4W DC 700 mA

| | Dynamic White | HC Dynamic White |
|-------|---------------|-------------------------|
| White | 84095 | 84097 |
| Black | 84096 | 84098 |



CRI90

| D | 2700K - 5700K | Dynamic White | Optic |
|---|---------------|---------------|---------------------|
| | | | 15 Spot - |
| | | | 30 Flood - |
| | | | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|---------------------------|------------------------------|-------------------|
| DALI DT8 4 - 8 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 10 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |

Warp_Q | Downlight | arrayLED 15 W DC 400 mA



91


| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90784 | 90788 | 90782 | 90786 |
| Black | 90785 | 90789 | 90783 | 90787 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1568 - 1146 | 1932 - 1412 | 15 Spot (22°) |
| W | 3000 | 1677 - 1226 | 1932 - 1412 | 30 Flood (38°) |
| N | 4000 | 1804 - 1320 | 2078 - 1519 | 60 W.Flood (53°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x l 137 x h 31 | 0/1-10V 1 art. p 134 x l 137 x h 31 | DALI PUSH 1 art. p 134 x l 137 x h 31 |

Warp_Q | Downlight | powerLED 25 W DC 700 mA



126

| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|--------------|--------------|--------------|
| White | 90798 | 90802 | 90796 | 90800 |
| Black | 90799 | 90803 | 90797 | 90801 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 2598 - 1905 | 3210 - 2354 | 15 Spot (22°) |
| W | 3000 | 2794 - 2049 | 3431 - 2515 | 30 Flood (38°) |
| N | 4000 | 2990 - 2191 | 3431 - 2515 | 60 W.Flood (50°) |

Electronics

| 99112 | 83066 | 99330 |
|---|---|---|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 179 x h 22 | DALI PUSH 1 art. p 210 x l 148 x h 28 |

DW **DALI2** **NEW** powerLED 8W DC 700 mA

| | Dynamic White | HC Dynamic White |
|-------|---------------|------------------|
| White | 84099 | 84101 |
| Black | 84100 | 84102 |

| CRI90 | Optic |
|----------|-----------------------------|
| D | 2700K - 5700K Dynamic White |
| | 15 Spot - |
| | 30 Flood - |
| | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|---|--------------------------|-------------------------------|--------------------|
| DALI DT8 1 - 2 art. p 202 x l 58 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

DW **DALI2** **NEW** powerLED 15W DC 700 mA


| | Dynamic White | HC Dynamic White |
|-------|---------------|------------------|
| White | 84103 | 84105 |
| Black | 84104 | 84106 |

| CRI90 | Optic |
|----------|-----------------------------|
| D | 2700K - 5700K Dynamic White |
| | 15 Spot - |
| | 30 Flood - |
| | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|---|--------------------------|-------------------------------|--------------------|
| DALI DT8 2 - 3 art. p 202 x l 58 x h 30 | Dimmer DMX 1 - 6 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

Warp_QY | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 90822 | 90826 | 90820 | 90824 |
| Black | 90823 | 90827 | 90821 | 90825 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 157 - 82 | 219 - 114 | 15 Spot - |
| W | 3000 | 179 - 94 | 233 - 122 | 30 Flood - |
| N | 4000 | - | 249 - 130 | 60 W.Flood - |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Warp_QY | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 90838 | 90842 | 90836 | 90840 |
| Black | 90839 | 90843 | 90837 | 90841 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 395 - 233 | 490 - 289 | 15 Spot - |
| W | 3000 | 423 - 249 | 490 - 289 | 30 Flood - |
| N | 4000 | 456 - 269 | 529 - 312 | 60 W.Flood - |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Warp_QY | Downlight | powerLED 10 W DC 800 mA




| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 90854 | 90858 | 90852 | 90856 |
| Black | 90855 | 90859 | 90853 | 90857 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 960 - 674 | 1108 - 778 | 15 Spot - |
| W | 3000 | 1034 - 724 | 1194 - 837 | 30 Flood - |
| N | 4000 | 1108 - 777 | 1280 - 897 | 60 W.Flood - |

Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Warp_QY | Downlight | arrayLED 15 W DC 400 mA




| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 90870 | 90874 | 90868 | 90872 |
| Black | 90871 | 90875 | 90869 | 90873 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 1568 - 1120 | 1932 - 1381 | 15 Spot - |
| W | 3000 | 1677 - 1198 | 1932 - 1381 | 30 Flood - |
| N | 4000 | 1804 - 1290 | 2078 - 1485 | 60 W.Flood - |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Warp_QY | Downlight | arrayLED 25 W DC 700 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|---|---------------|--|---------------|--|
| White | 90886 | 90890 | 90884 | 90888 |
| Black | 90887 | 90891 | 90885 | 90889 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------------|------------------------|------------------------|---------------------|
| M | 2700 | 2598 - 1928 | 3210 - 2382 | 15 Spot - |
| W | 3000 | 2794 - 2073 | 3431 - 2546 | 30 Flood - |
| N | 4000 | 2990 - 2219 | 3431 - 2546 | 60 W.Flood - |

Electronics

| 99112 | 83066 | 99330 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V DALI PUSH | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 124 x 179 x h 22 | p 210 x 148 x h 28 |



epitax


Materials


Aluminium body

Polycarbonate body (vers. 8 W and 15 W)



epitax range

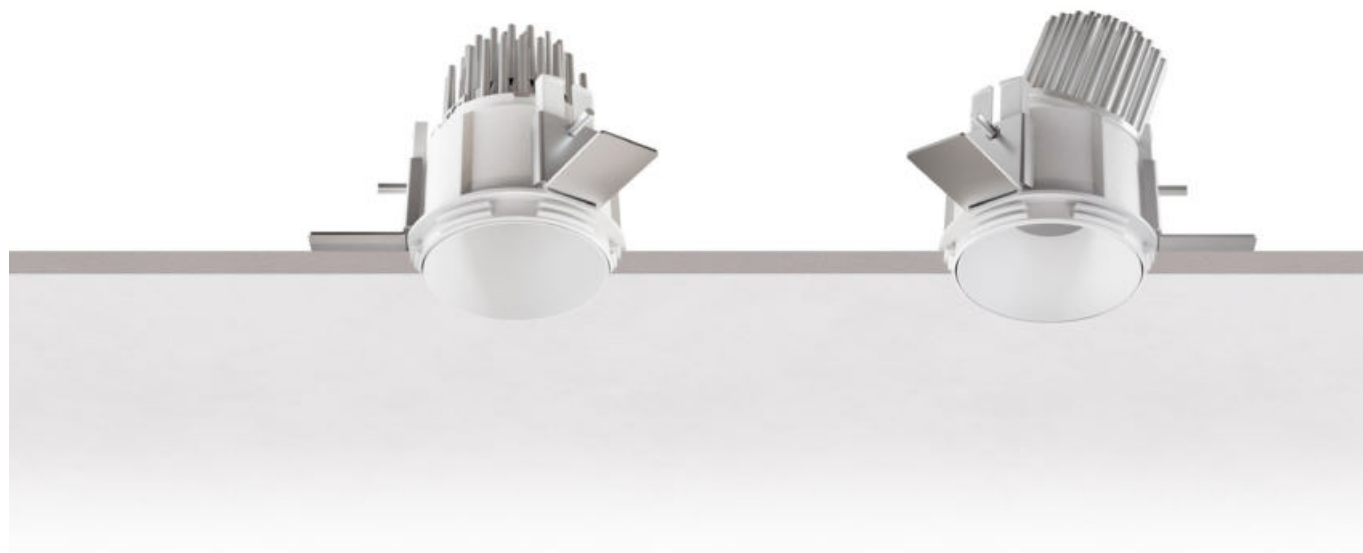

| | Round | J Round Adjustable |
|---|--|--|
| 2 W | Ø 29 mm | - |
| 4 W | Ø 29 mm | - |
| 6 W | Ø 35 mm | - |
| 8 W | - | Ø 64 mm |
| 10 W | Ø 64 mm | - |
| 15 W | Ø 88 mm | Ø 88 mm |
| Finish | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black <input type="checkbox"/> Gold | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black <input type="checkbox"/> Gold |
| Balance CRI 92 | (2W) 2700K - 3000K 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Efficiency CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Narrow Spot - Spot Flood - Wide Flood | Narrow Spot - Spot Flood - Wide Flood |
| Driver | On/Off - 1/10V - DALI - Fase-Cut | On/Off - 1/10V - DALI |
|  | 35/37 mm - 40 mm 73/76 mm - 102/105 mm | 73/76 mm - 102/105 mm |

Trimless

The Epitax family downlights can be flush mounted or extracted into a semi-recessed position even after installation: this possibility greatly simplifies the extraction operation and makes Epitax a product that is versatile and easy to configure.




Receded source

Being particularly recessed, this light source allows obtaining a defined emission, hence reducing the impact of the secondary light beam while drastically reducing glare at the same time.

Finishes

Three finishes available:

- white RAL9003
- black RAL9005
- warm & chic gold

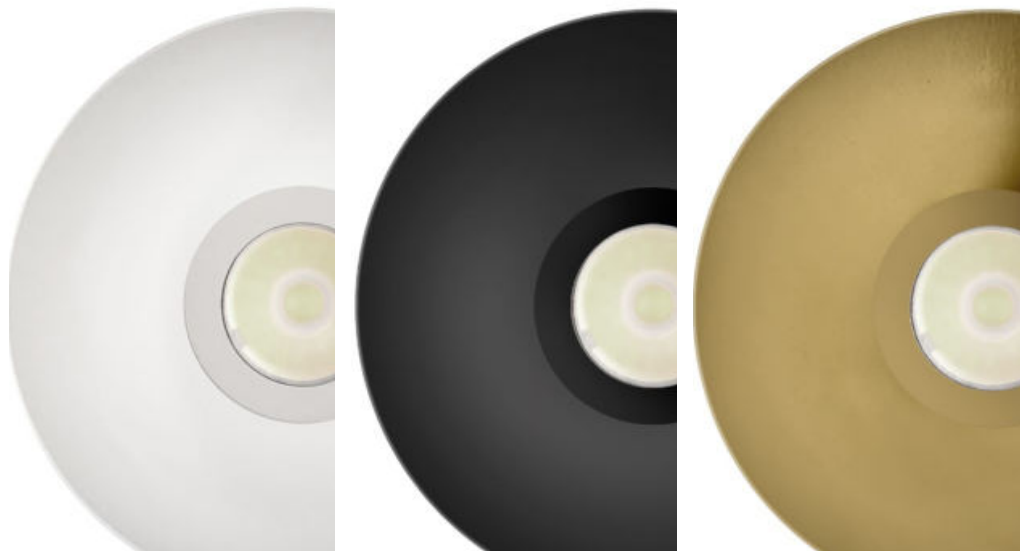


Tilting version

The Epitax_J range of products come with a 360° mobility on the horizontal axis and a 30° tilt on the vertical axis.



Epitax | Downlight | powerLED 2 W DC 630 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80632 | 80630 |
| Black | 80633 | 80631 |
| Gold | 80745 | 80744 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|--|
| M | 2700 | 157 - 97 | 219 - 136 | 8 Spot (11°) |
| W | 3000 | 179 - 111 | 233 - 145 | 15 Spot (22°) |
| N | 4000 | - | 249 - 155 | 30 Flood (27°) 60 W.Flood (52°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |




Recessed casing for flush installation Pag. 64

98501 H. 28 Ø 39 mm

Recessed casing with flange Pag. 64

| | |
|----------------------------|-------|
| 98527 H. 27 Ø 42 mm | White |
| 98528 H. 27 Ø 42 mm | Black |
| 98529 H. 27 Ø 42 mm | Gold |

Epitax | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80636 | 80634 |
| Black | 80637 | 80635 |
| Gold | 80747 | 80746 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 226 | 490 - 281 | 15 Spot (15°) |
| W | 3000 | 423 - 243 | 490 - 281 | 30 Flood (31°) |
| N | 4000 | 456 - 261 | 529 - 303 | 60 W.Flood (49°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | 0/1-10V converter 1 art. p 138 x l 22 x h 21 | DALI converter 1 art. p 138 x l 22 x h 21 | |




Recessed casing for flush installation Pag. 64

98501 H. 28 Ø 39 mm

Recessed casing with flange Pag. 64

| | |
|----------------------------|-------|
| 98527 H. 27 Ø 42 mm | White |
| 98528 H. 27 Ø 42 mm | Black |
| 98529 H. 27 Ø 42 mm | Gold |

Epitax | Downlight | powerLED 6 W DC 500 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80640 | 80638 |
| Black | 80641 | 80639 |
| Gold | 80749 | 80748 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 327 | 659 - 405 | 15 Spot (15°) |
| W | 3000 | 569 - 351 | 659 - 405 | 30 Flood (33°) |
| N | 4000 | 614 - 377 | 711 - 437 | 60 W.Flood (53°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |



Recessed casing for flush installation Pag. 64


98502 H. 28 Ø 43 mm

Recessed casing with flange Pag. 64

| | |
|----------------------------|-------|
| 98530 H. 28 Ø 48 mm | White |
| 98531 H. 28 Ø 48 mm | Black |
| 98532 H. 28 Ø 48 mm | Gold |

RTG 80638W15 / 80638W30 / 80638W60

Epitax | Downlight | powerLED 10 W DC 800 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80595 | 80591 |
| Black | 80596 | 80592 |
| Gold | 80751 | 80750 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 960 - 633 | 1108 - 731 | 15 Spot (17°) |
| W | 3000 | 1034 - 681 | 1194 - 787 | 30 Flood (28°) |
| N | 4000 | 1108 - 731 | 1280 - 844 | 45 W.Flood (42°) |

Electronics

| 99735 | 99135 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1-3 art. p 210 x 148 x h 25 |


Recessed casing for flush installation Pag. 64

98499 H. 42 Ø 73,5 mm

Recessed casing with flange Pag. 64

| | |
|----------------------------|-------|
| 98533 H. 42 Ø 84 mm | White |
| 98534 H. 42 Ø 84 mm | Black |
| 98535 H. 42 Ø 84 mm | Gold |

RTG 80591W30 / 80591W60



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80603 | 80599 |
| Black | 80604 | 80600 |
| Gold | 80753 | 80752 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1568 - 1035 | 1932 - 1275 | 15 Spot (22°) |
| W | 3000 | 1677 - 1107 | 1932 - 1275 | 30 Flood (37°) |
| N | 4000 | 1804 - 1190 | 2078 - 1371 | 60 W.Flood (50°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |


Recessed casing for flush installation Pag. 64

98500 H. 81 Ø 89,5 mm

Recessed casing with flange Pag. 64

| | |
|-------------------------------|-------|
| 98536 H. 42,5 Ø 110 mm | White |
| 98537 H. 42,5 Ø 110 mm | Black |
| 98538 H. 42,5 Ø 110 mm | Gold |

Epitax_J | Downlight | powerLED 8 W DC 700 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80644 | 80642 |
| Black | 80645 | 80643 |
| Gold | 80758 | 80757 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 689 - 411 | 854 - 509 | 15 Spot (15°) |
| W | 3000 | 738 - 440 | 854 - 509 | 30 Flood (33°) |
| N | 4000 | 796 - 475 | 922 - 550 | 60 W.Flood (64°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PSUH 1 - 3 art. p 210 x 148 x h 25 |


Recessed casing for flush installation Pag. 64

98499 H. 42 Ø 73,5 mm

Recessed casing with flange Pag. 64

| | |
|----------------------------|-------|
| 98533 H. 42 Ø 84 mm | White |
| 98534 H. 42 Ø 84 mm | Black |
| 98535 H. 42 Ø 84 mm | Gold |

Epitax_J | Downlight | powerLED 15 W DC 400 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80648 | 80646 |
| Black | 80649 | 80647 |
| Gold | 80760 | 80759 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | 1568 - 1020 | 1932 - 1258 | 15 Spot (23°) |
| W | 3000 | 1677 - 1091 | 1932 - 1258 | 30 Flood (36°) |
| N | 4000 | 1804 - 1174 | 2078 - 1353 | 60 W.Flood(55°) |

Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Recessed casing for flush installation Pag. 64

98500 H. 81 Ø 89,5 mm

Recessed casing with flange Pag. 64

| | |
|-------------------------------|-------|
| 98536 H. 42,5 Ø 110 mm | White |
| 98537 H. 42,5 Ø 110 mm | Black |
| 98538 H. 42,5 Ø 110 mm | Gold |


Recessed casing



description

98501 Recessed casing for flush installation

suitable for: Epitax 2W / Epitax 4W



description

type

98527 Recessed casing with flange

98528 Recessed casing with flange


98529 Recessed casing with flange

White

Black

Gold


suitable for: Epitax 2W / Epitax 4W



description

98502 Recessed casing for flush installation

suitable for: Epitax 6W



description

type

98530 Recessed casing with flange

98531 Recessed casing with flange

98532 Recessed casing with flange

White

Black

Gold


suitable for: Epitax 6W



description

98499 Recessed casing for flush installation

suitable for: Epitax 10W / Epitax 8W / Epitax_J 8W



description

type

98533 Recessed casing with flange

98534 Recessed casing with flange

98535 Recessed casing with flange

White

Black

Gold


suitable for: Epitax 10W / Epitax 8W / Epitax_J 8W



description

98500 Recessed casing for flush installation

suitable for: Epitax 15W / Epitax_J 15W



description

type

98536 Recessed casing with flange

98537 Recessed casing with flange

98538 Recessed casing with flange

White



Black

Gold

suitable for: Epitax 15W / Epitax_J 15W





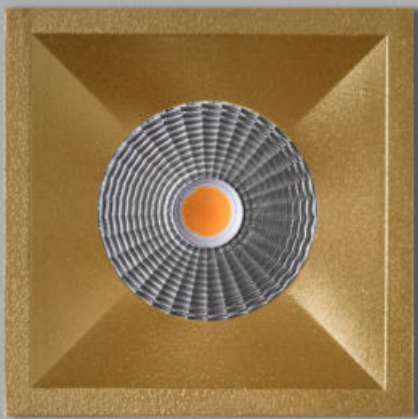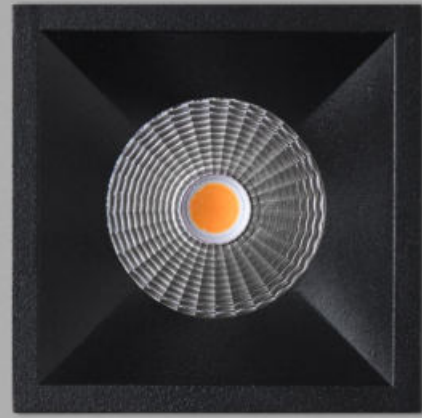


loro

Materials
Aluminium body



loro range



| | _R Round | _RJ Round Adjustable | _Q Square | _QJ Square Adjustable |
|---|--|--|--|--|
| 4 W | - | Ø 69 mm | - | - |
| 8 W | Ø 76 mm | Ø 100 mm | □ 70 mm | □ 100 mm |
| 13 W | Ø 76 mm | Ø 100 mm | □ 70 mm | □ 100 mm |
| 25 W | Ø 105 mm | Ø 139 mm | □ 100 mm | □ 139 mm |
| HC Accessories | 8W - 13W - 25W | 4W - 8W - 13W - 25W | 8W - 13W - 25W | 8W - 13W - 25W |
| Finish | <input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Grey <input type="checkbox"/> Gold | <input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Grey <input type="checkbox"/> Gold | <input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Grey <input type="checkbox"/> Gold | <input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Grey <input type="checkbox"/> Gold |
| Balance CRI 92 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Efficiency CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| DynamicWhite 2700K - 5700K | Ø 76 mm - Ø 105 mm | Ø 100 mm - Ø 139 mm | □ 70 mm - □ 100 mm | □ 100 mm - □ 139 mm |
| Optics | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood |
| Driver | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI |
|  | 68 mm - 95 mm | 62 mm - 92 mm - 127 mm | □ 64 mm - □ 93 mm | □ 91 mm - □ 124 mm |

Minimal size

Using a curved rear dissipator reduces the recess depth and allows the Loro range of products (except for the 25 W) versions to adapt to the installation on dropped ceilings with height lesser than 10 cm.

UGR<19

The optics group, consisting of a chrome-plated reflector and a transparent polycarbonate diffuser offers an optimal reflectance control and a UGR index below 19, i.e. the threshold value for the correct lighting of offices and environments with video terminals (UNI-EN 12464-1 standard).



IP65 O.C.

The optics gr group offers an IP65 front index of protection, i.e. full protection against entry of dust and extremely fine particles, as well as sprays and water jets. WARNING the value exclusively refers to the optics section and NOT the lamp body (IP44 index of protection).



IP44
IP65

Finishes

Four finishes available:

- white RAL9003
- black RAL9005
- grey RAL9006
- warm & chic gold



Aesthetic filter

The new type of optics filter, designed specifically to hide from view the LED positioned inside the product, it allows an aesthetic upgrade and a cleaner style of the downlight, maintaining the same lighting performance.




Product with filter
97920W33



Product without filter
97920W30

Loro_R | Downlight | arrayLED 8 W DC 220 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 97920 | 80791 | 97695 | 80787 |
| Black | 97921 | 80792 | 97696 | 80788 |
| Grey | 97924 | 80793 | 97697 | 80789 |
| Gold | 97925 | 80794 | 97698 | 80790 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | 883 - 638 | 1088 - 785 | 15 Spot (18°) |
| W | 3000 | 943 - 682 | 1088 - 785 | 30 Spot (22°) |
| N | 4000 | 1016 - 734 | 1173 - 847 | 60 Flood (44°) |
| | | | | 33* Flood (43°) |

Electronics

| 99198 | 99732 | 99730 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x 137 x h 31 | p 134 x 137 x h 31 | p 134 x 137 x h 31 |


RTG 97695W30 / 97695W60

*** Aesthetic filter**



Loro_R fitted with aesthetic filter (33), available only for codes without Honeycomb and Dynamic White

Loro_R | Downlight | arrayLED 13 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 91749 | 80799 | 91204 | 80795 |
| Black | 91750 | 80800 | 91205 | 80796 |
| Grey | 91751 | 80801 | 91206 | 80797 |
| Gold | 91752 | 80802 | 91207 | 80798 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1399 - 1183 | 1724 - 1457 | 15 Spot (17°) |
| W | 3000 | 1496 - 1265 | 1724 - 1457 | 30 Spot (23°) |
| N | 4000 | 1610 - 1361 | 1854 - 1567 | 60 W.Flood (46°) |
| | | | | 33* Flood (40°) |

Electronics

| 99260 | 99262 | 99721 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x 137 x h 31 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

DW **DALI2** **NEW** powerLED 8W DC 700 mA


| | Dynamic White | HC Dynamic White |
|-------|---------------|-------------------------|
| White | 84111 | 84115 |
| Black | 84112 | 84116 |
| Grey | 84113 | 84117 |
| Gold | 84114 | 84118 |

| CRI90 | | Optic |
|----------|-----------------------------|---------------------|
| D | 2700K - 5700K Dynamic White | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--------------------|------------|----------------|-----------|
| DALI DT8 | Dimmer DMX | Controllers | CV 48V |
| 2 - 3 art. | 1 - 6 art. | Pag. 952 - 953 | Pag. 941 |
| p 202 x 158 x h 30 | | | |

RTG 91204W30 / 91204W60



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|--------------------|--------------|------------------------|--------------|------------------------|
| White | 80672 | 80807 | 80670 | 80803 |
| Black | 80673 | 80808 | 80671 | 80804 |
| Grey | 80704 | 80809 | 80702 | 80805 |
| Gold | 80705 | 80810 | 80703 | 80806 |

| | Cct | 18W lm S - D CRI 92 | 18W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|--------------------------|
| M | 2700 | 1901 - On req. | 2349 - On req. | 15 Spot (15°) |
| W | 3000 | 2044 - On req. | 2510 - On req. | 30 Flood (34°) |
| N | 4000 | 2188 - On req. | 2510 - On req. | 60 W.Flood (56°) |
| | | | | 33* W.Flood (52°) |

| | Cct | 25W lm S - D CRI 92 | 25W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|--------------------------|
| M | 2700 | 2598 - 1958 | 3210 - 2451 | 15 Spot (15°) |
| W | 3000 | 2794 - 2134 | 3431 - 2621 | 30 Flood (34°) |
| N | 4000 | 2990 - 2283 | 3431 - 2620 | 60 W.Flood (56°) |
| | | | | 33* W.Flood (52°) |

Electronics 18W

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Electronics 25W

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

DW DALI2 NEW powerLED 15W DC 700 mA


| | Dynamic White | HC Dynamic White |
|--------------------|---------------|-------------------------------|
| White | 84119 | 84123 |
| Black | 84120 | 84124 |
| Grey | 84121 | 84125 |
| Gold | 84122 | 84126 |

| CRI90 | | Optic |
|----------|-----------------------------|---------------------|
| D | 2700K - 5700K Dynamic White | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|------------------------|-------------------------------|--------------------|
| DALI DT8 1-2 art. p 202 x 158 x h 30 | Dimmer DMX 1-2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

Loro_RJ | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 80710 | 80847 | 80706 | 80843 |
| Black | 80711 | 80848 | 80707 | 80844 |
| Grey | 80712 | 80849 | 80708 | 80845 |
| Gold | 80713 | 80850 | 80709 | 80846 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 230 | 490 - 287 | 15 Spot (15°) |
| W | 3000 | 423 - 247 | 490 - 287 | 30 Flood (31°) |
| N | 4000 | 456 - 267 | 529 - 309 | 60 W.Flood (49°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|--|--|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |



Loro_RJ | Downlight | arrayLED 8 W DC 220 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 93443 | 80855 | 93407 | 80851 |
| Black | 93444 | 80856 | 93411 | 80852 |
| Grey | 93446 | 80857 | 93413 | 80853 |
| Gold | 93449 | 80858 | 93418 | 80854 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | 883 - 637 | 1088 - 785 | 15 Spot (18°) |
| W | 3000 | 943 - 682 | 1088 - 785 | 30 Spot (22°) |
| N | 4000 | 1016 - 734 | 1173 - 847 | 60 Flood (44°) |
| | | | | 33* Flood (43°) |

Electronics

| 99198 | 99732 | 99730 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |


RTG 93407W30 / 93407W60

*** Aesthetic filter**



Loro_RJ fitted with aesthetic filter (33), available only for codes without Honeycomb and Dynamic White

Loro_RJ | Downlight | arrayLED 13 W DC 350 mA




| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 93450 | 80863 | 93422 | 80859 |
| Black | 93451 | 80864 | 93428 | 80860 |
| Grey | 93452 | 80865 | 93429 | 80861 |
| Gold | 93460 | 80866 | 93431 | 80862 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1399 - 1182 | 1724 - 1457 | 15 Spot (18°) |
| W | 3000 | 1496 - 1265 | 1724 - 1457 | 30 Spot (23°) |
| N | 4000 | 1610 - 1360 | 1854 - 1566 | 60 W.Flood (47°) |
| | | | | 33* Flood (40°) |

Electronics

| 99260 | 99262 | 99721 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 art. p 210 x 148 x h 25 |

Loro_RJ | Downlight | arrayLED 18W DC 500 mA - 25W DC 700 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 80370 | 80871 | 80374 | 80867 |
| Black | 80371 | 80872 | 80375 | 80868 |
| Grey | 80372 | 80873 | 80376 | 80869 |
| Gold | 80373 | 80874 | 80377 | 80870 |

| | Cct | 18W lm S - D CRI 92 | 18W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|--------------------------|
| M | 2700 | 1901 - On req. | 2349 - On req. | 15 Spot (15°) |
| W | 3000 | 2044 - On req. | 2510 - On req. | 30 Flood (34°) |
| N | 4000 | 2188 - On req. | 2510 - On req. | 60 W.Flood (56°) |
| | | | | 33* W.Flood (52°) |

| | Cct | 25W lm S - D CRI 92 | 25W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|--------------------------|
| M | 2700 | 2598 - 1985 | 3210 - 2451 | 15 Spot (15°) |
| W | 3000 | 2794 - 2134 | 3431 - 2621 | 30 Flood (34°) |
| N | 4000 | 2990 - 2283 | 3431 - 2620 | 60 W.Flood (56°) |
| | | | | 33* W.Flood (52°) |

Electronics 18W

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Electronics 25W

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

DW **DALI2** **NEW** **powerLED 8W DC 700 mA**

| Dynamic White | |
|---------------|--------------|
| White | 84143 |
| Black | 84144 |
| Grey | 84145 |
| Gold | 84146 |

| CRI90 | | Optic |
|----------|-----------------------------|--|
| D | 2700K - 5700K Dynamic White | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 2 - 3 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 6 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

RTG **93422W30 / 93442W60**

DW **DALI2** **NEW** **powerLED 15W DC 700 mA**


| Dynamic White | |
|---------------|--------------|
| White | 84147 |
| Black | 84148 |
| Grey | 84149 |
| Gold | 84150 |

| CRI90 | | Optic |
|----------|-----------------------------|--|
| D | 2700K - 5700K Dynamic White | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 1 - 2 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

Loro_Q | Downlight | arrayLED 8 W DC 220 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 97940 | 80823 | 97699 | 80819 |
| Black | 97941 | 80824 | 97700 | 80820 |
| Grey | 97944 | 80825 | 97701 | 80821 |
| Gold | 97945 | 80826 | 97702 | 80822 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | 883 - 637 | 1088 - 785 | 15 Spot (18°) |
| W | 3000 | 943 - 682 | 1088 - 785 | 30 Spot (22°) |
| N | 4000 | 1016 - 734 | 1173 - 847 | 60 Flood (44°) |
| | | | | 33* Flood (43°) |

Electronics

| 99198 | 99732 | 99730 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |


RTG 97699W30 / 97699W60

* Aesthetic filter



Loro_Q fitted with aesthetic filter (33), available only for codes without Honeycomb and Dynamic White

Loro_Q | Downlight | arrayLED 13 W DC 350 mA



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 91753 | 80831 | 91208 | 80827 |
| Black | 91754 | 80832 | 91209 | 80828 |
| Grey | 91755 | 80833 | 91210 | 80829 |
| Gold | 91756 | 80834 | 91211 | 80830 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1399 - 1182 | 1724 - 1457 | 15 Spot (17°) |
| W | 3000 | 1496 - 1265 | 1724 - 1457 | 30 Spot (23°) |
| N | 4000 | 1610 - 1360 | 1854 - 1566 | 60 W.Flood (46°) |
| | | | | 33* Flood (40°) |

Electronics

| 99260 | 99262 | 99721 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 art. p 210 x 148 x h 25 |

DW **DALI2** **NEW** powerLED 8W DC 700 mA


| | Dynamic White | HC Dynamic White |
|-------|---------------|-------------------------|
| White | 84127 | 84131 |
| Black | 84128 | 84132 |
| Grey | 84129 | 84133 |
| Gold | 84130 | 84134 |

| CRI90 | Optic |
|----------|-----------------------------|
| D | 2700K - 5700K Dynamic White |
| | 15 Spot - |
| | 30 Flood - |
| | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 2 - 3 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 6 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

RTG 91208W30 / 91208W60



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|--------------------|--------------|------------------------|--------------|------------------------|
| White | 80660 | 80839 | 80658 | 80835 |
| Black | 80661 | 80840 | 80659 | 80836 |
| Grey | 80690 | 80841 | 80688 | 80837 |
| Gold | 80691 | 80842 | 80689 | 80838 |

| | Cct | 18W lm S - D CRI 92 | 18W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|---|
| M | 2700 | 1901 - On req. | 2349 - On req. | 15 Spot (15°) |
| W | 3000 | 2044 - On req. | 2510 - On req. | 30 Flood (34°) |
| N | 4000 | 2188 - On req. | 2510 - On req. | 60 W.Flood (56°) 33* W.Flood (52°) |

| | Cct | 25W lm S - D CRI 92 | 25W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|---|
| M | 2700 | 2598 - 1985 | 3210 - 2451 | 15 Spot (15°) |
| W | 3000 | 2794 - 2134 | 3431 - 2621 | 30 Flood (34°) |
| N | 4000 | 2990 - 2283 | 3431 - 2620 | 60 W.Flood (56°) 33* W.Flood (52°) |

Electronics 18W

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Electronics 25W

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

DW DALI2 NEW powerLED 15W DC 700 mA


| | Dynamic White | HC Dynamic White |
|--------------------|---------------|-------------------------------|
| White | 84135 | 84139 |
| Black | 84136 | 84140 |
| Grey | 84137 | 84141 |
| Gold | 84138 | 84142 |

| CRI90 | | Optic |
|----------|-----------------------------|--|
| D | 2700K - 5700K Dynamic White | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 1 - 2 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

Loro_QJ | Downlight | arrayLED 8 W DC 220 mA



| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 80346 | 80887 | 80350 | 80883 |
| Black | 80347 | 80888 | 80351 | 80884 |
| Grey | 80348 | 80889 | 80352 | 80885 |
| Gold | 80349 | 80890 | 80353 | 80886 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | 883 - 637 | 1088 - 785 | 15 Spot (18°) |
| W | 3000 | 943 - 682 | 1088 - 785 | 30 Spot (22°) |
| N | 4000 | 1016 - 734 | 1173 - 847 | 60 Flood (44°) |
| | | | | 33* Flood (43°) |

Electronics


| 99198 | 99732 | 99730 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

* Aesthetic filter



Loro_QJ fitted with aesthetic filter (33), available only for codes without Honeycomb and Dynamic White

Loro_QJ | Downlight | arrayLED 13 W DC 350 mA



| | CRI 92 | CRI 92 ^{HC} | CRI 80 | CRI 80 ^{HC} |
|-------|--------------|----------------------|--------------|----------------------|
| White | 80354 | 80895 | 80358 | 80891 |
| Black | 80355 | 80896 | 80359 | 80892 |
| Grey | 80356 | 80897 | 80360 | 80893 |
| Gold | 80357 | 80898 | 80361 | 80894 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1399 - 1182 | 1724 - 1457 | 15 Spot (18°) |
| W | 3000 | 1496 - 1265 | 1724 - 1457 | 30 Spot (23°) |
| N | 4000 | 1610 - 1360 | 1854 - 1566 | 60 W.Flood (47°) |
| | | | | 33* Flood (40°) |

Electronics

| 99260 | 99262 | 99721 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 art. p 210 x 148 x h 25 |


DW **DALI2** **NEW** powerLED 8W DC 700 mA

| Dynamic White | |
|---------------|--------------|
| White | 84151 |
| Black | 84152 |
| Grey | 84153 |
| Gold | 84154 |

| CRI90 | | | Optic |
|----------|---------------|---------------|---------------------|
| D | 2700K - 5700K | Dynamic White | 15 Spot - |
| | | | 30 Flood - |
| | | | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 2 - 3 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 6 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |



| | CRI 92 | CRI 92 HC | CRI 80 | CRI 80 HC |
|-------|--------------|------------------|--------------|------------------|
| White | 80362 | 80903 | 80366 | 80899 |
| Black | 80363 | 80904 | 80367 | 80900 |
| Grey | 80364 | 80905 | 80368 | 80901 |
| Gold | 80365 | 80906 | 80369 | 80902 |

| | Cct | 18W lm S - D CRI 92 | 18W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|---|
| M | 2700 | 1901 - On req. | 2349 - On req. | 15 Spot (15°) |
| W | 3000 | 2044 - On req. | 2510 - On req. | 30 Flood (34°) |
| N | 4000 | 2188 - On req. | 2510 - On req. | 60 W.Flood (56°) 33* W.Flood (52°) |

| | Cct | 25W lm S - D CRI 92 | 25W lm S - D CRI 80 | Optic |
|----------|------|---------------------|---------------------|---|
| M | 2700 | 2598 - 1985 | 3210 - 2451 | 15 Spot (15°) |
| W | 3000 | 2794 - 2134 | 3431 - 2621 | 30 Flood (34°) |
| N | 4000 | 2990 - 2283 | 3431 - 2620 | 60 W.Flood (56°) 33* W.Flood (52°) |

Electronics 18W

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Electronics 25W

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

DW DALI2 NEW powerLED 15W DC 700 mA

| Dynamic White | |
|---------------|--------------|
| White | 84155 |
| Black | 84156 |
| Grey | 84157 |
| Gold | 84158 |

| CRI90 | Optic |
|--------------------------------------|---------------------|
| D 2700K - 5700K Dynamic White | 15 Spot - |
| | 30 Flood - |
| | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 1 - 2 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |



giotto

Materials
Aluminium body





In a class of its own

Due to the 9 millimetres of source and the surprising controlled diffusion in three 10°, 30° and 60° optical variants, Giotto ushers an innovative solution in the lighting industry, unrivalled for its ratio between the slim diameter of the beam output hole and the super efficient lighting technique.




Scale 1:1

9 mm

Cross Optics Technology™

This patented technology uses the positioning of two convex lenses placed across from one another: the first gathers the light on the surface of the second, channelling it into a small point for perfect definition. The second lens reopens the beam, now deprived of the secondary component, creating a crisp and clean ring of light on the lit surface.

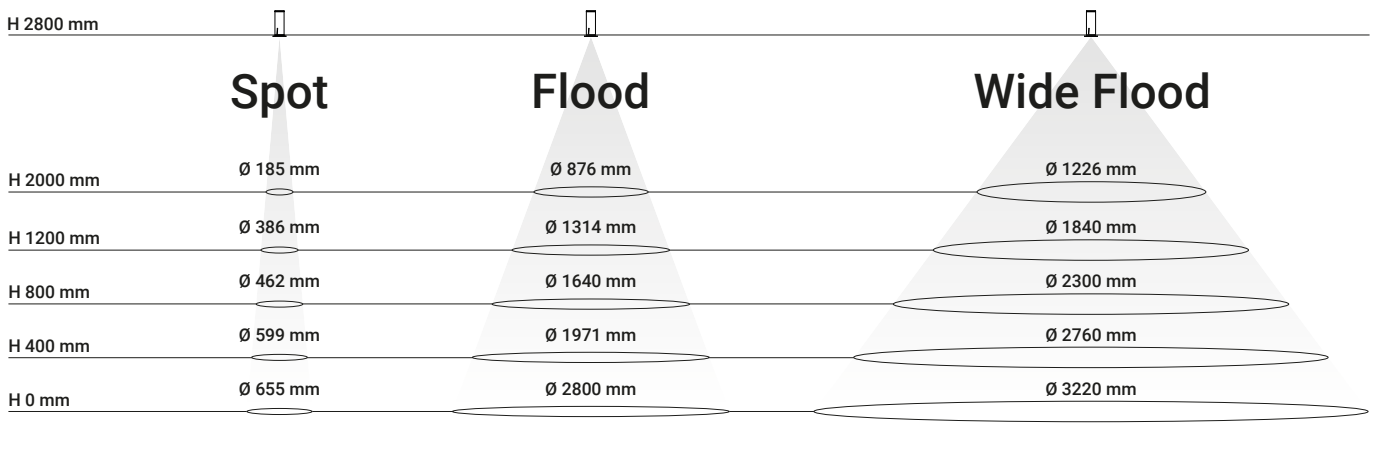


Giotto RF

The Giotto range expands and includes the new trimless version: Giotto_RF adapts to any ceiling and disappears entirely from view thanks to the plaster white body that allows the product to be painted. The recessed casing allows easy screw installation and just as easy removal of the item, which can be replaced with another from the Giotto family.



Giotto_R | Downlight | powerLED 4 W DC 350 mA



36

| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 84199 | 84201 |
| Black | 84200 | 84202 |


| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 94 | 490 - 118 | 10 Spot (14°) |
| W | 3000 | 423 - 102 | 490 - 118 | 30 Flood (35°) |
| N | 4000 | 456 - 110 | 529 - 128 | 60 W.Flood (54°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 138 x l 22 x h 21 | 0/1-10V converter 1 art. p 138 x l 22 x h 21 | DALI converter 1 art. p 138 x l 22 x h 21 | |



Giotto_R | Downlight | powerLED 6 W DC 500 mA



36

| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 84203 | 84205 |
| Black | 84204 | 84206 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 128 | 659 - 160 | 10 Spot (14°) |
| W | 3000 | 569 - 138 | 659 - 160 | 30 Flood (35°) |
| N | 4000 | 614 - 149 | 711 - 173 | 60 W.Flood (54°) |


Electronics

| 99377 | 99106 | 99714 | 99715 |
|---|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 138 x l 22 x h 21 | DALI 1 art. p 138 x l 22 x h 21 |



RTG 84203W30


Giotto_P | Pendant | 198-264 V AC | powerLED 7,5 W DC - 9 W AC



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 81477 | 81479 |
| Black | 81478 | 81480 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 614 - 150 | 760 - 184 | 10 Spot (14°) |
| W | 3000 | 657 - 160 | 760 - 184 | 30 Flood (35°) |
| N | 4000 | 709 - 173 | 821 - 199 | 60 W.Flood (54°) |

Giotto_RF | Downlight | powerLED 4 W DC 350 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 82075 | 82076 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 395 - 94 | 490 - 118 | 10 Spot (14°) |
| W | 3000 | 423 - 102 | 490 - 118 | 30 Flood (35°) |
| N | 4000 | 457 - 110 | 529 - 128 | 60 W.Flood (54°) |

Electronics


| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|---|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 138 x l 22 x h 21 | 0/1-10V converter 1 art. p 138 x l 22 x h 21 | DALI converter 1 art. p 138 x l 22 x h 21 | |



Recessed casing

98502 H. 28 Ø 43 mm

Giotto_RF | Downlight | powerLED 6 W DC 500 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 82077 | 82078 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 128 | 659 - 160 | 10 Spot (14°) |
| W | 3000 | 569 - 138 | 659 - 160 | 30 Flood (35°) |
| N | 4000 | 614 - 149 | 712 - 173 | 60 W.Flood (54°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|---|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 138 x l 22 x h 21 | DALI 1 art. p 138 x l 22 x h 21 |



Recessed casing

98502 H. 28 Ø 43 mm

Recessed casing



description

98502 Recessed casing for flush installation

suitable for: Giotto_RF 4W / Giotto_RF 6W







cob40



Materials
Aluminium body

Minimum bulk

Cob40 is a recessed mount with reduced dimensions and high efficiency. Available in two versions, fixed or tilting, in three power versions - 6.5W, 15W and 18W. Thanks to the new accessories, Cob 40 can change the colour of the inner ring to adapt and match the surrounding environment.

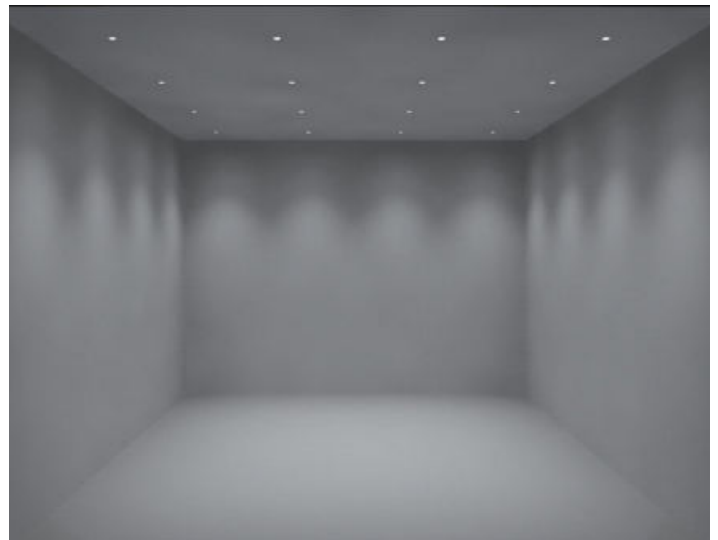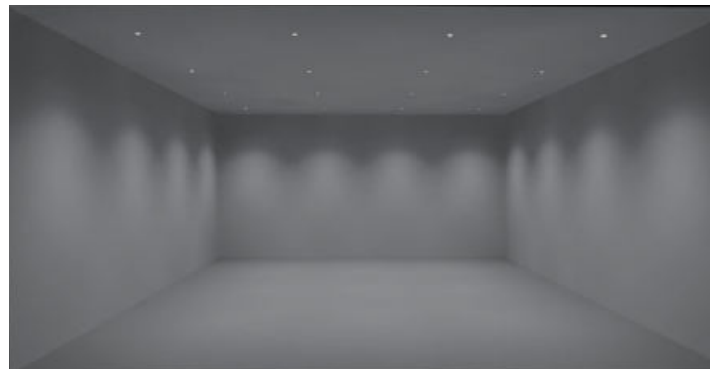

Cob40_R | Downlight | arrayLED 6,5 W DC 700 mA



CRI 80

| | |
|-------|--------------|
| White | 80244 |
| Black | 80245 |

| Cct | lm S - D CRI 80 | Optic |
|---------------|-----------------|-------------------------|
| M 2700 | 770 - 689 | 15 Spot (17°) |
| W 3000 | 770 - 689 | 30 Spot (24°) |
| N 4000 | 831 - 744 | 60 W.Flood (54°) |

Electronics


| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |



Accessories Pag. 87

| | |
|------------------------------|------------------------------|
| 99888 Accessories | 99890 Accessories |
| 99889 Accessories | 99899 Accessories |
| 89373 Recessed casing | 89374 Recessed casing |

Cob40_R | Downlight | arrayLED 18 W DC 500 mA



| CRI 92 | CRI 80 |
|--------------------|--------------|
| White 82473 | 82475 |
| Black 82474 | 82476 |

| Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---------------|-----------------|-----------------|-------------------------|
| M 2700 | 1939 - 1656 | 2304 - 1959 | 15 Spot (16°) |
| W 3000 | 2030 - 1725 | 2401 - 2041 | 30 Flood (34°) |
| N 4000 | 2182 - 1822 | 2535 - 2156 | 60 W.Flood (58°) |



Electronics

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Accessories Pag. 87

| | |
|------------------------------|------------------------------|
| 99901 Accessories | 99903 Accessories |
| 99902 Accessories | 99904 Accessories |
| 89373 Recessed casing | 89374 Recessed casing |

Cob40_R | Downlight | arrayLED 15 W DC 400 mA



CRI 80

| | |
|-------|--------------|
| White | 81351 |
| Black | 81352 |

| Cct | lm S - D CRI 80 | Optic |
|---------------|-----------------|-------------------------|
| M 2700 | 1932 - 1522 | 15 Spot (22°) |
| W 3000 | 1932 - 1522 | 30 Flood (31°) |
| N 4000 | 2078 - 1637 | 60 W.Flood (58°) |


Electronics

| 99734 | 99732 | 99730 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Accessories Pag. 87

| | |
|------------------------------|------------------------------|
| 99891 Accessories | 99893 Accessories |
| 99892 Accessories | 99900 Accessories |
| 89373 Recessed casing | 89374 Recessed casing |

Cob40_RJ | Downlight | arrayLED 6,5 W DC 700 mA



CRI 80

| | |
|-------|--------------|
| White | 80109 |
| Black | 80110 |

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 770 - 689 | 15 Spot (17°) |
| W | 3000 | 770 - 689 | 30 Spot (24°) |
| N | 4000 | 831 - 744 | 60 W.Flood (54°) |

Electronics



| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |



Accessories

| | |
|------------------------------|------------------------------|
| 99888 Accessories | 99890 Accessories |
| 99889 Accessories | 99899 Accessories |
| 89373 Recessed casing | 89374 Recessed casing |

Cob40_RJ | Downlight | arrayLED 18 W DC 500 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 82477 | 82479 |
| Black | 82478 | 82480 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 1939 - 1656 | 2304 - 1959 | 15 Spot (16°) |
| W | 3000 | 2030 - 1725 | 2401 - 2041 | 30 Flood (34°) |
| N | 4000 | 2182 - 1822 | 2535 - 2156 | 60 W.Flood (58°) |

Electronics

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Accessories

| | |
|--------------------------|--------------------------|
| 99901 Accessories | 99903 Accessories |
| 99902 Accessories | 99904 Accessories |

Accessories

| | description | type |
|--|--------------------------|--------|
| | 99888 | White |
| | 99889 Accessories | Gold |
| | 99890 | Copper |
| | 99899 | Chrome |

suitable for: Cob40_R 6,5W / Cob40_RJ 6,5W

| | description | type |
|--|--------------------------|--------|
| | 99891 | White |
| | 99892 Accessories | Gold |
| | 99893 | Copper |
| | 99900 | Chrome |

suitable for: Cob40_R 15W

| | description | type |
|--|--------------------------|--------|
| | 99901 | White |
| | 99902 Accessories | Gold |
| | 99903 | Copper |
| | 99904 | Chrome |

suitable for: Cob40_R 18W / Cob40_RJ 18W

RTG 99888 / 99889 / 99890 / 99899

RTG 99901 / 99902 / 99903 / 99904

| | description | type |
|--|------------------------------|------|
| | 89374 Recessed casing | |

suitable for: Cob40_R 6,5W / Cob40_R 15W
Cob40_R 18W / Cob40_RJ 6,5W

| | description | type |
|--|------------------------------|------|
| | 89373 Recessed casing | |

suitable for: Cob40_R 6,5W / Cob40_R 15W
Cob40_R 18W / Cob40_RJ 6,5W



cob44


Materials

Aluminium body

Polycarbonate flange



Cob44_R | Downlight | arrayLED 6,5 W DC 700 mA



CRI 80



- White **96801**
- Black **96802**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 770 - 635 | 15 Spot (15°) |
| W | 3000 | 770 - 635 | 30 Flood (26°) |
| N | 4000 | 831 - 685 | 60 W.Flood (52°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Cob44_R | Downlight | arrayLED 11 W DC 300 mA



CRI 80


- White **93832**
- Black **93833**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 1399 - 1147 | 15 Spot (17°) |
| W | 3000 | 1399 - 1147 | 30 Spot (22°) |
| N | 4000 | 1507 - 1235 | 60 W.Flood (51°) |

Electronics

| 99734 | 99732 | 99730 |
|---------------------------------------|---|---|
| ON/OFF 1 art. p 88 x 138 x h 23 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI_PUSH 1 art. p 134 x 137 x h 31 |

Cob44_RJ | Downlight | arrayLED 6,5 W DC 700 mA



CRI 80


- White **96803**
- Black **96804**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 770 - 635 | 15 Spot (15°) |
| W | 3000 | 770 - 635 | 30 Flood (26°) |
| N | 4000 | 831 - 685 | 60 W.Flood (52°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Cob44_RJ | Downlight | arrayLED 11 W DC 300 mA



CRI 80



- White **93834**
- Black **93835**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 1399 - 1147 | 15 Spot (17°) |
| W | 3000 | 1399 - 1147 | 30 Spot (22°) |
| N | 4000 | 1507 - 1235 | 60 W.Flood (51°) |

Electronics

| 99734 | 99732 | 99730 |
|---------------------------------------|---|---|
| ON/OFF 1 art. p 88 x 138 x h 23 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI_PUSH 1 art. p 134 x 137 x h 31 |

Cob44_Q | Downlight | arrayLED 6,5 W DC 700 mA



CRI 80


- White **93354**
- Black **93355**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 770 - 635 | 15 Spot (15°) |
| W | 3000 | 770 - 635 | 30 Flood (26°) |
| N | 4000 | 831 - 685 | 60 W.Flood (52°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Cob44_Q | Downlight | arrayLED 11 W DC 300 mA



CRI 80


- White **93836**
- Black **93839**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 1399 - 1147 | 15 Spot (17°) |
| W | 3000 | 1399 - 1147 | 30 Spot (22°) |
| N | 4000 | 1507 - 1235 | 60 W.Flood (51°) |

Electronics

| 99734 | 99732 | 99730 |
|---------------------------------------|---|---|
| ON/OFF 1 art. p 88 x 138 x h 23 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI_PUSH 1 art. p 134 x 137 x h 31 |

Cob44_QJ | Downlight | arrayLED 6,5 W DC 700 mA



CRI 80


- White **93844**
- Black **93847**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 770 - 635 | 15 Spot (15°) |
| W | 3000 | 770 - 635 | 30 Flood (26°) |
| N | 4000 | 831 - 685 | 60 W.Flood (52°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

Cob44_QJ | Downlight | arrayLED 11 W DC 300 mA



CRI 80

- White **93840**
- Black **93843**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| M | 2700 | 1399 - 1147 | 15 Spot (17°) |
| W | 3000 | 1399 - 1147 | 30 Spot (22°) |
| N | 4000 | 1507 - 1235 | 60 W.Flood (51°) |

Electronics

| 99734 | 99732 | 99730 |
|---------------------------------------|---|---|
| ON/OFF 1 art. p 88 x 138 x h 23 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI_PUSH 1 art. p 134 x 137 x h 31 |



cob20


Materials

Aluminium body
ABS flange



cob20 range



| | _R Round | _RX Round | _Q Square |
|---|--|------------------------------------|---------------------------------|
| 15W | Ø 147 mm - Ø 197 mm Ø 227 mm - Ø 250 mm | - | □ 140 mm - □ 175 mm □ 205 mm |
| 25W | Ø 147 mm - Ø 197 mm Ø 227 mm - Ø 250 mm | Ø 147 mm | □ 140 mm - □ 175 mm □ 205 mm |
| 30W | Ø 197 mm - Ø 227 mm Ø 250 mm | Ø 197 mm | □ 175 mm - □ 205 mm |
| 35W | Ø 227 mm - Ø 250 mm | Ø 227 mm | □ 205 mm |
| 45W | - | Ø 252 mm | - |
| Finish | White | White | White |
| CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Wide Flood - Extra Wide Flood | Flood | Extra Wide Flood |
| Driver | On/Off - 1/10 V - DALI | On/Off - 1/10 V - DALI | On/Off - 1/10 V - DALI |
|  | 129 mm - 180 mm 210 mm - 236 mm | 129 mm - 180 mm 210 mm - 236 mm | □ 122 mm - □ 157 mm □ 188 mm |


Long-lasting

Equipment provided with high efficiency passive dissipation system with alloy 6060 extruded aluminium profiles. When operative, diodes can easily reach high temperatures which affect their performance and life cycle: thanks to a compact array of strips the Cob20 range of downlights exploits the entire surface to efficiently cool the LED source, thus guaranteeing balance between high performance and operative duration over time.

50.3° C



23.3° C

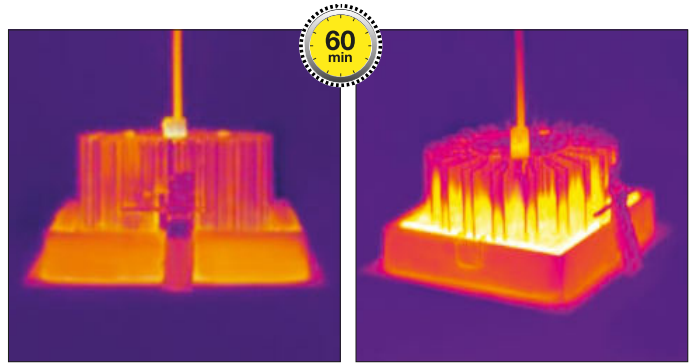


UGR index

The UGR (Unified Glare Rating) index evaluates the presence of disturbing glare, i.e. uncomfortable for the person, due to excessive luminance levels within the visual field. The COB20_RX versions guarantee a UGR index below 19, i.e. the threshold value for the correct lighting of offices and environments with video terminals (UNI-EN 12464-1 standard).

Easy and safe to assemble


The i-LèD technical laboratories developed the innovative springs equipped with the "smart spring" technology in the conventional versions and with the shaped-coupling-equipped torsional technology. It allows optimising time thanks to a quick and simple installation of the downlights, without damaging the plasterboard or the surface on which they are installed. Furthermore, it allows safe fixing avoiding accidental fall even in environments with heavy mechanical stresses (e.g. subway stations). The COB series downlights can be installed and lit even without the reflector, which will be installed later on, at the end of the works, so as to ensure perfect cleanness. The i-LèD downlights can be installed on dropped ceilings with small thicknesses that range between a minimum of 10mm and a maximum of 30mm.

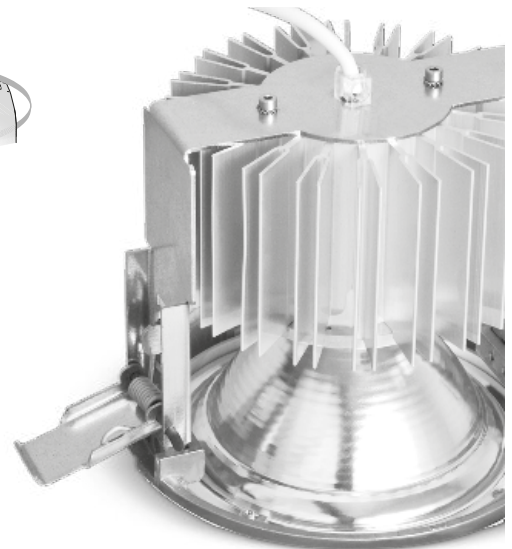


More light, less consumption

The COB downlights are designed for the convenient and quick replacement of conventional lighting equipment thus improving the energy efficiency of the installation. Example of replacement of fluorescence downlights with the same number of i-LèD equipment.

- 31% consumption drop
- Same number of fittings
- Better lighting level (+34%)
- Lasts longer

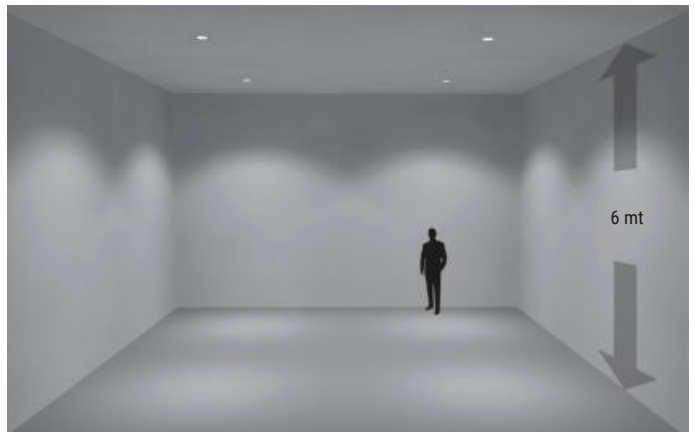

Cob20_R | Downlight | arrayLED



129

CRI 80

White 96809

| | Cct | lm S - D CRI 80 15W | Optic |
|---|------|---------------------|-------------------|
| M | 2700 | 1953 - On req | 40 W.Flood (54°) |
| W | 3000 | 2088 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 2088 - On req | |

Electronics 15W 400mA


| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x l 137 x h 31 | 0/1-10V 1 art. p 134 x l 137 x h 31 | DALI PUSH 1 art. p 134 x l 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|---|------|---------------------|-------------------|
| M | 2700 | 3210 - 2421 | 40 W.Flood (54°) |
| W | 3000 | 3431 - 2593 | 90 E.W.Flood(61°) |
| N | 4000 | 3431 - 2786 | |

Electronics 25W DC 700mA

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x l 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 179 x h 22 | DALI PUSH 1 art. p 210 x l 148 x h 28 |

Cob20_R | Downlight | arrayLED



180

CRI 80

White 96813

| | Cct | lm S - D CRI 80 15W | Optic |
|---|------|---------------------|-------------------|
| M | 2700 | 2082 - On req | 40 W.Flood (51°) |
| W | 3000 | 2227 - On req | 90 E.W.Flood(85°) |
| N | 4000 | 2393 - On req | |

Electronics 15W 400mA

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x l 137 x h 31 | 0/1-10V 1 art. p 134 x l 137 x h 31 | DALI PUSH 1 art. p 134 x l 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|---|------|---------------------|-------------------|
| M | 2700 | 3400 - On req | 40 W.Flood (51°) |
| W | 3000 | 3637 - On req | 90 E.W.Flood(85°) |
| N | 4000 | 3909 - On req | |

Electronics 25W DC 700mA





| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x l 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 179 x h 22 | DALI PUSH 1 art. p 210 x l 148 x h 28 |

| | Cct | lm S - D CRI 80 30W | Optic |
|---|------|---------------------|-------------------|
| M | 2700 | 3991 - 3065 | 40 W.Flood (51°) |
| W | 3000 | 4270 - 3283 | 90 E.W.Flood(85°) |
| N | 4000 | 4588 - 3527 | |


Electronics 30W DC 840mA

| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x l 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 179 x h 22 | DALI PUSH 1 art. p 210 x l 148 x h 28 |

97130W40

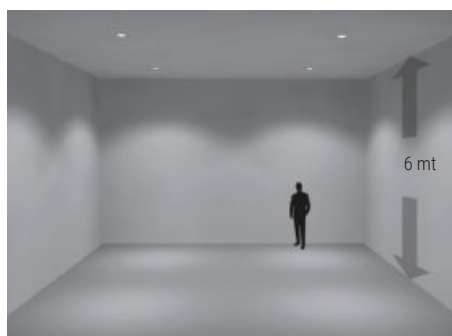

Cob20_R | Downlight | arrayLED



CRI 80

White **96819**

| | Cct | lm S - D CRI 80 15W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 2082 - On req | 40 W.Flood (54°) |
| W | 3000 | 2227 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 2393 - On req | |

Electronics 15W 400mA

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3400 - On req | 40 W.Flood (54°) |
| W | 3000 | 3637 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 3909 - On req | |

Electronics 25W DC 700mA

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 30W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3991 - On req | 40 W.Flood (54°) |
| W | 3000 | 4270 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 4588 - On req | |

Electronics 30W DC 840mA


| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 35W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 4363 - 4095 | 40 Flood (37°) |
| W | 3000 | 4667 - 4381 | 90 E.W.Flood(88°) |
| N | 4000 | 5016 - 4914 | |

Electronics 35W DC 950mA

| 99146 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_R | Downlight | arrayLED



CRI 80

White **97130**

| | Cct | lm S - D CRI 80 15W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 2082 - On req | 40 W.Flood (54°) |
| W | 3000 | 2227 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 2393 - On req | |

Electronics 15W 400mA

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3400 - On req | 40 W.Flood (54°) |
| W | 3000 | 3637 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 3909 - On req | |

Electronics 25W DC 700mA

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 30W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3991 - On req | 40 W.Flood (54°) |
| W | 3000 | 4270 - On req | 90 E.W.Flood(61°) |
| N | 4000 | 4588 - On req | |

Electronics 30W DC 840mA


| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 35W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 4363 - 4095 | 40 Flood (36°) |
| W | 3000 | 4667 - 4381 | 90 E.W.Flood(85°) |
| N | 4000 | 5016 - 4914 | |

Electronics 35W DC 950mA

| 99146 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_Q | Downlight | arrayLED



CRI 80

White **96827**

| | Cct | lm S - D CRI 80 15W | Optic |
|----------|------|---------------------|---------------------------|
| M | 2700 | 1953 - On req | 90 E.W.Flood(106°) |
| W | 3000 | 2088 - On req | |
| N | 4000 | 2088 - On req | |

Electronics 15W 400mA



| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|----------|------|---------------------|---------------------------|
| M | 2700 | 3210 - 1987 | 90 E.W.Flood(106°) |
| W | 3000 | 3431 - 2128 | |
| N | 4000 | 3431 - 2287 | |

Electronics 25W DC 700mA

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_Q | Downlight | arrayLED



CRI 80

White **96831**

| | Cct | lm S - D CRI 80 15W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 2082 - On req | 90 E.W.Flood(93°) |
| W | 3000 | 2227 - On req | |
| N | 4000 | 2393 - On req | |

Electronics 15W 400mA

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3400 - On req | 90 E.W.Flood(93°) |
| W | 3000 | 3637 - On req | |
| N | 4000 | 3909 - On req | |

Electronics 25W DC 700mA



| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 30W | Optic |
|----------|------|---------------------|---------------------------|
| M | 2700 | 3991 - 2747 | 90 E.W.Flood(104°) |
| W | 3000 | 4270 - 2942 | |
| N | 4000 | 4588 - 3161 | |

Electronics 30W DC 840mA

| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_Q | Downlight | arrayLED



CRI 80

White **96837**

| | Cct | lm S - D CRI 80 15W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 2082 - On req | 90 E.W.Flood(87°) |
| W | 3000 | 2227 - On req | |
| N | 4000 | 2393 - On req | |

Electronics 15W 400mA

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

| | Cct | lm S - D CRI 80 25W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3400 - On req | 90 E.W.Flood(87°) |
| W | 3000 | 3637 - On req | |
| N | 4000 | 3909 - On req | |

Electronics 25W DC 700mA

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 30W | Optic |
|----------|------|---------------------|--------------------------|
| M | 2700 | 3991 - On req | 90 E.W.Flood(87°) |
| W | 3000 | 4270 - On req | |
| N | 4000 | 4588 - On req | |

Electronics 30W DC 840mA



| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

| | Cct | lm S - D CRI 80 35W | Optic |
|----------|------|---------------------|---------------------------|
| M | 2700 | 4363 - 3419 | 90 E.W.Flood(101°) |
| W | 3000 | 4667 - 3658 | |
| N | 4000 | 5016 - 4109 | |

Electronics 35W DC 950mA

| 99146 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_RX | comfort UGR<16 | Downlight | arrayLED 25 W DC 700 mA



129

CRI 80



White 91398

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------------|
| M | 2700 | 3580 - 2933 | 15 Flood (25°) |
| W | 3000 | 3847 - 3153 | 30 Flood (34°) |
| N | 4000 | 3847 - 3153 | 60 Flood (42°) |

Electronics

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_RX | comfort UGR<16 | Downlight | arrayLED 30 W DC 840 mA



180

CRI 80


White 91402

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------------|
| M | 2700 | 4220 - 3372 | 15 Flood (25°) |
| W | 3000 | 4535 - 3625 | 30 Flood (34°) |
| N | 4000 | 4535 - 3625 | 60 Flood (42°) |

Electronics

| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_RX | comfort UGR<16 | Downlight | arrayLED 35 W DC 950 mA



210

CRI 80



White 91410

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------------|
| M | 2700 | 4811 - 4311 | 15 Flood (25°) |
| W | 3000 | 4811 - 4632 | 30 Flood (34°) |
| N | 4000 | 5173 - 4953 | 60 Flood (42°) |

Electronics

| 99146 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Cob20_RX | comfort UGR<16 | Downlight | arrayLED 45 W DC 1250 mA



236

CRI 80

White 91414

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------------|
| M | 2700 | 6002 - 4870 | 15 Flood (25°) |
| W | 3000 | 6002 - 5233 | 30 Flood (34°) |
| N | 4000 | 6452 - 5596 | 60 Flood (42°) |

Electronics

| 83114 | 83066 |
|--|---|
| ON/OFF 1 art. p 160 x 170 x h 36 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 |






anton

Materials
Aluminium body

Anton_R | Downlight | powerLED 2 W DC 630 mA



CRI 80

White 91896


| Cct | lm S - D CRI 80 | Optic |
|--------|-----------------|--------------------|
| W 3000 | 233 - 142 | 08 N.Spot (8°) |
| N 4000 | 249 - 152 | 15 Spot (17°) |
| | | 30 Spot (24°) |
| | | 60 W.Flood (60°) |
| | | 12 E.W.Flood(110°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Anton_R | Downlight | powerLED 6 W DC 630 mA



CRI 80

White 96634

| Cct | lm S - D CRI 80 | Optic |
|--------|-----------------|-------------------|
| W 3000 | 699 - 454 | 15 Spot (18°) |
| N 4000 | 747 - 517 | 30 Flood (26°) |
| | | 60 W.Flood (57°) |
| | | 12 E.W.Flood(85°) |


Electronics

| 99376 | 99105 | 99115 | 99344 |
|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 103 x l 58 x h 27 | 0/1-10V 1 - 3 art. p 210 x l 48 x h 25 | DALI PUSH 1 - 4 art. p 210 x l 48 x h 25 |



RTG 96634W30 / 96634W60

Anton_R | Downlight | powerLED 6 W DC 630 mA



CRI 80

White 97418

| Cct | Optic |
|-----|-------------------|
| Z | 15 Spot (17°) |
| | 30 Flood (26°) |
| | 60 W.Flood (57°) |
| | 12 E.W.Flood(85°) |


Electronics

| 99743+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |



Downlight

Anton_R | Downlight | powerLED 8 W DC 630 mA



65

CRI 80

White **96635**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| W | 3000 | 932 - 694 | 15 Spot (17°) |
| N | 4000 | 996 - 741 | 30 Spot (24°) |
| | | | 60 W.Flood (60°) |


Electronics

| 99376 | 99105 | 99115 | 99344 |
|--|---|--|--|
| ON/OFF 1 art. p 134 x l 137 x h 31 | ON/OFF 2 - 3 art. p 103 x l 58 x h 27 | 0/1-10V 1 - 2 art. p 210 x l 48 x h 25 | DALI PUSH 1 - 3 art. p 210 x l 48 x h 25 |

Recessed casing

89373 H. 83 - Ø. 200 **89374** H. 120 - Ø. 200

Anton_R | Downlight | powerLED 12 W DC 630 mA



65

CRI 80

White **94586**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| W | 3000 | 1398 - 1171 | 30 Flood (30°) |
| N | 4000 | 1494 - 1250 | 60 W.Flood(61°) |
| | | | 12 E.W.Flood(89°) |

Electronics

| 99129 | 99105 | 99115 | 99344 |
|--|---|--|--|
| ON/OFF 1 art. p 134 x l 137 x h 31 | ON/OFF 1 - 2 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 210 x l 48 x h 25 | DALI PUSH 1 - 2 art. p 210 x l 48 x h 25 |

Recessed casing

89373* H. 83 - Ø. 200 **89374*** H. 120 - Ø. 200

* with recessed casing for brick power reduction to 9W DC 500mA


Electronics

| 99128 | 99115 | 99344 |
|--|--|--|
| ON/OFF 1 art. p 134 x l 137 x h 31 | 0/1-10V 1 - 2 art. p 210 x l 48 x h 25 | DALI PUSH 1 - 2 art. p 210 x l 48 x h 25 |

Recessed casing




| description | type |
|---|------|
| 89373 Recessed casing | |
| suitable for: Anton_R 8W / Anton_R 12W | |



| description | type |
|---|------|
| 89374 Recessed casing | |
| suitable for: Anton_R 8W / Anton_R 12W | |

AntonX_1 | Downlight | arrayLED 18 W DC 500 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80105 | 80107 |
| Black | 80106 | 80108 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|--------------------------|
| M | 2700 | 1885 - 1471 | 2323 - 1662 | 00 General (101°) |
| W | 3000 | 2016 - 1574 | 2323 - 1662 | |
| N | 4000 | 2170 - 1694 | 2498 - 1787 | |

Electronics

| 99106 | 99115 | 99344 |
|---|--|--|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 210 x l 48 x h 28 | DALI PUSH 1 art. p 210 x l 48 x h 28 |

Recessed casing


89373* H. 83 - Ø. 200 **89374*** H. 120 - Ø. 200

* with recessed casing for brick power reduction to 14,5W DC 400mA

Electronics

| 99734 | 99732 | 99730 |
|---|--|--|
| ON/OFF 1 art. p 134 x l 37 x h 31 | 0/1-10V 1 art. p 134 x l 37 x h 31 | DALI PUSH 1 art. p 134 x l 37 x h 31 |

AntonX_2 | Downlight | arrayLED 25 W DC 700 mA



| | CRI 92 | CRI 80 |
|-------|--------------|--------------|
| White | 80015 | 80013 |
| Black | 80016 | 80014 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|--------------------------|
| M | 2700 | 2598 - 1799 | 3210 - 2128 | 00 General (105°) |
| W | 3000 | 2794 - 1936 | 3431 - 2274 | |
| N | 4000 | 2990 - 2070 | 3431 - 2274 | |


Electronics

| 99147 | 83008 | 99345 |
|---|--|--|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 79 x h 22 | DALI PUSH 1 art. p 210 x l 48 x h 28 |

Recessed casing




| description | type |
|---------------------------------|------|
| 89373 Recessed casing | |
| suitable for: AntonX 18W | |



| description | type |
|---------------------------------|------|
| 89374 Recessed casing | |
| suitable for: AntonX 18W | |

Anton_RJ | Downlight | powerLED 2 W DC 630 mA



46

CRI 80

White **97402**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|---------------------------|
| W | 3000 | 233 - 142 | 08 N.Spot (8°) |
| N | 4000 | 249 - 152 | 15 Spot (17°) |
| | | | 30 Spot (24°) |
| | | | 60 W.Flood (60°) |
| | | | 12 E.W.Flood(110°) |

Electronics


| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing

89373 H. 83 - Ø. 200 **89374** H. 120 - Ø. 200

Anton_RJ | Downlight | powerLED 6 W DC 630 mA



46

CRI 80

White **97404**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| W | 3000 | 699 - 454 | 15 Spot (18°) |
| N | 4000 | 747 - 517 | 30 Flood (26°) |
| | | | 60 W.Flood (57°) |
| | | | 12 E.W.Flood(85°) |

Electronics

| 99376 | 99105 | 99115 | 99344 |
|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 103 x l 58 x h 27 | 0/1-10V 1 - 3 art. p 210 x l 48 x h 25 | DALI PUSH 1 - 4 art. p 210 x l 48 x h 25 |



Recessed casing

89373 H. 83 - Ø. 200 **89374** H. 120 - Ø. 200

* with recessed casing for brick power reduction to 4,5W DC 500mA


Electronics

| 99377 | 99106 | 99714 | 99715 |
|---|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 138 x l 22 x h 21 | DALI 1 art. p 138 x l 22 x h 21 |

Recessed casing




| description | type |
|---|------|
| 89373 Recessed casing | |
| suitable for: Anton_RJ 2W / Anton_RJ 6W | |



| description | type |
|---|------|
| 89374 Recessed casing | |
| suitable for: Anton_RJ 2W / Anton_RJ 6W | |

Anton_RJ | Downlight | powerLED 8 W DC 630 mA



CRI 80

White **97427**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-------------------------|
| W | 3000 | 932 - 694 | 15 Spot (17°) |
| N | 4000 | 996 - 741 | 30 Spot (24°) |
| | | | 60 W.Flood (60°) |


Electronics

| 99376 | 99105 | 99115 | 99344 |
|--------------------|--------------------|--------------------|--------------------|
| ON/OFF | ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 2-3 art. | 1-2 art. | 1-3 art. |
| p 134 x 137 x h 31 | p 103 x 158 x h 27 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

Recessed casing

89373 H. 83 - Ø. 200 **89374** H. 120 - Ø. 200

Anton_RJ | Downlight | powerLED 12 W DC 630 mA



CRI 80

White **94592**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| W | 3000 | 1398 - 1171 | 30 Flood (30°) |
| N | 4000 | 1494 - 1250 | 60 W.Flood(61°) |
| | | | 12 E.W.Flood(89°) |

Electronics

| 99129 | 99105 | 99115 | 99344 |
|--------------------|--------------------|--------------------|--------------------|
| ON/OFF | ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1-2 art. | 1 art. | 1-2 art. |
| p 134 x 137 x h 31 | p 103 x 158 x h 27 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

Recessed casing

89373 H. 83 - Ø. 200 **89374** H. 120 - Ø. 200

* with recessed casing for brick power reduction to 9W DC 500mA


Electronics

| 99128 | 99115 | 99344 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1-2 art. | 1-2 art. |
| p 134 x 137 x h 31 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

Recessed casing



| description | type |
|---|------|
| 89373 Recessed casing | |
| suitable for: Anton_RJ 8W / Anton_RJ 12W | |



| description | type |
|---|------|
| 89374 Recessed casing | |
| suitable for: Anton_RJ 8W / Anton_RJ 12W | |




woofer


Materials
Aluminium body

woofer range



| | Woofer_R | Woofer_RX |
|---|--|--|
| 13W | Ø 182 mm | - |
| 17,5W | Ø 182 mm | - |
| 24,5W | Ø 182 mm | Ø 218 mm |
| 30,5W | - | Ø 218 mm |
| Finish | White | White |
| CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| CRI 92 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Spot - Wide Flood - Asymmetric - General | Spot - Wide Flood - Asymmetric - General |
| Driver | On/Off | On/Off |
|  | 165mm | 197mm |

Woofers_R | Downlight | 100-240 V AC | arrayLED 13 W DC - 15 W AC



CRI 92

White **84230**


| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 1322 - 970 | 20 Spot (16°) |
| W | 3000 | 1385 - 1016 | 60 W.Flood(64°) |
| N | 4000 | 1488 - 1087 | 07 Asymm.- 00 General (96°) |

CRI 80

White **84209**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 1561 - 1142 | 20 Spot (16°) |
| W | 3000 | 1627 - 1196 | 60 W.Flood(64°) |
| N | 4000 | 1718 - 1279 | 07 Asymm.- 00 General (96°) |

Woofers_R | Downlight | 100-240 V AC | arrayLED 24,5 W DC - 27,5 W AC



CRI 92

White **84232**


| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 2808 - 2040 | 20 Spot (21°) |
| W | 3000 | 2941 - 2134 | 60 W.Flood(60°) |
| N | 4000 | 3161 - 2296 | 07 Asymm.- 00 General (96°) |

CRI 80

White **84211**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 3337 - 2398 | 20 Spot (21°) |
| W | 3000 | 3478 - 2508 | 60 W.Flood(60°) |
| N | 4000 | 3672 - 2699 | 07 Asymm.- 00 General (96°) |

Woofers_R | Downlight | 100-240 V AC | arrayLED 17,5 W DC - 20 W AC



CRI 92

White **84231**

| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 2124 - 1473 | 20 Spot (21°) |
| W | 3000 | 2224 - 1612 | 60 W.Flood(61°) |
| N | 4000 | 2390 - 1755 | 07 Asymm.- 00 General (96°) |

CRI 80

White **84210**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 2524 - 1757 | 20 Spot (21°) |
| W | 3000 | 2630 - 1895 | 60 W.Flood(61°) |
| N | 4000 | 2777 - 2059 | 07 Asymm.- 00 General (96°) |




Asymmetric Optics

RTG 84210W60 / 84210N60 / 84231W60 / 84231N60

RTG 84211W60 / 84211N60 / 84232W60 / 84232N60

WoofeR_RX | Downlight | 100-240 V AC | arrayLED 24,5 W DC - 28 W AC



CRI 92

White **84228**


| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 2808 - 2040 | 20 Spot (21°) |
| W | 3000 | 2941 - 2134 | 60 W.Flood(60°) |
| N | 4000 | 3161 - 2296 | 07 Asymm.- 00 General (96°) |

CRI 80

White **84207**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 3337 - 2398 | 20 Spot (21°) |
| W | 3000 | 3478 - 2508 | 60 W.Flood(60°) |
| N | 4000 | 3672 - 2696 | 07 Asymm.- 00 General (96°) |

WoofeR_RX | Downlight | 100-240 V AC | arrayLED 30,5 W DC - 34 W AC



CRI 92

White **84229**

| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 3758 - 2694 | 20 Flood (27°) |
| W | 3000 | 3937 - 2818 | 60 W.Flood(57°) |
| N | 4000 | 4232 - 3033 | 07 Asymm.- 00 General (99°) |

CRI 80

White **84208**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--|
| M | 2700 | 4469 - 3166 | 20 Flood (27°) |
| W | 3000 | 4656 - 3312 | 60 W.Flood(57°) |
| N | 4000 | 4915 - 3564 | 07 Asymm.- 00 General (99°) |



W.Flood Optics



General Optics



LV44

Materials
Aluminium body

2700-6500K


DYNAMICWHITE

Scientific studies have shown that replicating the same frequencies in closed public environments can provide benefits to those who work in these places.

DALI Driver

The LV44 articles in dynamic white version can be managed with a DALI driver with firmware 8.8. This driver allows 8 addresses to be used on the same hardware.

2700 K
Super warm white
6500 K
Cold white

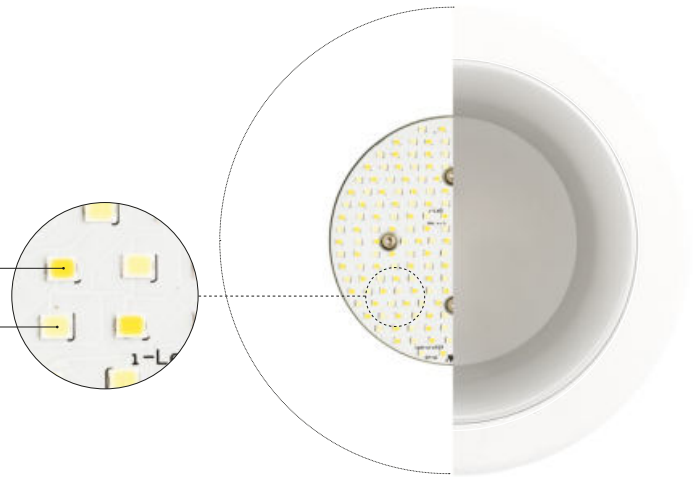


Colour mixing

We, at Linea Light Group, created a colour mixing technology that allows managing the Cct of the emitted light to the utmost due to the opaline diffuser which, alongside the particularly recessed source, serves as first "stabiliser", thus guaranteeing the desired colour temperature. In addition, the emission control through the Linea Light Group's DALI protocol allows controlling the Cct right from the light source.



Smart lighting


The Dynamic White modules, combined with the new, specifically developed management systems, allow the mixture of whites from Warm White and Cold White. With a single product, it is therefore possible to reproduce all the colour temperatures from 2700K to 6500K, maintaining the same luminous flow. Recent studies on the circadian cycles have shown how the temperature variations of natural light, from dawn to dusk, influence the well-being of humans.

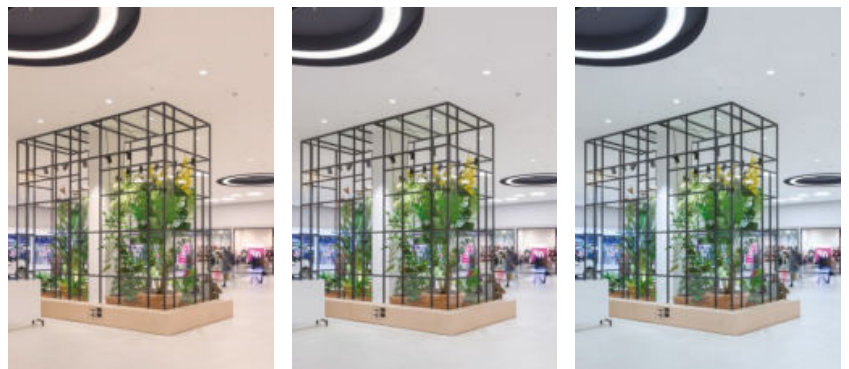

2700K

6500K

LV44_RD | Downlight | topLED 10 W DC 350 mA



CRI 80

- White **91769**
- Black **91776**


Optic

| | | | |
|----------|-----------------|---------|-------------------------|
| D | 2700 K - 6500 K | Dynamic | 00 General (84°) |
|----------|-----------------|---------|-------------------------|

Electronics

| 83058 | 99741+99701 | 99333 | DMX | Driver CV |
|--------------------------------------|-------------------------|--------------------------|------------------------------|-------------------|
| DALI 1 art. p 153 x 176 x h 30 | Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |

LV44_RD | Downlight | topLED 20 W DC 600 mA



CRI 80

- White **91777**
- Black **91778**


Optic

| | | | |
|----------|-----------------|---------|-------------------------|
| D | 2700 K - 6500 K | Dynamic | 00 General (84°) |
|----------|-----------------|---------|-------------------------|

Electronics

| 83059 | 99743+99701 | 99333 | DMX | Driver CV |
|--------------------------------------|-------------------------|--------------------------|------------------------------|-------------------|
| DALI 1 art. p 153 x 176 x h 30 | Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |

LV44_RD | Downlight | topLED 30 W DC 840 mA



CRI 80

- White **91779**
- Black **91780**


Optic

| | | | |
|----------|-----------------|---------|---------------------|
| D | 2700 K - 6500 K | Dynamic | 00 General - |
|----------|-----------------|---------|---------------------|

Electronics

| 83060 | 99333 | DMX | Driver CV |
|--------------------------------------|--------------------------|------------------------------|-------------------|
| DALI 1 art. p 153 x 176 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |

LV44_RD | Downlight | topLED 45 W DC 1250 mA



CRI 80

- White **91781**
- Black **91783**


Optic

| | | | |
|----------|-----------------|---------|---------------------|
| D | 2700 K - 6500 K | Dynamic | 00 General - |
|----------|-----------------|---------|---------------------|

Electronics
83061

DALI
1 art.
p 153 x 176 x h 30

LV44_RD | Downlight | topLED 65 W DC 1800 mA



CRI 80

- White **90746**
- Black **90747**


Optic

| | | | |
|----------|-----------------|---------|---------------------|
| D | 2700 K - 6500 K | Dynamic | 00 General - |
|----------|-----------------|---------|---------------------|

Electronics
99727 x2

DALI
1 art.
p 220 x 171 x h 38

CONTROL DIAGRAM EXAMPLE

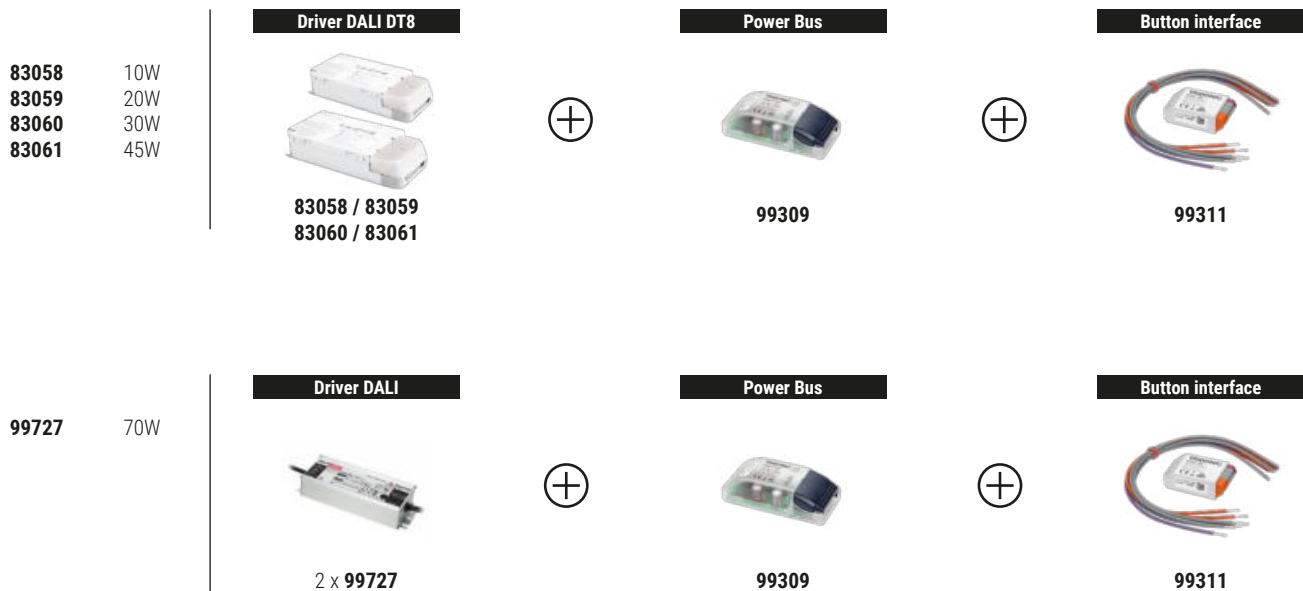


LV54 HV44

Materials

Aluminium body

Opaline PMMA diffuser

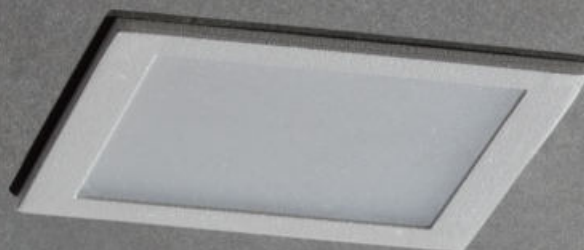

LV54_RS | Downlight | topLED 13 W DC 350 mA



121



CRI 80

White **97090**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 1344 - 1200 | 00 General (115°) |
| W | 3000 | 1488 - 1328 | |
| N | 4000 | 1632 - 1457 | |

Electronics



| 99260 | 99262 | 99721 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x 137 x h 31 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

RTG 97090W00 / 97090N00

LV54_RS | Downlight | topLED 30 W DC 840 mA



197



CRI 80

White **97094**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 3024 - 2772 | 00 General (113°) |
| W | 3000 | 3348 - 3069 | |
| N | 4000 | 3672 - 3366 | |

Electronics

| 99093 | 83066 | 99330 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V DALI PUSH | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 124 x 179 x h 22 | p 210 x 148 x h 28 |

RTG 97094W00 / 97094N00

LV54_RS | Downlight | topLED 23 W DC 630 mA



167



CRI 80

White **97092**


| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 2352 - 2163 | 00 General (114°) |
| W | 3000 | 2604 - 2395 | |
| N | 4000 | 2856 - 2626 | |

Electronics



| 99261 | 99262 | 99721 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 210 x 148 x h 28 | p 210 x 148 x h 28 |

RTG 97092W00 / 97092N00

LV54_RS | Downlight | topLED 45 W DC 1250 mA



236



CRI 80


White **97119**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 4704 - 4227 | 00 General (113°) |
| W | 3000 | 5208 - 4680 | |
| N | 4000 | 5712 - 5133 | |

Electronics

| 83114 | 83066 |
|--------------------|--------------------|
| ON/OFF | 0/1-10V DALI PUSH |
| 1 art. | 1 art. |
| p 160 x 170 x h 36 | p 124 x 179 x h 22 |

LV54_QS | Downlight | topLED 13 W DC 350 mA



CRI 80

White **97096**


| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 1344 - 1254 | 00 General (111°) |
| W | 3000 | 1488 - 1388 | |
| N | 4000 | 1632 - 1523 | |

Electronics

| 99260 | 99262 | 99721 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x 137 x h 31 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

RTG 97096W00 / 97096N00

LV54_QS | Downlight | topLED 23 W DC 630 mA



CRI 80

White **97098**



| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 2475 - 2301 | 00 General (111°) |
| W | 3000 | 2772 - 2577 | |
| N | 4000 | 2970 - 2761 | |

Electronics

| 99261 | 99262 | 99721 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 210 x 148 x h 28 | p 210 x 148 x h 28 |

RTG 97098W00 / 97098N00

LV54_QS | Downlight | topLED 30 W DC 840 mA



CRI 80


White **97100**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 2904 - 2800 | 00 General (112°) |
| W | 3000 | 3300 - 3182 | |
| N | 4000 | 3564 - 3436 | |

Electronics

| 99093 | 83066 | 99330 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V DALI PUSH | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 124 x 179 x h 22 | p 210 x 148 x h 28 |

HV44 | Downlight | 190-240 V | topLED 5 W AC




CRI 80

| | |
|-------|--------------|
| White | 97710 |
| Black | 97711 |
| Grey | 97712 |

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| W | 3000 | 570 - 232 | 00 General (114°) |
| N | 4000 | 610 - 248 | |

RTG 97710W00

HV44 | Downlight | 190-240 V | topLED 10 W AC



CRI 80


| | |
|-------|--------------|
| White | 97730 |
| Black | 97731 |
| Grey | 97732 |

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| W | 3000 | 980 - 492 | 00 General (114°) |
| N | 4000 | 1045 - 524 | |

RTG 97730W00

Direct connection to the power mains

The distinctive features of the HV44 series lie in having circuits defined for direct connection with the 220V mains supply. It does not require power supply units, hence reducing equipment maintenance needs.

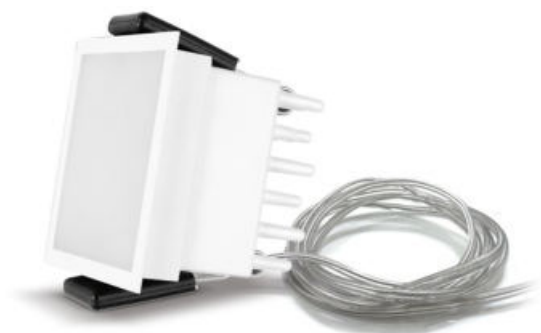



rada

Materials


Aluminium body

Recuperator in Optical white painted aluminium




rada range



| | _R Round | _Q Square |
|---|--|------------------------|
| 8W | Ø 116 mm | - |
| 12W | Ø 177 mm | □ 212x73 mm |
| 18W | Ø 233 mm | - |
| 23W | - | □ 362x73 mm |
| 25W | Ø 310 mm | - |
| 65W | Ø 600 mm | - |
| 82W | Ø 800 mm | - |
| Finish | White | White |
| CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | General | General |
| Driver | On/Off - 1/10 V - DALI | On/Off - 1/10 V - DALI |
|  | 107 mm - 169 mm - 224 mm 303 mm - 580 mm - 780 mm | 202x62 mm 352x62 mm |

Visual comfort

The perimeter LED circuit, placed in the inner part of the circular frame and concealed from view, directs the light upwards; this is collected by the dome reflector made of optical white painted aluminium, which redistributes it in the environment. The final effect corresponds to an indirect and diffused, very soft lighting. The total absence of glare allows direct observation of the product without any discomfort for the eyes.

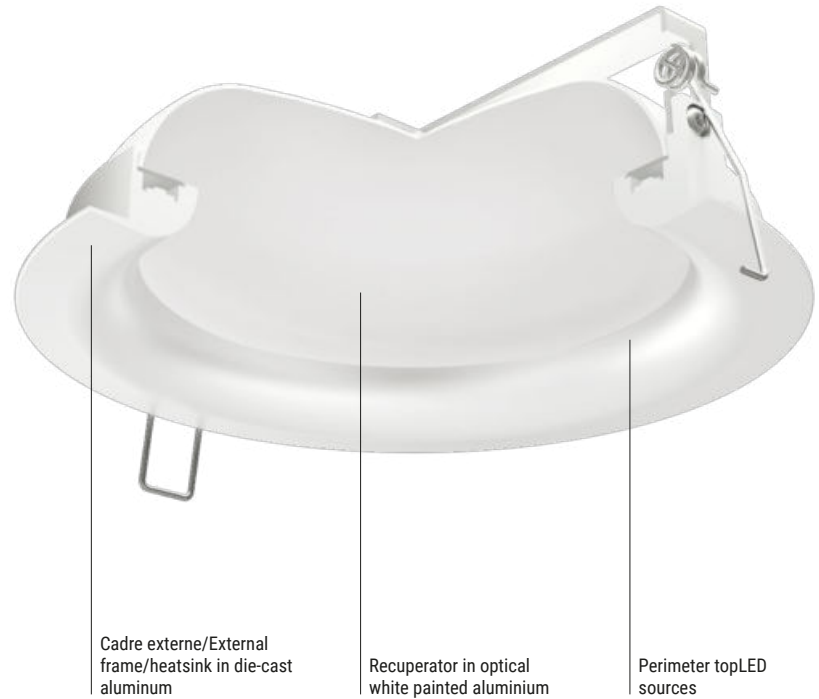


Oblique diffusion

Due to the specifically studied internal reflections, Rada offers a diffusion almost oblique to the ceiling, distributing the light in the entire surrounding environment.



Rada_R | Downlights | topLED 8 W DC 220 mA



107

CRI 80

White 91992

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 955 - 372 | 00 General (132°) |
| W | 3000 | 1022 - 398 | |
| N | 4000 | 1070 - 416 | |


Electronics

| 99198 | 99732 | 99730 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x 137 x h 31 | p 134 x 137 x h 31 | p 134 x 137 x h 31 |

Accessories Pag. 126

98436 Easy-plug

Rada_R | Downlights | topLED 18 W DC 500 mA



224

CRI 80

White 92000

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 2462 - 1408 | 00 General (146°) |
| W | 3000 | 2520 - 1436 | |
| N | 4000 | 2693 - 1544 | |


Electronics

| 99106 | 99115 | 99344 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 210 x 148 x h 28 | p 210 x 148 x h 28 |

Accessories Pag. 126

98436 Easy-plug

Rada_R | Downlights | topLED 12 W DC 350 mA



169

CRI 80

White 91996

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 1642 - 978 | 00 General (140°) |
| W | 3000 | 1680 - 996 | |
| N | 4000 | 1795 - 1072 | |


Electronics

| 99126 | 99115 | 99344 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x 137 x h 30 | p 210 x 148 x h 25 | p 210 x 148 x h 25 |

Accessories Pag. 126

98436 Easy-plug

Rada_R | Downlights | topLED 25 W DC 700 mA



303

CRI 80

White 92004

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 3283 - 2033 | 00 General (145°) |
| W | 3000 | 3360 - 2072 | |
| N | 4000 | 3590 - 2228 | |


Electronics

| 99147 | 83008 | 99345 |
|--------------------|--------------------|--------------------|
| ON/OFF | 0/1-10V DALI PUSH | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x 158 x h 27 | p 124 x 179 x h 22 | p 210 x 148 x h 28 |

Accessories Pag. 126

98436 Easy-plug

Rada_R | Downlights | topLED 65 W DC 1800 mA

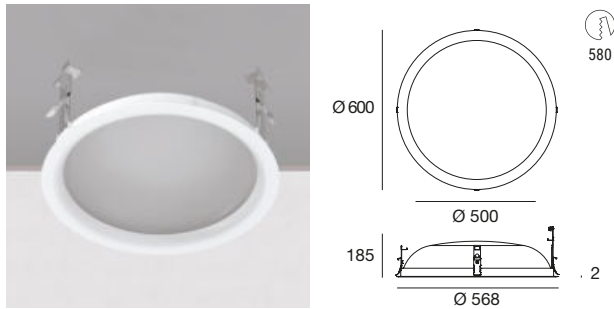

CRI 80

White **93854**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 9792 - 6065 | 00 General (147°) |
| W | 3000 | 10253 - 6500 | |
| N | 4000 | 10714 - 6807 | |


Electronics

| 99717 | 99726 | 99727 |
|--|---|--------------------------------------|
| ON/OFF 1 art. p 208 x 189 x h 40 | 0/1-10V 1 art. p 191 x 163 x h 37 | DALI 1 art. p 191 x 163 x h 37 |

Accessories Pag. 126

98436 Easy-plug

Rada_R | Downlights | topLED 82 W DC 2260 mA

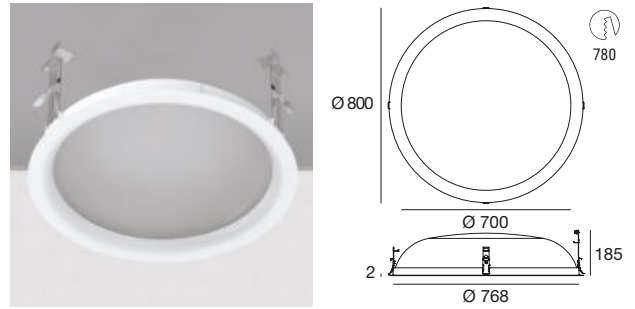

CRI 80

White **93862**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 12240 - 8797 | 00 General (147°) |
| W | 3000 | 12816 - 9373 | |
| N | 4000 | 13392 - 9789 | |


Electronics

| 99718 | 99728 | 99729 |
|--|---|--------------------------------------|
| ON/OFF 1 art. p 208 x 189 x h 40 | 0/1-10V 1 art. p 220 x 168 x h 39 | DALI 1 art. p 220 x 168 x h 39 |


Accessories Pag. 126

98436 Easy-plug



92004W00



Photometric curve




Light beam

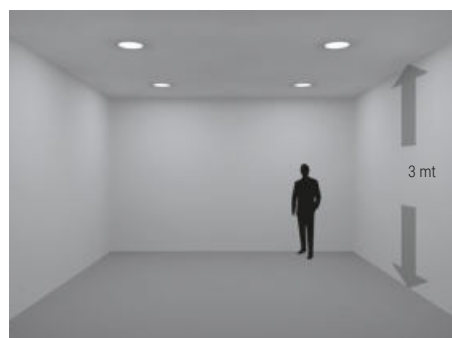


Floor plan



93862W00



Photometric curve




Light beam

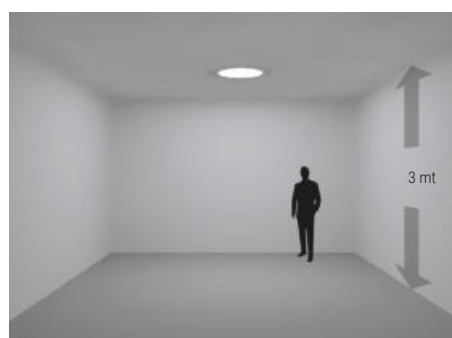

Floor plan

Rada_Q | Downlights | topLED 12 W DC 350 mA



CRI 80


White **92432**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 1706 - 648 | 00 General (117°) |
| W | 3000 | 1829 - 694 | |
| N | 4000 | 1915 - 727 | |

Electronics

| 99260 | 99262 | 99721 |
|---------------------|---------------------|---------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 134 x l 37 x h 31 | p 210 x l 48 x h 25 | p 210 x l 48 x h 25 |

Rada_Q | Downlights | topLED 23 W DC 630 mA



CRI 80


White **92434**

| | Cct | lm S - D CRI 80 | Optic |
|----------|------|-----------------|--------------------------|
| M | 2700 | 2866 - 1272 | 00 General (120°) |
| W | 3000 | 3067 - 1364 | |
| N | 4000 | 3211 - 1427 | |


Electronics

| 99261 | 99262 | 99721 |
|---------------------|---------------------|---------------------|
| ON/OFF | 0/1-10V | DALI PUSH |
| 1 art. | 1 art. | 1 art. |
| p 103 x l 58 x h 27 | p 210 x l 48 x h 28 | p 210 x l 48 x h 28 |



92434W00



Photometric curve



Light beam

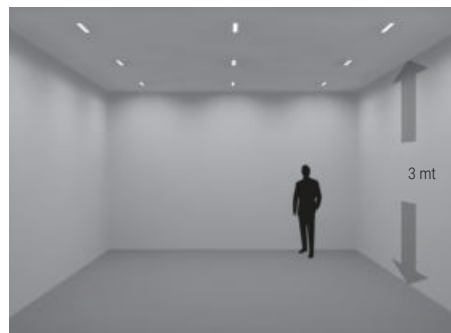

Floor plan

Accessories



| | description |
|--------------|-------------|
| 98436 | Easy-plug |





cell

Materials

Aluminium body



The Gypsum_Cell comes with a recessed casing with plaster frame




TO THE MUSEUM OF MODERN ART

TO THE MUSEUM OF MODERN ART

cell range

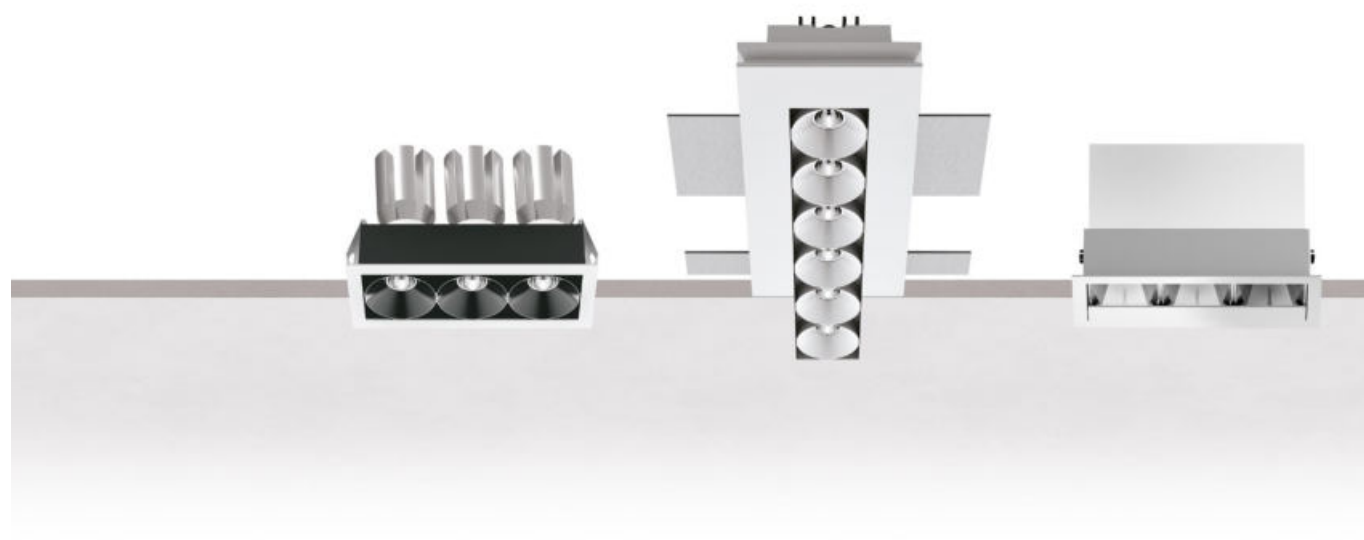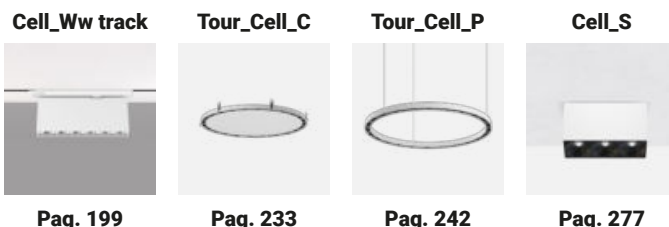

| | Cell | Gypsum_Cell | Cell_Ww |
|---|---|--|--|
| 1 x powerLED | 2W/4W 50x50 mm | 2W/4W 75x75 mm | - |
| 3 x powerLED | 6W/12W 119x50 mm | 6W/12W 150x80 mm | 9,5W 120x50 mm |
| 6 x powerLED | 12W 221x50 mm | 12W 260x80 mm | 18W 225x50 mm |
| 9 x powerLED | 18W 119x119 mm | 18W 150x150 mm | - |
| 12 x powerLED | - | - | 32,5W 435x50 mm |
| Finish | <input type="checkbox"/> White <input type="checkbox"/> Wh <input checked="" type="checkbox"/> Bk | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black |
| CRI 92 CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Spot - Flood - W.Flood | Spot - Flood - W.Flood | Asymmetric |
| Driver | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI | On/Off - 1/10V - DALI |
|  | 42x42 mm - 113x40 mm 215x42 mm - 113x113 mm | 85x85 mm - 160x90 mm 270x90 mm - 160x160 mm | 114x40 mm - 219x40 mm 432x42 mm |

Micro-Optics CELL


The particular wire mesh with convex faces that characterises the surface of the micro reflectors is capable of controlling each light beam defining an emission available in 15°, 30° and 45°.

Heat sink in extruded black anodized aluminium

Frame in plaster (Gypsum version)


Cut-off cells in polycarbonate

Micro-optics in metallic polycarbonate

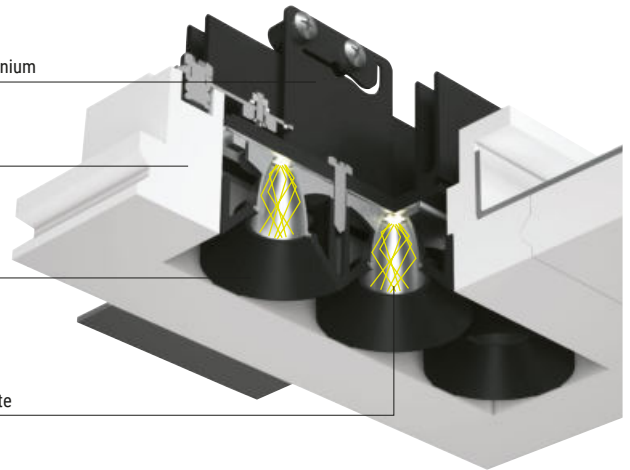

Quick installation

The Gypsum_Cell comes with a recessed casing with plaster frame, conceived for installation on dropped ceiling. The magnet-equipped quick coupling system allows to easily position the light units that can be painted, for full integration with the architecture.

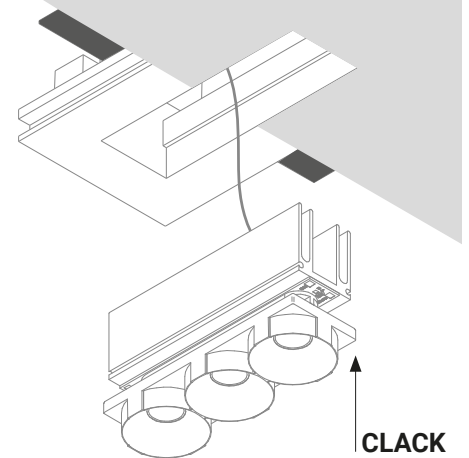


Vast range

The Cell and Gypsum_Cell range of products now come with new versions, conceived to meet several lighting technology needs. The new one-cell single recessed casing joins the three and six-cell options arranged linearly and squared with nine modules. The innovation is the introduction of the Cell_Ww asymmetric versions, designed for wall lighting, available in linear configurations of 3, 6 and 12 cells.


Frame and Gypsum Version

Asymmetric Version



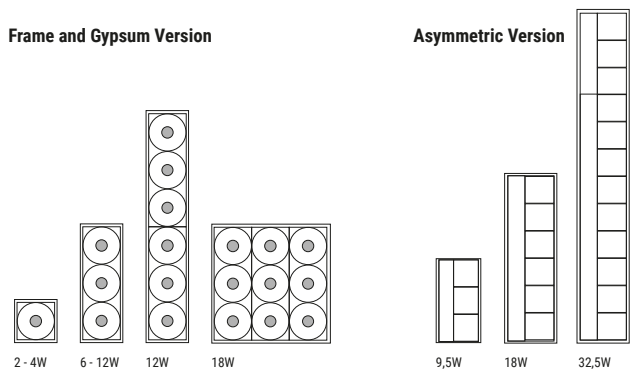


New Wall washer Optics

The Cell_Ww **Optics** compartment is designed to guarantee clean and precise wall washer lighting. The cut-off cells are structured to channel the wall light, starting from the peak, lighting it with a sharp-edged and defined beam that gradually washes the entire surface. The opening of the beam reaches 90 degrees, also lighting the walking area adjacent to the wall. A specific fixed eyelid, slightly raised to eliminate the luminance of the cells, partially covers the **Optics** compartment, defines the angle of emission and eliminates any smudging of stray light.

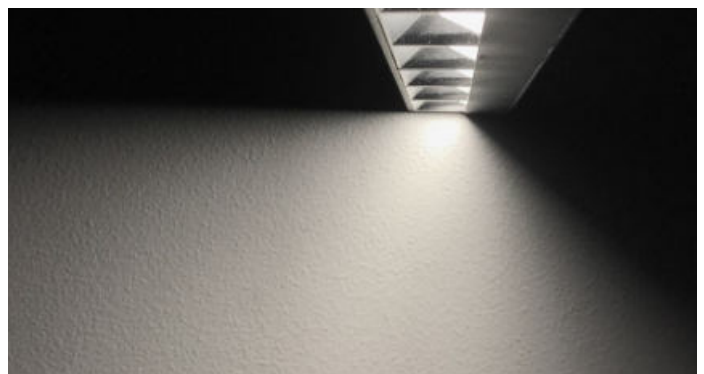

Gypsum Cell | Downlights | powerLED 2 W DC 630 mA



CRI 80/92

White **64630**
Black **64631**




| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|---|------|-----------------|-----------------|-----------------|
| M | 2700 | - | 157 - 134 | 15 Spot (13°) |
| W | 3000 | - | 179 - 154 | 30 Flood (32°) |
| N | 4000 | 249 - 200 | - | 45 W.Flood(48°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Gypsum Cell | Downlights | powerLED 4 W DC 350 mA



CRI 80

White **64632**
Black **64633**



| | Cct | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|
| M | 2700 | 490 - 387 | 15 Spot (15°) |
| W | 3000 | 490 - 387 | 30 Flood (33°) |
| N | 4000 | 529 - 418 | 45 W.Flood(47°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Gypsum Cell | Downlights | 3 x powerLEDs 2 W | 6 W DC 630 mA



CRI 80/92

White **64547**
Black **64546**




| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|---|------|-----------------|-----------------|-----------------|
| M | 2700 | - | 471 - 409 | 15 Spot (12°) |
| W | 3000 | - | 537 - 500 | 30 Flood (32°) |
| N | 4000 | 747 - 532 | - | 45 W.Flood(49°) |

Electronics

| 99376 | 99105 | 99115 | 99344 |
|--|--|---|---|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 - 3 art. p 210 x 148 x h 25 | DALI PUSH 1 - 4 art. p 210 x 148 x h 25 |

RTG **64547W30 / 64546W30**

Gypsum Cell | Downlights | 3 x powerLEDs 4 W | 12 W DC 350 mA



CRI 80

White **64637**
Black **64638**



| | Cct | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|
| M | 2700 | 1470 - 1123 | 15 Spot (16°) |
| W | 3000 | 1470 - 1123 | 30 Flood (35°) |
| N | 4000 | 1587 - 1213 | 45 W.Flood(47°) |

Electronics

| 99126 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 30 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 art. p 210 x 148 x h 25 |



Gypsum Cell | Downlights | 6 x powerLEDs 2 W | 12 W DC 630 mA



CRI 80/92

| | |
|-------|--------------|
| White | 64549 |
| Black | 64548 |



| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | - | 942 - 852 | 15 Spot (13°) |
| W | 3000 | - | 1074 - 907 | 30 Flood (34°) |
| N | 4000 | 1494 - 965 | - | 45 W.Flood(49°) |

Electronics

| 99129 | 99105 | 99115 | 99344 |
|--|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 1 - 2 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 - 2 art. p 210 x 148 x h 25 |

RTG 64549W30 / 64548W30

Gypsum Cell | Downlights | 9 x powerLEDs 2 W | 18 W DC 630 mA



CRI 80/92

| | |
|-------|--------------|
| White | 64551 |
| Black | 64550 |

| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | - | 1413 - 1342 | 15 Spot (13°) |
| W | 3000 | - | 1611 - 1361 | 30 Flood (26°) |
| N | 4000 | 2241 - 1448 | - | 45 W.Flood(49°) |

Electronics


| 99105 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Accessories

Spacer




60830 100x19 mm

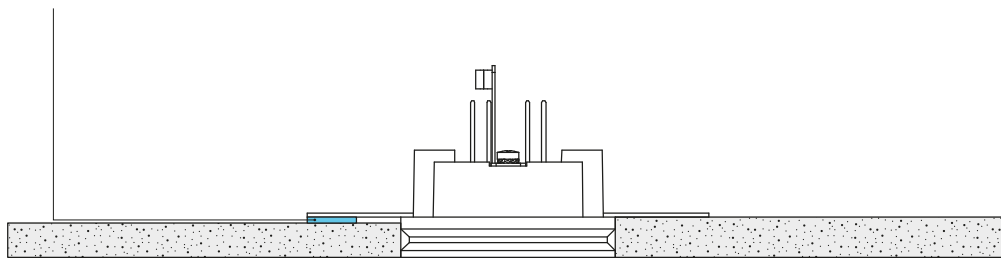

STANDARD THICKNESS = 13 mm

SPECIAL THICKNESS ≤ 15 mm

Cell | Downlights | powerLED 2 W DC 630 mA



CRI 80/92

White **64507**
Black **64508**



| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|---|------|-----------------|-----------------|-----------------|
| M | 2700 | - | 157 - 134 | 15 Spot (13°) |
| W | 3000 | - | 179 - 154 | 30 Flood (32°) |
| N | 4000 | 249 - 200 | - | 45 W.Flood(48°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Cell | Downlights | powerLED 4 W DC 350 mA



CRI 80

White **64526**
Black **64527**



| | Cct | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|
| M | 2700 | 490 - 387 | 15 Spot (15°) |
| W | 3000 | 490 - 387 | 30 Flood (33°) |
| N | 4000 | 529 - 418 | 45 W.Flood(47°) |

Electronics

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | |



Cell | Downlights | 3 x powerLEDs 2 W | 6 W DC 630 mA



CRI 80/92

White **64541**
Black **64540**



| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|---|------|-----------------|-----------------|-----------------|
| M | 2700 | - | 471 - 409 | 15 Spot (12°) |
| W | 3000 | - | 537 - 500 | 30 Flood (33°) |
| N | 4000 | 747 - 532 | - | 45 W.Flood(49°) |

Electronics

| 99376 | 99105 | 99115 | 99344 |
|--|--|---|---|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 - 3 art. p 210 x 148 x h 25 | DALI PUSH 1 - 4 art. p 210 x 148 x h 25 |

RTG **64541W30 / 64540W30**

Cell | Downlights | 3 x powerLEDs 4 W | 12 W DC 350 mA



CRI 80


White **64509**
Black **64510**

| | Cct | lm S - D CRI 80 | Optic |
|---|------|-----------------|-----------------|
| M | 2700 | 1470 - 1123 | 15 Spot (16°) |
| W | 3000 | 1470 - 1123 | 30 Flood (35°) |
| N | 4000 | 1587 - 1213 | 45 W.Flood(47°) |

Electronics

| 99126 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 30 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 art. p 210 x 148 x h 25 |

Cell | Downlights | 6 x powerLEDs 2 W | 12 W DC 630 mA



CRI 80/92


- White **64543**
- Black **64542**

| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | - | 942 - 852 | 15 Spot (13°) |
| W | 3000 | - | 1074 - 907 | 30 Flood (34°) |
| N | 4000 | 1494 - 965 | - | 45 W.Flood(49°) |

Electronics

| 99129 | 99105 | 99115 | 99344 |
|--|---|--|--|
| ON/OFF 1 art. p 134 x l 137 x h 31 | ON/OFF 1 - 2 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 210 x l 48 x h 25 | DALI PUSH 1 - 2 art. p 210 x l 48 x h 25 |

Cell | Downlights | 9 x powerLEDs 2 W | 18 W DC 630 mA



CRI 80/92


- White **64545**
- Black **64544**

| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | - | 1413 - 1342 | 15 Spot (12°) |
| W | 3000 | - | 1611 - 1361 | 30 Flood (31°) |
| N | 4000 | 2241 - 1448 | - | 45 W.Flood(49°) |


Electronics

| 99105 | 99115 | 99344 |
|---|--|--|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 210 x l 48 x h 28 | DALI PUSH 1 art. p 210 x l 48 x h 28 |



64542W30



Photometric curve




Light beam

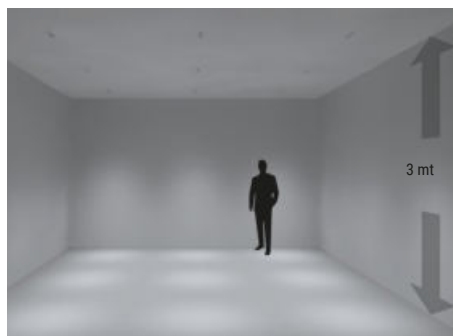


Floor plan



64545W15



Photometric curve




Light beam

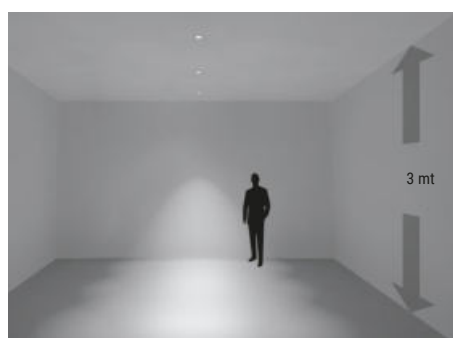


Floor plan

Cell_Ww | Downlights | powerLED | 9,5 W DC 350 mA



114 x 40



CRI 92

| | |
|-------|--------------|
| White | 82600 |
| Black | 82940 |

| | Cct | lm S - D CRI 92 | Optic |
|---|------|-----------------|-------------|
| M | 2700 | 1099 - 481 | 07 Asymm. - |
| W | 3000 | 1152 - 517 | |
| N | 4000 | 1426 - 558 | |


Electronics

| 99126 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 206 x 189 x h 40 | 0/1-10V 1 art. p 220 x 168 x h 39 | 0/1-10V DALI PUSH 1 art. p 220 x 168 x h 39 |

Cell_Ww | Downlights | powerLED | 18 W DC 630 mA



219 x 40



CRI 92

| | |
|-------|--------------|
| White | 82601 |
| Black | 82941 |

| | Cct | lm S - D CRI 92 | Optic |
|---|------|-----------------|-------------|
| M | 2700 | 2198 - 926 | 07 Asymm. - |
| W | 3000 | 2304 - 993 | |
| N | 4000 | 2852 - 1073 | |


Electronics

| 99129 | 83008 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 149 x 137 x h 30 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 220 x 168 x h 39 |

Cell_Ww | Downlights | powerLED | 32,5 W DC 1200 mA



432 x 42



CRI 92



| | |
|-------|--------------|
| White | 82602 |
| Black | 82942 |

| | Cct | lm S - D CRI 92 | Optic |
|---|------|-----------------|-------------|
| M | 2700 | 3740 - 1838 | 07 Asymm. - |
| W | 3000 | 3912 - 1972 | |
| N | 4000 | 4848 - 2130 | |

Electronics

| 83008 |
|---|
| ON/OFF - 0/1-10V - DALI 1 art. p 124 x 179 x h 22 |

82600W07

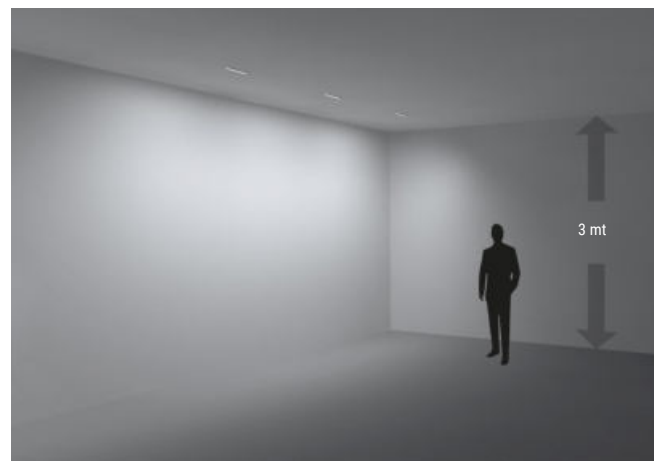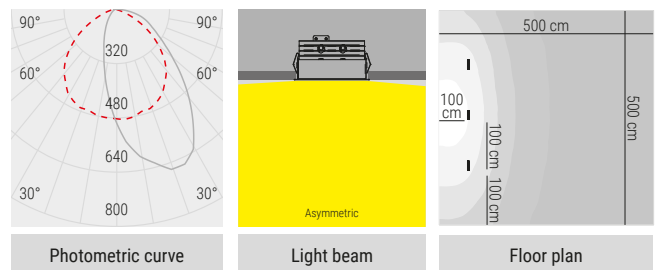








play

Materials
Recessed casing in aluminium
Aluminium body

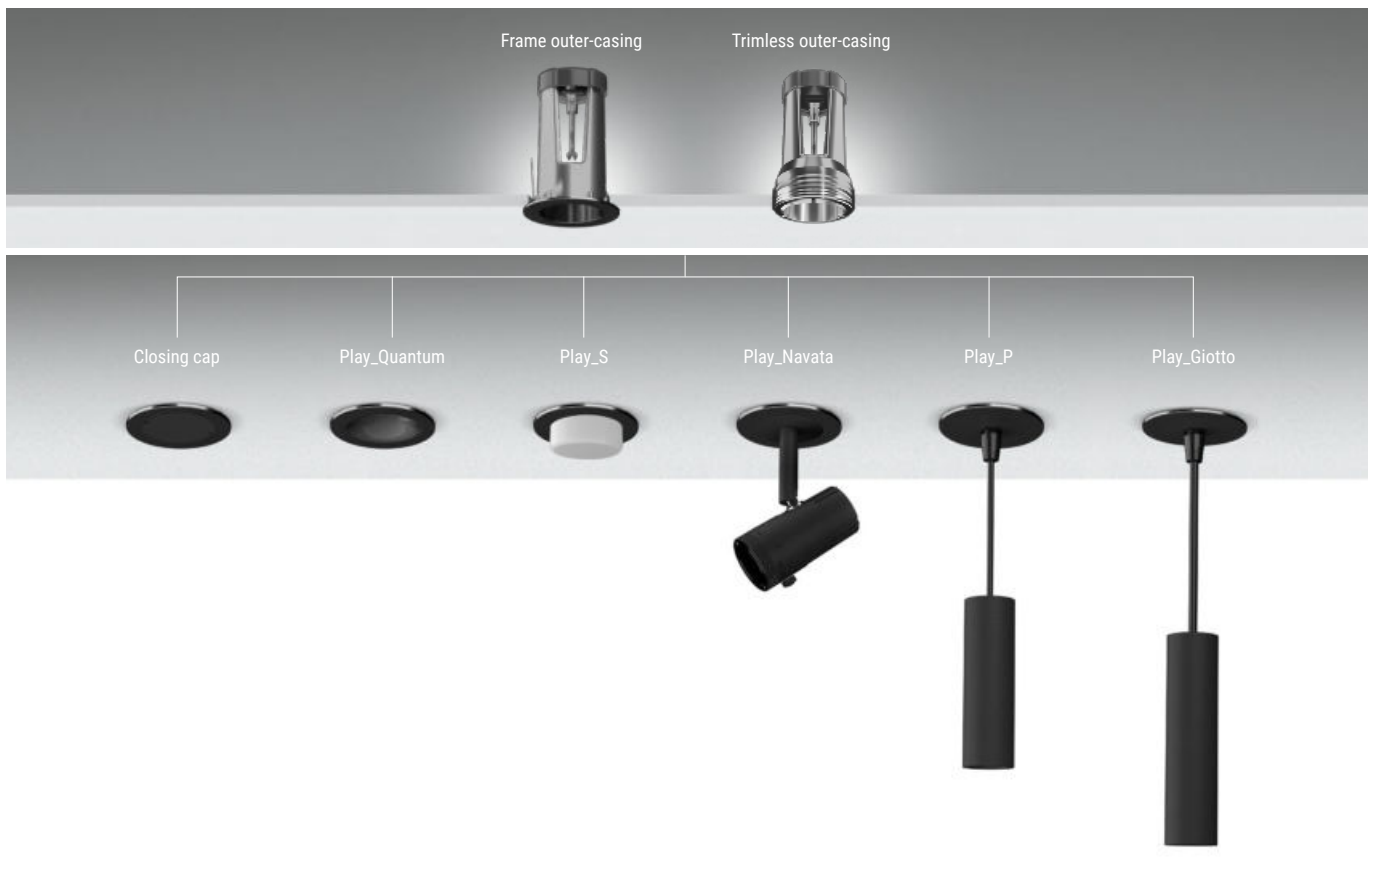


Play | Outer-casing (frameless)



99754

Play System Recessed Casing with particular threading to screw onto the edge of the false ceiling. Secondary cabling and assembly brackets included.

Play | Outer-casing (with frame)





White **99752**

Black **99753**

Play System Recessed Casing with spring flange for flush installation on the false ceiling. Secondary cabling included.

Play | Closing cap

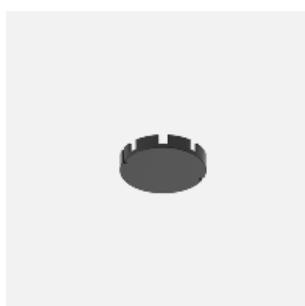


White **99755**

Black **99756**

Recessed casing closing plug in case of the absence of Play System article. Only mechanical fixing, not electrical connection.

Play_Navata | Projector | powerLED 6 W DC 500 mA



Balance - CRI 92 Efficiency - CRI 80


| | | |
|-------|--------------|--------------|
| White | 81528 | 81526 |
| Black | 81529 | 81527 |

| Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---------------|-----------------|-----------------|--------------------------|
| M 2700 | 532 - On req | 659 - On req | 85 Focus (8°-43°) |
| W 3000 | 569 - On req | 659 - On req | |
| N 4000 | 614 - On req | 712 - On req | |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |

Play_Navata | Projector | powerLED 6 W DC 500 mA



Balance - CRI 92 Efficiency - CRI 80


| | | |
|-------|--------------|--------------|
| White | 81532 | 81530 |
| Black | 81533 | 81531 |

| Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---------------|-----------------|-----------------|-------------------------|
| M 2700 | 532 - 378 | 659 - 468 | 15 Spot (14°) |
| W 3000 | 569 - 403 | 659 - 468 | 30 Flood (34°) |
| N 4000 | 614 - 435 | 711 - 505 | 60 W.Flood (54°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |

Play_Quantum | Downlight | powerLED 6 W DC 500 mA



Balance - CRI 92 HC Efficiency - CRI 80 HC


| | | | | |
|-------|--------------|--------------|--------------|--------------|
| White | 81520 | 81552 | 81518 | 81550 |
| Black | 81521 | 81553 | 81519 | 81551 |

| Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|---------------|-----------------|-----------------|---------------------|
| M 2700 | 532 - On req | 659 - On req | 15 Spot - |
| W 3000 | 569 - On req | 659 - On req | 30 Flood - |
| N 4000 | 614 - On req | 711 - On req | 60 W.Flood - |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |

Play_S | Ceiling lamp | powerLED 6 W DC 500 mA



Balance - CRI 92


| | |
|-------|--------------|
| White | 81522 |
|-------|--------------|

| Cct | lm S - D CRI 92 | Optic |
|---------------|-----------------|---------------------|
| M 2700 | 532 - On req | 00 General - |
| W 3000 | 569 - On req | |
| N 4000 | 614 - On req | |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|--|--|---|--------------------------------------|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2-3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 138 x 122 x h 21 | DALI 1 art. p 138 x 122 x h 21 |

Play_P | Pendant luminaire | powerLED 6 W DC 500 mA



Balance - CRI 92 Efficiency - CRI 80


| | | |
|-------|--------------|--------------|
| White | 81536 | 81534 |
| Black | 81537 | 81535 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|---------------------|
| M | 2700 | 532 - On req | 659 - On req | 15 Spot - |
| W | 3000 | 569 - On req | 659 - On req | 30 Flood - |
| N | 4000 | 614 - On req | 712 - On req | 60 W.Flood - |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|---|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 138 x l 22 x h 21 | DALI 1 art. p 138 x l 22 x h 21 |

Play_Giotto | Pendant luminaire | powerLED 6 W DC 500 mA



Balance - CRI 92 Efficiency - CRI 80

| | | |
|-------|--------------|--------------|
| White | 81540 | 81538 |
| Black | 81541 | 81539 |

| | Cct | lm S - D CRI 92 | lm S - D CRI 80 | Optic |
|----------|------|-----------------|-----------------|-------------------------|
| M | 2700 | 532 - 106 | 659 - 130 | 10 Spot - |
| W | 3000 | 569 - 113 | 659 - 130 | 30 Spot (24°) |
| N | 4000 | 614 - 121 | 712 - 142 | 60 W.Flood (55°) |

Electronics

| 99377 | 99106 | 99714 | 99715 |
|---|---|--|---------------------------------------|
| ON/OFF 1 art. p 138 x l 22 x h 21 | ON/OFF 2-3 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 138 x l 22 x h 21 | DALI 1 art. p 138 x l 22 x h 21 |



optus_ex

Materials
Aluminium body



optus_EX range

Optus_T



Pag. 190

Optus_W



Pag. 196



| | _EX mini Extractable mini | _EX Extractable |
|---------------------------------------|--|--|
| 1,5 W | Ø 55 mm | - |
| 4 W | Ø 75 mm | - |
| 18 W | . | Ø 138 mm |
| 34 W | . | Ø 173 mm |
| Accessories | - | |
| Finish | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black |
| Specialty CRI 98 | - | 3000K |
| Fidelity CRI 98 | - | 3000K - 4000K |
| Balance CRI 92 | - | 2700K - 3000K - 4000K - 5000K |
| DynamicWhite 2700K - 5700K | - | Ø 173 mm - Ø 138 mm |
| Optics | Spot - Flood - Wide Flood - Focus | Spot - Flood - Wide Flood |
| Driver | On/Off - 1-10 V - DALI | On/Off - 1-10 V - DALI |
| | 46 mm - 66 mm | 130 mm - 162 mm |

Extractable tilting version

Optux_EX downlights come with a 350° mobility on the horizontal axis and an inclination on the vertical axis that allows a max 20° recess or an up to 45° extraction of the spotlight.




Small size

Optux_EX comes with an extremely compact-size die cast aluminium single block, just 5 cm high. This particular shape allows installation in plasterboards as well as low and narrow surfaces.

Diode varieties

The Optux_EX range of products offers the highest combination-source degree, given that it is fit for LED Balance - CRI 92, Specialty - CRI 98 and Fidelity - CRI 98 diodes. This allows obtaining maximum versatility of use, given that Optux_EX can be installed in various environments ranging from museums to retail, depending on the specific type of source chosen.

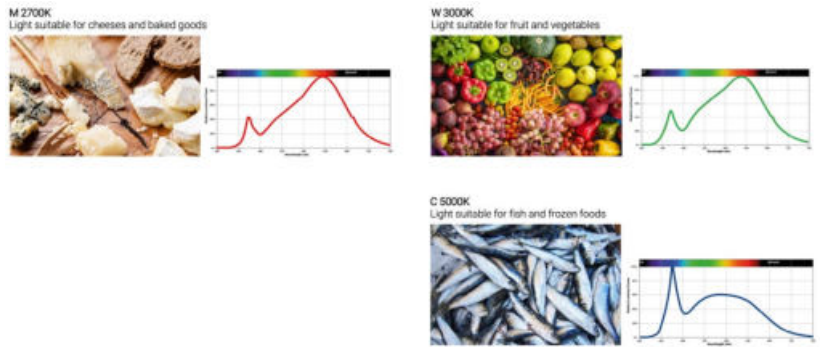

Emission control accessories

Optux_EX is compatible with a wide range of light emission control accessories: standard cylindrical screen and at 45 degrees, fully or partly eliminating the secondary beam and reducing the light cone; cross-like and honeycomb diffuser, for controlling and reducing glaring more or less markedly; directional fins and elliptical filter, for shaping the light or creating ovalized projections.

Kicker accessory

Applied in the installation hole, the kicker accessory allows concealing the inner part of the dropped ceiling, otherwise visible with the spotlight extracted and oriented.

Cylindrical screen 45°



Cylindrical screen



Honeycomb



Cross diffuser



Elliptical filter



Kicker



Focal Kit





Smart lighting

The Dynamic White modules, combined with the new, specifically developed management systems, allow the mixture of whites from Warm White and Cold White. With a single product, it is therefore possible to reproduce all the colour temperatures from 2700K to 5700K, maintaining the same luminous flow. Recent studies on the circadian cycles have shown how the temperature variations of natural light, from dawn to dusk, influence the well-being of humans.





Optus_EX | Downlight | powerLED 1,5 W DC 500 mA



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|---------------|-----------|-----------------------|
| White 82737 | M 2700 | 134 - 97 | 20 Spot (22°) |
| Black 82738 | W 3000 | 153 - 111 | 35 Flood (32°) |


| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|--|--|--|--|---|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |

Optus_EX | Downlight | powerLED 4 W DC 350mA




| CRI 92 | Cct | lm S - D | Optic |
|--------------------|---------------|-----------|---------------------------|
| White 82739 | M 2700 | 478 - 275 | 15 Spot (15°) |
| Black 82740 | W 3000 | 514 - 295 | 30 Flood (33°) |
| | N 4000 | 551 - 318 | 60 W.Flood (61°) |
| | | | 85 Focus (10°-20°) |

| 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|--|--|---|--|--|
| ON/OFF 1 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | 0/1-10V converter 1 art. p 138 x 122 x h 21 | DALI converter 1 art. p 138 x 122 x h 21 | DC 99374 75W 99331 150W |

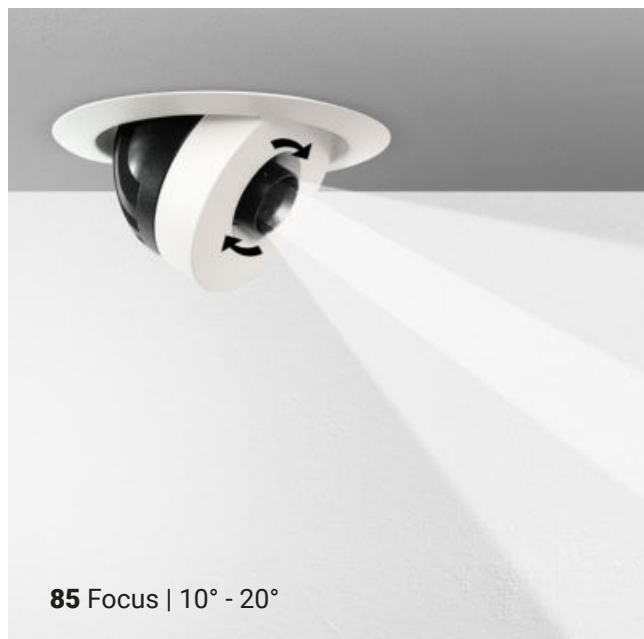

85 Focus | 10° - 20°

Optus_EX | Downlight | arrayLED 12W DC 350mA - 18 W DC 500 mA



Specialty - CRI 98

| | |
|-------|--------------|
| White | 81665 |
| Black | 81666 |

| Cct | lm S - D 12W | lm S - D 18W | Optic |
|--------|---------------|--------------|--|
| W 3000 | 1423 - On req | 1948 - 1445 | 15 Spot (22°) 30 Flood (37°) 60 W.Flood (63°) |

Fidelity - CRI 98

| | |
|-------|--------------|
| White | 81663 |
| Black | 81664 |

| Cct | lm S - D 12W | lm S - D 18W | Optic |
|--------|---------------|--------------|--|
| W 3000 | 1423 - On req | 1948 - 1445 | 15 Spot (22°) 30 Flood (37°) 60 W.Flood (63°) |
| N 4000 | 1564 - On req | 2141 - 1588 | |

Balance - CRI 92

| | |
|-------|--------------|
| White | 81661 |
| Black | 81662 |

| Cct | lm S - D 12W | lm S - D 18W | Optic |
|--------|---------------|--------------|--|
| M 2700 | 1551 - On req | 2124 - 1576 | 15 Spot (22°) 30 Flood (37°) 60 W.Flood (63°) |
| W 3000 | 1624 - On req | 2224 - 1650 | |
| N 4000 | 1746 - On req | 2390 - 1772 | |

Electronics 12W DC 350mA

| 99126 | 99115 | 99344 |
|---|--|--|
| ON/OFF 1 art. p 134 x l 37 x h 30 | 0/1-10V 1 art. p 210 x l 48 x h 25 | DALI PUSH 1 art. p 210 x l 48 x h 25 |

Electronics 18W DC 500mA

| 99106 | 99115 | 99344 |
|---|--|--|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V 1 art. p 210 x l 48 x h 28 | DALI PUSH 1 art. p 210 x l 48 x h 28 |

DW DALI2 powerLED 8W DC 700 mA

Dinamic White

| | |
|-------|--------------|
| White | 84159 |
| Black | 84160 |

CRI90

| D | 2700K - 5700K | Dynamic White | Optic |
|---|---------------|---------------|--|
| | | | 15 Spot - 30 Flood - 60 W.Flood - |

Electronics


| 83159 | 99333 | DMX | Driver CV |
|---|------------------------|-----------------------------|--------------------|
| DALI DT8 2-3 art. p 202 x l 58 x h 30 | Dimmer DMX 1-6 art. | Controllers Pag. 952-953 | CV 48V Pag. 941 |

RTG 81661W30 / 81661W60 / 81662W30 / 81662W60 / 81661N60

Optics & accessories Pag. 148/149

Downlight

Optus_EX | Downlight | arrayLED 25W DC 700mA - 35 W DC 950mA



Specialty - CRI 98

| | |
|-------|--------------|
| White | 81671 |
| Black | 81672 |

| Cct | lm S - D 25W | lm S - D8 35W | Optic |
|--------|---------------|---------------|--|
| W 3000 | 2785 - On req | 3608 - 2925 | 15 Spot (17°) 30 Flood (26°) 60 W.Flood (51°) |

Fidelity - CRI 98

| | |
|-------|--------------|
| White | 81669 |
| Black | 81670 |

| Cct | lm S - D 25W | lm S - D 35W | Optic |
|--------|---------------|--------------|--|
| W 3000 | 2785 - On req | 3608 - 2925 | 15 Spot (17°) 30 Flood (26°) 60 W.Flood (51°) |
| N 4000 | 3059 - On req | 3964 - 3214 | |

Balance - CRI 92

| | |
|-------|--------------|
| White | 81667 |
| Black | 81668 |

| Cct | lm S - D 25W | lm S - D 35W | Optic |
|--------|---------------|---------------|--|
| M 2700 | 3033 - On req | 3930 - On req | 15 Spot (17°) 30 Flood (26°) 60 W.Flood (51°) |
| W 3000 | 3177 - On req | 4117 - 3338 | |
| N 4000 | 3416 - On req | 4426 - 3588 | |
| C 5000 | 3515 - On req | 4555 - 3693 | |

Electronics 25W DC 700mA

| 99147 | 83008 | 99345 |
|---|--|--|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 79 x h 22 | DALI PUSH 1 art. p 210 x l 48 x h 28 |


Electronics 35W DC 950mA

| 99239 | 83008 | 99345 |
|---|--|--|
| ON/OFF 1 art. p 103 x l 58 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x l 79 x h 22 | DALI PUSH 1 art. p 210 x l 48 x h 28 |

RTG 81667W30 / 81667W60 / 81668W30 / 81668W60 / 81667N30

Optics & accessories Pag. 148/149

Optus_EX | Downlight | powerLED 15 W DC 700mA

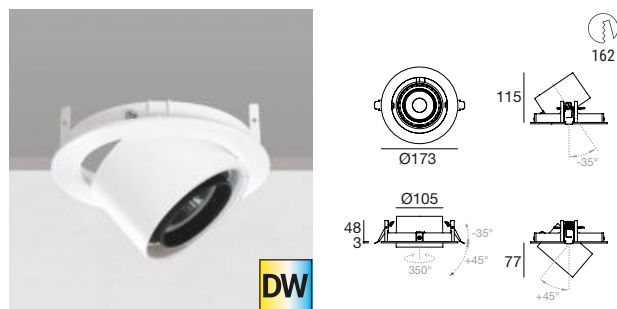

Dinamic White

| | |
|-------|--------------|
| White | 84161 |
| Black | 84162 |

CRI90

| D | 2700K - 5700K | Dynamic White | Optic |
|---|---------------|---------------|---------------------|
| | | | 15 Spot - |
| | | | 30 Flood - |
| | | | 60 W.Flood - |

Electronics

| 83159 | 99333 | DMX | Driver CV |
|--|--------------------------|-------------------------------|--------------------|
| DALI DT8 1 - 2 art. p 202 x 158 x h 30 | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 |

Optics & accessories Pag. 148/149

Optus_EX | Downlight | powerLED 25 W DC 700mA



Dinamic White

| | |
|-------|--------------|
| White | 84163 |
| Black | 84164 |

CRI90


| D | 2700K - 5700K | Dynamic White | Optic |
|---|---------------|---------------|---------------------|
| | | | 15 Spot - |
| | | | 30 Flood - |
| | | | 60 W.Flood - |

Electronics


| 83159 | 99333 | DMX | Driver CV |
|--|----------------------|------------------------------|-------------------|
| DALI DT8 1 art. p 202 x 158 x h 30 | Dimmer DMX 1 art. | Controllers Pag 952 - 953 | CV 48V Pag 941 |


Optics & accessories Pag. 148/149


Optics

| | description |
|---|---|
|  | 99827 Spot suitable for: Optus_EX 12W / 18W |


| | description |
|---|---|
|  | 99829 Wide Flood suitable for: Optus_EX 12W / 18W |


| | description |
|--|--|
|  | 99828 Flood suitable for: Optus_EX 12W / 18W |

| | description |
|--|--|
|  | 99844 Focal Kit (min 16° / max 50°) suitable for: Optus_EX 12W / 18W |

| | description |
|---|---|
|  | 99808 Spot suitable for: Optus_EX 15W / 25W / 35W |

| | description |
|---|---|
|  | 99810 Wide Flood suitable for: Optus_EX 15W / 25W / 35W |

| | description |
|--|--|
|  | 99809 Flood suitable for: Optus_EX 15W / 25W / 35W |


| | description |
|--|--|
|  | 99843 Focal Kit (min 16° / max 42°) suitable for: Optus_EX 15W / 25W / 35W |

Accessories



description

99781 Elliptical filter
suitable for: Optus_EX 12W / 18W



description

99779 Cross louvre
suitable for: Optus_EX 12W / 18W



description

99782 45° Cylindrical screen
suitable for: Optus_EX 12W / 18W



description

99510 Kicker
suitable for: Optus_EX 12W / 18W



description

99780 Honeycomb
suitable for: Optus_EX 12W / 18W



description

99783 Cylindrical screen
suitable for: Optus_EX 12W / 18W




description

99841 Honeycomb
suitable for: Focal kit **99844**



description

99797 Elliptical filter
suitable for: Optus_EX 15W / 25W / 35W



description

99799 Cross louvre
suitable for: Optus_EX 15W / 25W / 35W



description

99795 45° Cylindrical screen
suitable for: Optus_EX 15W / 25W / 35W



description

99479 Kicker
suitable for: Optus_EX 15W / 25W / 35W



description

99798 Honeycomb
suitable for: Optus_EX 15W / 25W / 35W




description

99796 Cylindrical screen
suitable for: Optus_EX 15W / 25W / 35W



description

99842 Honeycomb
suitable for: Focal kit **99843**

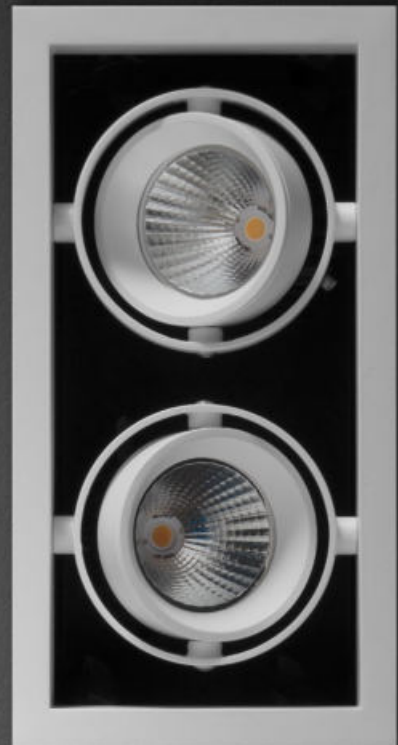


illuminator

Materials
Aluminium body



illuminator | Downlight | arrayLED 7 W DC 700 mA



CRI 92


Anod. AL **80338**

| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-------------------------|
| W | 3000 | 665 - 602 | 15 Spot (15°) |
| N | 4000 | 718 - 649 | 30 Flood (26°) |
| | | | 60 W.Flood (52°) |

Electronics

| 99735 | 99147 | 99733 | 99731 | 99345 |
|--|--|---|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | ON/OFF 2 - 3 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 | DALI PUSH 1 - 3 art. p 210 x 148 x h 25 |

illuminator | Swivelling recessed casing





| | | |
|-------|--------------|----------|
| White | 99486 | 2 x lamp |
| Black | 99489 | 2 x lamp |

Accessories Pag. 157

- 99550** Honeycomb
- 99554** Cylindrical screen
- 99552** Elliptical filter

RTG 99486

illuminator | Swivelling recessed casing




| | | |
|-------|--------------|----------|
| White | 99485 | 1 x lamp |
| Black | 99488 | 1 x lamp |

Accessories Pag. 157

- 99550** Honeycomb
- 99554** Cylindrical screen
- 99552** Elliptical filter

RTG 99485

illuminator | Swivelling recessed casing




| | | |
|-------|--------------|----------|
| White | 99487 | 3 x lamp |
| Black | 99490 | 3 x lamp |

Accessories Pag. 157

- 99550** Honeycomb
- 99554** Cylindrical screen
- 99552** Elliptical filter

RTG 99487

illuminator | Downlight | arrayLED 18 W DC 500 mA



CRI 92

White **82339**



Black **82340**

| | Cct | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-------------------------|
| W | 3000 | 2224 - 1680 | 30 Flood (29°) |
| N | 4000 | 2390 - 1808 | 60 W.Flood (55°) |

Electronics

| 99106 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V 1 art. p 210 x 148 x h 28 | DALI PUSH 1 art. p 210 x 148 x h 28 |

illuminator | Swivelling recessed casing



White **99491** 1 x lamp


Black **99494** 1 x lamp

Accessories Pag. 157

- 99896** Honeycomb
- 99981** Cylindrical screen
- 99897** Elliptical filter

RTG 99491

illuminator | Swivelling recessed casing



White **99492** 2 x lamp


Black **99495** 2 x lamp

Accessories Pag. 157

- 99896** Honeycomb
- 99981** Cylindrical screen
- 99897** Elliptical filter

RTG 99492

illuminator | Downlight | arrayLED 15 W DC 400 mA



CRI 92

| | |
|-------|--------------|
| White | 80389 |
| Black | 80390 |

| Cct | lm S - D CRI 92 | Optic |
|---------------|-----------------|-------------------------|
| W 3000 | 1677 - 1468 | 30 Flood (25°) |
| N 4000 | 1804 - 1580 | 60 W.Flood (49°) |


Electronics

| 99740 | 99739 | 99738 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Optics Pag. 156/157

| | |
|-------------------------|--------------------|
| 99562 Wide Flood | 99561 Flood |
|-------------------------|--------------------|

illuminator | Downlight | arrayLED 25 W DC 700 mA



CRI 92

| | |
|-------|--------------|
| White | 80387 |
| Black | 80388 |

| Cct | lm S - D CRI 92 | Optic |
|---------------|-----------------|-------------------------|
| W 3000 | 2794 - 2288 | 30 Flood (26°) |
| N 4000 | 2990 - 2448 | 60 W.Flood (56°) |

Electronics

| 99112 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Optics Pag. 156/157

| | |
|-------------------------|--------------------|
| 99562 Wide Flood | 99561 Flood |
|-------------------------|--------------------|

illuminator | Downlight | arrayLED 30 W DC 840 mA



CRI 92

| | |
|-------|--------------|
| White | 91229 |
| Black | 91230 |

| Cct | lm S - D CRI 92 | Optic |
|---------------|-----------------|-------------------------|
| W 3000 | 3554 - 2810 | 15 Spot (15°) |
| N 4000 | 3806 - 3009 | 30 Flood (26°) |
| | | 60 W.Flood (57°) |


Electronics

| 99093 | 83066 | 99330 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Optics Pag. 156/157

| | |
|--------------------|-------------------------|
| 98507 Spot | 98509 Wide Flood |
| 98508 Flood | |

illuminator | Downlight | arrayLED 35 W DC 950 mA



CRI 92

| | |
|-------|--------------|
| White | 82341 |
| Black | 82342 |

| Cct | lm S - D CRI 92 | Optic |
|---------------|-----------------|-------------------------|
| W 3000 | 3937 - 3139 | 15 Spot (17°) |
| N 4000 | 4232 - 3376 | 30 Flood (26°) |
| | | 60 W.Flood (53°) |


Electronics

| 99239 | 83008 | 99345 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Optics Pag. 156/157

| | |
|--------------------|-------------------------|
| 98507 Spot | 98509 Wide Flood |
| 98508 Flood | |

illuminator | Swivelling recessed casing



| | | |
|-------|--------------|----------|
| White | 99497 | 1 x lamp |
| Black | 99500 | 1 x lamp |

Accessories Pag. 157


- 99551** Honeycomb
- 99555** Cylindrical screen
- 99553** Elliptical filter

Accessories 35 W Pag. 157

- 99921** Honeycomb
- 99555** Cylindrical screen
- 99920** Elliptical filter

RTG 99497

illuminator | Swivelling recessed casing



| | | |
|-------|--------------|----------|
| White | 99499 | 3 x lamp |
| Black | 99502 | 3 x lamp |

Accessories Pag. 157



- 99551** Honeycomb
- 99555** Cylindrical screen
- 99553** Elliptical filter

Accessories 35 W Pag. 157

- 99921** Honeycomb
- 99555** Cylindrical screen
- 99920** Elliptical filter

RTG 99499

illuminator | Swivelling recessed casing



| | | |
|-------|--------------|----------|
| White | 99498 | 2 x lamp |
| Black | 99501 | 2 x lamp |


Accessories Pag. 157

- 99551** Honeycomb
- 99555** Cylindrical screen
- 99553** Elliptical filter


Accessories 35 W Pag. 157

- 99921** Honeycomb
- 99555** Cylindrical screen
- 99920** Elliptical filter

RTG 99498

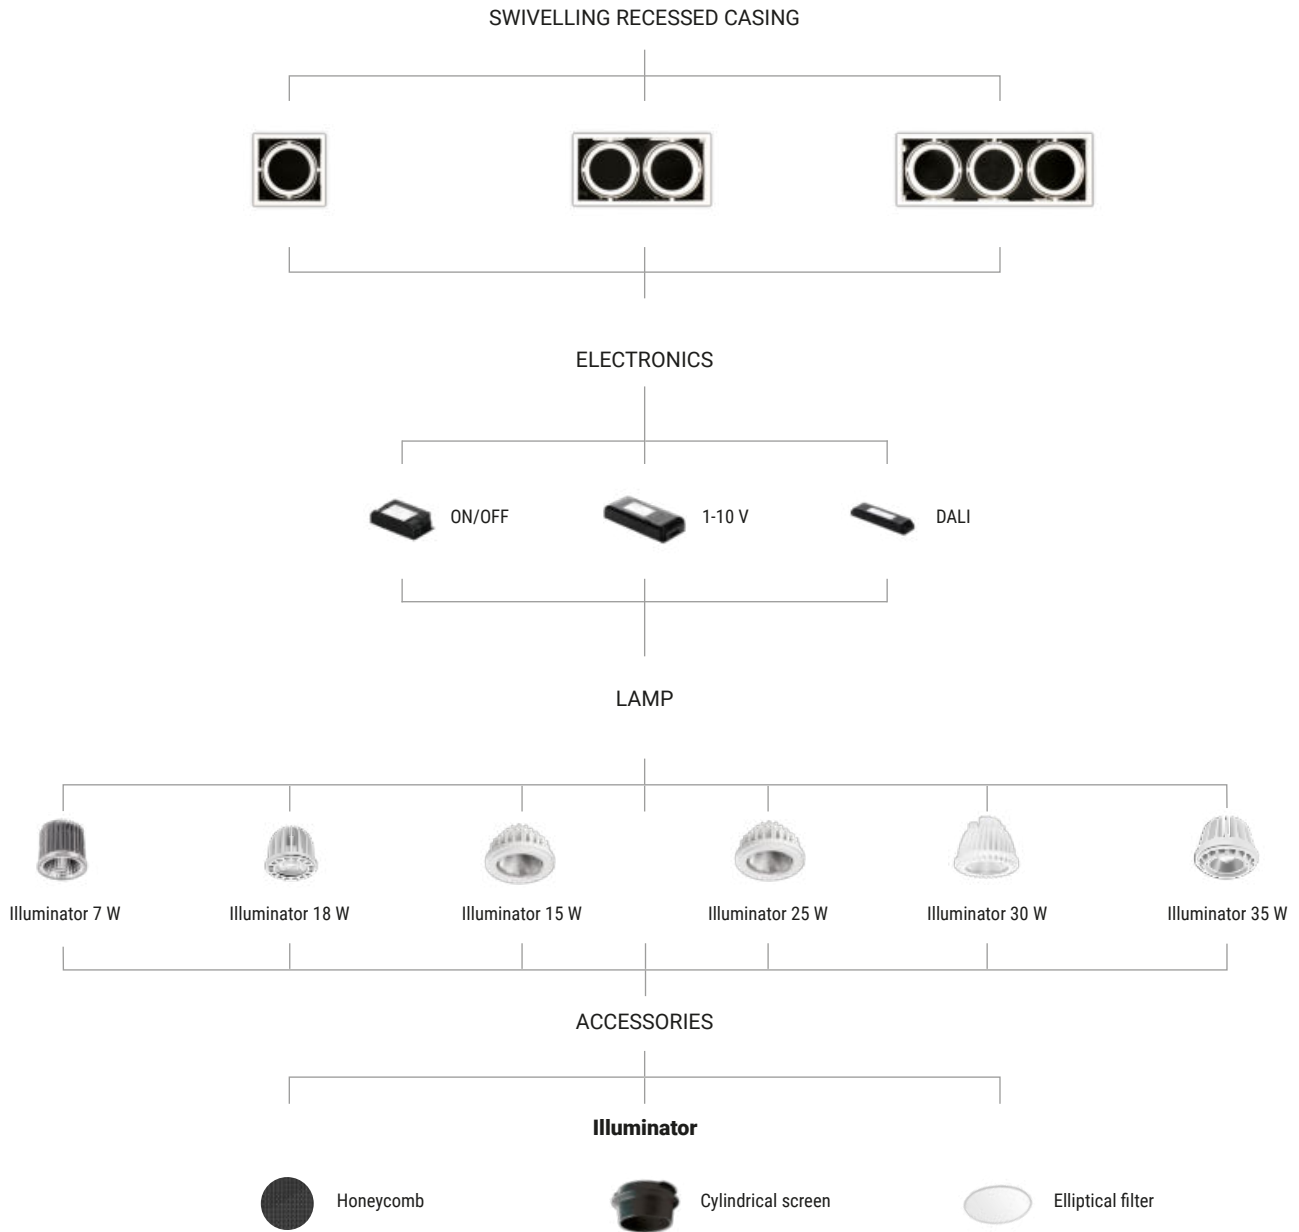


Optics



description

99561 Flood


suitable for: Illuminator 15W / Illuminator 25W



description

99562 Wide Flood


suitable for: Illuminator 15W / Illuminator 25W



description

98507 Spot


suitable for: Illuminator 30W



description

98508 Flood

suitable for: Illuminator 30W




description

98509 Wide Flood

suitable for: Illuminator 30W


Optics



description

99808 Spot


suitable for: Illuminator 35W



description

99809 Flood

suitable for: Illuminator 35W




description

99810 Wide Flood

suitable for: Illuminator 35W

Accessories



description

99550 Honeycomb


suitable for: Illuminator 7W



description

99554 Cylindrical screen


suitable for: Illuminator 7W



description

99552 Elliptical filter

suitable for: Illuminator 7W



description

99896 Honeycomb


suitable for: Illuminator 18W
Illuminator outer casing



description

99981 Cylindrical screen


suitable for: Illuminator 18W
Illuminator outer casing



description

99897 Elliptical filter

suitable for: Illuminator 18W
Illuminator outer casing



description

99551 Honeycomb


suitable for: Illuminator 15W / 25W / 30W
Illuminator outer casing



description

99555 Cylindrical screen


suitable for: Illuminator 15W / 25W / 30W / 35W
Illuminator outer casing



description

99553 Elliptical filter


suitable for: Illuminator 15W / 25W / 30W
Illuminator outer casing



description

99921 Honeycomb

suitable for: Illuminator 35W
Illuminator outer casing



description

99920 Elliptical filter















suitable for: Illuminator 35W
Illuminator outer casing





Projectors

projectors range index

| | | | | | | |
|---------------------|---|--|--|---|---|---|
| Pound | Pound_T  <small>new</small> 172 | Pound_SuperSpot  <small>new</small> 172 | Pound Focus  <small>new</small> 176 | Pound Shaper  <small>new</small> 179 | Pound_BC  <small>new</small> 182 | Pound_BS  <small>new</small> 183 |
| Optus | Optus_T  <small>new</small> 190 | Optus_Ww  <small>new</small> 194 | Optus_W  <small>new</small> 196 | | | |
| Cell | Cell_Ww track  <small>new</small> 199 | | | | | |
| Track system | Track system  202 | | | | | |
| Navata | Navata Optus  <small>new</small> 210 | Navata Pound Shaper  <small>new</small> 211 | | | | |
| Creek | Creek_Optus  <small>new</small> 219 | | | | | |







ACCESS
NYC
IN A
NEW YORK
MINUTE

rom
es

JOSEPH

fitting rooms

DIANE
VON
FURSTENBERG

projectors optics

TIR lenses

TIR (total internal reflection) optics are made of thermoplastic resins or "optical" glass, and it is used for reducing secondary beams. The light beam is collimated in a central "spot" characterised by a diameter that varies as a function of the shape of the optics, thus guaranteeing precision and cleanliness of the projection.





Shaper optics




The profiled lighting through beam shaper is conceived for exhibit purposes. The shaper channels the light to the exhibited work, emphasising it with respect to the rest of the environment. Turning the specific ring varies the focus of the beam for softer or more defined lighting. Turning the external knob adjusts the lens extraction, concentrating more or less light on a determined point. It is, therefore, possible to always have ideal lighting from any distance (e.g. 1 and 4 metres). Moving the stainless steel blades as desired, the contour of the light beam can be varied.

Fresnel optics

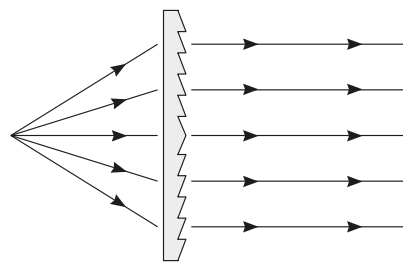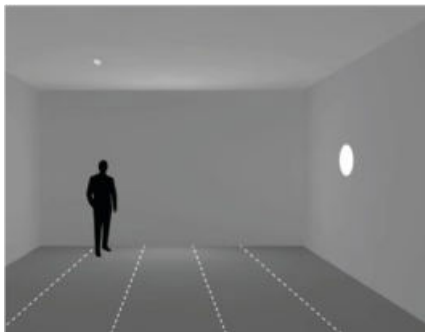

Fresnel optics come from the naval lighting environment and are used in the photographic field to take highly professional shots. The Fresnel lens, featuring a particular and characteristic conformation, allows the light to be channelled, guaranteeing concentrated and accent lighting even over long distances.

Variable dynamics optics

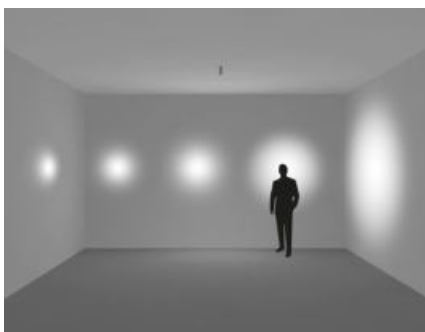

This particular optical system allows to change focus by adopting the spherical lens and the relative internal sliding mechanism. The gradient can be adjusted thanks to the special ring nut that the projector is provided with.

Optics with variable focal


projectors accessories

Optics

Variable dynamic optics



A unique focal accessory on the market which allows the focus and/or zoom of the light beam to be adjusted using two specific rings. The plug and play installation allows for dynamic and versatile light in any situation.



Light diffuser

Honeycomb




The honeycomb grid reduces glaring along the views orthogonal to the lighting flow direction. The cells contribute to the orientation of the light towards a given point, thus generating soft shades. By applying this type of accessory the lighting flow could reduce by about 20-30%.



Cross diffuser



Accessory capable of reducing the light beam and increasing visual comfort zenithal applications with respect to the treading surface. The diffuser application entails reduction of the output lighting flow by about 10% and generates more clear-cut shades with respect to the honeycomb brise-soleil.

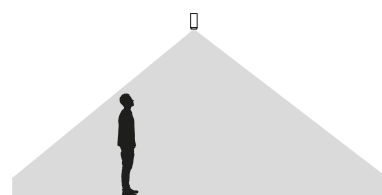


Screens

45° asymmetric screen with rotary motion ("visor")



It partly changes the light beam, reducing secondary beam dispersion for about half of the emission area.

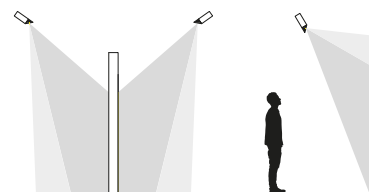


Cylinders screen




The cylinders screen fully removes the secondary beams, thus considerably reducing the glaring phenomenon; it is used to enhance details.



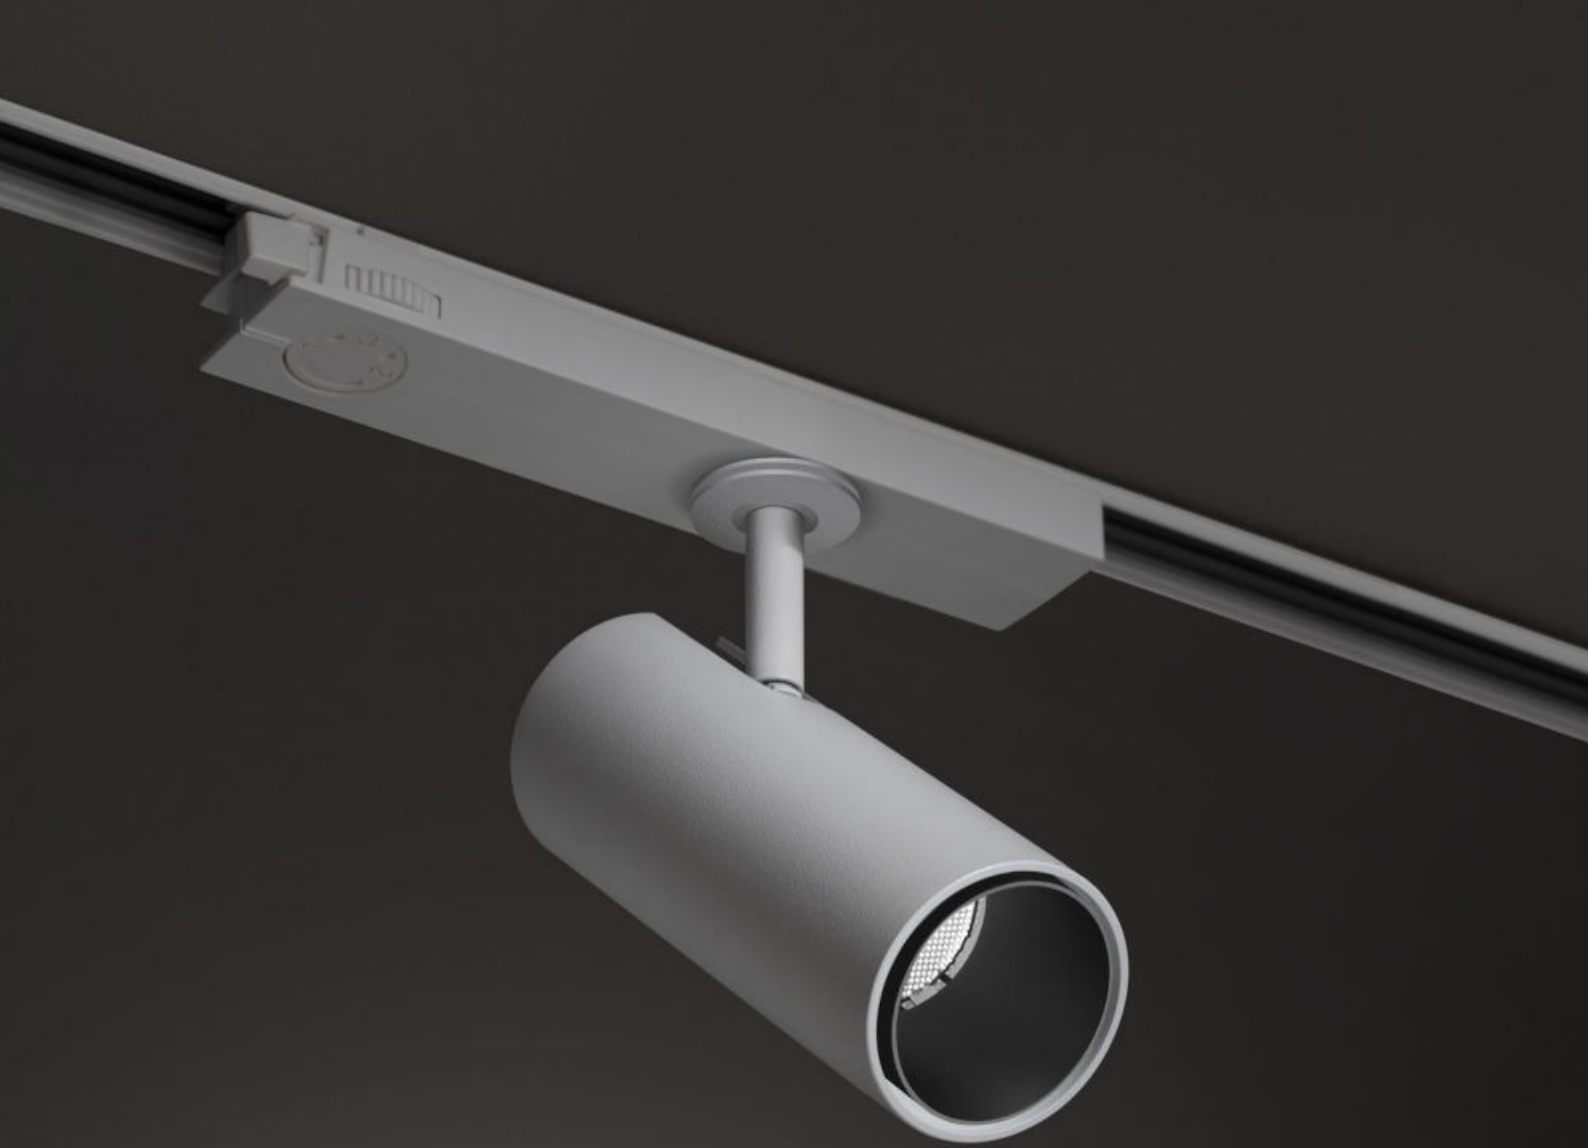

pound

Materials
Aluminium body

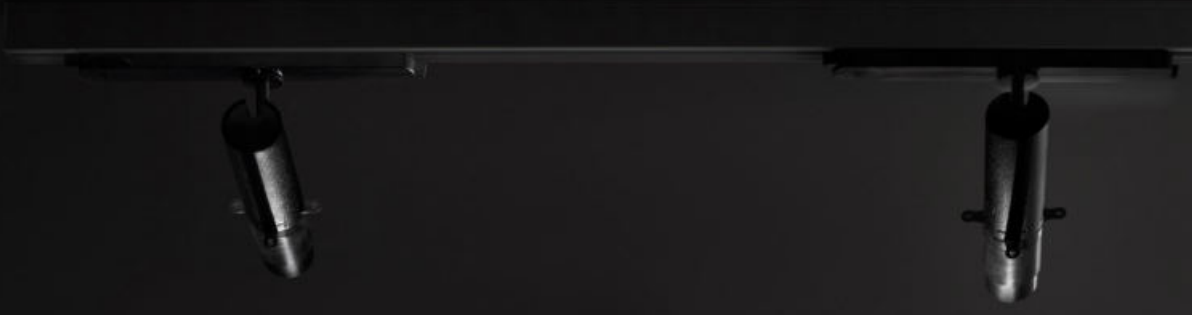




Professional Range



The revamped Pound Family presents three new products for track installation as well as six new products designed to meet all the needs of installation without a track. The new track-mounted projectors make the most of technology: Focus on Board, Shaper and Super Spot are perfect for meeting the countless needs of any field, from retail spaces to museums. If you are unable to use a track, the Pound family offers several variants such as the new Pound_BC, Pound_BS and Pound_S which can be installed in different positions. The latest innovation is the Pound_Wall which has been designed to adapt to any type of situation. It makes use of the new joint that allows the product to be rotated on the vertical axis by 90° and on the horizontal axis by 350°.

Pound Super spot

The Pound range offers a special version with an extremely small opening angle (8°). Thanks to a Fresnel lens, pound can reach small objects over long distances and accentuate details in museum or retail environments.

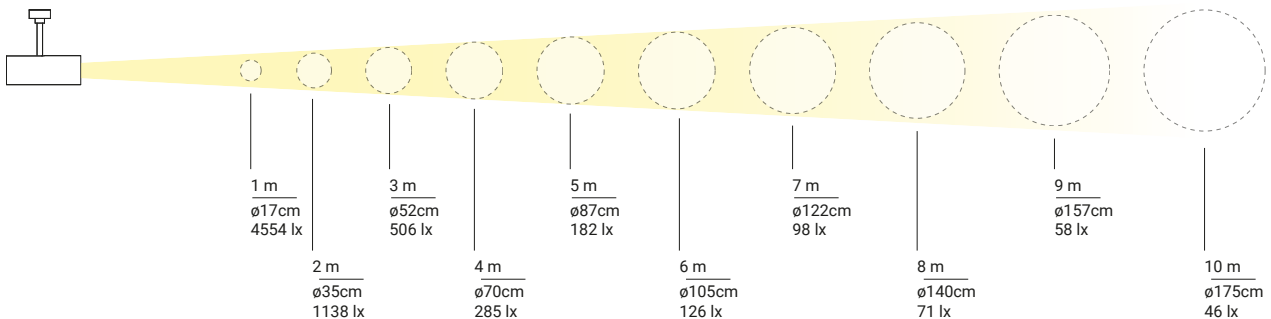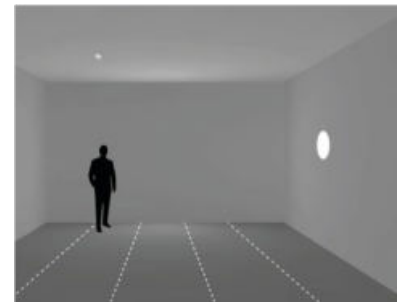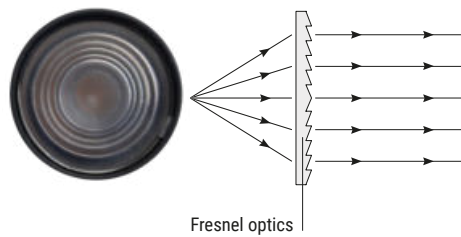

Pound Shaper

Pound shaper is the new professional profiler in the i-LèD projector range.

It was developed to highlight and emphasise museum works of different shapes and sizes thanks to the shaping system that minimises the outflow of reflections from the optical compartment.

It is easy to use and available in 2 powers, 11 or 27 watts, with two different lenses designed to adapt to any distance.




Acro Optic Technology®




Conventional Optic Shaper

Profiling Report



Pound Shaper 11W

| | |
|-----|--|
| 1 m | min: 8,5x8,5 cm 2200 lx max: 40x40 cm 2300 lx |
| 2 m | min: 16x16 cm 490 lx max: 80x80 cm 460 lx |
| 3 m | min: 26x26cm 190 lx max: 125x125 cm 200 lx |
| 4 m | min: 35x35 cm 105 lx max: 170x170cm 115 lx |
| 5 m | min: 45x45 cm 65 lx max: 210x210 cm 75 lx |



Pound Shaper_distance 11W

| | |
|------|--|
| 6 m | min: 33x33 cm 175 lx max: 190x190 cm 150 lx |
| 7 m | min: 38,7x38,7 cm 140 lx max: 220x220 cm 105 lx |
| 8 m | min: 43x43 cm 125 lx max: 260x260 cm 82 lx |
| 9 m | min: 48x48 cm 110 lx max: 290x290 cm 60 lx |
| 10 m | min: 53x53 cm 90 lx max: 330x330cm 44 lx |

pound range




| | Pag. 273 Pound_Wall | Pag. 273 Pound_Wall Focus | Pag. 272 Pound_S | Pag. 272 Pound_S Focus | Pound_BC |
|---------------------|---------------------------|------------------------------|---------------------------|---------------------------|---------------------------|
| 6W | Ø 48 mm | Ø 48 mm | Ø 48 mm | Ø 48 mm | - |
| 7,2W | - | - | - | - | - |
| 11W | - | - | - | - | - |
| 13W | - | - | - | - | Ø 48 mm |
| 18W | Ø 65 mm | Ø 65 mm | Ø 65 mm | Ø 65 mm | - |
| 23W | - | - | - | - | - |
| 24,5W | - | Ø 85mm | - | Ø 85mm | - |
| 25W - 25,5W | Ø 85mm | - | Ø 85mm | - | Ø 65 mm |
| 27W | - | - | - | - | - |
| 32,5W | - | - | - | - | - |
| 34W | - | - | - | - | Ø 85mm |
| Finish | White Black | White Black | White Black | White Black | White Black |
| Specialty CRI 98 | - | - | - | - | - |
| Fidelity CRI 98 | - | - | - | - | - |
| Balance CRI 92 | 2700 K - 3000 K 4000 K | 2700 K - 3000 K 4000 K | 2700 K - 3000 K 4000 K | 2700 K - 3000 K 4000 K | 2700 K - 3000 K 4000 K |
| Optics | Spot - Flood - W.Flood | Focus | Spot - Flood - W.Flood | Focus | Spot - Flood - W.Flood |
| Accessories | | - | | - | |
| Control | On-Off | On-Off | On-Off | On-Off | . |



| | Pound_BS | Pound_T | Pound Focus | Pound Shaper | Pound_T Super Spot |
|-------------------------------|--|--|--|--|--|
| 6W | - | - | - | - | - |
| 7,2W | - | - | - | - | Ø 48 mm |
| 11W | - | - | - | Ø 40 mm - Ø 44 mm | - |
| 13W | Ø 48 mm | Ø 48 mm | Ø 48 mm | - | - |
| 18W | - | - | - | - | - |
| 23W | - | - | Ø 65 mm | - | - |
| 24,5W | - | - | - | - | - |
| 25W - 25,5W | Ø 65 mm | Ø 65 mm | - | - | - |
| 27W | - | - | - | Ø 63 mm - Ø 85 mm | - |
| 32,5W | - | - | Ø 85mm | - | - |
| 34W | Ø 85mm | Ø 85mm | - | - | - |
| Finish | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black |
| Specialty CRI 98 | - | 3000 K | - | - | - |
| Fidelity CRI 98 | - | 2700 K - 3000 K 4000 K | 2700 K - 3000 K 4000 K | 2700 K - 3000 K 4000 K | - |
| Balance CRI 92 | 2700 K - 3000 K 4000 K | 3000 K - 4000 K | 2700 K - 3000 K 4000 K | - | 2700 K - 3000 K 4000 K |
| DynamicWhite 2700K - 5700K | - | 2700 K - 5700 K | - | - | - |
| Optics | Spot - Flood - W.Flood | Spot - Flood - W.Flood | Focus | Shaper | Super Spot |
| Accessories | | | - | | - |
| Control | On-Off / DALI 2 | On-Off / DALI 2 / D.O.B Bluetooth | DALI 2 / D.O.B. Bluetooth | DALI 2 / D.O.B. Bluetooth | DALI 2 |

Pound_T | Projectors | 176-264 V AC | arrayLED 13 W DC - 15,5 W AC




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|------------|----------------|
| White | 81629 | W 3000 | 1142 - 936 | 15 Spot (17°) |
| Black | 81630 | | | 30 Flood (25°) |
| | | | | 60 Flood (42°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|----------------|
| White | 81627 | M 2700 | 1142 - 887 | 15 Spot (17°) |
| Black | 81628 | W 3000 | 1230 - 936 | 30 Flood (25°) |
| | | N 4000 | 1318 - 1029 | 60 Flood (42°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|----------------|
| White | 81625 | W 3000 | 1318 - 1062 | 15 Spot (17°) |
| Black | 81626 | N 4000 | 1515 - 1142 | 30 Flood (25°) |
| | | | | 60 Flood (42°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 176-264 V AC | arrayLED 34 W DC - 39 W AC





| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 81641 | W 3000 | 3608 - 2876 | 15 Spot (17°) |
| Black | 81642 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (57°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81639 | M 2700 | 3416 - 2722 | 15 Spot (17°) |
| Black | 81640 | W 3000 | 3608 - 2876 | 30 Flood (26°) |
| | | N 4000 | 3964 - 3160 | 60 W.Flood (57°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 81637 | W 3000 | 4117 - 3282 | 15 Spot (17°) |
| Black | 81638 | N 4000 | 4426 - 3528 | 30 Flood (26°) |
| | | | | 60 W.Flood (57°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 176-264 V AC | arrayLED 25 W DC - 29 W AC



| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 81635 | W 3000 | 2577 - 1835 | 15 Spot (19°) |
| Black | 81636 | | | 30 Flood (37°) |
| | | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81633 | M 2700 | 2440 - 1738 | 15 Spot (19°) |
| Black | 81634 | W 3000 | 2577 - 1835 | 30 Flood (37°) |
| | | N 4000 | 2831 - 2016 | 60 W.Flood (63°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 81631 | W 3000 | 2941 - 2094 | 15 Spot (19°) |
| Black | 81632 | N 4000 | 3161 - 2251 | 30 Flood (37°) |
| | | | | 60 W.Flood (63°) |


Optics & accessories Pag. 184/185

RTG 81625W30 / 81625W60 / 81626W30 / 81626W60 / 81625N30

RTG 81631W30 / 81631W60 / 81632W30 / 81632W60


RTG 81637W30 / 81637W60 / 81638W30 / 81638W60 / 81637N30 / 81638N30

Pound_T Super Spot | Projectors | 176-264 V AC | powerLED 7,2 W DC - 9 W AC



| Balance - CRI 92 | | Cct | Im S - D | Optic |
|------------------|--------------|--------|-----------|------------------------|
| White | 81954 | M 2700 | 614 - 260 | 08 Fresnel (8°) |
| Black | 81955 | W 3000 | 657 - 278 | |
| | | N 4000 | 709 - 300 | |

Pound_T | Projectors | 176-264 V AC | arrayLED 13 W DC - 15,5 W AC




| Specialty - CRI 98 | | Cct | Im S - D | Optic |
|--------------------|--------------|--------|------------|---------------------|
| White | 82611 | W 3000 | 1142 - 936 | 15 Spot - |
| Black | 82612 | | | 30 Flood - |
| | | | | 60 W.Flood - |

| Fidelity - CRI 98 | | Cct | Im S - D | Optic |
|-------------------|--------------|--------|-------------|---------------------|
| White | 82609 | M 2700 | 1142 - 887 | 15 Spot - |
| Black | 82610 | W 3000 | 1230 - 936 | 30 Flood - |
| | | N 4000 | 1318 - 1029 | 60 W.Flood - |

| Balance - CRI 92 | | Cct | Im S - D | Optic |
|------------------|--------------|--------|-------------|---------------------|
| White | 82607 | W 3000 | 1318 - 1062 | 15 Spot - |
| Black | 82608 | N 4000 | 1515 - 1142 | 30 Flood - |
| | | | | 60 W.Flood - |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 176-264 V AC | arrayLED 23 W DC - 26 W AC



| Specialty - CRI 98 | | Cct | Im S - D | Optic |
|--------------------|--------------|--------|-------------|-------------------------|
| White | 81812 | W 3000 | 2427 - 1835 | 15 Spot (19°) |
| Black | 81813 | | | 30 Flood (37°) |
| | | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | | Cct | Im S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 81810 | M 2700 | 2298 - 1738 | 15 Spot (19°) |
| Black | 81811 | W 3000 | 2427 - 1835 | 30 Flood (37°) |
| | | N 4000 | 2667 - 2016 | 60 W.Flood (63°) |


| Balance - CRI 92 | | Cct | Im S - D | Optic |
|------------------|--------------|--------|-------------|-------------------------|
| White | 81808 | W 3000 | 2770 - 2094 | 15 Spot (19°) |
| Black | 81809 | N 4000 | 2978 - 2251 | 30 Flood (37°) |
| | | | | 60 W.Flood (63°) |

DW DALI2 NEW powerLED 8W DC - 9W AC

| CRI 90 | Dynamic White | Optic |
|--------|---------------|-------------------------|
| White | 84165 | D 2700K - 5700K |
| Black | 84166 | |
| | | 15 Spot (19°) |
| | | 30 Flood (37°) |
| | | 60 W.Flood (63°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 176-264 V AC | arrayLED 34 W DC - 39 W AC



| Specialty - CRI 98 | | Cct | Im S - D | Optic |
|--------------------|--------------|--------|-------------|-------------------------|
| White | 81756 | W 3000 | 3289 - 2622 | 15 Spot (17°) |
| Black | 81757 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (57°) |

| Fidelity - CRI 98 | | Cct | Im S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 81754 | M 2700 | 3114 - 2483 | 15 Spot (17°) |
| Black | 81755 | W 3000 | 3289 - 2622 | 30 Flood (26°) |
| | | N 4000 | 3613 - 2882 | 60 W.Flood (57°) |

| Balance - CRI 92 | | Cct | Im S - D | Optic |
|------------------|--------------|--------|-------------|-------------------------|
| White | 81752 | W 3000 | 3753 - 2992 | 15 Spot (17°) |
| Black | 81753 | N 4000 | 4034 - 3219 | 30 Flood (26°) |
| | | | | 60 W.Flood (57°) |

DW DALI2 NEW powerLED 15W DC - 17,5W AC


| CRI 90 | Dynamic White | Optic |
|--------|---------------|-------------------------|
| White | 84167 | D 2700K - 5700K |
| Black | 84168 | |
| | | 15 Spot (17°) |
| | | 30 Flood (26°) |
| | | 60 W.Flood (57°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 198-264 V AC | arrayLED 13 W DC - 15,5 W AC



Technology Partner
SILVAIR



| Specialty - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|------------|----------------|
| White 83799 | W 3000 | 1213 - 936 | 15 Spot (17°) |
| Black 83800 | | | 30 Flood (25°) |
| | | | 60 Flood (41°) |

| Fidelity - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|----------------|
| White 83801 | M 2700 | 1148 - 887 | 15 Spot (17°) |
| Black 83802 | W 3000 | 1213 - 936 | 30 Flood (25°) |
| | N 4000 | 1333 - 1029 | 60 Flood (41°) |


| Balance - CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|----------------|
| White 83803 | M 2700 | 1165 - 1014 | 15 Spot (17°) |
| Black 83804 | W 3000 | 1220 - 1062 | 30 Flood (25°) |
| | N 4000 | 1311 - 1142 | 60 Flood (41°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 198-264 V AC | arrayLED 23 W DC - 26 W AC



Technology Partner
SILVAIR



| Specialty - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83805 | W 3000 | 2273 - 1729 | 15 Spot (19°) |
| Black 83806 | | | 30 Flood (37°) |
| | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83807 | M 2700 | 2152 - 1637 | 15 Spot (19°) |
| Black 83808 | W 3000 | 2273 - 1729 | 30 Flood (37°) |
| | N 4000 | 2497 - 1898 | 60 W.Flood (63°) |


| Balance - CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83809 | M 2700 | 2477 - 1883 | 15 Spot (19°) |
| Black 83810 | W 3000 | 2594 - 1974 | 30 Flood (37°) |
| | N 4000 | 2788 - 2120 | 60 W.Flood (63°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 198-264 V AC | arrayLED 32,5 W DC - 37,5 W AC



Technology Partner
SILVAIR




| Specialty - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83811 | W 3000 | 3450 - 2750 | 15 Spot (17°) |
| Black 83812 | | | 30 Flood (26°) |
| | | | 60 W.Flood (57°) |

| Fidelity - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83823 | M 2700 | 3266 - 2603 | 15 Spot (17°) |
| Black 83824 | W 3000 | 3450 - 2750 | 30 Flood (26°) |
| | N 4000 | 3790 - 3022 | 60 W.Flood (57°) |

| Balance - CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83825 | M 2700 | 3758 - 2994 | 15 Spot (17°) |
| Black 83826 | W 3000 | 3937 - 3138 | 30 Flood (26°) |
| | N 4000 | 4232 - 3374 | 60 W.Flood (57°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 198-264 V AC | arrayLED 13 W DC - 15,5 W AC




| Specialty - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|------------|----------------|
| White 82408 | W 3000 | 1213 - 936 | 15 Spot (17°) |
| Black 82409 | | | 30 Flood (25°) |
| | | | 60 Flood (41°) |

| Fidelity - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|----------------|
| White 82406 | M 2700 | 1148 - 887 | 15 Spot (17°) |
| Black 82407 | W 3000 | 1213 - 936 | 30 Flood (25°) |
| | N 4000 | 1333 - 1029 | 60 Flood (41°) |

| Balance - CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|----------------|
| White 82227 | M 2700 | 1165 - 1014 | 15 Spot (17°) |
| Black 82228 | W 3000 | 1220 - 1062 | 30 Flood (25°) |
| | N 4000 | 1311 - 1142 | 60 Flood (41°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 198-264 V AC | arrayLED 32,5 W DC - 37,5 W AC




| Specialty - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 82416 | W 3000 | 3450 - 2750 | 15 Spot (17°) |
| Black 82417 | | | 30 Flood (26°) |
| | | | 60 W.Flood (57°) |

| Fidelity - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 82414 | M 2700 | 3266 - 2603 | 15 Spot (17°) |
| Black 82415 | W 3000 | 3450 - 2750 | 30 Flood (26°) |
| | N 4000 | 3790 - 3022 | 60 W.Flood (57°) |

| Balance - CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 82231 | M 2700 | 3758 - 2994 | 15 Spot (17°) |
| Black 82232 | W 3000 | 3937 - 3158 | 30 Flood (26°) |
| | N 4000 | 4232 - 3374 | 60 W.Flood (57°) |

Optics & accessories Pag. 184/185

Pound_T | Projectors | 198-264 V AC | arrayLED 23 W DC - 26 W AC




| Specialty - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 82412 | W 3000 | 2273 - 1729 | 15 Spot (19°) |
| Black 82413 | | | 30 Flood (37°) |
| | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 82410 | M 2700 | 2152 - 1637 | 15 Spot (19°) |
| Black 82411 | W 3000 | 2273 - 1729 | 30 Flood (37°) |
| | N 4000 | 2497 - 1889 | 60 W.Flood (63°) |

| Balance - CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 82229 | M 2700 | 2477 - 1883 | 15 Spot (19°) |
| Black 82230 | W 3000 | 2594 - 1974 | 30 Flood (37°) |
| | N 4000 | 2788 - 2120 | 60 W.Flood (63°) |

Optics & accessories Pag. 184/185


Pound Focus | Projectors | 176-264 V AC | arrayLED 13 W DC - 15,5 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82422 | M 2700 | 1148 - 0n req | 85 Focus 14° - 47° |
| Black | 82423 | W 3000 | 1213 - 0n req | |
| | | N 4000 | 1333 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 81987 | M 2700 | 1165 - 0n req | 85 Focus 14° - 47° |
| Black | 81988 | W 3000 | 1220 - 0n req | |
| | | N 4000 | 1311 - 0n req | |


Pound Focus | Projectors | 176-264 V AC | arrayLED 23 W DC - 29 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82438 | M 2700 | 2298 - 0n req | 85 Focus 16° - 65° |
| Black | 82439 | W 3000 | 2427 - 0n req | |
| | | N 4000 | 2667 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 81989 | M 2700 | 2645 - 0n req | 85 Focus 16° - 65° |
| Black | 81990 | W 3000 | 2770 - 0n req | |
| | | N 4000 | 2978 - 0n req | |

Pound Focus | Projectors | 176-264 V AC | arrayLED 32,5 W DC - 37 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82440 | M 2700 | 3266 - 0n req | 85 Focus 17° - 60° |
| Black | 82441 | W 3000 | 3450 - 0n req | |
| | | N 4000 | 3790 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 81991 | M 2700 | 3758 - 0n req | 85 Focus 17° - 60° |
| Black | 81992 | W 3000 | 3937 - 0n req | |
| | | N 4000 | 4232 - 0n req | |



Technology Partner
SILVAIR




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 83827 | M 2700 | 1148 - 0n req | 85 Focus 14° - 47° |
| Black | 83828 | W 3000 | 1213 - 0n req | |
| | | N 4000 | 1333 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 83829 | M 2700 | 1165 - 0n req | 85 Focus 14° - 47° |
| Black | 83830 | W 3000 | 1220 - 0n req | |
| | | N 4000 | 1311 - 0n req | |



Technology Partner
SILVAIR




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 83831 | M 2700 | 2298 - 0n req | 85 Focus 16° - 65° |
| Black | 83832 | W 3000 | 2427 - 0n req | |
| | | N 4000 | 2667 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 83833 | M 2700 | 2645 - 0n req | 85 Focus 16° - 65° |
| Black | 83834 | W 3000 | 2770 - 0n req | |
| | | N 4000 | 2978 - 0n req | |




Technology Partner
SILVAIR



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 83835 | M 2700 | 3266 - 0n req | 85 Focus 17° - 60° |
| Black | 83836 | W 3000 | 3450 - 0n req | |
| | | N 4000 | 3790 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 83839 | M 2700 | 3758 - 0n req | 85 Focus 17° - 60° |
| Black | 83840 | W 3000 | 3937 - 0n req | |
| | | N 4000 | 4232 - 0n req | |


Pound Focus | Projectors | 198-264 V AC | arrayLED 13 W DC - 15,5 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82444 | M 2700 | 1148 - 0n req | 85 Focus 14° - 47° |
| Black | 82445 | W 3000 | 1213 - 0n req | |
| | | N 4000 | 1333 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 82105 | M 2700 | 1165 - 0n req | 85 Focus 14° - 47° |
| Black | 82106 | W 3000 | 1220 - 0n req | |
| | | N 4000 | 1311 - 0n req | |


Pound Focus | Projectors | 198-264 V AC | arrayLED 23 W DC - 29 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82446 | M 2700 | 2298 - 0n req | 85 Focus 16° - 65° |
| Black | 82447 | W 3000 | 2427 - 0n req | |
| | | N 4000 | 2667 - 0n req | |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 82107 | M 2700 | 2645 - 0n req | 85 Focus 16° - 65° |
| Black | 82108 | W 3000 | 2770 - 0n req | |
| | | N 4000 | 2978 - 0n req | |


Pound Focus | Projectors | 198-264 V AC | arrayLED 32,5 W DC - 37 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82448 | M 2700 | 3266 - 0n req | 85 Focus 17° - 60° |
| Black | 82449 | W 3000 | 3450 - 0n req | |
| | | N 4000 | 3790 - 0n req | |


| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 82109 | M 2700 | 3758 - 0n req | 85 Focus 17° - 60° |
| Black | 82110 | W 3000 | 3937 - 0n req | |
| | | N 4000 | 4232 - 0n req | |

Pound Shaper_distance | Projectors | 176-264 V AC | arrayLED 11 W DC - 13 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 76659 | M 2700 | 1019 - 0n req | 66 Shaper - |
| Black | 76660 | W 3000 | 1076 - 0n req | |
| | | N 4000 | 1182 - 0n req | |

Pound Shaper | Projectors | 176-264 V AC | arrayLED 11 W DC - 13 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 76661 | M 2700 | 1019 - 0n req | 66 Shaper - |
| Black | 76662 | W 3000 | 1076 - 0n req | |
| | | N 4000 | 1182 - 0n req | |

Pound Shaper_distance | Projectors | 176-264 V AC | arrayLED 27 W DC - 30 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 82072 | M 2700 | 2799 - 0n req | 66 Shaper - |
| Black | 82114 | W 3000 | 2957 - 0n req | |
| | | N 4000 | 3247 - 0n req | |

Pound Shaper | Projectors | 176-264 V AC | arrayLED 27 W DC - 30 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 82071 | M 2700 | 2799 - 0n req | 66 Shaper - |
| Black | 82113 | W 3000 | 2957 - 0n req | |
| | | N 4000 | 3247 - 0n req | |

Accessories Pag. 185


Accessories Pag. 185

Pound Shaper_distance | Projectors | 198-264 V AC | arrayLED 11 W DC - 13 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 76663 | M 2700 | 1019 - 0n req | 66 Shaper - |
| Black | 76664 | W 3000 | 1076 - 0n req | |
| | | N 4000 | 1182 - 0n req | |

Pound Shaper | Projectors | 198-264 V AC | arrayLED 11 W DC - 13 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 76665 | M 2700 | 1019 - 0n req | 66 Shaper - |
| Black | 76666 | W 3000 | 1076 - 0n req | |
| | | N 4000 | 1182 - 0n req | |

Pound Shaper_distance | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 83899 | M 2700 | 2799 - 0n req | 66 Shaper - |
| Black | 83900 | W 3000 | 2958 - 0n req | |
| | | N 4000 | 3247 - 0n req | |

Pound Shaper | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 83901 | M 2700 | 2799 - 0n req | 66 Shaper - |
| Black | 83902 | W 3000 | 2956 - 0n req | |
| | | N 4000 | 3247 - 0n req | |

Accessories Pag. 185


Accessories Pag. 185

Pound Shaper_distance | Projectors | 198-264 V AC | arrayLED 11 W DC - 13 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 76667 | M 2700 | 1019 - 0n req | 66 Shaper - |
| Black | 76668 | W 3000 | 1076 - 0n req | |
| | | N 4000 | 1182 - 0n req | |

Pound Shaper | Projectors | 198-264 V AC | arrayLED 11 W DC - 13 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 76669 | M 2700 | 1019 - 0n req | 66 Shaper - |
| Black | 76670 | W 3000 | 1076 - 0n req | |
| | | N 4000 | 1182 - 0n req | |

Pound Shaper_distance | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 82121 | M 2700 | 2799 - 0n req | 66 Shaper - |
| Black | 82122 | W 3000 | 2957 - 0n req | |
| | | N 4000 | 3247 - 0n req | |

Pound Shaper | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|-------------|
| White | 82119 | M 2700 | 2799 - 0n req | 66 Shaper - |
| Black | 82120 | W 3000 | 2957 - 0n req | |
| | | N 4000 | 3247 - 0n req | |

Accessories Pag. 185

Accessories Pag. 185

Pound_BC | Projectors | arrayLED 13 W DC 350mA




| CRI 92 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-----------------------|
| White 82353 | M 2700 | 1165 - 1024 | 15 Spot (17°) |
| Black 82354 | W 3000 | 1220 - 1062 | 30 Flood (25°) |
| | N 4000 | 1311 - 1142 | 60 Flood (42°) |

Electronics

| 99126 | 99115 | 99344 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 30 | 0/1-10V 1 art. p 210 x 148 x h 25 | DALI PUSH 1 art. p 210 x 148 x h 25 |

Optics & accessories Pag. 184/185

Pound_BC | Projectors | arrayLED 25 W DC 700mA



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-------------------------|
| White 82355 | M 2700 | 2808 - 2001 | 15 Spot (19°) |
| Black 82356 | W 3000 | 2941 - 2094 | 30 Flood (36°) |
| | N 4000 | 3161 - 2251 | 60 W.Flood (63°) |


Electronics

| 99147 | 83008 | 99345 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |



Optics & accessories Pag. 184/185

Pound_BC | Projectors | arrayLED 34 W DC 950mA



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-------------------------|
| White 82357 | M 2700 | 3930 - 3135 | 15 Spot (17°) |
| Black 82358 | W 3000 | 4117 - 3282 | 30 Flood (25°) |
| | N 4000 | 4426 - 3528 | 60 W.Flood (57°) |


Electronics

| 99239 | 83008 | 99345 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |



Optics & accessories Pag. 184/185

Pound_BS | Projectors | 198-264 V AC | arrayLED 13 W DC - 15,5 W AC




| CRI 92 | | Cct | lm S - D | Optic |
|--------|--------------|--------|-------------|----------------|
| White | 82359 | M 2700 | 1165 - 1014 | 15 Spot (17°) |
| Black | 82360 | W 3000 | 1220 - 1062 | 30 Flood (25°) |
| | | N 4000 | 1311 - 1142 | 60 Flood (42°) |

| CRI 92 DALI | | Cct | lm S - D | Optic |
|-------------|--------------|--------|-------------|----------------|
| White | 82365 | M 2700 | 1165 - 1014 | 15 Spot (17°) |
| Black | 82366 | W 3000 | 1220 - 1062 | 30 Flood (25°) |
| | | N 4000 | 1311 - 1142 | 60 Flood (42°) |

Optics & accessories Pag. 184/185

Pound_BS | Projectors | 198-264 V AC | arrayLED 25 W DC - 29 W AC




| CRI 92 | | Cct | lm S - D | Optic |
|--------|--------------|--------|-------------|------------------|
| White | 82361 | M 2700 | 2808 - 2001 | 15 Spot (19°) |
| Black | 82362 | W 3000 | 2941 - 2094 | 30 Flood (36°) |
| | | N 4000 | 3161 - 2251 | 60 W.Flood (63°) |

| CRI 92 DALI | | Cct | lm S - D | Optic |
|-------------|--------------|--------|-------------|------------------|
| White | 82367 | M 2700 | 2808 - 2001 | 15 Spot (19°) |
| Black | 82368 | W 3000 | 2941 - 2094 | 30 Flood (36°) |
| | | N 4000 | 3161 - 2251 | 60 W.Flood (63°) |

Optics & accessories Pag. 184/185

Pound_BS | Projectors | 198-264 V AC | arrayLED 34 W DC - 39 W AC



| CRI 92 | | Cct | lm S - D | Optic |
|--------|--------------|--------|-------------|------------------|
| White | 82363 | M 2700 | 3930 - 2994 | 15 Spot (17°) |
| Black | 82364 | W 3000 | 4117 - 3138 | 30 Flood (25°) |
| | | N 4000 | 4426 - 3374 | 60 W.Flood (57°) |

| CRI 92 DALI | | Cct | lm S - D | Optic |
|-------------|--------------|--------|-------------|------------------|
| White | 82369 | M 2700 | 3930 - 2994 | 15 Spot (17°) |
| Black | 82370 | W 3000 | 4117 - 3138 | 30 Flood (25°) |
| | | N 4000 | 4426 - 3374 | 60 W.Flood (57°) |

Optics & accessories Pag. 184/185

Optics



description

99805 Spot

suitable for: Pound_T 13W / Pound_BC 13W
Pound_BS 13W



description

99806 Flood

suitable for: Pound_T 13W / Pound_BC 13W
Pound_BS 13W



description

99807 Wide Flood

suitable for: Pound_T 13W / Pound_BC 13W
Pound_BS 13W



description

99827 Spot

suitable for: Pound_T 23W / 25W / Pound_BC 25W
Pound_BS 25W



description

99828 Flood

suitable for: Pound_T 23W / 25W / Pound_BC 25W
Pound_BS 25W



description

99829 Wide Flood

suitable for: Pound_T 23W / 25W / Pound_BC 25W
Pound_BS 25W



description

99808 Spot

suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
Pound_BS 34W



description

99809 Flood

suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
Pound_BS 34W



description


99810 Wide Flood

suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
Pound_BS 34W

Accessories



description
99775 Elliptical filter
suitable for: Pound_T 13W / Pound_BC 13W
 Pound_BS 13W



description
99777 Cross louvre
suitable for: Pound_T 13W / Pound_BC 13W
 Pound_BS 13W



description
99773 45° Cylindrical screen
suitable for: Pound_T 13W / Pound_BC 13W
 Pound_BS 13W




description
99776 Honeycomb
suitable for: Pound_T 13W / Pound_BC 13W
 Pound_BS 13W



description
99774 Cylindrical screen
suitable for: Pound_T 13W / Pound_BC 13W
 Pound_BS 13W



description
99781 Elliptical filter
suitable for: Pound_T 23W / 25W / Pound_BC 25W
 Pound_BS 25W



description
99779 Cross louvre
suitable for: Pound_T 23W / 25W / Pound_BC 25W
 Pound_BS 25W



description
99782 45° Cylindrical screen
suitable for: Pound_T 23W / 25W / Pound_BC 25W
 Pound_BS 25W




description
99780 Honeycomb
suitable for: Pound_T 23W / 25W / Pound_BC 25W
 Pound_BS 25W



description
99783 Cylindrical screen
suitable for: Pound_T 23W / 25W / Pound_BC 25W
 Pound_BS 25W



description
99797 Elliptical filter
suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
 Pound_BS 34W



description
99799 Cross louvre
suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
 Pound_BS 34W



description
99795 45° Cylindrical screen
suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
 Pound_BS 34W



description
99798 Honeycomb
suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
 Pound_BS 34W



description
99796 Cylindrical screen
suitable for: Pound_T / 31W / 32,5W / 34W Pound_BC 34W
 Pound_BS 34W



description
99853 Gobo accessory
suitable for: Pound Shaper 27W



optus

Materials
Aluminium body




optus range




| | _T | _T Dimmer | _Ww Wall Washer | _W2 / _W3 |
|---------------------|-------------------------------|-------------------------------|----------------------------|---------------------------|
| 12W | - | Ø 66 mm | - | - |
| 16W | Ø 66 mm | Ø 66 mm | - | - |
| 17W | - | - | Ø 90 mm | - |
| 23W | - | Ø 90 mm | - | - |
| 24W | Ø 90 mm | Ø 90 mm | - | - |
| 27W | - | - | Ø 105 mm | - |
| 30W | - | - | - | 280 x 98 mm |
| 32W | - | Ø 105 mm | - | - |
| 34W | Ø 105 mm | Ø 105 mm | - | - |
| 45W | - | - | - | 420 x 98 mm |
| Accessories | | | - | |
| Finish | White Black | White Black | White Black | White Black |
| Specialty CRI 98 | 3000K | 3000K | - | 3000K |
| Fidelity CRI 98 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | - | 2700K - 3000K - 4000K |
| Balance CRI 92 | 2700K - 3000K - 4000K - 5000K | 2700K - 3000K - 4000K - 5000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Spot - Flood - Wide Flood | Spot - Flood - Wide Flood | Asymm | Spot - Flood - Wide Flood |
| Control | On-Off | DALI 2 / Bluetooth / D.O.B | On-Off / Bluetooth / D.O.B | On-Off |

In spite of its ultra-compact dimensions, Optus_T contains several technological bonuses; first of all the adoption of TIR optics capable of reducing secondary beams. Secondly, the attachment of the product is designed to disappear into the three-phase track, a device that allows to further reduce the space. Not just technology: the compact and minimal design makes Optus_T a versatile solution, suitable for various contexts, from retail to museums.

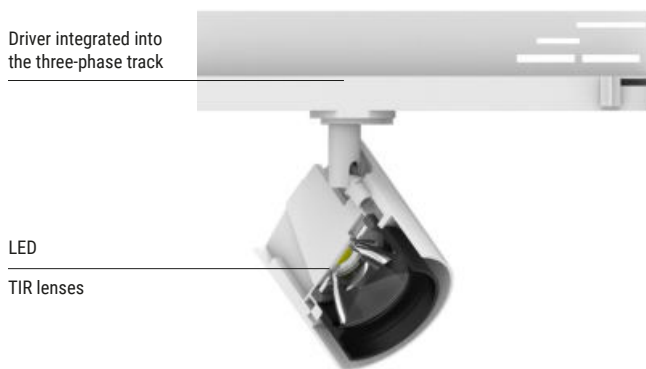


Diode varieties

The Optus_T range of products offers the highest combination-source degree, given that it is fit for LED Balance - CRI 92, Specialty - CRI 98 and Fidelity - CRI 98 diodes. This allows obtaining maximum versatility of use, given that Optus_T can be installed in various environments ranging from museums to retail, depending on the specific type of source chosen.

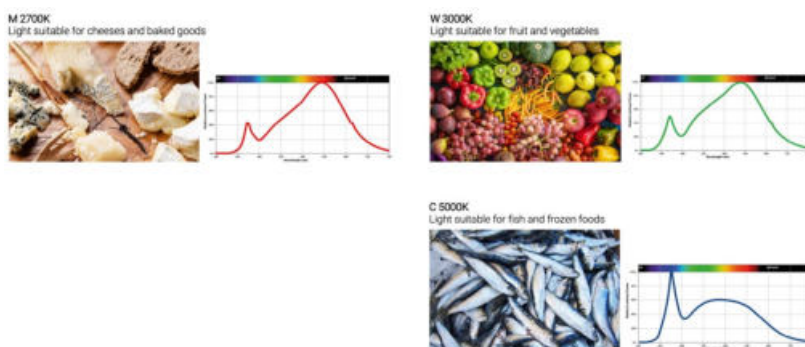

Extensive range of products

The Optus range of products comes in three different application: recessed (Optus_EX), wall-mounted (Optus_W) and track-mounted projector (Optus_T). Given its unmistakable design, it becomes an effective tool when working in spaces with several applications while maintaining the same product design.

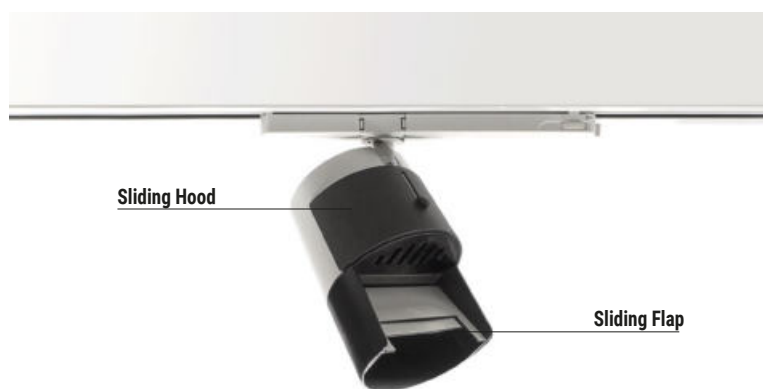

Optus_WW


Optus WW is equipped with the new technology for light control through the mechanical Sliding Kickers and Sliding Hood systems located in the body of the projector. The technology developed by the i-LèD technical offices rewrites the technical lighting rules and allows precise shaping at any distance. Optus WW is adaptive to the space and to the object being lit.

Variable dynamic optics

Focal Kit Ø66 (min 16° / max 50°) Focal Kit Ø90 / Ø105 (min 16° / max 42°)

A unique focal accessory on the market which allows the focus and/or zoom of the light beam to be adjusted using two specific rings. The plug and play installation allows for dynamic and versatile light in any situation.







| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 77048 | W 3000 | 1779 - 1334 | 15 Spot (22°) |
| Black | 77049 | | | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 77050 | W 3000 | 1779 - 1334 | 15 Spot (22°) |
| Black | 77051 | N 4000 | 1954 - 1433 | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 77052 | M 2700 | 1939 - 1447 | 15 Spot (22°) |
| Black | 77053 | W 3000 | 2030 - 1516 | 30 Flood (38°) |
| | | N 4000 | 2182 - 1630 | 60 W.Flood (63°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 82239 | W 3000 | 2785 - 2231 | 15 Spot (17°) |
| Black | 82240 | | | 30 Flood (25°) |
| | | | | 60 W.Flood (53°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 82237 | M 2700 | 2636 - 2114 | 15 Spot (17°) |
| Black | 82238 | W 3000 | 2785 - 2331 | 30 Flood (25°) |
| | | N 4000 | 3059 - 2453 | 60 W.Flood (53°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 82235 | M 2700 | 3033 - 2410 | 15 Spot (17°) |
| Black | 82236 | W 3000 | 3177 - 2546 | 30 Flood (25°) |
| | | N 4000 | 3416 - 2796 | 60 W.Flood (53°) |

Optics & accessories Pag.197



| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 81659 | W 3000 | 3608 - 2925 | 15 Spot (17°) |
| Black | 81660 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |


| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81657 | W 3000 | 3608 - 2925 | 15 Spot (17°) |
| Black | 81658 | N 4000 | 3964 - 3214 | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 81655 | M 2700 | 3930 - 3187 | 15 Spot (17°) |
| Black | 81656 | W 3000 | 4117 - 3338 | 30 Flood (26°) |
| | | N 4000 | 4426 - 3588 | 60 W.Flood (51°) |
| | | C 5000 | 4555 - 3694 | |

Optics & accessories Pag.197

RTG 81643W30 / 81643W60 / 81644W30 / 81644W60

RTG 81655W30 / 81655W60 / 81656W30 / 81656W60 / 81655N30 / 81656N30




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 77054 | W 3000 | 1779 - 1334 | 15 Spot (22°) |
| Black | 77055 | | | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 77056 | W 3000 | 1779 - 1334 | 15 Spot (22°) |
| Black | 77057 | N 4000 | 1954 - 1433 | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 77058 | M 2700 | 1939 - 1447 | 15 Spot (22°) |
| Black | 77059 | W 3000 | 2030 - 1516 | 30 Flood (38°) |
| | | N 4000 | 2182 - 1630 | 60 W.Flood (63°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 82895 | W 3000 | 2785 - 2231 | 15 Spot (17°) |
| Black | 82896 | | | 30 Flood (25°) |
| | | | | 60 W.Flood (53°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 82897 | M 2700 | 2636 - 2114 | 15 Spot (17°) |
| Black | 82898 | W 3000 | 2785 - 2231 | 30 Flood (25°) |
| | | N 4000 | 3059 - 2453 | 60 W.Flood (53°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 82899 | M 2700 | 3033 - 2410 | 15 Spot (17°) |
| Black | 82900 | W 3000 | 3177 - 2546 | 30 Flood (25°) |
| | | N 4000 | 3416 - 2796 | 60 W.Flood (53°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 81818 | W 3000 | 3608 - 2925 | 15 Spot (17°) |
| Black | 81819 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81816 | W 3000 | 3608 - 2925 | 15 Spot (17°) |
| Black | 81817 | N 4000 | 3964 - 3214 | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 81814 | M 2700 | 3930 - 3187 | 15 Spot (17°) |
| Black | 81815 | W 3000 | 4117 - 3338 | 30 Flood (26°) |
| | | N 4000 | 4426 - 3588 | 60 W.Flood (51°) |
| | | C 5000 | 4555 - 3694 | |

Optics & accessories Pag.197

RTG 81814W30 / 81814W60




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 77060 | W 3000 | 1423 - 1067 | 15 Spot (22°) |
| Black | 77061 | | | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 77062 | W 3000 | 1423 - 1067 | 15 Spot (22°) |
| Black | 77063 | N 4000 | 1564 - 1147 | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 77064 | M 2700 | 1551 - 1158 | 15 Spot (22°) |
| Black | 77065 | W 3000 | 1624 - 1213 | 30 Flood (38°) |
| | | N 4000 | 1746 - 1303 | 60 W.Flood (63°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 83909 | W 3000 | 2610 - 2231 | 15 Spot (17°) |
| Black | 83910 | | | 30 Flood (25°) |
| | | | | 60 W.Flood (53°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 83911 | W 3000 | 2610 - 2231 | 15 Spot (17°) |
| Black | 83912 | N 4000 | 2867 - 2453 | 30 Flood (25°) |
| | | | | 60 W.Flood (53°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 83913 | M 2700 | 2843 - 2410 | 15 Spot (17°) |
| Black | 83914 | W 3000 | 2977 - 2546 | 30 Flood (25°) |
| | | N 4000 | 3201 - 2796 | 60 W.Flood (53°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 83915 | W 3000 | 3450 - 2808 | 15 Spot (17°) |
| Black | 83916 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 83917 | W 3000 | 3450 - 2808 | 15 Spot (17°) |
| Black | 83918 | N 4000 | 3790 - 3085 | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 83919 | M 2700 | 3758 - 3060 | 15 Spot (17°) |
| Black | 83920 | W 3000 | 3937 - 3204 | 30 Flood (26°) |
| | | N 4000 | 4232 - 3445 | 60 W.Flood (51°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 77066 | W 3000 | 1779 - 1067 | 15 Spot (22°) |
| Black | 77067 | | | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 77068 | W 3000 | 1779 - 1067 | 15 Spot (22°) |
| Black | 77069 | N 4000 | 1954 - 1147 | 30 Flood (38°) |
| | | | | 60 W.Flood (63°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 77070 | M 2700 | 1939 - 1158 | 15 Spot (22°) |
| Black | 77071 | W 3000 | 2030 - 1213 | 30 Flood (38°) |
| | | N 4000 | 2182 - 1303 | 60 W.Flood (63°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 82377 | W 3000 | 2610 - 2231 | 15 Spot (17°) |
| Black | 82378 | | | 30 Flood (25°) |
| | | | | 60 W.Flood (53°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 82375 | W 3000 | 2610 - 2231 | 15 Spot (17°) |
| Black | 82376 | N 4000 | 2867 - 2453 | 30 Flood (25°) |
| | | | | 60 W.Flood (53°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 82243 | M 2700 | 2843 - 2410 | 15 Spot (17°) |
| Black | 82244 | W 3000 | 2977 - 2546 | 30 Flood (25°) |
| | | N 4000 | 3201 - 2796 | 60 W.Flood (53°) |

Optics & accessories Pag.197




| Specialty - CRI 98 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|------------------|
| White | 82381 | W 3000 | 3450 - 2808 | 15 Spot (17°) |
| Black | 82382 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 82379 | W 3000 | 3450 - 2808 | 15 Spot (17°) |
| Black | 82380 | N 4000 | 3790 - 3085 | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 82245 | M 2700 | 3758 - 3060 | 15 Spot (17°) |
| Black | 82246 | W 3000 | 3937 - 3204 | 30 Flood (26°) |
| | | N 4000 | 4232 - 3445 | 60 W.Flood (51°) |


Optics & accessories Pag.197

Optus_Ww | Projectors | 198-264 V AC | arrayLED 17 W DC - 19 W AC




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------|
| White | 82247 | M 2700 | 2026 - 1244 | 07 Asymm. - |
| Black | 82248 | W 3000 | 2174 - 1280 | |
| | | N 4000 | 2520 - 1383 | |

Optus_Ww | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------|
| White | 82249 | M 2700 | 3299 - 1945 | 07 Asymm. - |
| Black | 82250 | W 3000 | 3540 - 2087 | |
| | | N 4000 | 4103 - 2253 | |

Optus_Ww | Projectors | 198-264 V AC | arrayLED 17 W DC - 19 W AC




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------|
| White | 83921 | M 2700 | 2026 - 1244 | 07 Asymm. - |
| Black | 83922 | W 3000 | 2174 - 1280 | |
| | | N 4000 | 2520 - 1383 | |

Optus_Ww | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------|
| White | 83923 | M 2700 | 3299 - 1945 | 07 Asymm. - |
| Black | 83924 | W 3000 | 3540 - 2087 | |
| | | N 4000 | 4103 - 2253 | |

Optus_Ww | Projectors | 198-264 V AC | arrayLED 17 W DC - 19 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------|
| White | 82251 | M 2700 | 2026 - 1244 | 07 Asymm. - |
| Black | 82252 | W 3000 | 2174 - 1280 | |
| | | N 4000 | 2520 - 1383 | |

Optus_Ww | Projectors | 198-264 V AC | arrayLED 27 W DC - 30 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------|
| White | 82253 | M 2700 | 3299 - 1945 | 07 Asymm. - |
| Black | 82254 | W 3000 | 3540 - 2087 | |
| | | N 4000 | 4103 - 2253 | |

wall washer



Height 2,75 m
Distance 0,5 m
Tilted 12°
Sliding Hood Open
Sliding Flap Open




Height 2,75 m
Distance 1 m
Tilted 18°
Sliding Hood Closed
Sliding Flap Semi-Open



Height 2,75 m
Distance 1,5 m
Tilted 27°
Sliding Hood Closed
Sliding Flap Closed



Optus_W2 | Wall luminaires | arrayLED 30W DC 840mA



| Specialty - CRI 98 | | Cct | Im S - D | Optic |
|--------------------|--------------|---------------|-----------------|-------------------------|
| White | 77072 | W 3000 | 2x1604 - On req | 15 Spot (21°) |
| Black | 77073 | | | 30 Flood (36°) |
| | | | | 60 W.Flood (53°) |

| Fidelity - CRI 98 | | Cct | Im S - D | Optic |
|-------------------|--------------|---------------|-----------------|-------------------------|
| White | 77074 | M 2700 | 2x1518 - On req | 15 Spot (17°) |
| Black | 77075 | W 3000 | 2x1604 - On req | 30 Flood (26°) |
| | | N 4000 | 2x1762 - On req | 60 W.Flood (51°) |


| Balance - CRI 92 | | Cct | Im S - D | Optic |
|------------------|--------------|---------------|-----------------|-------------------------|
| White | 77076 | M 2700 | 2x1748 - On req | 15 Spot (17°) |
| Black | 77077 | W 3000 | 2x1830 - On req | 30 Flood (26°) |
| | | N 4000 | 2x1967 - On req | 60 W.Flood (51°) |

Optics & accessories Pag.197

Electronics

| 99135 | 83008 | 99345 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Optus_W3 | Wall luminaires | arrayLED 45W DC 1250mA



| Specialty - CRI 98 | | Cct | Im S - D | Optic |
|--------------------|--------------|---------------|-----------------|-------------------------|
| White | 77078 | W 3000 | 3x1604 - On req | 15 Spot (17°) |
| Black | 77079 | | | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |

| Fidelity - CRI 98 | | Cct | Im S - D | Optic |
|-------------------|--------------|---------------|-----------------|-------------------------|
| White | 77080 | M 2700 | 3x1518 - On req | 15 Spot (17°) |
| Black | 77081 | W 3000 | 3x1604 - On req | 30 Flood (26°) |
| | | N 4000 | 3x1762 - On req | 60 W.Flood (51°) |

| Balance - CRI 92 | | Cct | Im S - D | Optic |
|------------------|--------------|---------------|-----------------|-------------------------|
| White | 77082 | M 2700 | 3x1748 - On req | 15 Spot (17°) |
| Black | 77083 | W 3000 | 3x1830 - On req | 30 Flood (26°) |
| | | N 4000 | 3x1967 - On req | 60 W.Flood (51°) |

Optics & accessories Pag.197

Electronics

| 83112 | 83008 |
|--|---|
| ON/OFF 1 art. p 160 x 170 x h 36 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 |

Optics



| description | |
|--|------|
| 83348 | Spot |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|------------|
| 83350 | Wide Flood |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |




| description | |
|--|------|
| 99808 | Spot |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |



| description | |
|--|------------|
| 99810 | Wide Flood |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |




| description | |
|--|-------|
| 83349 | Flood |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|-------------------------------|
| 83347 | Focal Kit (min 16° / max 50°) |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|-------|
| 99809 | Flood |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |




| description | |
|--|-------------------------------|
| 99843 | Focal Kit (min 16° / max 42°) |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |

Accessories



| description | |
|--|-------------------|
| 83345 | Elliptical filter |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|--------------|
| 83344 | Cross louvre |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|------------------------|
| 83343 | 45° Cylindrical screen |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|-----------|
| 83346 | Honeycomb |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |




| description | |
|--|--------------------|
| 83342 | Cylindrical screen |
| suitable for: Optus_T 12,5W / 16,2W / Optus_W2 / Oputs_W3 | |



| description | |
|--|-----------|
| 99841 | Honeycomb |
| suitable for: Kit focale 83347 | |



| description | |
|--|-------------------|
| 99797 | Elliptical filter |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |



| description | |
|--|--------------|
| 99799 | Cross louvre |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |



| description | |
|--|------------------------|
| 99795 | 45° Cylindrical screen |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |



| description | |
|--|-----------|
| 99798 | Honeycomb |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |



| description | |
|--|--------------------|
| 99796 | Cylindrical screen |
| suitable for: Optus_T 23W / 24W / 32,5W / 34W | |




| description | |
|--|-----------|
| 99842 | Honeycomb |
| suitable for: Kit focale 99843 | |


cell

Materials

Aluminium body

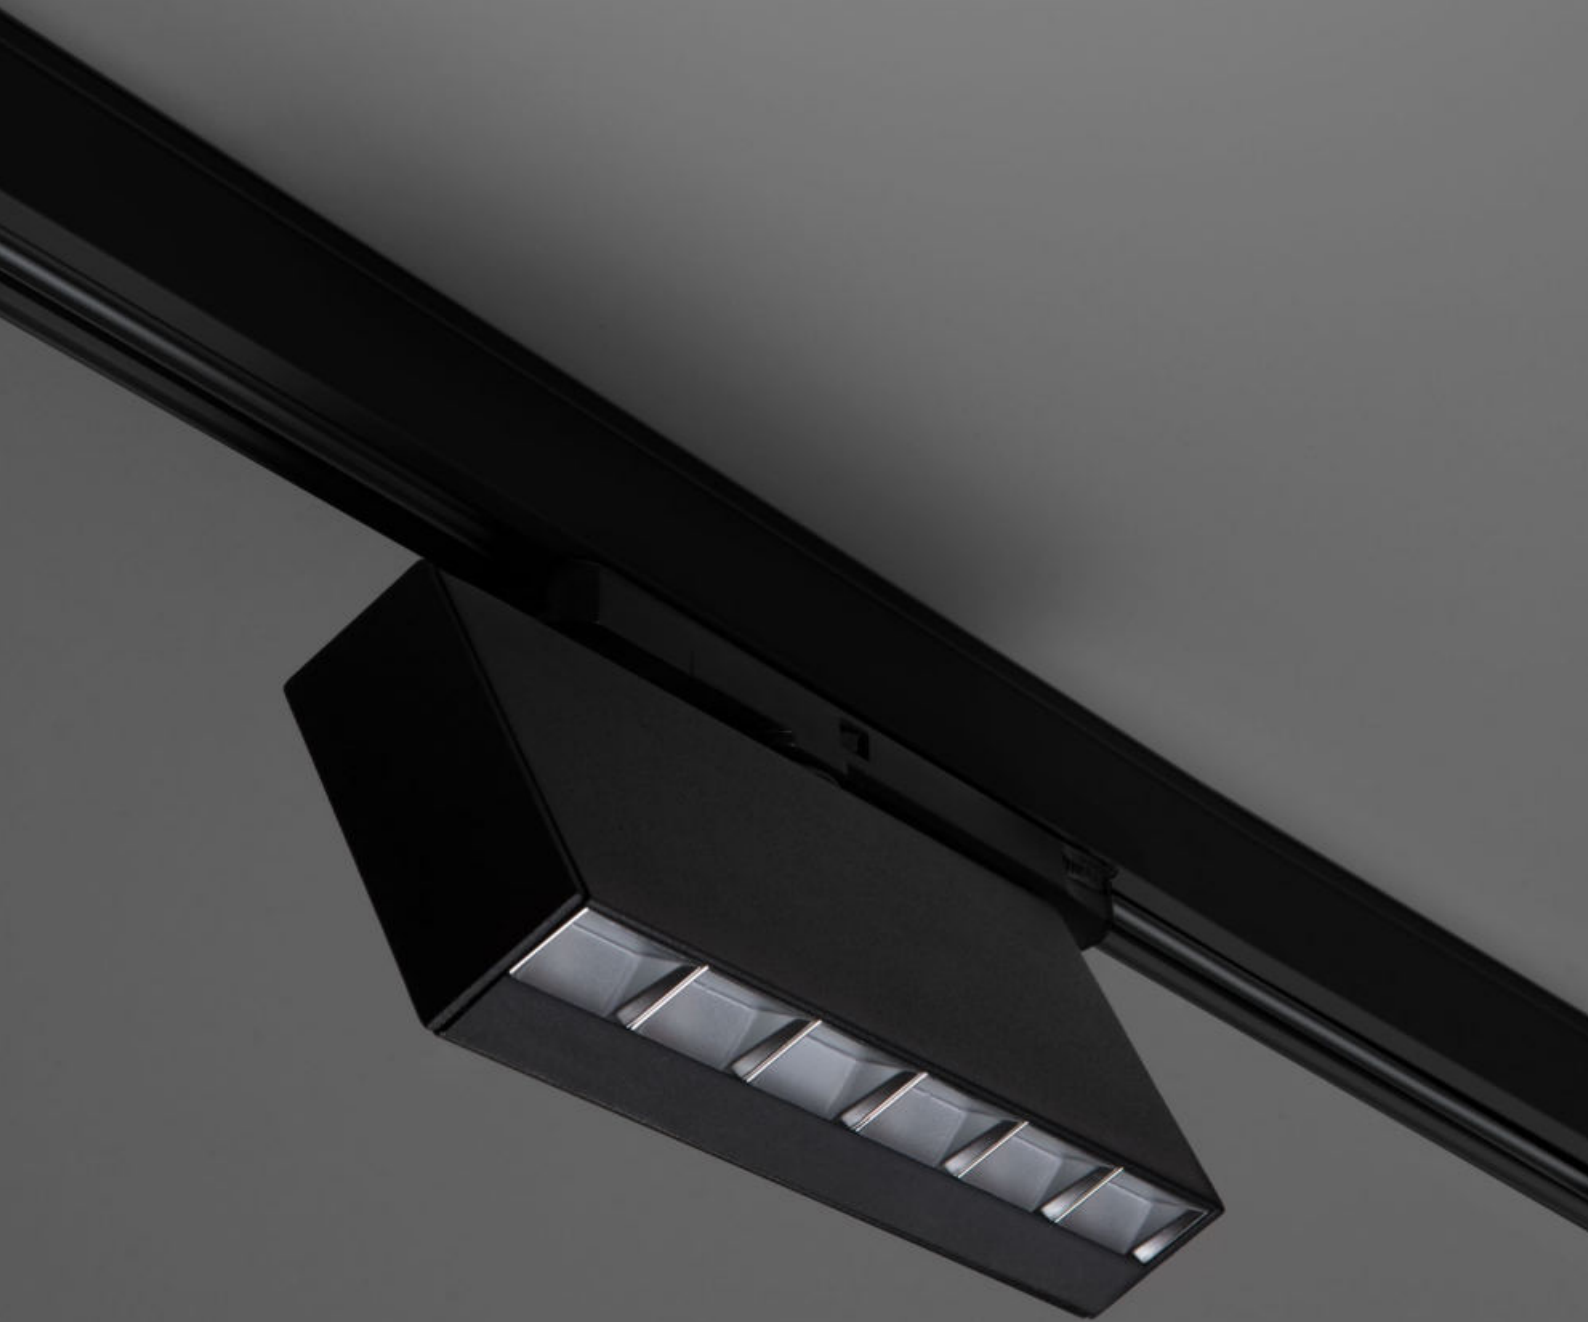


Cell_Ww track | Projectors | 198-264 V AC | 6 x powerLEDs | 19 W DC - 21 W AC



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|---------------|---------------|--------------------|
| White 83893 | M 2700 | 2198 - On req | 07 Asymm. - |
| Black 83894 | W 3000 | 2304 - On req | |
| | N 4000 | 2852 - On req | |





track system

Materials
Aluminium body

track system configuration

Earthing continuity

For proper earthing of all accessories that contribute to form a three-phase track system, the continuity of the earthing line between each element is crucial.

As shown by the track section herebeside, the position of the earthing line (red) is asymmetric to the central axis of the track; based on this structural difference one can distinguish the right part (including the earthing line) which binds the introduction of all accessories.



The positioning of the earth conductor, must be consequential between the accessory and the electrified track structure.

Configuration

For a correct design, we suggest to create the structure with top plan view, as shown in the drawing below:



Plan view

Axonometric view



Plan view from above

The "H", "I" and "L" accessories can be used in both directions.

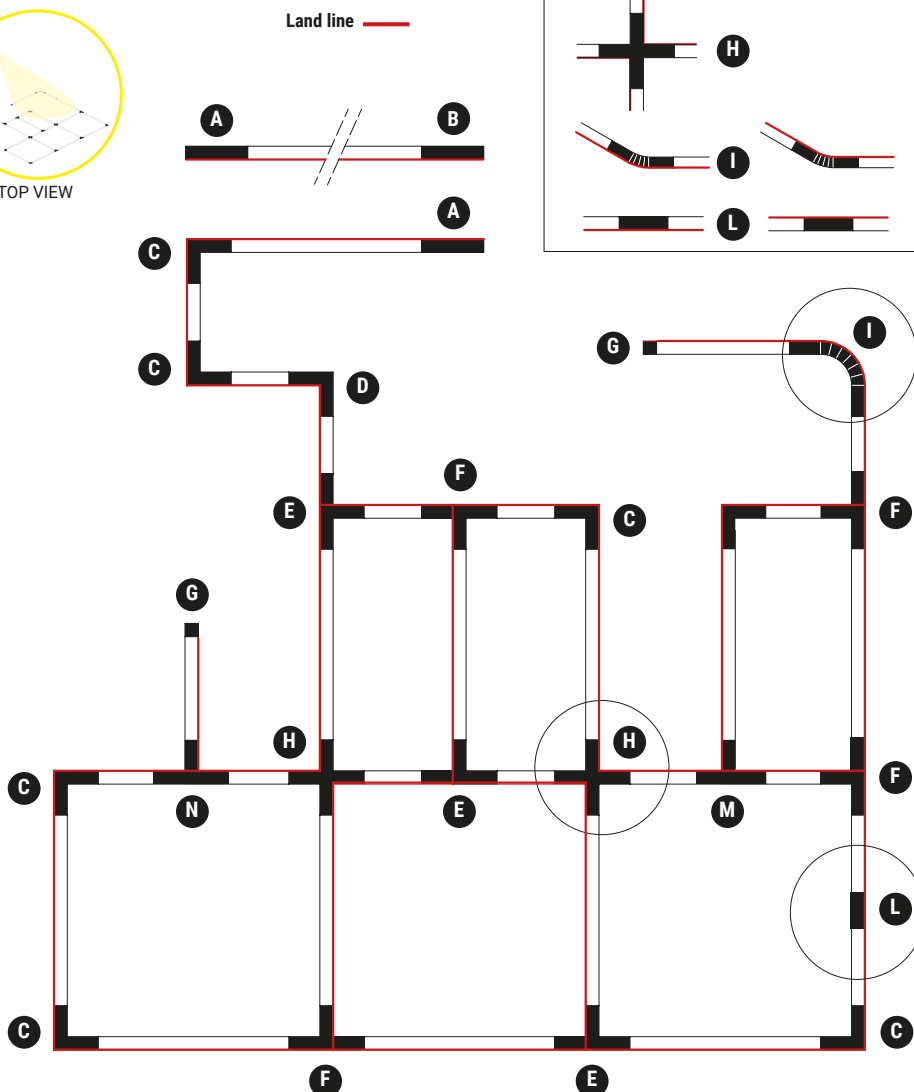


- | | | |
|----------|--|-------|
| A | | 81033 |
| B | | 81036 |
| C | | 81048 |
| D | | 81045 |
| E | | 81051 |
| F | | 81054 |
| G | | 80999 |
| H | | 81063 |
| I | | 81066 |
| L | | 81042 |
| M | | 81057 |
| N | | 81060 |


Track system | Three-phase track + DALI | Ceiling/Suspension



Track system | Three-phase track + DALI | Recessed



Track system | Three-phase track + DALI



| | 1 M | 2 M | 3 M |
|-------|-------|-------|-------|
| White | 83336 | 83337 | 83338 |
| Black | 83339 | 83340 | 83341 |

Track system | Head power supply



| | POWER DX | POWER SX |
|-------|----------|----------|
| White | 81033 | 81036 |
| Black | 81034 | 81037 |

Track system | Central joint



| | |
|-------|-------|
| White | 81042 |
| Black | 81043 |

Track system | Flexible joint



| | |
|-------|-------|
| White | 81066 |
| Black | 81067 |

Track system | T-shaped joint




| | EST/SX | EST/DX |
|-------|--------|--------|
| White | 81051 | 81054 |
| Black | 81052 | 81055 |

Track system | Sealing cap | Ceiling/Suspension



| | |
|-------|-------|
| White | 80999 |
| Black | 81000 |

Track system | Recessed three-phase track + DALI



| | 1 M | 2 M | 3 M |
|-------|-------|-------|-------|
| White | 80990 | 80991 | 80992 |
| Black | 80993 | 80994 | 80995 |

Track system | Internal electrical joint



| | |
|-------|-------|
| White | 81039 |
| Black | 81040 |

Track system | L-shaped joint



| | INT | EST |
|-------|-------|-------|
| White | 81045 | 81048 |
| Black | 81046 | 81049 |

Track system | X-shaped joint



| | |
|-------|-------|
| White | 81063 |
| Black | 81064 |

Track system | T-shaped joint



| | INT/SX | INT/DX |
|-------|--------|--------|
| White | 81057 | 81060 |
| Black | 81058 | 81061 |

Track system | Sealing cap | Recessed



| | |
|-------|-------|
| White | 81002 |
| Black | 81003 |

Track system | Suspension




| | 1.5 m | 5 m |
|-------|-------|-------|
| White | 81012 | 81013 |
| Black | 81014 | 81015 |

Track system | Rigid suspension



| | 1 m |
|-------|-------|
| White | 81021 |
| Black | 81022 |

Track system | Ceiling-mounted fixing bracket




| | |
|-----------|-------|
| Anod. Al. | 81086 |
| White | 81087 |
| Black | 81088 |

Track system | Power supply head cover




| | |
|-------|-------|
| White | 81069 |
| Black | 81070 |

Track system | L-shaped joint cover



| | |
|-------|-------|
| White | 81075 |
| Black | 81076 |

Track system | X-shaped joint cover



| | |
|-------|-------|
| White | 81081 |
| Black | 81082 |

Track system | Three-phase track adaptor *



| | |
|-------|-------|
| White | 81091 |
| Black | 81093 |

*Use for tapping line voltage only.

Track system | Conductor cutting pliers



| | |
|-----------|-------|
| Anod. Al. | 81005 |
|-----------|-------|

Track system | Suspension with adjustment devices



| | 1.5 m | 5 m |
|-------|-------|-------|
| White | 81006 | 81007 |
| Black | 81008 | 81009 |

Track system | Tensioner clip for rigid suspension




| | |
|-------|-------|
| White | 81018 |
| Black | 81019 |

Track system | Stiffening bracket




| | |
|-----------|-------|
| Anod. Al. | 81024 |
| White | 81025 |
| Black | 81026 |

Track system | Central joint cover




| | |
|-------|-------|
| White | 81072 |
| Black | 81073 |

Track system | T-shaped joint cover



| | |
|-------|-------|
| White | 81078 |
| Black | 81079 |

Track system | Three-phase track cover



| | |
|-------|-------|
| White | 83249 |
| Black | 83250 |

Track system | Power supply head gasket



| | |
|-------|-------|
| White | 81084 |
| Black | 81085 |

Track system | Three-phase track adaptor + DALI *



| | |
|-------|-------|
| White | 81094 |
| Black | 81095 |

* Use for tapping line voltage and/or DALI signal only.







navata

Materials
Structure in aluminium



Articulated chain arm Double rotation on base and light body


The Navata system allows a vast range of movements for lighting that is as versatile as possible, able to overcome the limitations due to installations in narrow or recessed spaces. The chain arm is highly flexible, allowing the projector to be literally folded back on itself or to be stretched out, reaching a considerable distance with respect to the base. The double rotation on base and light body allows the projector to be directed 360° to achieve the desired positioning.



Navata Optus


The Navata Optus range offers an updated optical range that allows you to enhance the architecture of, for example, a place of worship while respecting its context.

The reduced dimensions of the structure seem to almost disappear and the correctly oriented beams will enhance: domes, vaults, walls, or they will create real paths of light

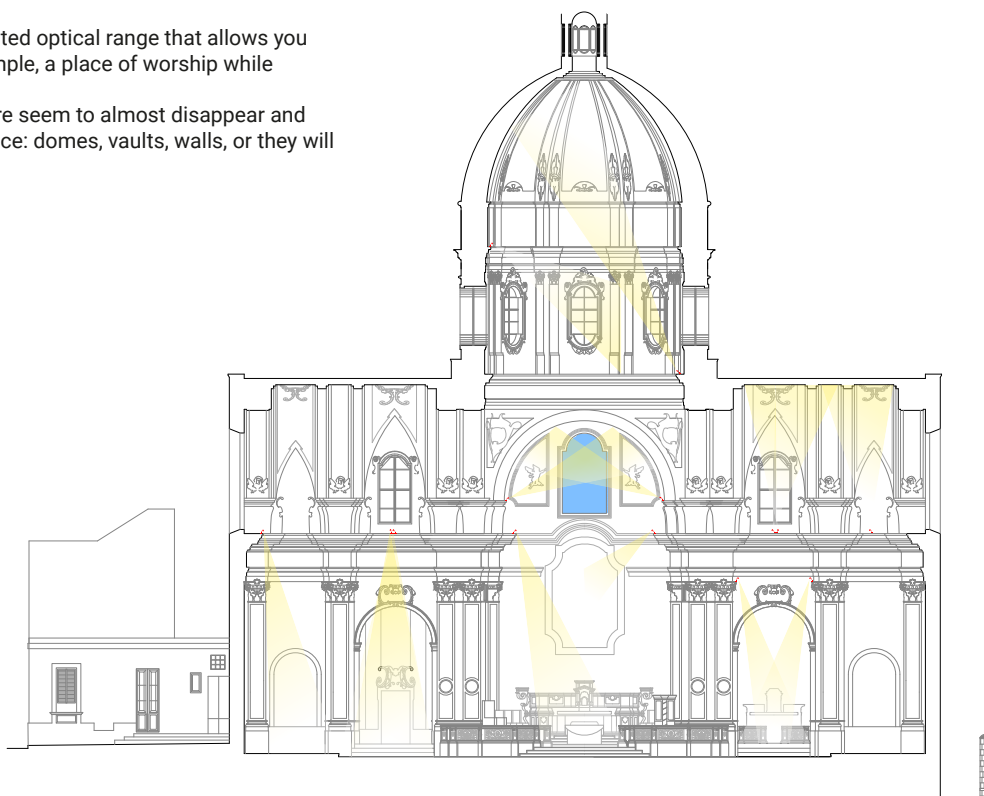


Navata Pound Shaper

The Navata Pound Shaper range with the particular lens system that guarantees maximum efficiency and the right quality of light, allows you to clearly define any type of picture even with measurements up to 3.30 meters x 3.30 meters, the detail of a work of art or the architectural details in its details. The elements illuminated with remarkable precision thus become the protagonists of the project

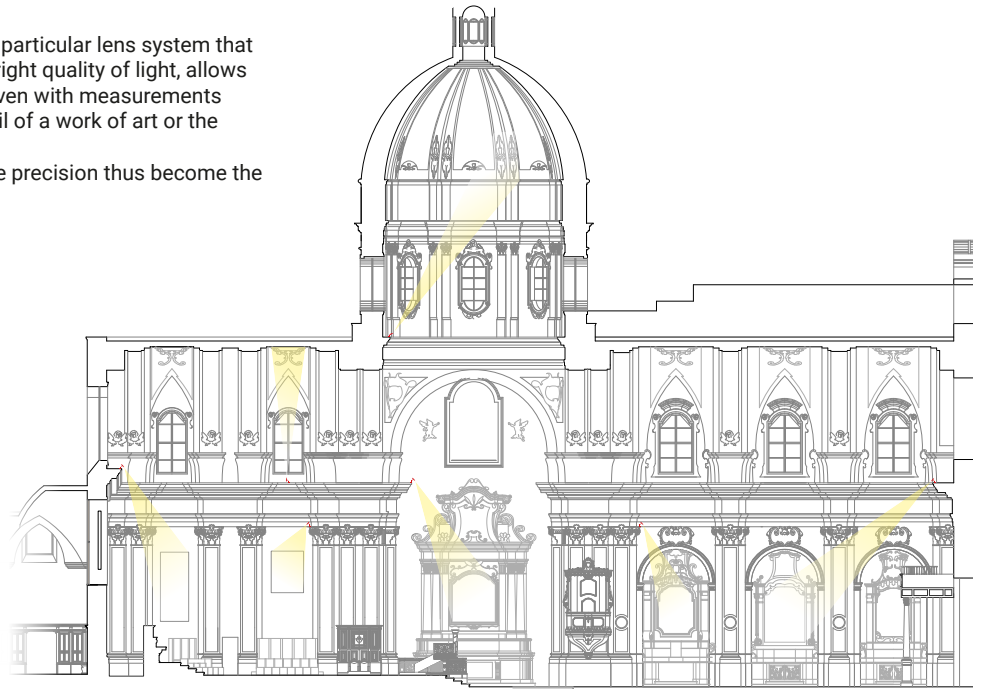


Profiling Report


Navata Pound Shaper 27W

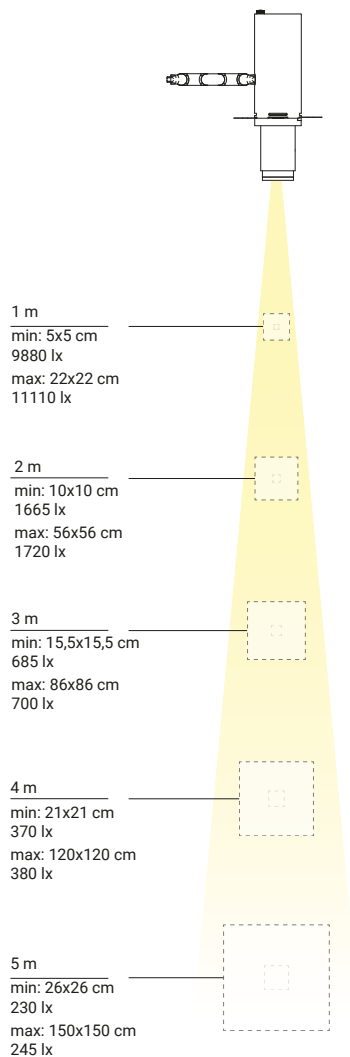

Navata Pound Shaper distance 27W

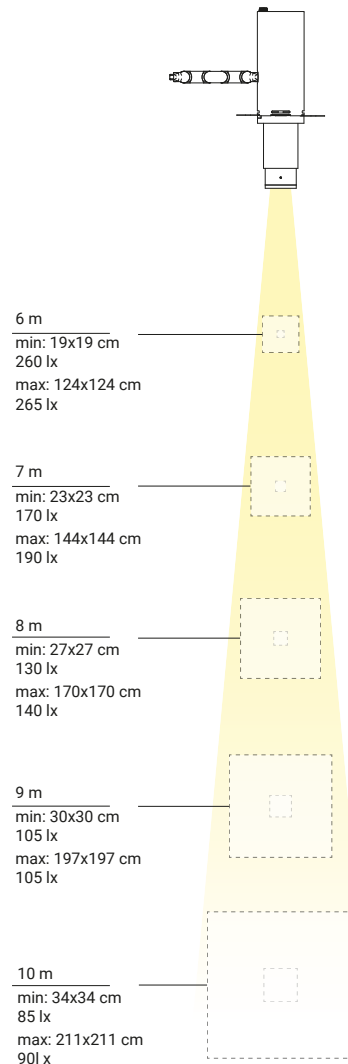

Navata_Optus | Projectors | arrayLED 16 W DC 450mA




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 82385 | M 2700 | 1684 - 1260 | 15 Spot (22°) |
| Black | 82386 | W 3000 | 1779 - 1334 | 30 Flood (38°) |
| Sand | 82902 | N 4000 | 1954 - 1433 | 60 W.Flood (63°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------------------|
| White | 82383 | M 2700 | 1939 - 1448 | 15 Spot (22°) |
| Black | 82384 | W 3000 | 2030 - 1516 | 30 Flood (38°) |
| Sand | 82903 | N 4000 | 2182 - 1630 | 60 W.Flood (63°) |

Optics & accessories Pag. 213

Base for installation Pag. 212

Navata_Optus | Projectors | arrayLED 24 W DC 700mA




| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 82391 | M 2700 | 2636 - 2114 | 15 Spot (17°) |
| Black | 82392 | W 3000 | 2785 - 2231 | 30 Flood (25°) |
| Sand | 82905 | N 4000 | 3059 - 2453 | 60 W.Flood (53°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------------------|
| White | 82389 | M 2700 | 3033 - 2410 | 15 Spot (17°) |
| Black | 82390 | W 3000 | 3177 - 2546 | 30 Flood (25°) |
| Sand | 82906 | N 4000 | 3416 - 2796 | 60 W.Flood (53°) |

Optics & accessories Pag. 213

Base for installation Pag. 212

Navata_Optus | Projectors | arrayLED 34 W DC 950mA



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 82397 | W 3000 | 3608 - 2925 | 15 Spot (17°) |
| Black | 82398 | N 4000 | 3964 - 3214 | 30 Flood (26°) |
| Sand | 82908 | | | 60 W.Flood (51°) |

| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|-------------------------|
| White | 82395 | M 2700 | 3930 - 3187 | 15 Spot (17°) |
| Black | 82396 | W 3000 | 4117 - 3338 | 30 Flood (26°) |
| Sand | 82909 | N 4000 | 4426 - 3588 | 60 W.Flood (51°) |
| | | C 5000 | 4555 - 3694 | |

Optics & accessories Pag. 213


Base for installation Pag. 212

RTG **82903W30**

RTG **82906W30**

RTG **82909W30**


Navata Pound Shaper distance | Projectors | arrayLED 11 W DC 300mA



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 76739 | M 2700 | 1019 - On req | 66 Shaper - |
| Black | 76740 | W 3000 | 1076 - On req | |
| Sand | 76741 | N 4000 | 1182 - On req | |

Base for installation Pag. 212


Navata Pound Shaper | Projectors | arrayLED 11 W DC 300mA



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 76742 | M 2700 | 1019 - On req | 66 Shaper - |
| Black | 76743 | W 3000 | 1076 - On req | |
| Sand | 76744 | N 4000 | 1182 - On req | |

Base for installation Pag. 212


Navata Pound Shaper distance | Projectors | arrayLED 27 W DC 700mA



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82631 | M 2700 | 2636 - On req | 66 Shaper - |
| Black | 82632 | W 3000 | 2785 - On req | |
| Sand | 82912 | N 4000 | 3059 - On req | |

Base for installation Pag. 212



Navata Pound Shaper | Projectors | arrayLED 27 W DC 700mA



| Fidelity - CRI 98 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|---------------|--------------------|
| White | 82629 | M 2700 | 2636 - On req | 66 Shaper - |
| Black | 82630 | W 3000 | 2785 - On req | |
| Sand | 82913 | N 4000 | 3059 - On req | |

Base for installation Pag. 212




Base | On/Off | 198 - 264V AC | 300mA - 1050mA



| | | |
|-------|--------------|--------------------|
| White | 99938 | From 11 to 38 W DC |
| Black | 99943 | From 11 to 38 W DC |
| Sand | 83055 | From 11 to 38 W DC |

RTG **83055**

Base | DALI | 198 - 264V AC | 300mA - 1050mA





| | | |
|-------|--------------|--------------------|
| White | 99936 | From 11 to 38 W DC |
| Black | 99941 | From 11 to 38 W DC |
| Sand | 83054 | From 11 to 38 W DC |

RTG **83054**

Base | bluetooth | 198 - 264V AC | 300mA - 950mA



Technology Partner
SILVAIR



300 mA

| | | |
|-------|--------------|--------------|
| White | 99935 | 11W DC 300mA |
| Black | 99940 | 11W DC 300mA |
| Sand | 83053 | 11W DC 300mA |

450 mA

| | | |
|-------|--------------|--------------|
| White | 83168 | 16W DC 450mA |
| Black | 83169 | 16W DC 450mA |
| Sand | 83170 | 16W DC 450mA |

700 mA

| | | |
|-------|--------------|--------------|
| White | 83171 | 24W DC 700mA |
| Black | 83172 | 24W DC 700mA |
| Sand | 83173 | 24W DC 700mA |

950 mA

| | | |
|-------|--------------|--------------|
| White | 83174 | 34W DC 950mA |
| Black | 83175 | 34W DC 950mA |
| Sand | 83176 | 34W DC 950mA |

Pag. 213

RTG **99809 / 99810 / 99828 / 99829**

Accessories



description

99853 Accessoire Gobo
suitable for: Navata Pound Shaper 27W

Optics



| description | |
|---------------------------------------|------|
| 99827 | Spot |
| suitable for: Navata_Optus 16W | |



| description | |
|---------------------------------------|------------|
| 99829 | Wide Flood |
| suitable for: Navata_Optus 16W | |



| description | |
|---|------|
| 99808 | Spot |
| suitable for: Navata_Optus 24W / 34W | |



| description | |
|---|------------|
| 99810 | Wide Flood |
| suitable for: Navata_Optus 24W / 34W | |




| description | |
|---------------------------------------|-------|
| 99828 | Flood |
| suitable for: Navata_Optus 16W | |



| description | |
|---------------------------------------|-------------------------------|
| 99844 | Focal Kit (min 16° / max 50°) |
| suitable for: Navata_Optus 16W | |



| description | |
|---|-------|
| 99809 | Flood |
| suitable for: Navata_Optus 24W / 34W | |




| description | |
|---|-------------------------------|
| 99843 | Focal Kit (min 16° / max 42°) |
| suitable for: Navata_Optus 24W / 34W | |

Accessories



| description | |
|---------------------------------------|-------------------|
| 99781 | Elliptical filter |
| suitable for: Navata_Optus 16W | |



| description | |
|---------------------------------------|--------------|
| 99779 | Cross louvre |
| suitable for: Navata_Optus 16W | |



| description | |
|---------------------------------------|------------------------|
| 99782 | 45° Cylindrical screen |
| suitable for: Navata_Optus 16W | |



| description | |
|---------------------------------------|-----------|
| 99780 | Honeycomb |
| suitable for: Navata_Optus 16W | |




| description | |
|---------------------------------------|--------------------|
| 99783 | Cylindrical screen |
| suitable for: Navata_Optus 16W | |



| description | |
|--|-----------|
| 99841 | Honeycomb |
| suitable for: Kit focale 99844 | |



| description | |
|---|-------------------|
| 99797 | Elliptical filter |
| suitable for: Navata_Optus 24W / 34W | |



| description | |
|---|--------------|
| 99799 | Cross louvre |
| suitable for: Navata_Optus 24W / 34W | |



| description | |
|---|------------------------|
| 99795 | 45° Cylindrical screen |
| suitable for: Navata_Optus 24W / 34W | |



| description | |
|---|-----------|
| 99798 | Honeycomb |
| suitable for: Navata_Optus 24W / 34W | |



| description | |
|---|--------------------|
| 99796 | Cylindrical screen |
| suitable for: Navata_Optus 24W / 34W | |



| description | |
|--|-----------|
| 99842 | Honeycomb |
| suitable for: Kit focale 99843 | |



creek


Materials

Structure in EPS


Aluminium projector




creek range

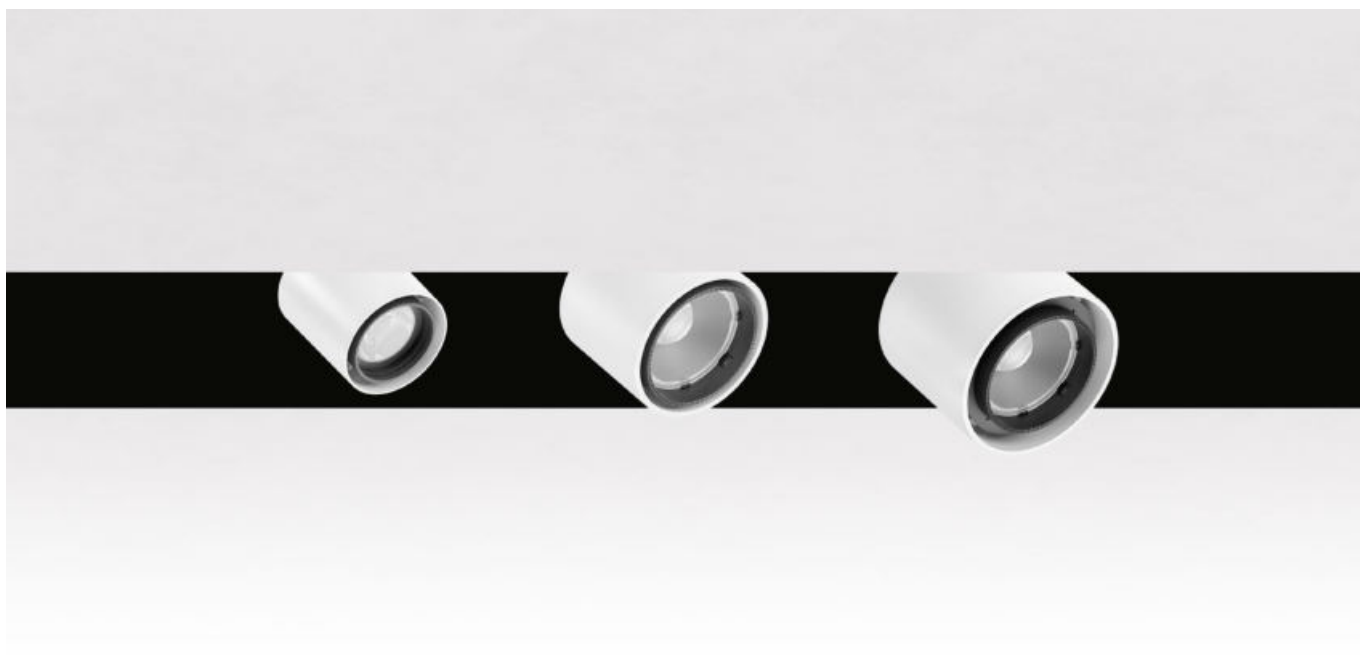

Creek Optus

| | |
|-------------------|---|
| 16W | 66 mm |
| 24W | 90 mm |
| 34W | 105 mm |
| Accessories |  |
| Finish | <input type="checkbox"/> White <input checked="" type="checkbox"/> Black |
| Balance CRI 92 | 2700K - 3000K - 4000K |
| Optics | Spot - Flood - Wide Flood |

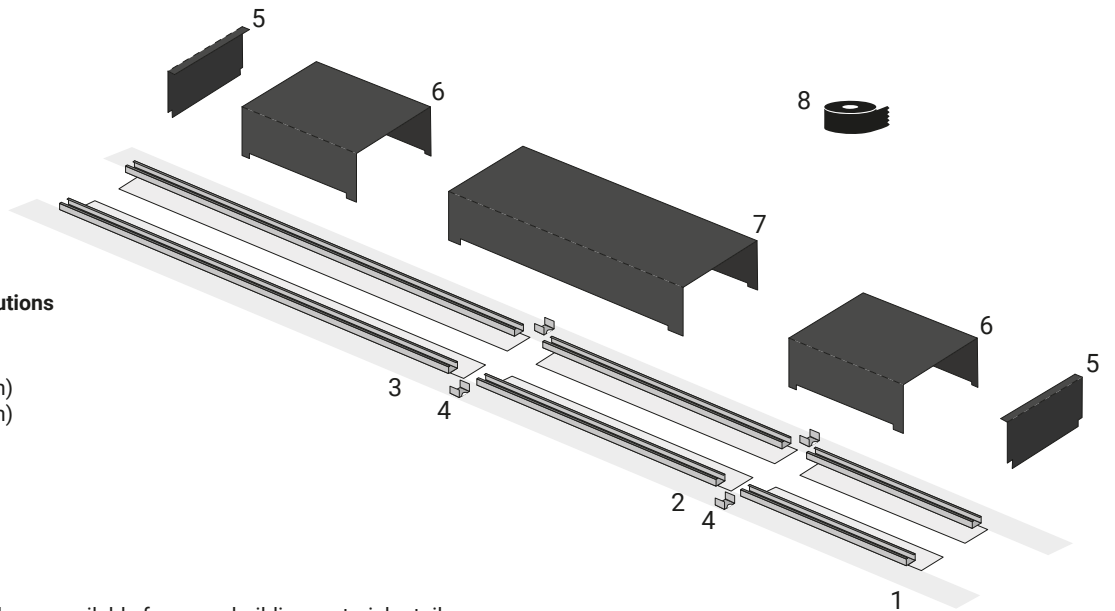


Integrated architecture solutions

- 1 | Linear profiles (500 mm)
- 2 | Linear profiles (1000 mm)
- 3 | Linear profiles (1500 mm)
- 4 | Mechanical joint*
- 5 | Final guard
- 6 | Linear guard (500 mm)
- 7 | Linear guard (1000 mm)
- 8 | Duct Tape

*item supplied by the installer, or available from any building material retailer.


Structure size

The new structure of Creek adapts perfectly to the standard center distance of the uprights of the plasterboard structure with a hole of just 370mm. The linear profiles, made up of standard uprights combined with ESP panels, can be easily combined in line thanks to the mechanical joint. Once the linear profile has been positioned and fixed, it will be possible to fill and paint the EPS panel, which, thanks to its characteristics, will ensure uniformity with the plasterboard of the ceiling.

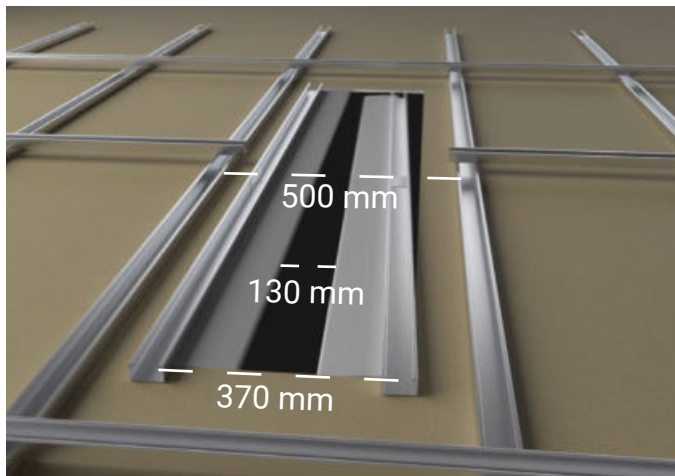


EPS panel

The EPS panel mates directly with the plasterboard false ceiling with the possibility of being sanded and treated in the same way. When finished, there will be no difference in finish.

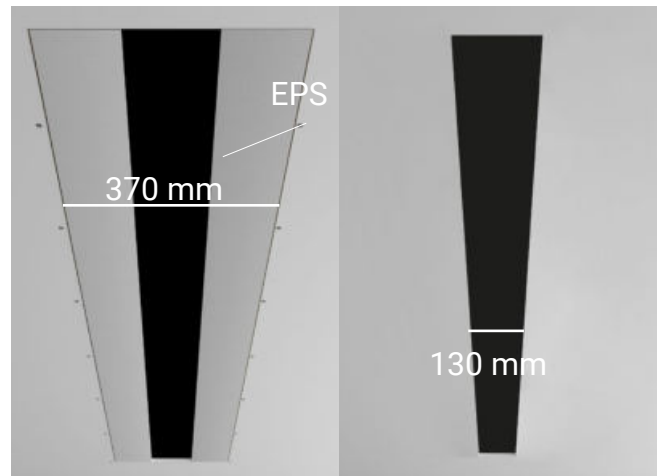

Product installation phase

PHASE 1

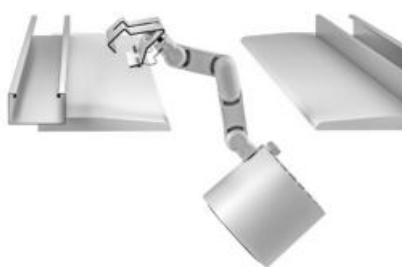

Once the structure has been set up in the false ceiling, the lighting body is positioned in the linear casing.

PHASE 2




The fixing is done by interlocking, inserting the end of the base in the internal seat of the profile.

PHASE 3




The process is completed by pressing down on the base near the point where the articulated arm starts..

Upper cover guard




| code | type | Lmm |
|-------|-------|------|
| 99927 | Black | 500 |
| 99928 | Black | 1000 |

Sealing head




| code | type |
|-------|-------|
| 99929 | Black |

Linear Profile _P (pair)



| code | type | Lmm |
|-------|-------|------|
| 82728 | White | 500 |
| 82729 | White | 1000 |
| 82730 | White | 1500 |

Creek Optus | powerLED 16 W DC 450mA




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|-------------|-------------------------|
| White | 82731 | M 2700 | 1939 - 1447 | 15 Spot (22°) |
| Black | 82732 | W 3000 | 2030 - 2030 | 30 Flood (37°) |
| | | N 4000 | 2182 - 2182 | 60 W.Flood (63°) |

Electronics

| 99734 | 99732 | 99730 |
|--|---|---|
| ON/OFF 1 art. p 134 x 137 x h 31 | 0/1-10V 1 art. p 134 x 137 x h 31 | DALI PUSH 1 art. p 134 x 137 x h 31 |

Optics & accessories Pag. 220

Creek Optus | powerLED 24 W DC 700mA




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|-------------|-------------------------|
| White | 82733 | M 2700 | 3033 - 2410 | 15 Spot (17°) |
| Black | 82734 | W 3000 | 3177 - 2546 | 30 Flood (25°) |
| | | N 4000 | 3416 - 2796 | 60 W.Flood (53°) |

Electronics

| 99147 | 83008 | 99345 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Optics & accessories Pag. 220

Creek Optus | arrayLED 34 W DC 950mA




| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|-------------|-------------------------|
| White | 82735 | M 2700 | 3930 - 3187 | 15 Spot (17°) |
| Black | 82736 | W 3000 | 4117 - 3338 | 30 Flood (26°) |
| | | N 4000 | 4426 - 3588 | 60 W.Flood (51°) |

Electronics


| 99239 | 83008 | 99345 |
|--|---|---|
| ON/OFF 1 art. p 103 x 158 x h 27 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 | DALI PUSH 1 art. p 210 x 148 x h 28 |

Optics & accessories Pag. 220


Optics

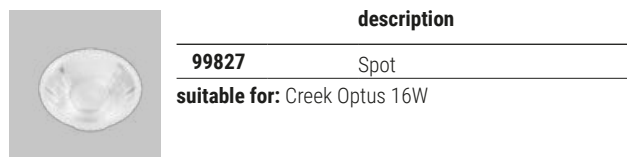


| description | |
|--------------------------------------|------|
| 99827 | Spot |
| suitable for: Creek Optus 16W | |

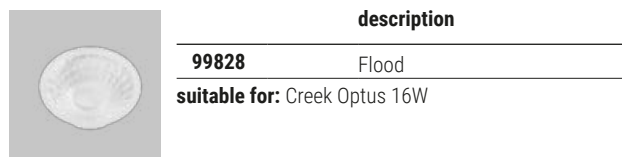


| description | |
|--------------------------------------|-------|
| 99828 | Flood |
| suitable for: Creek Optus 16W | |

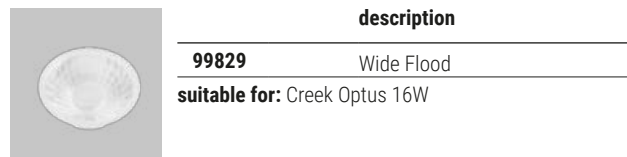


| description | |
|--------------------------------------|------------|
| 99829 | Wide Flood |
| suitable for: Creek Optus 16W | |

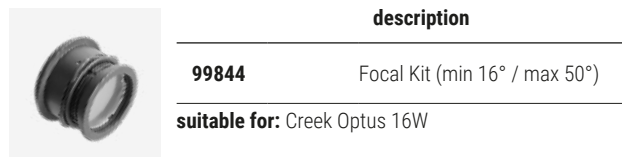


| description | |
|--------------------------------------|-------------------------------|
| 99844 | Focal Kit (min 16° / max 50°) |
| suitable for: Creek Optus 16W | |

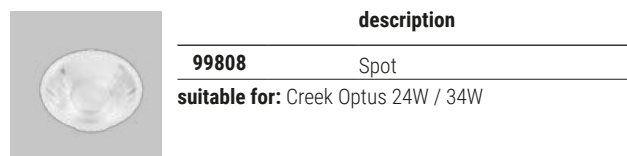


| description | |
|--|------|
| 99808 | Spot |
| suitable for: Creek Optus 24W / 34W | |

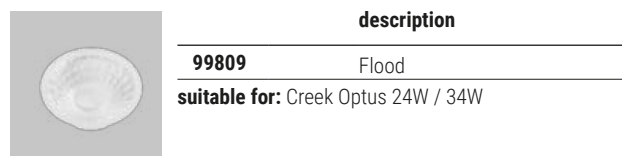

| description | |
|--|-------|
| 99809 | Flood |
| suitable for: Creek Optus 24W / 34W | |

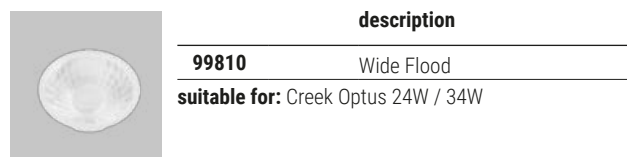


| description | |
|--|------------|
| 99810 | Wide Flood |
| suitable for: Creek Optus 24W / 34W | |

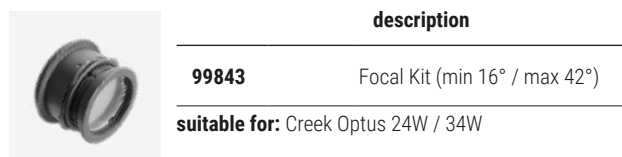


| description | |
|--|-------------------------------|
| 99843 | Focal Kit (min 16° / max 42°) |
| suitable for: Creek Optus 24W / 34W | |


Accessories

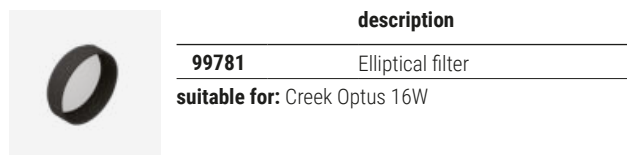


| description | |
|--------------------------------------|-------------------|
| 99781 | Elliptical filter |
| suitable for: Creek Optus 16W | |

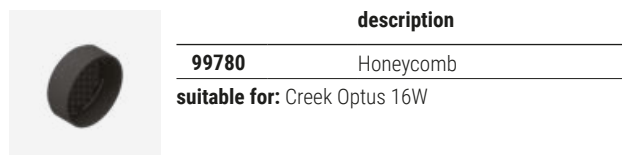


| description | |
|--------------------------------------|-----------|
| 99780 | Honeycomb |
| suitable for: Creek Optus 16W | |

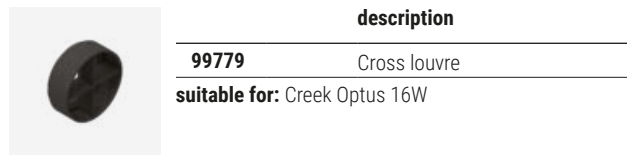

| description | |
|--------------------------------------|--------------|
| 99779 | Cross louvre |
| suitable for: Creek Optus 16W | |

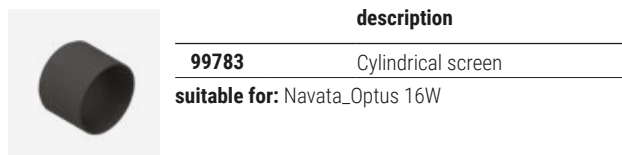


| description | |
|---------------------------------------|--------------------|
| 99783 | Cylindrical screen |
| suitable for: Navata_Optus 16W | |

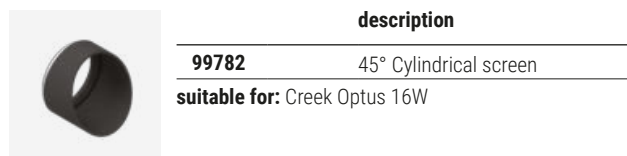


| description | |
|--------------------------------------|------------------------|
| 99782 | 45° Cylindrical screen |
| suitable for: Creek Optus 16W | |




| description | |
|--|-----------|
| 99841 | Honeycomb |
| suitable for: Kit focale 99844 | |

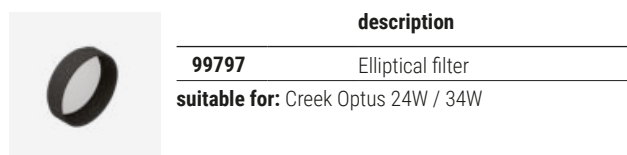


| description | |
|--|-------------------|
| 99797 | Elliptical filter |
| suitable for: Creek Optus 24W / 34W | |

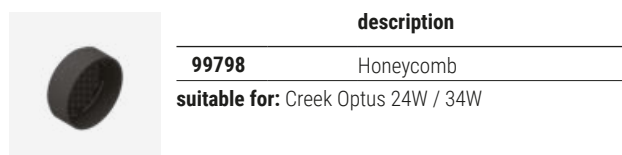


| description | |
|--|-----------|
| 99798 | Honeycomb |
| suitable for: Creek Optus 24W / 34W | |

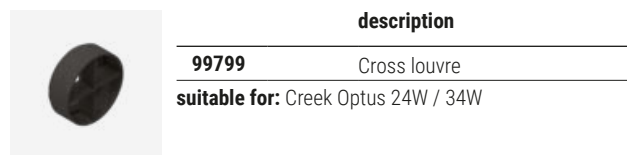

| description | |
|--|--------------|
| 99799 | Cross louvre |
| suitable for: Creek Optus 24W / 34W | |

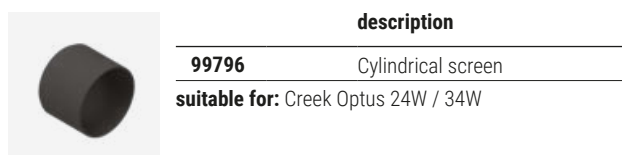

| description | |
|--|--------------------|
| 99796 | Cylindrical screen |
| suitable for: Creek Optus 24W / 34W | |

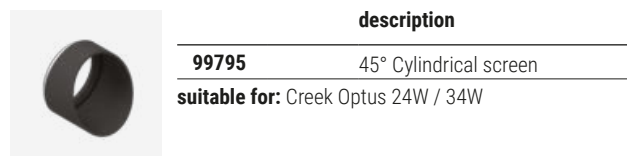

| description | |
|--|------------------------|
| 99795 | 45° Cylindrical screen |
| suitable for: Creek Optus 24W / 34W | |



| description | |
|--|-----------|
| 99842 | Honeycomb |
| suitable for: Kit focale 99843 | |































Ceiling and pendant lamps



ceiling and pendant lamps range index

| | | | | | | | |
|---------------|---|---|---|---|--|---|---|
| Tour | Tour_R | Tour_Cell_C | Tour_CD | Tour_CI | Tour_PD | Tour_PI | Tour_PU |
| |  | new  |  |  |  |  |  |
| | 232 | 233 | 234 | 235 | 238 | 239 | 240 |
| Tour | Tour_D | Tour_Cell_P | Tour_Q | Tour_QV | Tour_QD | Tour_Track | Tour_Projectors |
| |  | new  |  |  |  | new  | new  |
| | 241 | 242 | 244 | 244 | 245 | 246 | 246 |
| Skylum | Skylum_Q | Skylum_Q PRO | | | | | |
| | new  | new  | | | | | |
| | 254 | 255 | | | | | |
| Pool | Pool_C | Pool_S | Pool_P | | | | |
| |  |  |  | | | | |
| | 260 | 260 | 261 | | | | |
| Emy | Emy | | | | | | |
| | new  | | | | | | |
| | 266 | | | | | | |
| Pound | Pound_S | Pound_S Focus | Pound_Wall | Pound_Wall Focus | | | |
| | new  | new  | new  | new  | | | |
| | 272 | 272 | 273 | 273 | | | |
| Cell | Cell_S | Cell_SWw | | | | | |
| |  | new  | | | | | |
| | 277 | 277 | | | | | |

Baton

Baton_P



282

Baton_R



283

Baton_Q



283





tour

Materials
Structure in aluminium



THERESIA
PARENTISVAE
NEOSTADIEN
SISCARMELI
FILLAE
STATVERE

tour range

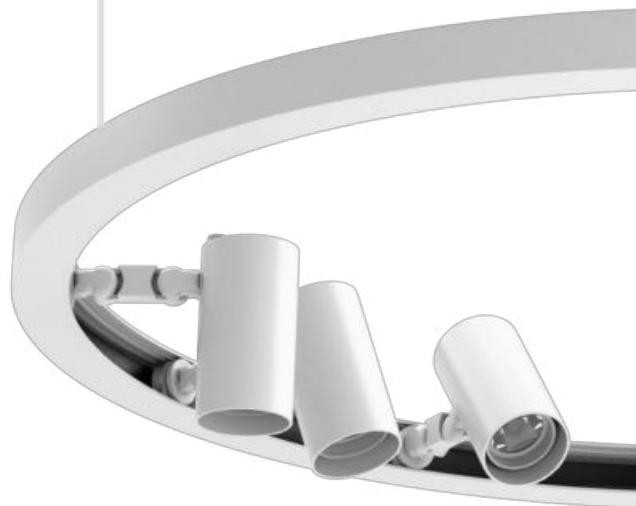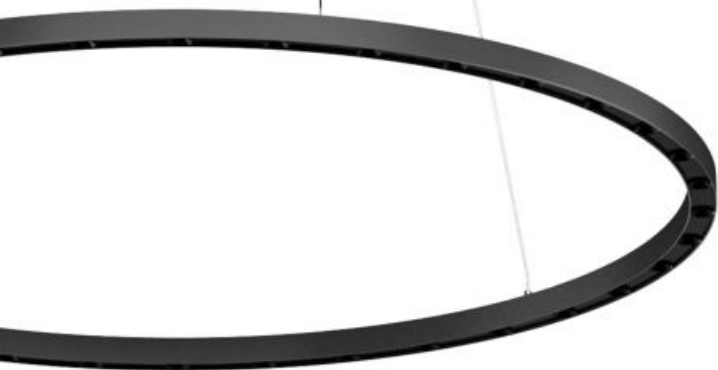


| | _R Recessed Direct | _Cell_C Cell Recessed | _CD Ceiling direct | _CI Ceiling Internal | _PD Pendant Direct | _PI Pendant Internal | _PU Pendant UP |
|----------------|--|---|--|--|--|--|--|
| 29W | - | - | - | Ø 740 mm | - | Ø 750 mm | - |
| 36,5W | - | - | - | Ø 910 mm | - | Ø 945 mm | - |
| 37,5 W 38 W | Ø 745 mm | Ø 745 mm | Ø 740 mm | - | Ø 740 mm | - | Ø 740 mm |
| 45 W 46 W | Ø 915 mm | Ø 915 mm | Ø 910 mm | - | Ø 910 mm | - | Ø 910 mm |
| 57,5W | - | - | - | Ø 1430 mm | - | Ø 1475 mm | - |
| 68 W 70 W | Ø 1435 mm | Ø 1435 mm | Ø 1430 mm | - | Ø 1430 mm | - | Ø 1430 mm |
| 75W | - | - | - | - | - | - | - |
| 90W | - | - | - | - | - | - | - |
| 105W | - | - | - | - | - | - | - |
| 114W | - | - | - | - | Ø 2450 mm | - | Ø 2450 mm |
| 140W | - | - | - | - | - | - | - |
| 180W | - | - | - | - | - | - | - |
| 200W 210W | - | - | - | - | - | - | - |
| 224W | - | - | - | - | - | - | - |
| Finish | <div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="background-color: white; border: 1px solid black; padding: 2px;">White</div> <div style="background-color: black; border: 1px solid black; padding: 2px;">Black</div> <div style="background-color: nickel; border: 1px solid black; padding: 2px;">Nickel</div> <div style="background-color: gold; border: 1px solid black; padding: 2px;">Gold</div> <div style="background-color: bronze; border: 1px solid black; padding: 2px;">Bronze</div> <div style="background-color: rosegold; border: 1px solid black; padding: 2px;">Rosegold</div> </div> | <div style="background-color: white; border: 1px solid black; padding: 2px; display: inline-block;">White</div> | <div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="background-color: white; border: 1px solid black; padding: 2px;">White</div> <div style="background-color: black; border: 1px solid black; padding: 2px;">Black</div> <div style="background-color: nickel; border: 1px solid black; padding: 2px;">Nickel</div> <div style="background-color: gold; border: 1px solid black; padding: 2px;">Gold</div> <div style="background-color: bronze; border: 1px solid black; padding: 2px;">Bronze</div> <div style="background-color: rosegold; border: 1px solid black; padding: 2px;">Rosegold</div> </div> | <div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="background-color: white; border: 1px solid black; padding: 2px;">White</div> <div style="background-color: black; border: 1px solid black; padding: 2px;">Black</div> <div style="background-color: nickel; border: 1px solid black; padding: 2px;">Nickel</div> <div style="background-color: gold; border: 1px solid black; padding: 2px;">Gold</div> <div style="background-color: bronze; border: 1px solid black; padding: 2px;">Bronze</div> <div style="background-color: rosegold; border: 1px solid black; padding: 2px;">Rosegold</div> </div> | <div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="background-color: white; border: 1px solid black; padding: 2px;">White</div> <div style="background-color: black; border: 1px solid black; padding: 2px;">Black</div> <div style="background-color: nickel; border: 1px solid black; padding: 2px;">Nickel</div> <div style="background-color: gold; border: 1px solid black; padding: 2px;">Gold</div> <div style="background-color: bronze; border: 1px solid black; padding: 2px;">Bronze</div> <div style="background-color: rosegold; border: 1px solid black; padding: 2px;">Rosegold</div> </div> | <div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="background-color: white; border: 1px solid black; padding: 2px;">White</div> <div style="background-color: black; border: 1px solid black; padding: 2px;">Black</div> <div style="background-color: nickel; border: 1px solid black; padding: 2px;">Nickel</div> <div style="background-color: gold; border: 1px solid black; padding: 2px;">Gold</div> <div style="background-color: bronze; border: 1px solid black; padding: 2px;">Bronze</div> <div style="background-color: rosegold; border: 1px solid black; padding: 2px;">Rosegold</div> </div> | <div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="background-color: white; border: 1px solid black; padding: 2px;">White</div> <div style="background-color: black; border: 1px solid black; padding: 2px;">Black</div> <div style="background-color: nickel; border: 1px solid black; padding: 2px;">Nickel</div> <div style="background-color: gold; border: 1px solid black; padding: 2px;">Gold</div> <div style="background-color: bronze; border: 1px solid black; padding: 2px;">Bronze</div> <div style="background-color: rosegold; border: 1px solid black; padding: 2px;">Rosegold</div> </div> |
| CRI 80 | 3000K - 4000K | 2700K - 3000K 4000K | 3000K - 4000K | - | 3000K - 4000K | - | 3000K - 4000K |
| CRI 90 | - | - | - | 3000K - 4000K | - | 3000K - 4000K | - |
| Control | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI |



| | _D Double Emission | _Cell_P Cell Pendan | _Track Projectors | _Q Square | _QV Square Vertical | _QD Square Double |
|------------------------------|---|---|---|---|---|---|
| 29W | - | - | - | - | - | - |
| 36,5W | - | - | - | - | - | - |
| 37,5 W 38 W | - | Ø 740 mm | - | - | - | - |
| 45W | - | Ø 910 mm | - | 655x655 mm | 670x670 mm | - |
| 57,5W | - | - | - | - | - | - |
| 68 W 70 W | - | Ø 1430 mm | - | - | - | - |
| 75W | Ø 740 mm | - | Ø 945 mm Ø 1475 mm | - | - | - |
| 90W | Ø 910 mm | - | - | 1255x1255 mm | - | 657x657 mm |
| 105W | - | - | - | 1655x1255 mm | - | - |
| 114W | - | - | - | - | - | - |
| 140W | Ø 1430 mm | - | - | - | - | - |
| 180W | - | - | - | - | - | 1257x1257 mm |
| 200W 210W | - | - | Ø 945 mm Ø 1475 mm | - | - | 1657x1257 mm |
| 224W | Ø 2450 mm | - | - | - | - | - |
| Finish | <input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Nickel <input type="checkbox"/> Gold <input type="checkbox"/> Bronze <input type="checkbox"/> Rosegold | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black |
| CRI 80 | 3000K - 4000K | 2700K - 3000K 4000K | - | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K |
| CRI 90 | - | - | 2700K (15W - 22W) 3000K (15W - 22W) 4000K (15W - 22W) | - | - | - |
| Control | On/Off DALI | On/Off 0/1-10V DALI | On/Off | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI | On/Off 0/1-10V DALI |

Emissions range

In 2021, new models of Tour are introduced, fitted with new optics. Tour_Cell adopts cut-off micro cells for a general emission with zero glaring and extremely high visual comfort; Tour_Track, using the hook of specific floodlights, lets you obtain a highly versatile accent emission. The new versions come alongside the four already-known emissions, namely direct, indirect, internal lateral and double-emission: four light effects that can be combined with one another in countless combinations to transform environments with a minimum and modern sign of light.

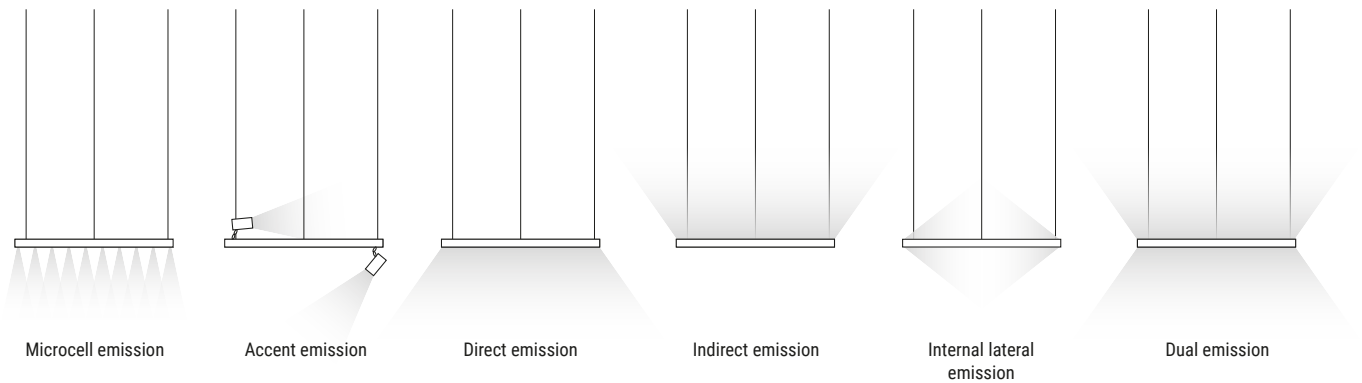

Cell Optics

Small and round, the convex-faced micro reflectors that make up the Tour_Cell optics effectively control the luminance and, combined with the recessed source and the black cell, guarantee almost total glare control. In fact, the light source is impossible to see unless you are in the zenith position with respect to the lamp. This guarantees extremely high visual comfort, with uniform general lighting without shadowy areas or discolouring. Tour_Cell is available in the hanging version, essential and elegant, or for recessed installation for maximum conservation of clean aesthetics and architecture.



Sound absorbent

Tour's sound absorbent system is designed to guarantee maximum comfort, always preserving the aesthetic factor, a distinctive elements of the family, available in three colours and compatible with the following families: Tour_PD - Tour_PU - Tour_D - Tour_cell_P - Tour_Q - Tour_QD - Tour_CD. Thanks to the installation bracket, it is quick and easy, guaranteeing maximum efficiency.




Tour_projector

Tour_projector guarantees high performance thanks to the projectors available in two sizes: 15W ø65 mm and 22W ø85 mm. The characteristics of the two projectors allow Tour_projector to work at its best level in a Retail setting, but also in a Museum setting, providing top-level dynamic performance, allowing the projectors to be positioned in any area of the Tour_track without affecting the final balance of the suspension.




Easy Plug Connection

Thanks to the particular connection system, can be positioned on the entire circumference of Tour_track. Using the new mechanical locking system, Tour_projector guarantees maximum safety and stability in the directing phase.

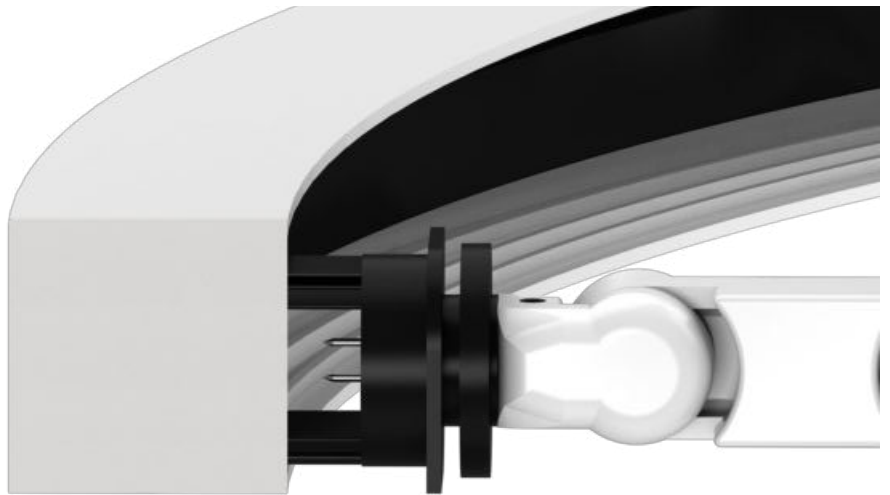


Emission control accessories

Tour_projector is compatible with a wide range of light beam control accessories: standard cylindrical screen and at 45 degrees, fully or partly eliminating the secondary beam and reducing the light cone; cross-like and honeycomb diffuser, for controlling and reducing glaring more or less markedly; directional fins and elliptical filter, for shaping the light or creating ovalized projections.

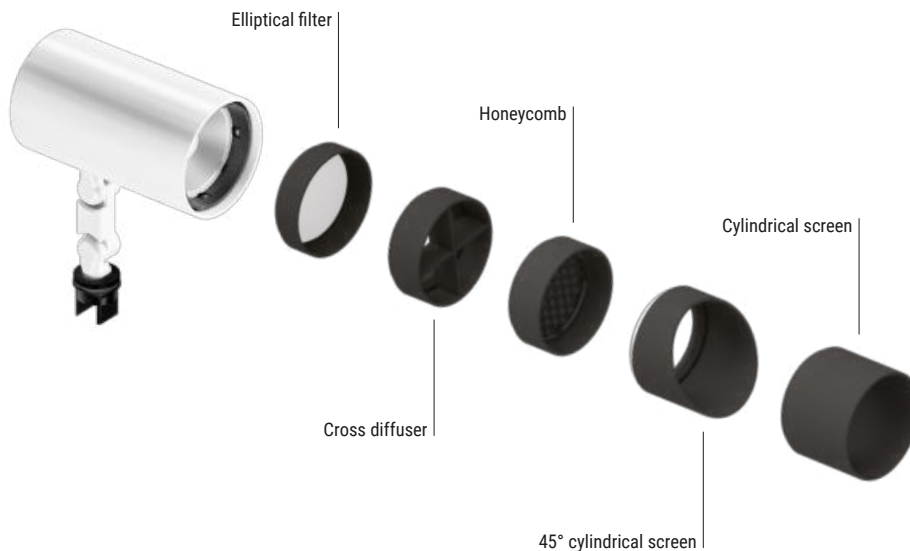

Tour_R | Integrated Luminaires | 24 V DC | topLED 37,5 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 65420 | W 3000 | 4678 - 2183 | 00 General - |
| Black 65421 | N 4000 | 5006 - 2335 | |
| Nickel 65422 | | | |
| Gold 63710 | | | |
| Bronze 65424 | | | |
| Rosegold 65425 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 4 art. p 150 x 160 x h 35 | DALI 1 - 3 art. p 191 x 163 x h 38 | DALI PUSH 1 - 4 art. p 280 x 143 x h 30 |

Tour_R | Integrated Luminaires | 24 V DC | topLED 45 W DC





| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 65426 | W 3000 | 5847 - 2921 | 00 General - |
| Black 65427 | N 4000 | 6139 - 3067 | |
| Nickel 65428 | | | |
| Gold 63720 | | | |
| Bronze 65430 | | | |
| Rosegold 65431 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1 - 3 art. p 150 x 160 x h 35 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI PUSH 1 - 3 art. p 280 x 143 x h 30 |

Tour_R | Integrated Luminaires | 24 V DC | topLED 70 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 65432 | W 3000 | 9355 - 4327 | 00 General - |
| Black 65433 | N 4000 | 9823 - 4542 | |
| Nickel 65434 | | | |
| Gold 63730 | | | |
| Bronze 65436 | | | |
| Rosegold 65437 | | | |


Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |


Removal steps of the EPS element




Dropped ceiling section



Product insertion




Removing cap



Painting and positioning the cap

Tour_Cell_C | Integrated Luminaires | powerLED 38 W DC 600mA




742

| CRI 80 | Cct | lm S - D | Optic |
|--------|--------------|---------------------------|-------------------------|
| White | 82727 | M 2700 4380 - 2552 | 30 Flood - |
| | | W 3000 4660 - 2714 | 45 W.Flood (52°) |
| | | N 4000 4980 - 2904 | |

Electronics

| 83122 | 83120 |
|--|---|
| ON/OFF 1 art. p 129 x 176 x h 30 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 |

Tour_Cell_C | Integrated Luminaires | powerLED 46 W DC 600mA




912

| CRI 80 | Cct | lm S - D | Optic |
|--------|--------------|---------------------------|-------------------------|
| White | 82264 | M 2700 5256 - 2914 | 30 Flood - |
| | | W 3000 5592 - 3100 | 45 W.Flood (62°) |
| | | N 4000 5976 - 3317 | |

Electronics

| 83122 | 83120 |
|--|---|
| ON/OFF 1 art. p 129 x 176 x h 30 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 |

Tour_Cell_C | Integrated Luminaires | powerLED 68 W DC 550mA



1432


| CRI 80 | Cct | lm S - D | Optic |
|--------|--------------|---------------------------|-------------------------|
| White | 82265 | M 2700 7884 - 4371 | 30 Flood - |
| | | W 3000 8388 - 4649 | 45 W.Flood (62°) |
| | | N 4000 8964 - 4975 | |

Electronics

| 83143 | 83121 |
|---|--------------------------------------|
| ON/OFF PUSH 0/1-10V 1 art. p 124 x 179 x h 22 | DALI 1 art. p 150 x 190 x h 38 |



Tour_CD | Ceiling Light | 24 V DC | topLED 37,5 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|---------------------|
| White 65350 | W 3000 | 4678 - 2183 | 00 General - |
| Black 65351 | N 4000 | 5006 - 2335 | |
| Nickel 65352 | | | |
| Gold 63740 | | | |
| Bronze 65354 | | | |
| Rosegold 65355 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 4 art. p 150 x 160 x h 35 | DALI 1 - 3 art. p 191 x 163 x h 38 | DALI PUSH 1 - 4 art. p 280 x 143 x h 30 |

Tour_CD | Ceiling Light | 24 V DC | topLED 45 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|---------------------|
| White 65356 | W 3000 | 5847 - 2921 | 00 General - |
| Black 65357 | N 4000 | 6139 - 3067 | |
| Nickel 65358 | | | |
| Gold 63750 | | | |
| Bronze 65360 | | | |
| Rosegold 65361 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1 - 3 art. p 150 x 160 x h 35 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI PUSH 1 - 3 art. p 280 x 143 x h 30 |

Tour_CD | Ceiling Light | 24 V DC | topLED 70 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|---------------------|
| White 65362 | W 3000 | 9355 - 4327 | 00 General - |
| Black 65363 | N 4000 | 9823 - 4542 | |
| Nickel 65364 | | | |
| Gold 63760 | | | |
| Bronze 65366 | | | |
| Rosegold 65367 | | | |


Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |

Spacer kit for Tour_CD




| |
|-----------------------|
| White 65386 |
| Black 65387 |
| Nickel 65389 |
| Gold 63724 |
| Bronze 65390 |
| Rosegold 65391 |



The Tour_C version comes with 23 mm-long spacers included.

Tour_CI | Ceiling_Wall Light | 24 V DC | stripLED 29 W DC




| CRI 90 | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|---------------------|
| White 65368 | W 3000 | 3000 - 1212 | 00 General - |
| Black 65369 | N 4000 | 3220 - 1297 | |
| Nickel 65370 | | | |
| Gold 63721 | | | |
| Bronze 65372 | | | |
| Rosegold 65373 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 5 art. p 150 x 160 x h 35 | DALI 1 - 4 art. p 191 x 163 x h 38 | DALI PUSH 1 - 5 art. p 280 x 143 x h 30 |

Tour_CI | Ceiling_Wall Light | 24 V DC | stripLED 36,5 W DC




| CRI 90 | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|---------------------|
| White 65374 | W 3000 | 3783 - 1568 | 00 General - |
| Black 65375 | N 4000 | 4060 - 1682 | |
| Nickel 65376 | | | |
| Gold 63722 | | | |
| Bronze 65378 | | | |
| Rosegold 65379 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 4 art. p 150 x 160 x h 35 | DALI 1 - 3 art. p 191 x 163 x h 38 | DALI PUSH 1 - 4 art. p 280 x 143 x h 30 |

Tour_CI | Ceiling_Wall Light | 24 V DC | stripLED 57,5 W DC




| CRI 90 | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|---------------------|
| White 65380 | W 3000 | 6000 - 2369 | 00 General - |
| Black 65381 | N 4000 | 6440 - 2542 | |
| Nickel 65382 | | | |
| Gold 63723 | | | |
| Bronze 65384 | | | |
| Rosegold 65385 | | | |


Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |

Spacer kit for Tour_CI



| |
|-----------------------|
| White 65386 |
| Black 65387 |
| Nickel 65389 |
| Gold 63724 |
| Bronze 65390 |
| Rosegold 65391 |




The Tour_C version comes with 23 mm-long spacers included.

Configuration of Tour_C with spacer kit

Providing an ON/OFF composition. Tour_CI, CD with spacer kit. Tour_C is distributed including 23 mm spacers which can be possibly replaced by the suspension kit to extend the distance from the ceiling.


Selection Tour model




Selection suspension kit



Selection driver / controller

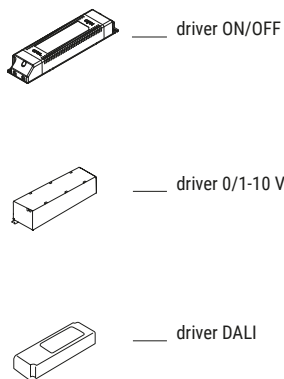

Final result

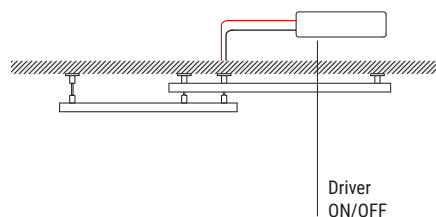


Ordering example:

n.1 art. 65368W00 + n.1 art. 65386 (spacer kit) + n.1 art. 99374 (driver ON/OFF)
n.1 art. 65356W00


Recess Tour configuration

Providing an ON/OFF configuration with Tour_R.


Selection Tour model



Selection driver / controller

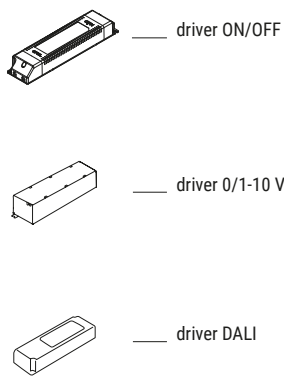

Final result

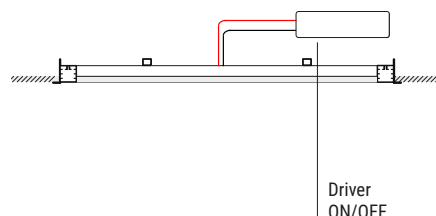


Ordering example:

n.1 art. 65420W00 + n.1 art. 99374 (driver ON/OFF)



Tour_PD | Pendant Luminaires | 24 V DC | topLED 37,5 W DC



| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64570 | W 3000 | 4678 - 2183 | 00 General - |
| Black 65112 | N 4000 | 5006 - 2335 | |
| Nickel 65113 | | | |
| Gold 63726 | | | |
| Bronze 65115 | | | |
| Rosegold 65128 | | | |


Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 4 art. p 150 x 160 x h 35 | DALI 1 - 3 art. p 191 x 163 x h 38 | DALI PUSH 1 - 4 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

RTG 64570W00 / 65112W00

Tour_PD | Pendant Luminaires | 24 V DC | topLED 70 W DC



| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64572 | W 3000 | 9355 - 4327 | 00 General - |
| Black 65120 | N 4000 | 9823 - 4542 | |
| Nickel 65121 | | | |
| Gold 63728 | | | |
| Bronze 65123 | | | |
| Rosegold 65130 | | | |


Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

RTG 64572W00 / 64572N00 / 65120W00 / 65120N00

Tour_PD | Pendant Luminaires | 24 V DC | topLED 45 W DC



| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64571 | W 3000 | 5847 - 2921 | 00 General - |
| Black 65116 | N 4000 | 6139 - 3067 | |
| Nickel 65117 | | | |
| Gold 63727 | | | |
| Bronze 65119 | | | |
| Rosegold 65129 | | | |




Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1 - 3 art. p 150 x 160 x h 35 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI PUSH 1 - 3 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

RTG 64571W00 / 65116W00

Tour_PD | Pendant Luminaires | 24 V DC | topLED 114 W DC



| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|--------------|--------------|
| White 64573 | W 3000 | 15588 - 7210 | 00 General - |
| Black 65124 | N 4000 | 16367 - 7551 | |
| Nickel 65125 | | | |
| Gold 63729 | | | |
| Bronze 65127 | | | |
| Rosegold 65131 | | | |


Electronics

| 99331 | 83019 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

RTG 64573W00 / 64573N00 / 65124W00 / 65124N00

Tour_PI | Pendant Luminaire | 24 V DC | stripLED 29 W DC





| CRI 90 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64577 | W 3000 | 3000 - 1212 | 00 General - |
| Black 65100 | N 4000 | 3220 - 1297 | |
| Nickel 65101 | | | |
| Gold 63736 | | | |
| Bronze 65103 | | | |
| Rosegold 65132 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 5 art. p 150 x 160 x h 35 | DALI 1 - 4 art. p 191 x 163 x h 38 | DALI PUSH 1 - 5 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_PI | Pendant Luminaire | 24 V DC | stripLED 36,5 W DC




| CRI 90 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64579 | W 3000 | 3785 - 1568 | 00 General - |
| Black 65104 | N 4000 | 4060 - 1682 | |
| Nickel 65105 | | | |
| Gold 63737 | | | |
| Bronze 65107 | | | |
| Rosegold 65133 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 4 art. p 150 x 160 x h 35 | DALI 1 - 3 art. p 191 x 163 x h 38 | DALI PUSH 1 - 4 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_PI | Pendant Luminaire | 24 V DC | stripLED 57,5 W DC




| CRI 90 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64581 | W 3000 | 6000 - 2369 | 00 General - |
| Black 65108 | N 4000 | 6440 - 2542 | |
| Nickel 65109 | | | |
| Gold 63738 | | | |
| Bronze 65111 | | | |
| Rosegold 65134 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_PU | Pendant Luminaires | 24 V DC | topLED 37,5 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64583 | W 3000 | 4678 - 2183 | 00 General - |
| Black 64682 | N 4000 | 5006 - 2340 | |
| Nickel 64683 | | | |
| Gold 63731 | | | |
| Bronze 64685 | | | |
| Rosegold 65135 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 210 x 148 x h 25 | PUSH 1 - 2 art. p 210 x 149 x h 30 | 0/1-10V 1 - 4 art. p 150 x 160 x h 35 | DALI 1 - 3 art. p 191 x 163 x h 38 | DALI PUSH 1 - 4 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_PU | Pendant Luminaires | 24 V DC | topLED 45 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64584 | W 3000 | 5847 - 2921 | 00 General - |
| Black 64686 | N 4000 | 6139 - 3066 | |
| Nickel 64687 | | | |
| Gold 63732 | | | |
| Bronze 64689 | | | |
| Rosegold 65136 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1 - 3 art. p 150 x 160 x h 35 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI PUSH 1 - 3 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_PU | Pendant Luminaires | 24 V DC | topLED 70 W DC





| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|-------------|--------------|
| White 64585 | W 3000 | 9355 - 4327 | 00 General - |
| Black 64690 | N 4000 | 9823 - 4542 | |
| Nickel 64691 | | | |
| Gold 63733 | | | |
| Bronze 64693 | | | |
| Rosegold 65137 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_PU | Pendant Luminaires | 24 V DC | topLED 114 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|--------------|--------------|
| White 64587 | W 3000 | 15588 - 7210 | 00 General - |
| Black 64694 | N 4000 | 16367 - 7571 | |
| Nickel 64695 | | | |
| Gold 63734 | | | |
| Bronze 64697 | | | |
| Rosegold 65138 | | | |

Electronics

| 99331 | 83019 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_D | Pendant Luminaires | 24 V DC | topLED 75 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|--------------|--------------|
| White 65300 | W 3000 | 9356 - 4364 | 00 General - |
| Black 65301 | N 4000 | 10012 - 4669 | |
| Nickel 65302 | | | |
| Gold 63711 | | | |
| Bronze 65304 | | | |
| Rosegold 65305 | | | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 - 2 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 - 2 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_D | Pendant Luminaires | 24 V DC | topLED 90 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|--------------|--------------|
| White 65306 | W 3000 | 11694 - 5841 | 00 General - |
| Black 65307 | N 4000 | 12278 - 6128 | |
| Nickel 65308 | | | |
| Gold 63712 | | | |
| Bronze 65310 | | | |
| Rosegold 65311 | | | |

Electronics

| 99331 | 83019 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_D | Pendant Luminaires | 24 V DC | topLED 140 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|--------------|--------------|
| White 65312 | W 3000 | 18710 - 8655 | 00 General - |
| Black 65313 | N 4000 | 19646 - 9084 | |
| Nickel 65314 | | | |
| Gold 63713 | | | |
| Bronze 65316 | | | |
| Rosegold 65317 | | | |

Electronics

| 99331 | 83019 | 99332 | 99787 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 220 x 171 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_D | Pendant Luminaires | 24 V DC | topLED 224 W DC




| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|---------------|--------------|
| White 65318 | W 3000 | 31176 - 14421 | 00 General - |
| Black 65319 | N 4000 | 32724 - 15101 | |
| Nickel 65320 | | | |
| Gold 63714 | | | |
| Bronze 65322 | | | |
| Rosegold 65323 | | | |

Electronics

| 99786 | 99787 |
|--|--------------------------------------|
| ON/OFF 1 art. p 220 x 171 x h 18 | DALI 1 art. p 220 x 171 x h 18 |

Accessories Pag. 248/249

Tour_Cell_P | Pendant Luminaires | powerLED 38 W DC 600mA




| CRI 80 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-------------------------|
| White 82725 | M 2700 | 4380 - 3096 | 30 Flood - |
| Black 82726 | W 3000 | 4660 - 3289 | 45 W.Flood (52°) |
| | N 4000 | 4980 - 3514 | |

Electronics

| 83122 | 83120 |
|--|---|
| ON/OFF 1 art. p 129 x 176 x h 30 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 |

Accessories Pag. 248/249

Tour_Cell_P | Pendant Luminaires | powerLED 46 W DC 600mA




| CRI 80 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-------------------------|
| White 82298 | M 2700 | 5256 - 3712 | 30 Flood - |
| Black 82299 | W 3000 | 5592 - 3943 | 45 W.Flood (62°) |
| | N 4000 | 5976 - 4217 | |

Electronics

| 83122 | 83120 |
|--|---|
| ON/OFF 1 art. p 129 x 176 x h 30 | 0/1-10V DALI PUSH 1 art. p 124 x 179 x h 22 |

Accessories Pag. 248/249

Tour_Cell_P | Pendant Luminaires | powerLED 68 W DC 550mA



| CRI 80 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-------------------------|
| White 82300 | M 2700 | 7884 - 5575 | 30 Flood - |
| Black 82301 | W 3000 | 8388 - 5923 | 45 W.Flood (62°) |
| | N 4000 | 8964 - 6328 | |


Electronics

| 83143 | 83121 |
|---|--------------------------------------|
| ON/OFF PUSH 0/1-10V 1 art. p 124 x 179 x h 22 | DALI 1 art. p 150 x 190 x h 38 |

Accessories Pag. 248/249



Tour_Q | Pendant Luminaires | 24 V DC | topLED 45 W DC






| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 64360 | W 3000 | 4810 - 2200 | 00 General - |
| Black 64370 | N 4000 | 5040 - 2306 | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1-3 art. p 150 x 160 x h 35 | DALI 1-2 art. p 191 x 163 x h 38 | DALI PUSH 1-3 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_Q | Pendant Luminaires | 24 V DC | topLED 90 W DC





| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|--------------|--------------|
| White 64361 | W 3000 | 9619 - 4403 | 00 General - |
| Black 64371 | N 4000 | 10080 - 4615 | |

Electronics

| 99331 | 83019 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_Q | Pendant Luminaires | 24 V DC | topLED 105 W DC





| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|--------------|--------------|
| White 64362 | W 3000 | 11223 - 5139 | 00 General - |
| Black 64372 | N 4000 | 11760 - 5386 | |

Electronics

| 99331 | 83019 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_QV | Pendant Luminaires | 24 V DC | topLED 45 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 64260 | W 3000 | 4810 - 2347 | 00 General - |
| Black 64250 | N 4000 | 5040 - 2460 | |

Electronics

| 99374 | 83018 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--|---|
| ON/OFF 1 art. p 210 x 148 x h 25 | PUSH 1 art. p 210 x 149 x h 30 | 0/1-10V 1-3 art. p 150 x 160 x h 35 | DALI 1-2 art. p 191 x 163 x h 38 | DALI PUSH 1-3 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_QD | Pendant Luminaires | 24 V DC | topLED 90 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 64363 | W 3000 | 4810 - 4397 | 00 General - |
| Black 64373 | N 4000 | 5040 - 4609 | |

Electronics

| 99331 | 83019 | 99332 | 99722 | 83062 |
|--|--------------------------------------|---|--------------------------------------|---|
| ON/OFF 1 art. p 150 x 160 x h 35 | PUSH 1 art. p 150 x 160 x h 35 | 0/1-10V 1 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI PUSH 1 art. p 280 x 143 x h 30 |

Accessories Pag. 248/249

Tour_QD | Pendant Luminaires | 24 V DC | topLED 180 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|--------------|--------------|
| White 64364 | W 3000 | 9619 - 8805 | 00 General - |
| Black 64374 | N 4000 | 10080 - 9014 | |

Electronics

| 99786 | 99787 |
|--|--------------------------------------|
| ON/OFF 1 art. p 220 x 171 x h 18 | DALI 1 art. p 220 x 171 x h 18 |

Accessories Pag. 248/249

Tour_QD | Pendant Luminaires | 24 V DC | topLED 210 W DC




| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|---------------|--------------|
| White 64365 | W 3000 | 11222 - 10337 | 00 General - |
| Black 64375 | N 4000 | 11760 - 10827 | |

Electronics

| 99786 | 99787 |
|--|--------------------------------------|
| ON/OFF 1 art. p 220 x 171 x h 18 | DALI 1 art. p 220 x 171 x h 18 |

Accessories Pag. 248/249


Tour_Track | Pendant Luminaires | 48 V DC



| | |
|-------|--------------|
| White | 82753 |
| Black | 82755 |

Accessories Pag. 248/249



Tour_Track | Pendant Luminaires | 48 V DC



| | |
|-------|--------------|
| White | 82754 |
| Black | 82756 |

Accessories Pag. 248/249


Tour_Projectors | Pendant Luminaires | 48 V DC | arrayLED 15 W DC



| Balance - CRI 90 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-------------------------|
| White 82757 | M 2700 | 1748 - 1243 | 15 Spot (19°) |
| Black 82758 | W 3000 | 1830 - 1303 | 30 Flood (36°) |
| | N 4000 | 1967 - 1400 | 60 W.Flood (63°) |

Optics & accessories Pag. 247

Tour_Projectors | Pendant Luminaires | 48 V DC | arrayLED 22 W DC



| Balance - CRI 90 | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|-----------------------|
| White 82759 | M 2700 | 2648 - 2264 | 15 Spot (17°) |
| Black 82760 | W 3000 | 2774 - 2373 | 30 Flood (25°) |
| | N 4000 | 2982 - 2551 | 60 Flood (57°) |

Optics & accessories Pag. 247

Optics



| description | |
|--|------|
| 99827 | Spot |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|-------|
| 99828 | Flood |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|------------|
| 99829 | Wide Flood |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|------|
| 99808 | Spot |
| suitable for: Tour_Projectors 22W | |



| description | |
|--|-------|
| 99809 | Flood |
| suitable for: Tour_Projectors 22W | |



| description | |
|--|------------|
| 99810 | Wide Flood |
| suitable for: Tour_Projectors 22W | |


Accessories



| description | |
|--|-------------------|
| 99781 | Elliptical filter |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|-----------|
| 99780 | Honeycomb |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|--------------|
| 99779 | Cross louvre |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|--------------------|
| 99783 | Cylindrical screen |
| suitable for: Tour_Projectors 15W | |




| description | |
|--|------------------------|
| 99782 | 45° Cylindrical screen |
| suitable for: Tour_Projectors 15W | |



| description | |
|--|-------------------|
| 99797 | Elliptical filter |
| suitable for: Tour_Projectors 22W | |



| description | |
|--|-----------|
| 99798 | Honeycomb |
| suitable for: Tour_Projectors 22W | |



| description | |
|--|--------------|
| 99799 | Cross louvre |
| suitable for: Tour_Projectors 22W | |




| description | |
|--|--------------------|
| 99796 | Cylindrical screen |
| suitable for: Tour_Projectors 22W | |



| description | |
|--|------------------------|
| 99795 | 45° Cylindrical screen |
| suitable for: Tour_Projectors 22W | |

3-coupling point



Tour PD - PI - PU one-side emission

Ø 740 mm - Ø 910 mm - Ø 1430 mm

ON/OFF
Max 75 W

| | |
|----------|-------|
| White | 64578 |
| Black | 65142 |
| Nickel | 65144 |
| Gold | 63706 |
| Bronze | 65148 |
| Rosegold | 65150 |

DALI 0/1-10 V
Max 75 W

| | |
|----------|-------|
| White | 64586 |
| Black | 65143 |
| Nickel | 65145 |
| Gold | 63707 |
| Bronze | 65149 |
| Rosegold | 65151 |

Tour D dual-side emission

Ø 740 mm - Ø 910 mm - Ø 1430 mm


ON/OFF
Max 75+75 W

| | |
|----------|-------|
| White | 65324 |
| Black | 65326 |
| Nickel | 65328 |
| Gold | 63701 |
| Bronze | 65332 |
| Rosegold | 65334 |

DALI 0/1-10V
Max 75+75 W

| | |
|----------|-------|
| White | 65325 |
| Black | 65327 |
| Nickel | 65329 |
| Gold | 63702 |
| Bronze | 65333 |
| Rosegold | 65335 |

6-point coupling ceiling rose



Tour PD - PI - PU one-side emission

Ø 2450 mm

ON/OFF
Max 150 W

| | |
|----------|-------|
| White | 64580 |
| Black | 65152 |
| Nickel | 65154 |
| Gold | 63708 |
| Bronze | 65158 |
| Rosegold | 65160 |

DALI
Max 150 W

| | |
|----------|-------|
| White | 64588 |
| Black | 65153 |
| Nickel | 65155 |
| Gold | 63709 |
| Bronze | 65159 |
| Rosegold | 65161 |

Tour D dual-side emission

Ø 2450 mm


ON/OFF
Max 150+150 W

| | |
|----------|-------|
| White | 65336 |
| Black | 65338 |
| Nickel | 65340 |
| Gold | 63703 |
| Bronze | 65344 |
| Rosegold | 65346 |

DALI 0/1-10V
Max 150+150 W

| | |
|----------|-------|
| White | 65337 |
| Black | 65339 |
| Nickel | 65341 |
| Gold | 63704 |
| Bronze | 65345 |
| Rosegold | 65347 |

6-point ceiling rose for 3 Tour fixing



ON/OFF
Max 450 W


| | |
|----------|-------|
| White | 65412 |
| Black | 65413 |
| Nickel | 65414 |
| Gold | 63716 |
| Bronze | 65416 |
| Rosegold | 65417 |

DALI
Max 450 W

| | |
|----------|-------|
| White | 65418 |
| Black | 65419 |
| Nickel | 65398 |
| Gold | 63717 |
| Bronze | 65349 |
| Rosegold | 65399 |

Coupling ceiling rose Tour_Cell_P

Ø 740 mm - Ø 910 mm
Ø 1430 mm



ON/OFF
75 W

| | |
|-------|-------|
| White | 63778 |
| Black | 63779 |

Ø 740 mm - Ø 910 mm

DALI
75 W

| | |
|-------|-------|
| White | 63788 |
| Black | 63789 |


Ø 1430 mm

DALI
75 W

| | |
|-------|-------|
| White | 63798 |
| Black | 63799 |

Coupling ceiling rose Tour_Track


Ø 945 mm - Ø 1475 mm



ON/OFF
75 W

| | |
|-------|-------|
| White | 63782 |
| Black | 63783 |


Ø 945 mm - Ø 1475 mm



ON/OFF
200 W

| | |
|-------|-------|
| White | 63772 |
| Black | 63773 |

Coupling ceiling rose for one-side emission Tour Q



ON/OFF
Max 75 W

White **64368**
Black **64369**

DALI 0/1-10 V
Max 75 W

White **64388**
Black **64389**


ON/OFF
Max 150 W

White **64378**
Black **64379**

DALI 0/1-10 V
Max 150 W

White **64398**
Black **64399**

Coupling ceiling rose for dual-side emission Tour Q




ON/OFF
Max 75 W + 75 W

White **64358**
Black **64359**

DALI 0/1-10 V
Max 75 W + 75 W

White **64348**
Black **64349**




ON/OFF
Max 150 W + 150 W

White **64338**
Black **64339**

DALI 0/1 -10 V
Max 150 W + 150 W

White **64328**
Black **64329**

3 fixing kit Tour_R




White **64575**
Black **64670**
Nickel **64671**
Gold **63700**
Bronze **64673**
Rosegold **65141**

For version Ø 2450 requires 2x fixing kit with 3 cones each

RTG 64575 / 64670



4 fixing kit Tour_Q



type

White **64270**
Black **64240**

Sound absorbing panels



| | | Ø mm | L mm |
|------------|--------------|-----------|-----------|
| Grey | 99957 | Ø 665 | 579x579 |
| Anthracite | 99958 | Ø 665 | 579x579 |
| Black | 99959 | Ø 665 | 579x579 |
| Grey | 99954 | Ø 835 | 1179x1179 |
| Anthracite | 99955 | Ø 835 | 1179x1179 |
| Black | 99956 | Ø 835 | 1179x1179 |
| Grey | 99960 | 579x579 | 1179x1579 |
| Anthracite | 99961 | 579x579 | 1179x1579 |
| Black | 99962 | 579x579 | 1179x1579 |
| Grey | 99963 | 1179x1179 | 1179x1579 |
| Anthracite | 99964 | 1179x1179 | 1179x1579 |
| Black | 99965 | 1179x1179 | 1179x1579 |
| Grey | 99966 | 1179x1579 | 1179x1579 |
| Anthracite | 99967 | 1179x1579 | 1179x1579 |
| Black | 99968 | 1179x1579 | 1179x1579 |

On request, a suspension/ceiling light kit is available for sound-absorbing panels.

Pag. 248

RTG 64578 / 65142 / 64586 / 65143

RTG 64580 / 65152 / 64588 / 65153



skylum

Materials

Body in aluminium

Diffuser in opal white polyester fabric



High light diffusion


Skylum is a high definition system, with the large surface lit in an entirely uniform way in every part without drop-offs or blind corners, perfectly vertical on the ground surface, it completely cancels out horizontal shadows and is characterised by a B1 grade fire-resistant polyester diffuser which complies with the DIN 4102-1 standard, easily removable.

Standard version



56,5mm

Pro version



100mm

Micro Optics



Skylum is pure diffused light

Skylum is the diffused lighting system available in two versions: Standard and PRO, with multiple possibilities of combinations and configurations. In default or custom dimensions, Skylum is the ideal lighting for retail and contract environments or large open spaces such as airports and hotels. The system guarantees the perfect uniformity of the light, cancelling out shadows on the ground and increasing environmental comfort.

82260



7 m x 7 m x 3 h

value calculated with reflection coefficients:

20 floor

50 wall

70 ceiling

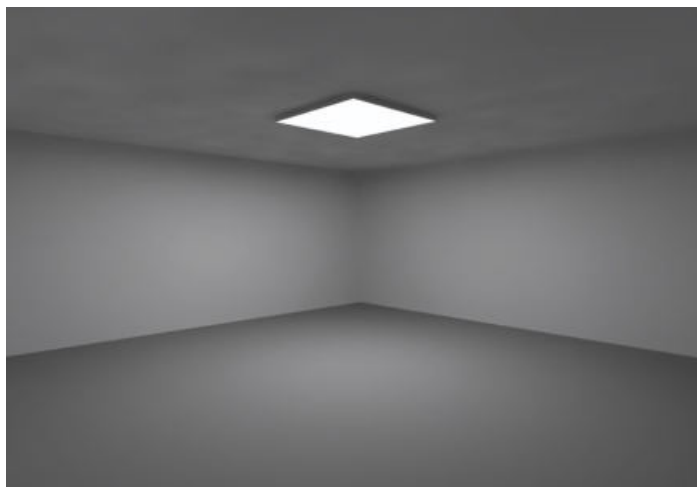


NO SHADOWS



Standard version

The Standard version is made up of a thin aluminium frame, just 56,5 mm thick, available in three sizes: 620x620, 935x935, 1250x1250 mm, with LED circuits distributed inside, where each individual diode is mounted on special micro-optics that guarantee uniformity, despite the reduced height of the reflection chamber




82258

620 mm x 620 mm x h: 56,5 mm

38 W DC - 43 W AC

3000 K - 6557 lm S

4000 K - 6794 lm S

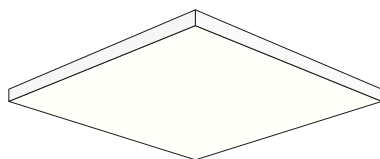


82259

935 mm x 935 mm x h: 56,5 mm

96 W DC - 101 W AC

3000 K - 16400 lm S

4000 K - 17000 lm S

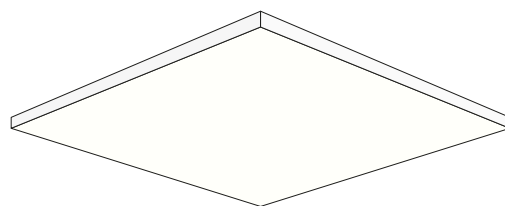

82260

1250 mm x 1250 mm x h: 56,5 mm

159,6 W DC - 169 W AC

3000 K - 29890 lm S

4000 K - 30983 lm S

PRO version

In the PRO version, the frame is 100 mm thick and has two fixed sizes: 1500x500 and 1500x1500; both models contain modular LED sources that are easily customised in terms of size up to two limit shapes: (max. 1940x1940 mm) and rectangular (max. 5780x1460 mm), the frame of the structure with its extremely thin edges makes the side-by-side placement of the module imperceptible, guaranteeing original lighting structures every time.


Mod. A
480 mm x 480 mm
4000 K: **3298 lm S**



Mod. B
120 mm x 160 mm
4000 K: **275 lm S**





Frame
10 mm





Example:
2 Mod. A + 12 Mod. B

740 mm x 980 mm
(frame included)
4000 K: **9896 lm S**

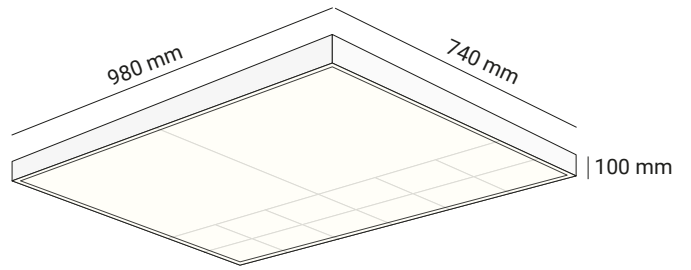



Example:
1 Mod. A + 18 Mod. B

740 mm x 820 mm
(frame included)
4000 K: **8248 lm S**

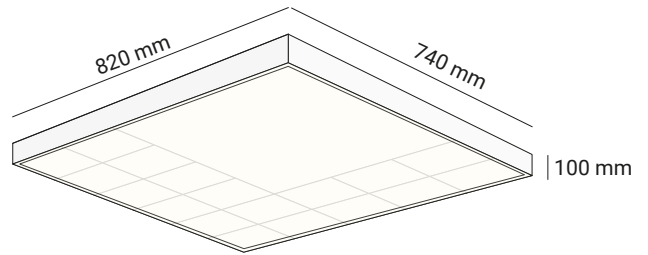



Example:
1 Mod. A + 13 Mod. B

620 mm x 820 mm
(frame included)
4000 K: **6873 lm S**

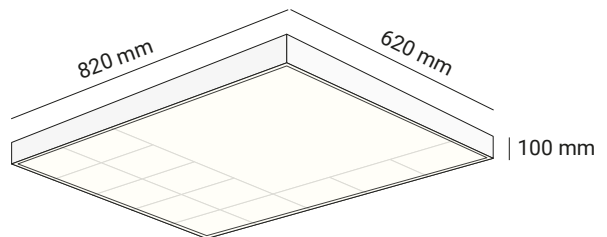


Example:
1 Mod. A + 8 Mod. B

820 mm x 500 mm
(frame included)
4000 K: **5498 lm S**

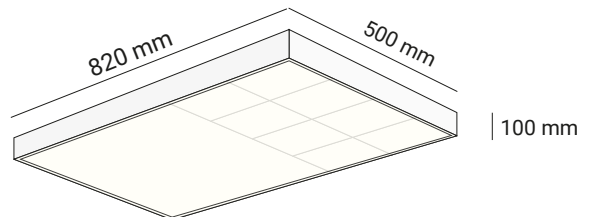


Maximum sizes:
12 Mod. A + 3 Mod. A

5780 mm x 1460 mm
(frame included)
4000 K: **118728 lm S**

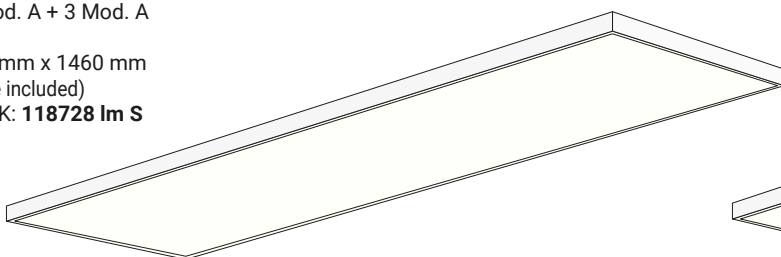


Maximum sizes:
4 Mod. A + 4 Mod. A

1940 mm x 1940 mm
(frame included)
4000 K: **52768 lm S**

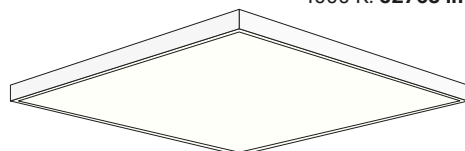


Skylum_Q | Ceiling Lights | 100-240 V AC | topLED 38W DC - 43 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 82258 | W 3000 | 6557 - 4942 | 00 General - |
| Black 84273 | N 4000 | 6794 - 5191 | |

| CRI 80 - DALI 2 / PUSH | Cct | lm S - D | Optic |
|------------------------|--------|-------------|--------------|
| White 82261 | W 3000 | 6557 - 4952 | 00 General - |
| Black 84276 | N 4000 | 6794 - 5191 | |


Skylum_Q | Ceiling Lights | 220-240 V AC | topLED 96W DC - 104 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|---------------|--------------|
| White 82259 | W 3000 | 16400 - 12580 | 00 General - |
| Black 84274 | N 4000 | 17000 - 13086 | |

| CRI 80 - DALI 2 / PUSH | Cct | lm S - D | Optic |
|------------------------|--------|---------------|--------------|
| White 82262 | W 3000 | 16400 - 12580 | 00 General - |
| Black 84277 | N 4000 | 17000 - 13086 | |


Skylum_Q | Ceiling Lights | 220-240 V AC | topLED 160W DC - 172 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|---------------|--------------|
| White 82260 | W 3000 | 29890 - 20545 | 00 General - |
| Black 84275 | N 4000 | 30983 - 21370 | |

| CRI 80 - DALI 2 / PUSH | Cct | lm S - D | Optic |
|------------------------|--------|---------------|--------------|
| White 82263 | W 3000 | 29890 - 20545 | 00 General - |
| Black 84278 | N 4000 | 30983 - 21370 | |

Skylum_Q PRO | Ceiling Lights | topLED 78 W DC 2100 mA

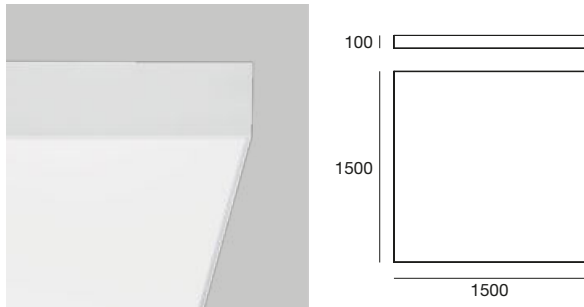


| CRI 80 - DALI | Cct | lm S - D | Optic |
|--------------------|---------------|--------------|---------------------|
| White 84170 | W 3000 | 14904 - 8134 | 00 General - |
| Black 84271 | N 4000 | 15426 - 8419 | |

Electronics

83195

DALI
1 art.
p 180 x 163 x h 36

Skylum_Q PRO | Ceiling Lights | topLED 157 W DC 4350 mA

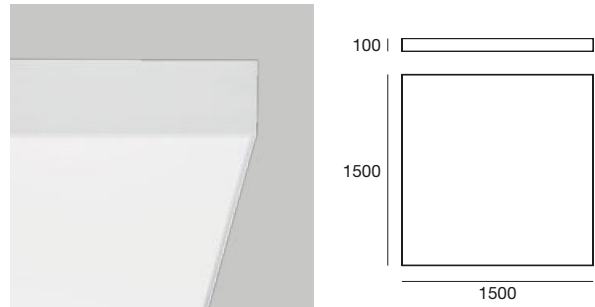

| CRI 80 - DALI | Cct | lm S - D | Optic |
|--------------------|---------------|---------------|---------------------|
| White 84171 | W 3000 | 28638 - 16576 | 00 General - |
| Black 84272 | N 4000 | 29681 - 17156 | |

Electronics

83196

DALI
1 art.
p 244 x 171 x h 38

Skylum_Q PRO | Ceiling Lights | topLED 52 W DC 1450 mA




| CRI 80 - DALI | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|---------------------|
| White 84169 | W 3000 | 9546 - 5525 | 00 General - |
| Black 84270 | N 4000 | 9894 - 5719 | |

Electronics

83194

DALI
1 art.
p 180 x 163 x h 36

Skylum PRO can be installed as ceiling light or suspended (cables are included).

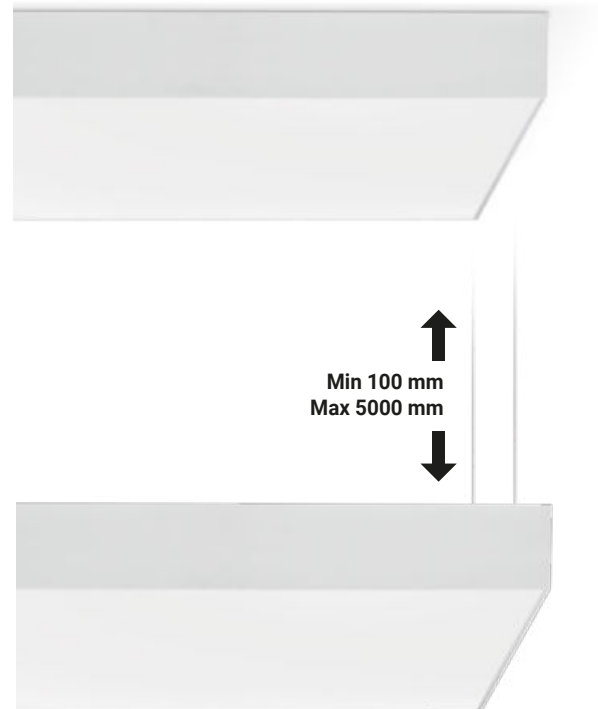



pool

Materials

Aluminium body

Opaline polycarbonate diffuser



pool range



| | _C Recessed | _P Pendant | _S Surface |
|----------------|---------------------------|---------------------------|---------------------------|
| 20W | Ø 353 mm | - | Ø 352 mm |
| 60W | Ø 652 mm | Ø 652 mm | Ø 652 mm |
| 120W | Ø 952 mm | Ø 952 mm | Ø 952 mm |
| Finish | White | White | White |
| CRI 80 | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K |
| Optics | General | General | General |
| Control | On/Off - DALI - DALI PUSH | On/Off - DALI - DALI PUSH | On/Off - DALI - DALI PUSH |

Furnishing with light

Light technology meets design precision. Visual comfort finds its most rational form, exploiting the simplicity of pure geometry to create a scenographic effect.


DALI version

The Pool range of products offers the possibility to select the recessed, ceiling-mounted and suspension versions with the DALI dimming protocol: given the large dimensions of the lamps and the extensive overall power achievable, opting for the versatility of the DALI solutions considerably simplifying the management of the various light parameters is of crucial importance.

Low thickness


Application flushed with the ceiling

Perfect light homogeneity

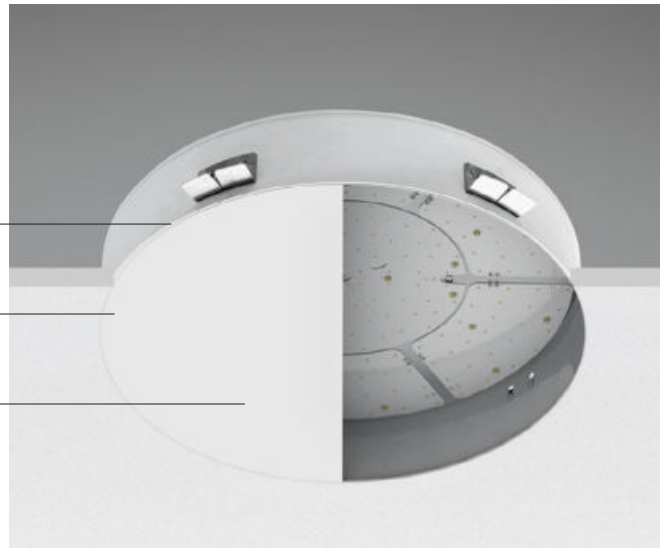


Multiple installation

Pool offers a range of products capable of meeting any project needs; irrespective of the type of installation required (recessed, surface or suspension) the body is fully concealed from view, while the slim polycarbonate diffuser offers low luminance, which translates into a soft and comfortable light; or even more it creates a striking light circle, in the version with perimeter circle.

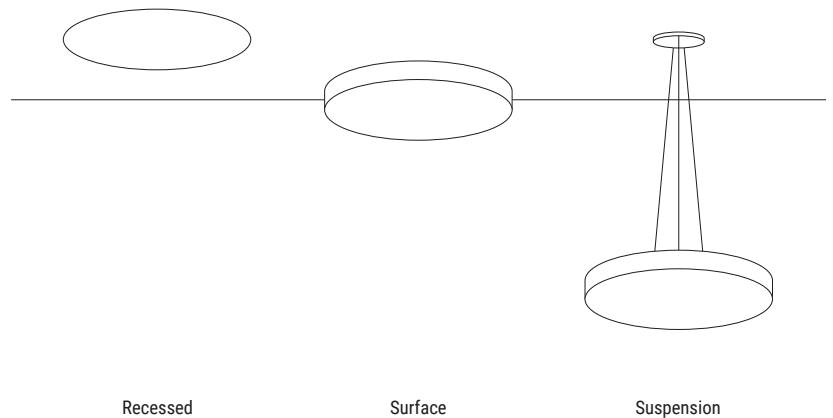


Controlled emission

The opaline polycarbonate diffuser guarantees full control of the light emission, thus allowing to combine and direct the photons emitted by the light source without lenses or filters. Visually, the effect is cosy, the light appears soft and well diffused.

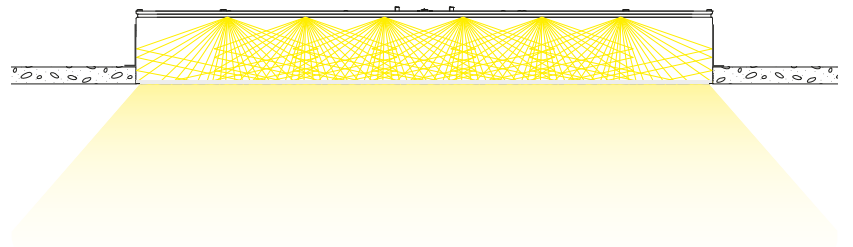


Pool_C | Recessed lights | 220-240 V AC | topLED 20 W DC - 24 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 62931 | W 3000 | 2730 - 1751 | 00 General - |
| | N 4000 | 2925 - 1876 | |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|--------------|
| White 62934 | W 3000 | 2730 - 1751 | 00 General - |
| | N 4000 | 2925 - 1876 | |


Pool_C | Recessed lights | 220-240 V AC | topLED 60 W DC - 66 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 62932 | W 3000 | 8190 - 6121 | 00 General - |
| | N 4000 | 8775 - 6558 | |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|--------------|
| White 62935 | W 3000 | 8190 - 6121 | 00 General - |
| | N 4000 | 8775 - 6558 | |


Pool_C | Recessed lights | 220-240 V AC | topLED 120 W DC - 131 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|---------------|--------------|
| White 62933 | W 3000 | 16380 - 12279 | 00 General - |
| | N 4000 | 17550 - 13156 | |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|---------------|--------------|
| White 62936 | W 3000 | 16380 - 12279 | 00 General - |
| | N 4000 | 17550 - 13156 | |


Pool_S | Ceiling Lights | 100-240 V AC | topLED 20 W DC - 24 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 62911 | W 3000 | 2730 - 1751 | 00 General - |
| | N 4000 | 2925 - 1876 | |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|--------------|
| White 62923 | W 3000 | 2730 - 1751 | 00 General - |
| | N 4000 | 2925 - 1876 | |


Pool_S | Ceiling Lights | 220-240 V AC | topLED 60 W DC - 66 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 62912 | W 3000 | 8190 - 6121 | 00 General - |
| | N 4000 | 8775 - 6558 | |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|--------------|
| White 62922 | W 3000 | 8190 - 6121 | 00 General - |
| | N 4000 | 8775 - 6558 | |


Pool_S | Ceiling Lights | 220-240 V AC | topLED 120 W DC - 131 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|---------------|--------------|
| White 62915 | W 3000 | 16380 - 12279 | 00 General - |
| | N 4000 | 17550 - 13156 | |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|---------------|--------------|
| White 62925 | W 3000 | 16380 - 12279 | 00 General - |
| | N 4000 | 17550 - 13156 | |


Pool_P | Pendant Luminaires | 220-240 V AC | topLED 60 W DC - 66 W AC



| CRI 80 | Cct | lm S - D | Optic | |
|--------|--------------|--------------------------------|----------------------------|---------------------|
| White | 62916 | W 3000 N 4000 | 8190 - 6121 8775 - 6558 | 00 General - |

| DALI - DALI PUSH - CRI 80 | Cct | lm S - D | Optic | |
|---------------------------|--------------|--------------------------------|----------------------------|---------------------|
| White | 62926 | W 3000 N 4000 | 8190 - 6121 8775 - 6558 | 00 General - |

Pool_P | Pendant Luminaires | 220-240 V AC | topLED 120 W DC - 131 W AC



| CRI 80 | Cct | lm S - D | Optic | |
|--------|--------------|--------------------------------|--------------------------------|---------------------|
| White | 62921 | W 3000 N 4000 | 16380 - 12279 17550 - 13156 | 00 General - |

Ekipe Sporting Center | Catania, Italy



Ceiling and pendant lamps







emy


Materials

Aluminium body

Diffuser in microprismatic PMMA


Construction details

Extra thin lamp body, just 9 mm thick. Thanks to the diffuser's particular microprisms, lighting is bright and comfortable with a high chromatic yield index, CRI90. Glare is reduced, UGR<19.

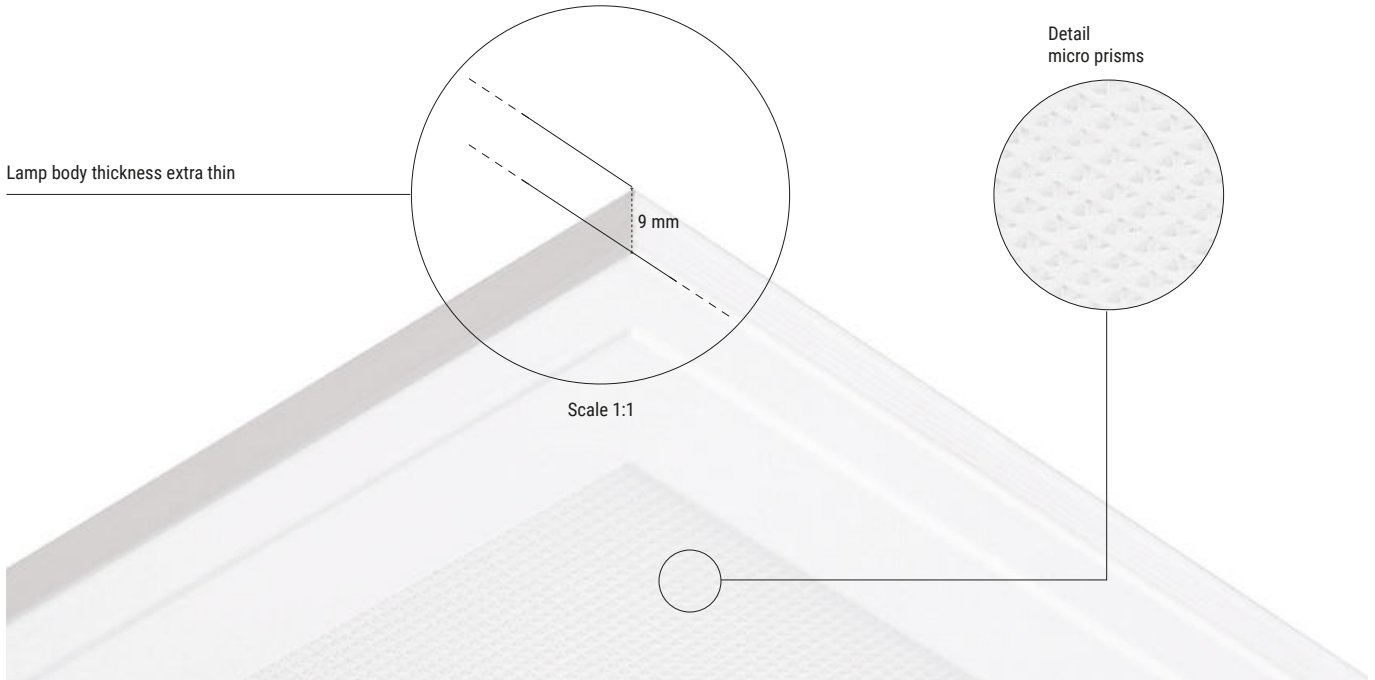


Quick installation

Lamp body in white painted aluminium with minimum bulk and practical installation. The Driver is included in the item with cable and "Easy Plug" quick connector. Simple connection in two quick points.

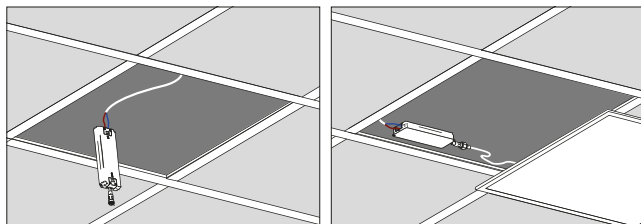

1 Connection of the Driver to the electrical mains.

2 Driver-Emy connection using quick connector "Easy Plug".

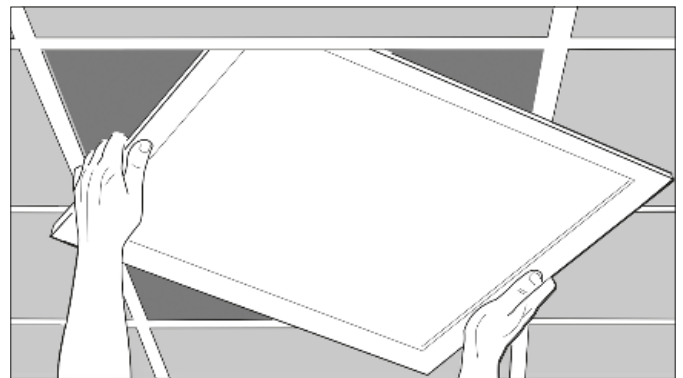

Surface installation on the modular false ceiling frame


Surface or hanging installation

Frame accessory available on request for surface installation, whereas for hanging installation, the specific kit is available with appropriate hooks and cables.


Surface Installation



Hanging installation

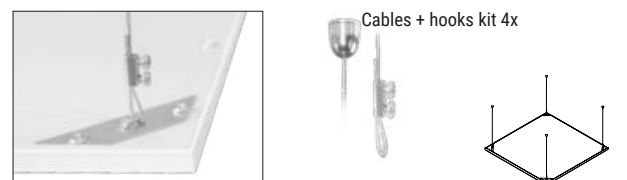

Emy | Ceiling lights | topLED | 40W DC Max 1200mA




| CRI 90 | Cct | lm S - D | Optic |
|--------|--------------|--------------------------------|-------------------|
| White | 82831 | W 3000 N 4000 | 00 General |
| | | 5000 - 4409 5000 - 4573 | |

Accessories Pag. 266

RTG 82831N00 / 82831W00

Emy | Ceiling lights | 220-240 V AC | topLED | 40W AC




| CRI 90 | Cct | lm S - D | Optic |
|--------|--------------|---------------|-------------------|
| White | 82832 | N 4000 | 00 General |
| | | 4000 - 3743 | |

Accessories Pag. 266

RTG 82832N00

Emy | Ceiling lights | topLED | 40W DC Max 1200mA








| CRI 90 | Cct | lm S - D | Optic |
|--------|--------------|--------------------------------|--------------------|
| White | 82833 | W 3000 N 4000 | 00 General. |
| | | 4000 - 3369 4000 - 3788 | |

Accessories Pag. 266

RTG 82833N00 / 82833W00

Accessories

| | description |
|---|---|
|  | 99584 Suspension cables 4 pz. suitable for: Emy 82831 - 82833* * installation over 2.80 meters is recommended Not suitable for Emy 82832 |
|  | 99556 Surface frame 600x600 suitable for: Emy 595x595x50 |
|  | 99898 Surface frame 1200x300 suitable for: Emy 1195x295x70 |
|  | 99970 Driver ON/OFF 135x45x25 - 1 art suitable for: Emy 40W (IP20) |
|  | 99971.01 Driver DALI2 PUSH 112x64x30 - 1 art suitable for: Emy 40W (IP20) |

RTG 99584 / 99556 / 99898 / 99970 / 99971.01






ound

Materials

Body in aluminium

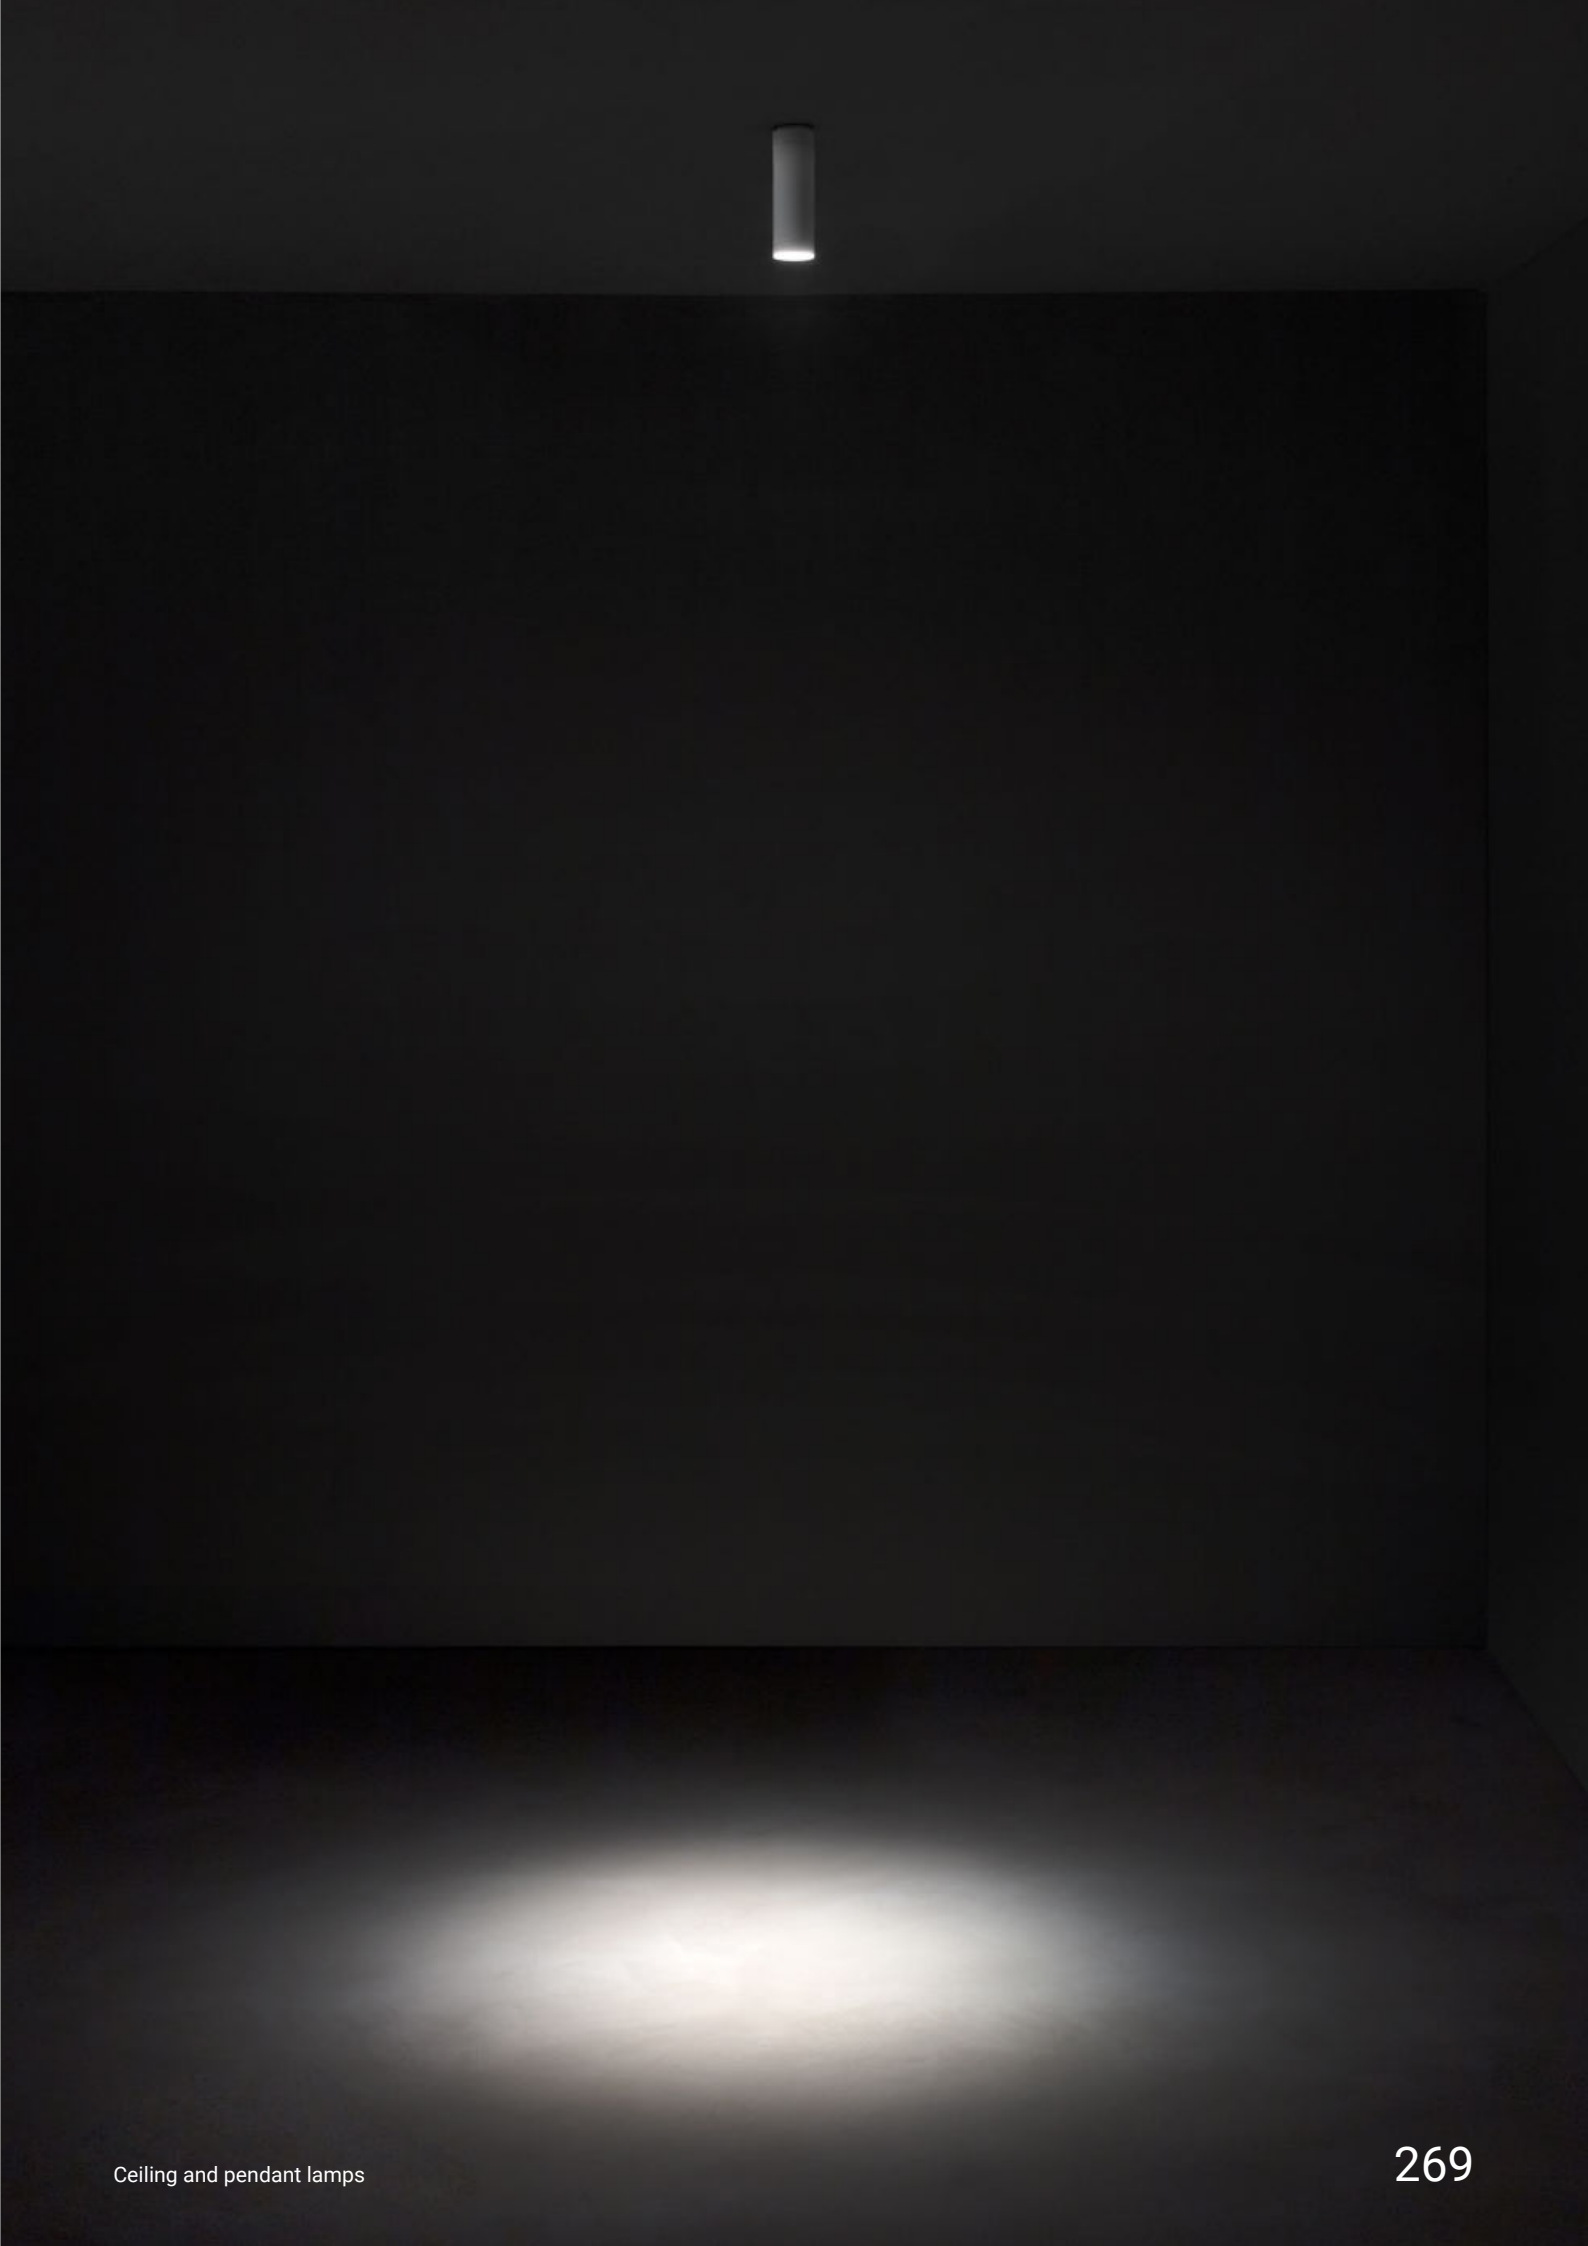

Vast range

Pound_S is available in four versions: ceiling-mounted, ceiling-mounted with variable focus. Equipped with on board driver and available in white and black finishes, the Pound_S models free you from the track system whilst maintaining the advantages of the Pound range. The latest innovation is the Pound_Wall which has been designed to adapt to any type of situation. It makes use of the new joint that allows the product to be rotated on the vertical axis by 90° and on the horizontal axis by 350°.



Dynamic ceiling light fixture

The punctual illumination from above of Pound_S lets you emphasize works displayed on a wall or installations below in the best way. The versatility of the Pound_S Focus models, with adjustable focus.


Lenticular ceiling light fixture

To guarantee the maximum possible focus control combined with top quality lighting, Pound_S Focus integrates a special optics system consisting of a movable glass lens. The sliding feature allows the source beam to be varied, going from extremely narrow angles to more diffused emission. The graduated focus-on-board ring nut allows the opening of the beam to be calibrated from 15° to 60°, thus making the pointing operation easy and precise. The simplified focus locking system lets you obtain an opening that corresponds accurately to the gradient indicated along the ring nut.






Pound_S | Projectors | 190-250 V AC | arrayLED 6,5 W DC - 8,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-----------|----------------|
| White | 82003 | M 2700 | 621 - 478 | 15 Spot (17°) |
| Black | 82004 | W 3000 | 665 - 512 | 30 Flood (25°) |
| | | N 4000 | 718 - 554 | 60 Flood (42°) |

Optics & accessories Pag. 274/275


Pound_S | Projectors | 190-250 V AC | arrayLED 17,5 W DC - 19,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 82005 | M 2700 | 2124 - 1512 | 15 Spot (19°) |
| Black | 82006 | W 3000 | 2224 - 1584 | 30 Flood (36°) |
| | | N 4000 | 2390 - 1702 | 60 W.Flood (63°) |

Optics & accessories Pag. 274/275


Pound_S | Projectors | 190-250 V AC | arrayLED 26 W DC - 29 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|-------------|------------------|
| White | 82007 | M 2700 | 3220 - 2570 | 15 Spot (17°) |
| Black | 82008 | W 3000 | 3373 - 2690 | 30 Flood (25°) |
| | | N 4000 | 3626 - 2892 | 60 W.Flood (57°) |

Optics & accessories Pag. 274/275


Pound_S Focus | Projectors | 190-250 V AC | arrayLED 6,5 W DC - 8,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|--------------|--------------------|
| White | 82063 | M 2700 | 621 - 0n req | 85 Focus 15° - 60° |
| Black | 82064 | W 3000 | 665 - 0n req | |
| | | N 4000 | 718 - 0n req | |

Optics & accessories Pag. 274/275


Pound_S Focus | Projectors | 190-250 V AC | arrayLED 17,5 W DC - 19,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 82065 | M 2700 | 2124 - 0n req | 85 Focus 15° - 60° |
| Black | 82066 | W 3000 | 2224 - 0n req | |
| | | N 4000 | 2390 - 0n req | |

Optics & accessories Pag. 274/275


Pound_S Focus | Projectors | 190-250 V AC | arrayLED 24,5 W DC - 27,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------------|
| White | 82067 | M 2700 | 3033 - 0n req | 85 Focus 15° - 60° |
| Black | 82068 | W 3000 | 3177 - 0n req | |
| | | N 4000 | 3416 - 0n req | |

Optics & accessories Pag. 274/275


Pound_Wall | Projectors | 190-250 V AC | arrayLED 6,5 W DC - 8,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|-----------|-----------------------|
| White | 81995 | M 2700 | 621 - 478 | 15 Spot (17°) |
| Black | 81996 | W 3000 | 665 - 512 | 30 Flood (25°) |
| | | N 4000 | 718 - 554 | 60 Flood (42°) |

Optics & accessories Pag. 274/275


Pound_Wall | Projectors | 190-250 V AC | arrayLED 17,5 W DC - 19,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|-------------|-------------------------|
| White | 81997 | M 2700 | 2124 - 1512 | 15 Spot (19°) |
| Black | 81998 | W 3000 | 2224 - 1584 | 30 Flood (36°) |
| | | N 4000 | 2390 - 1702 | 60 W.Flood (63°) |


Optics & accessories Pag. 274/275

Pound_Wall | Projectors | 190-250 V AC | arrayLED 26 W DC - 29 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|-------------|-------------------------|
| White | 81999 | M 2700 | 3220 - 2570 | 15 Spot (17°) |
| Black | 82000 | W 3000 | 3373 - 2690 | 30 Flood (25°) |
| | | N 4000 | 3626 - 2892 | 60 W.Flood (57°) |


Pound_Wall Focus | Projectors | 190-250 V AC | arrayLED 6,5 W DC - 8,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|--------------|---------------------------|
| White | 82055 | M 2700 | 621 - On req | 85 Focus 15° - 60° |
| Black | 82056 | W 3000 | 665 - On req | |
| | | N 4000 | 718 - On req | |

Optics & accessories Pag. 274/275


Pound_Wall Focus | Projectors | 190-250 V AC | arrayLED 17,5 W DC - 19,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|---------------|---------------------------|
| White | 82057 | M 2700 | 2124 - On req | 85 Focus 15° - 60° |
| Black | 82058 | W 3000 | 2224 - On req | |
| | | N 4000 | 2390 - On req | |

Optics & accessories Pag. 274/275

Pound_Wall Focus | Projectors | 190-250 V AC | arrayLED 24,5 W DC - 27,5 W AC



| Balance - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|---------------|---------------|---------------------------|
| White | 82059 | M 2700 | 3033 - On req | 85 Focus 15° - 60° |
| Black | 82060 | W 3000 | 3177 - On req | |
| | | N 4000 | 3416 - On req | |

Optics

description

99805 Spot

suitable for: Pound_S 6,5W / Pound_Wall 6,5W



description

99806 Flood

suitable for: Pound_S 6,5W / Pound_Wall 6,5W



description

99807 Wide Flood

suitable for: Pound_S 6,5W / Pound_Wall 6,5W



description

99827 Spot

suitable for: Pound_S 17,5W / Pound_Wall 17,5W



description

99828 Flood

suitable for: Pound_S 17,5W / Pound_Wall 17,5W



description

99829 Wide Flood

suitable for: Pound_S 17,5W / Pound_Wall 17,5W



description

99808 Spot

suitable for: Pound_S 26W / Pound_Wall 26W



description

99809 Flood

suitable for: Pound_S 26W / Pound_Wall 26W















description

99810 Wide Flood

suitable for: Pound_S 26W / Pound_Wall 26W

Accessories

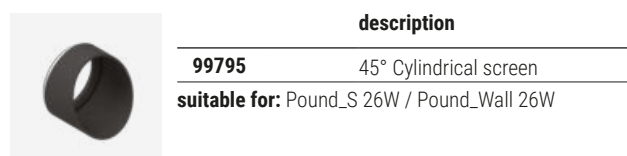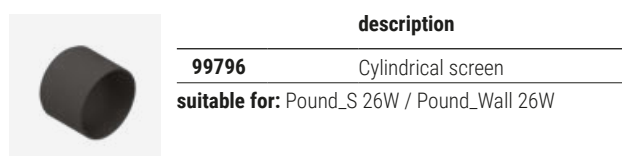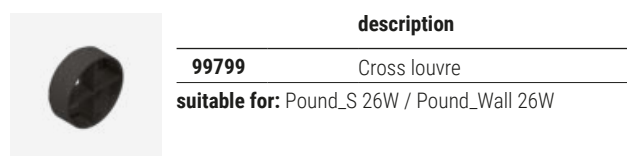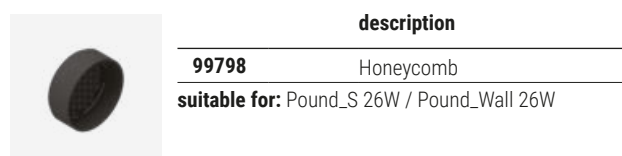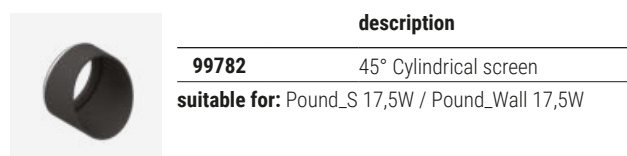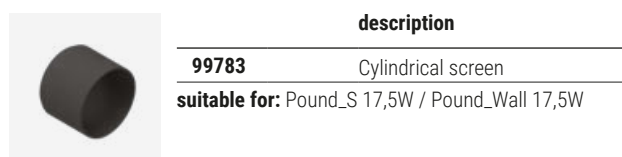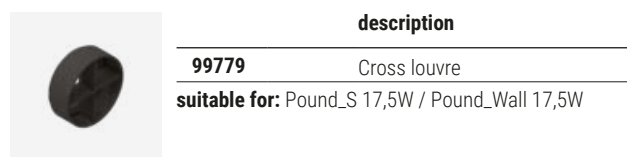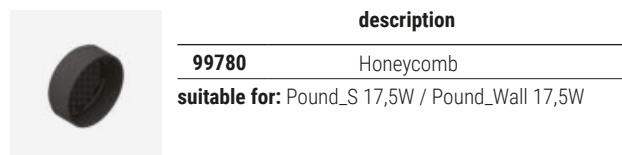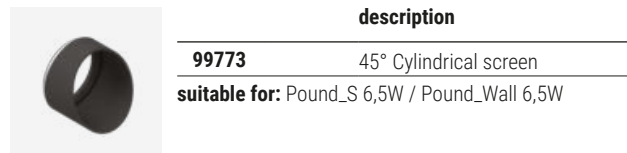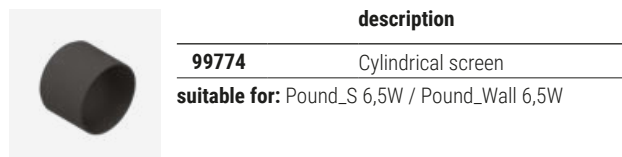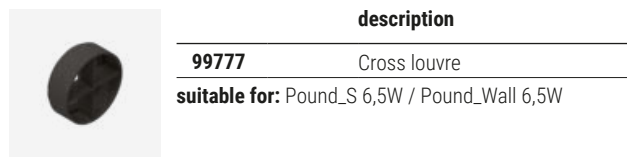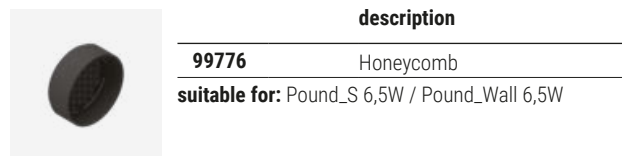




cell

Materials
Aluminium body

Cell_S | Ceiling lights | 190-250 V AC | 3 x powerLEDs | 5 W DC - 6 W AC




CRI 80/92

| | | |
|-------|----|--------------|
| Wh | Bk | 65190 |
| Black | | 65191 |

| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | - | 472 - 382 | 15 Spot (12°) |
| W | 3000 | - | 518 - 439 | 30 Flood (33°) |
| N | 4000 | 681 - 568 | - | 45 W.Flood(49°) |

RTG 65190W30 / 65190W45 / 65191W30 / 65191W45

Cell_S | Ceiling lights | 190-250 V AC | 6 x powerLEDs | 9 W DC - 11 W AC




CRI 80/92

| | | |
|-------|----|--------------|
| Wh | Bk | 65192 |
| Black | | 65193 |

| | Cct | lm S - D CRI 80 | lm S - D CRI 92 | Optic |
|----------|------|-----------------|-----------------|------------------------|
| M | 2700 | - | 944 - 796 | 15 Spot (13°) |
| W | 3000 | - | 1036 - 907 | 30 Flood (34°) |
| N | 4000 | 1362 - 1181 | - | 45 W.Flood(49°) |


Cell_SWw | Ceiling lights | 190-250 V AC | 3 x powerLEDs | 9,5 W DC - 10,5 W AC



CRI 92

| | Cct | lm S - D | Optic |
|-------|--------------|--------------------------|--------------------|
| White | 82603 | M 2700 1026 - 481 | 07 Asymm. - |
| Black | 82604 | W 3000 1101 - 512 | |
| | | N 4000 1188 - 558 | |

Cell_SWw | Ceiling lights | 190-250 V AC | 6 x powerLEDs | 19 W DC - 21 W AC



CRI 92

| | Cct | lm S - D | Optic |
|-------|--------------|---------------------------|--------------------|
| White | 82605 | M 2700 2052 - 926 | 07 Asymm. - |
| Black | 82606 | W 3000 2202 - 993 | |
| | | N 4000 2376 - 1073 | |



Driver on board in only 86 mm



baton

Materials
Aluminium body



baton lighting concept




| | _P Pendant | _R Round | _Q Square |
|----------------|------------------------------------|--|--|
| 2W | - | Ø 30 - H 30 mm | 30x30 mm |
| 3W | Ø 32 - H 350 mm Ø 32 - H 500 mm | - | - |
| 7,3W | Ø 60 - H 250 mm Ø 60 - H 400 mm | Ø 80 - H 120 mm | 80x120 mm 80x200 mm |
| Finish | White Bk White Au Black Au | White White Bk White Au | White White Bk White Au |
| CRI 92 | 3000K - 4000K | 2W 3000K - 4000K - 5000K 3000K - 4000K | 2W 3000K - 4000K - 5000K 3000K - 4000K |
| Optics | Wide Flood - Extra Wide Flood | Narrow Spot - Flood Wide Flood - Extra Wide Flood | Narrow Spot - Flood Wide Flood - Extra Wide Flood |
| Control | - | 2W On/Off | 2W On/Off |
| Control | On/Off | 7,3W On/Off | 7,3W On/Off |

Controlled emission

Baton creates high contrast light effects. The lens integrated in the body creates a light beam characterised by clear-cut edges capable of casting any lit subject.

The receded position of the LED makes this suspension extremely comfortable to view, perfect, for example, for, lighting cafeteria tables and counters.

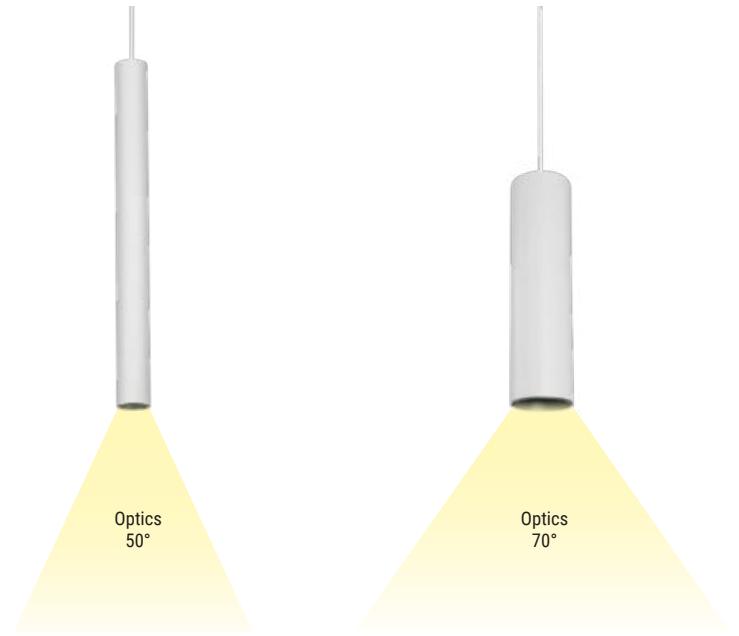




Range

Though extremely minimal is used alone, Baton can become incredibly scenographic if combined in multiple composition playing with the various available shapes.




Finishes

The lighting bodies, painted with white matt or black matt finish powders, perfectly merge with the architectural space. The internal of the optical unit characterises the product with a slight colour accent, declined in matt black and gold black.

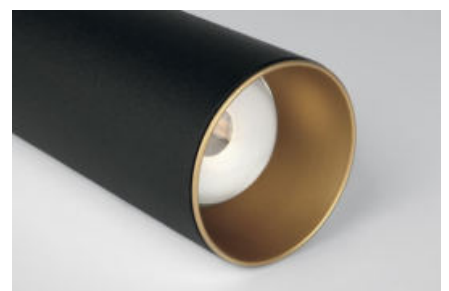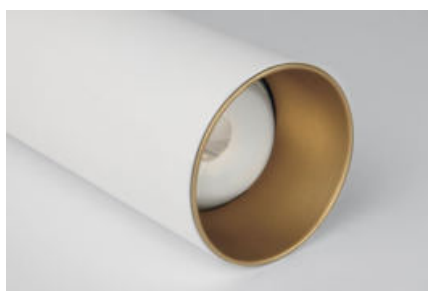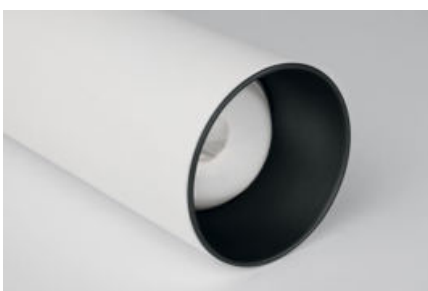


Baton_P | Pendant Luminaires | 220-240 V AC | arrayLED 3 W DC - 5 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|--------|-----------|----------------|
| White Bk 64785 | W 3000 | 325 - 250 | 50 Flood (55°) |
| White Au 64786 | N 4000 | 351 - 250 | |
| Black Au 64787 | | | |


RTG 64787W50

Baton_P | Pendant Luminaires | 220-240 V AC | arrayLED 3 W DC - 5 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|--------|-----------|----------------|
| White Bk 64782 | W 3000 | 325 - 250 | 50 Flood (55°) |
| White Au 64783 | N 4000 | 351 - 250 | |
| Black Au 64784 | | | |


Baton_P | Pendant Luminaires | 220-240 V AC | arrayLED 7,3 W DC - 9 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|--------|------------|----------------|
| White Bk 64742 | W 3000 | 988 - 690 | 70 Flood (70°) |
| White Au 64741 | N 4000 | 1058 - 720 | |
| Black Au 64754 | | | |

RTG 64742W70

Baton_P | Pendant Luminaires | 220-240 V AC | arrayLED 7,3 W DC - 9 W AC



| CRI 80 | Cct | lm S - D | Optic |
|-----------------------|--------|------------|----------------|
| White Bk 64744 | W 3000 | 988 - 690 | 70 Flood (70°) |
| White Au 64743 | N 4000 | 1058 - 720 | |
| Black Au 64755 | | | |

Baton_R | Ceiling luminaires | powerLED 2 W DC 630 mA



30 |

Ø30

| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-----------|--------------------|
| White 91328 | W 3000 | 233 - 183 | 10 Flood (34°) |
| | N 4000 | 249 - 195 | 30 Flood (44°) |
| | C 5000 | 266 - 223 | 50 W.Flood (72°) |
| | | | 70 E.W.Flood(82°) |
| | | | 12 E.W.Flood(113°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |

Baton_Q | Ceiling luminaires | powerLED 2 W DC 630 mA



30 |

□30

| CRI 80 | Cct | lm S - D | Optic |
|-------------|--------|-----------|--------------------|
| White 91330 | W 3000 | 233 - 183 | 10 Flood (34°) |
| | N 4000 | 249 - 195 | 30 Flood (44°) |
| | C 5000 | 266 - 223 | 50 W.Flood (72°) |
| | | | 70 E.W.Flood(82°) |
| | | | 12 E.W.Flood(113°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |

Baton_R | Ceiling Lights | 220-240 V AC | 7,3 W DC - 9 W AC



Ø 80 |

120 |

| CRI 80 | Cct | lm S - D | Optic |
|----------------|--------|------------|------------------|
| White 64747 | W 3000 | 988 - 745 | 60 W.Flood (72°) |
| White Bk 64749 | N 4000 | 1058 - 780 | |
| White Au 64738 | | | |

RTG 64747W60

Baton_Q | Ceiling Lights | 220-240 V AC | 7,3 W DC - 9 W AC



Ø 80 |

L |


| CRI 80 - 120mm | Cct | lm S - D | Optic |
|----------------|--------|------------|------------------|
| White 64756 | W 3000 | 988 - 745 | 60 W.Flood (72°) |
| White Bk 64745 | N 4000 | 1058 - 780 | |
| White Au 64739 | | | |

| CRI 80 - 200mm | Cct | lm S - D | Optic |
|----------------|--------|------------|------------------|
| White 64757 | W 3000 | 988 - 745 | 60 W.Flood (72°) |
| White Bk 64746 | N 4000 | 1058 - 780 | |
| White Au 64740 | | | |









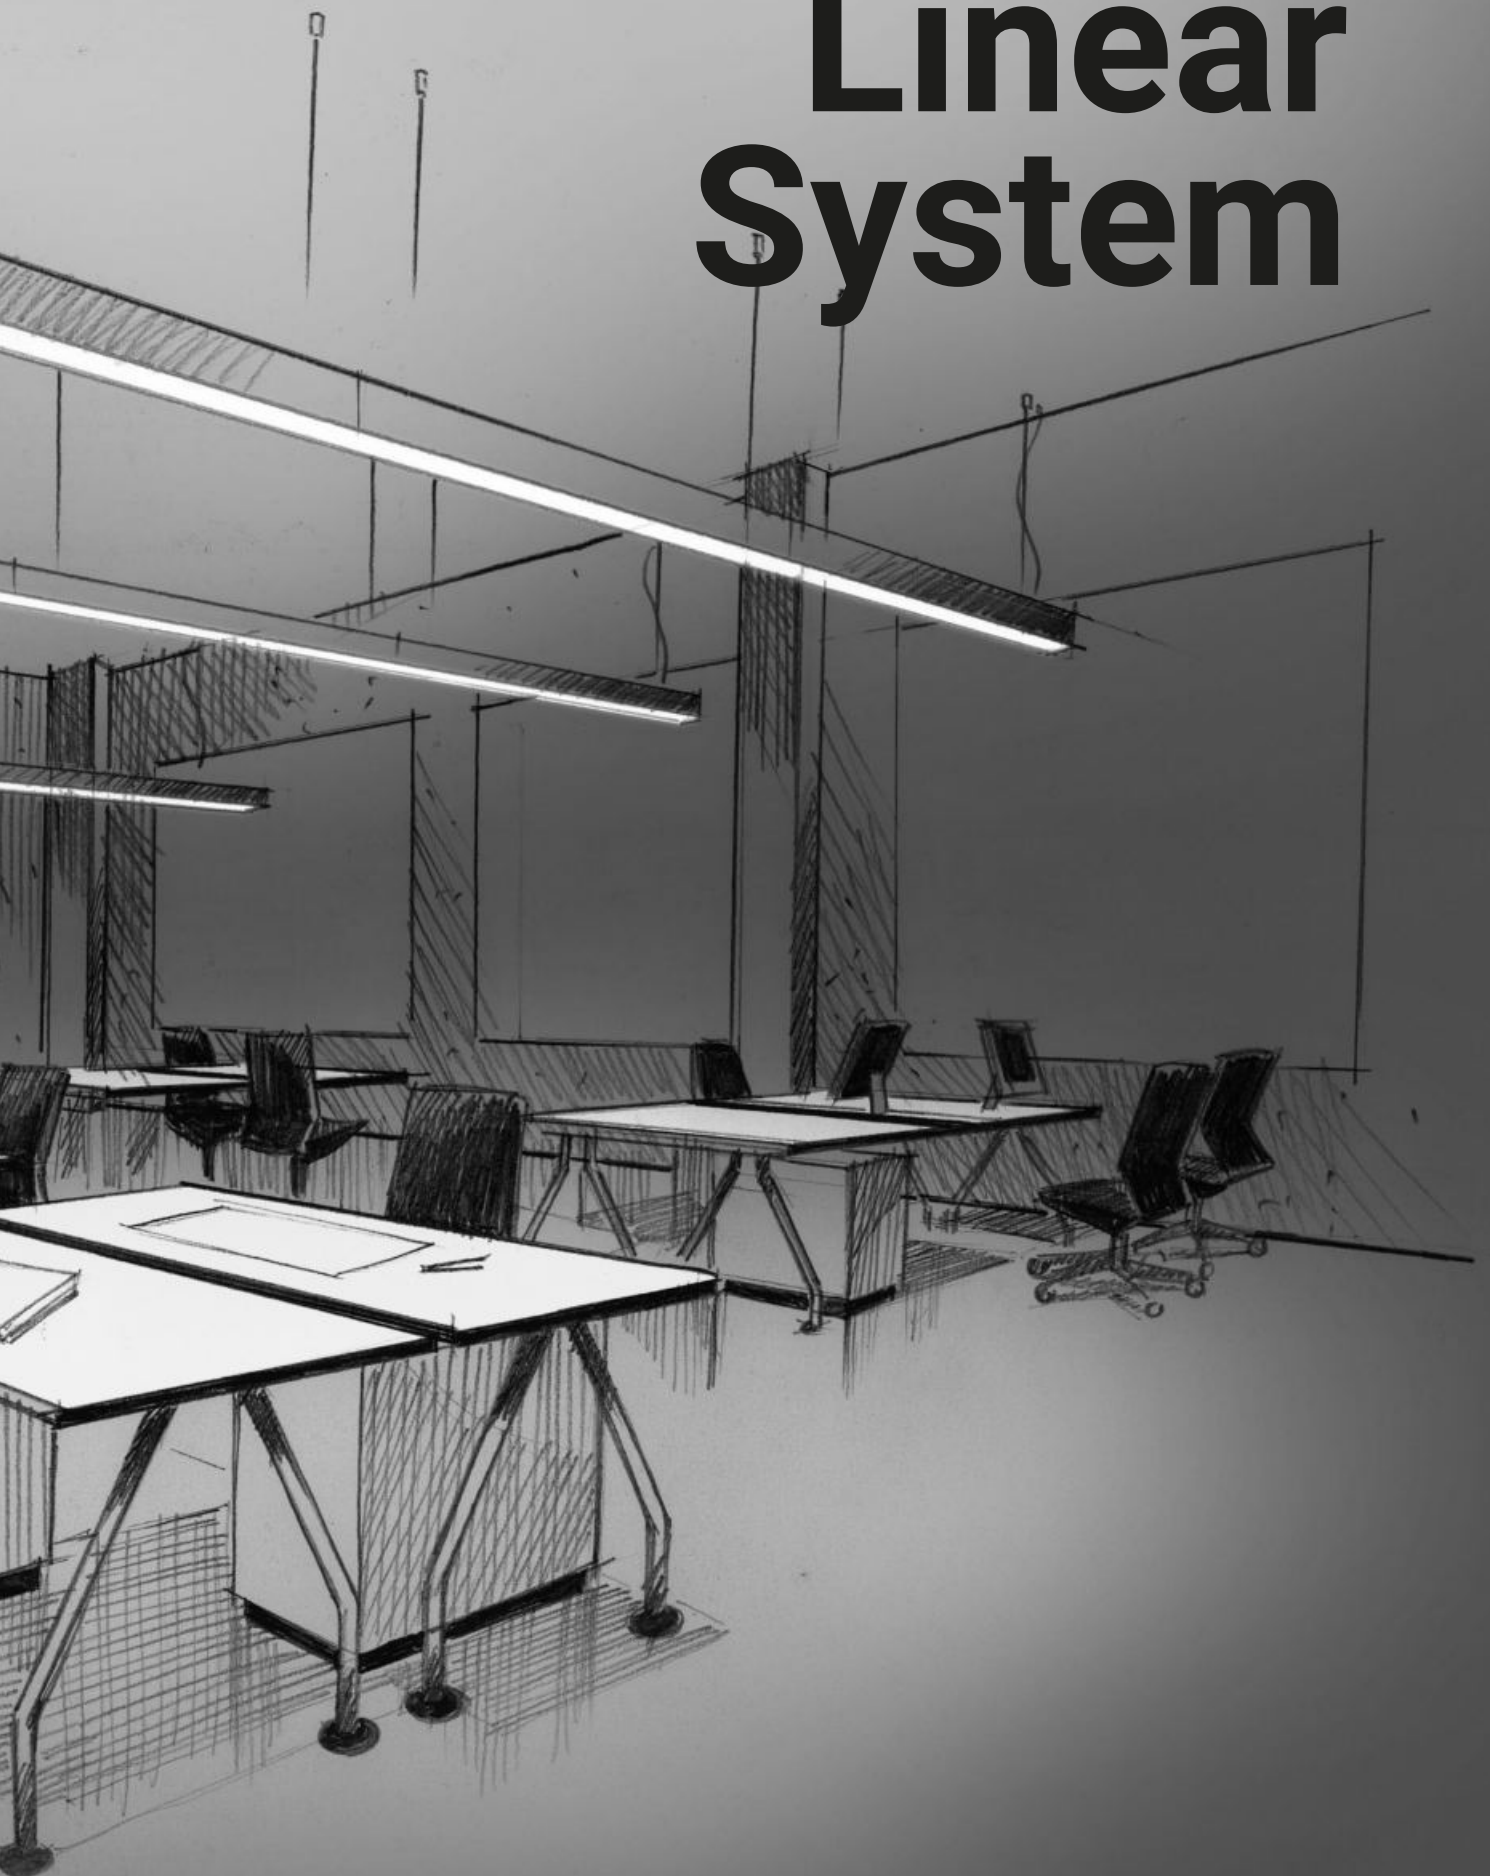












RTG 64756W60



Linear System



linear system range index

| | | | | | | | |
|---------------|--|--|--|--|--|--|--|
| Modus | Modus_M | Modus_M Complete | | | | | |
| |  294 |  298 | | | | | |
| Rollip | Rollip PRO | RollipPRO_C | Rollip35_MC | Rollip70_MC | Rollip35_C | Rollip70_C | Rollip35_MS |
| |  304 |  305 |  308 |  310 |  312 |  312 |  314 |
| | Rollip60_MS | Rollip35_MP | Rollip7035_MP | Rollip60_MP | Rollip35_PC | Rollip7035_PC | Rollip60_PC |
| |  315 |  316 |  318 |  320 |  322 |  322 |  323 |
| | Clear | Clear_MP | | | | | |
| | |  327 | | | | | |
| | Mini_Albatros | Mini Albatros | Mini Albatros_M | | | | |
| | |  334 |  334 | | | | |
| | Trail | Trail | | | | | |
| | |  338 | | | | | |
| | Ink | Ink | | | | | |
| | |  346 | | | | | |

Fylo+

Fylo+ Direct



365

Fylo+ Recessed



366

Fylo+ Surface



368

Archicove

Archicove



374

Ice-Cut

Ice-Cut




378

Ice-Cut_F



379

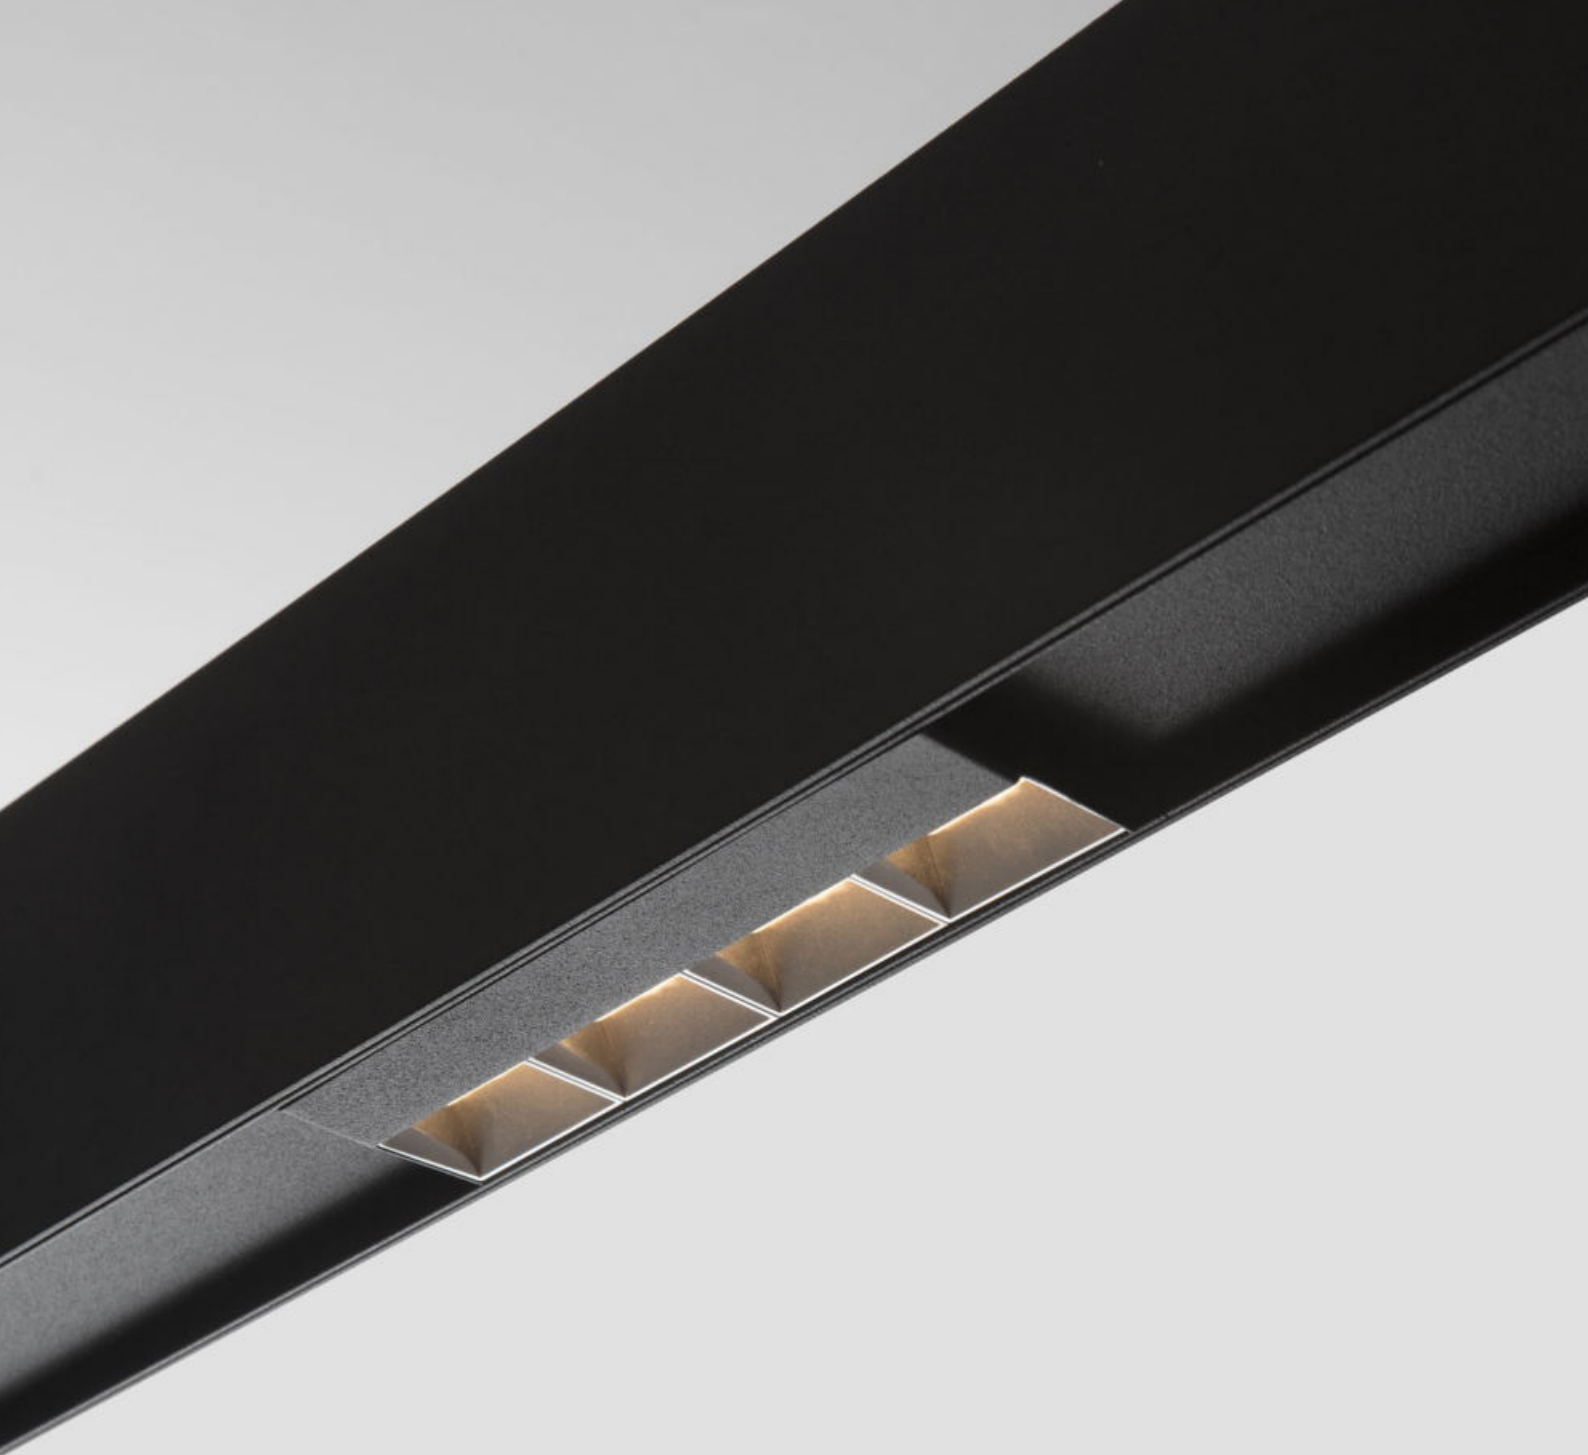

modus

Materials

Aluminium profile

Polycarbonate diffuser

Aluminium accessories





modus

design Arch. Jacopo Acciaro

Extended and versatile system

Modus is a modular and implementable suspension system. Modus is an aluminium electrified track, available in three neutral white, black and burnished finishes and with a vast range of modules that provide great freedom of composition. The system includes different elements and numerous accessories, each dedicated to a specific lighting scenario or a precise operating environment. The great ease of use is joined by the speed of integration and variation of the elements, all easily press-fitted into the track. The extreme versatility of Modus makes it suitable for various spaces such as offices, retail environments, museums or even modern residential settings. Modus is a system conceived and designed to simplify and streamline any technical lighting creation, no matter how complex.

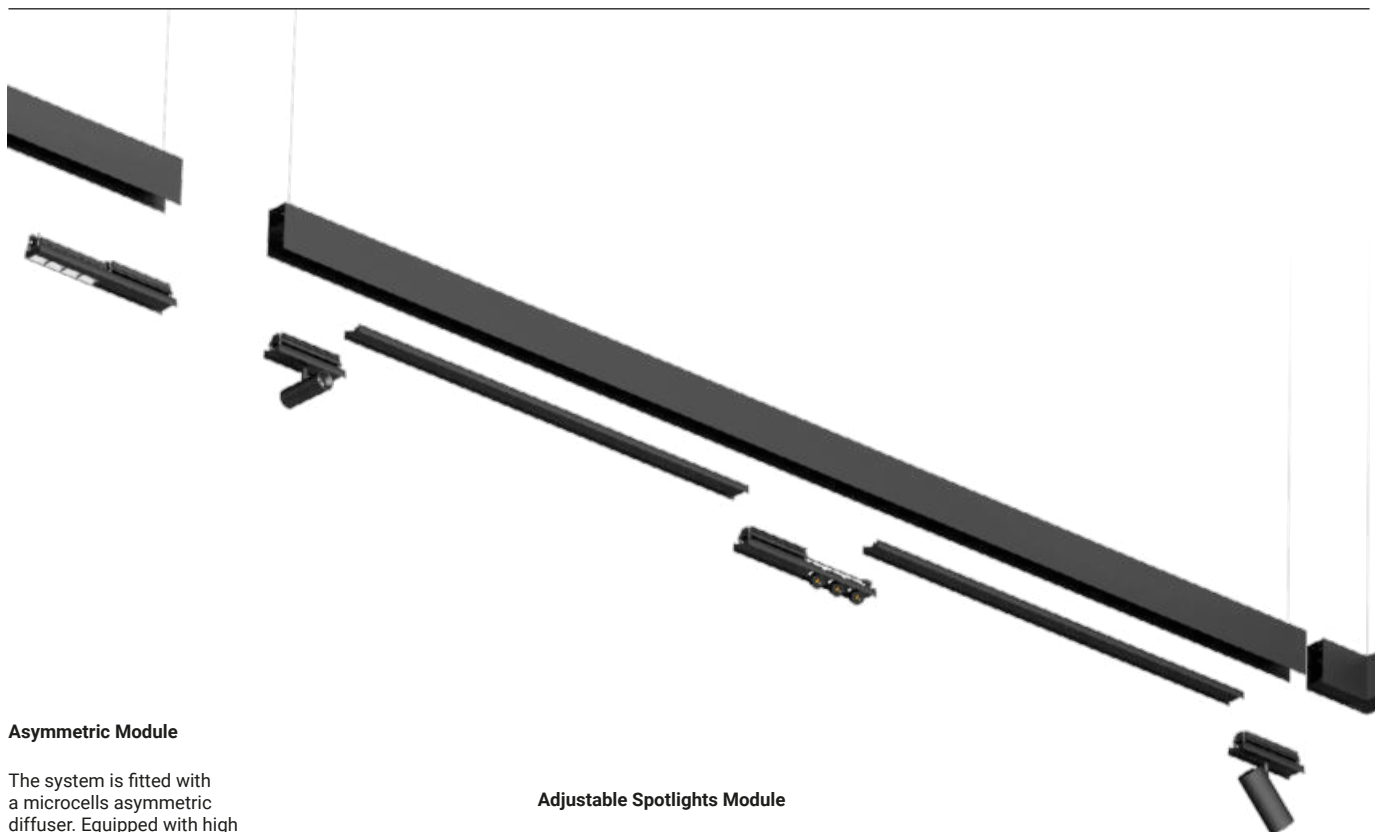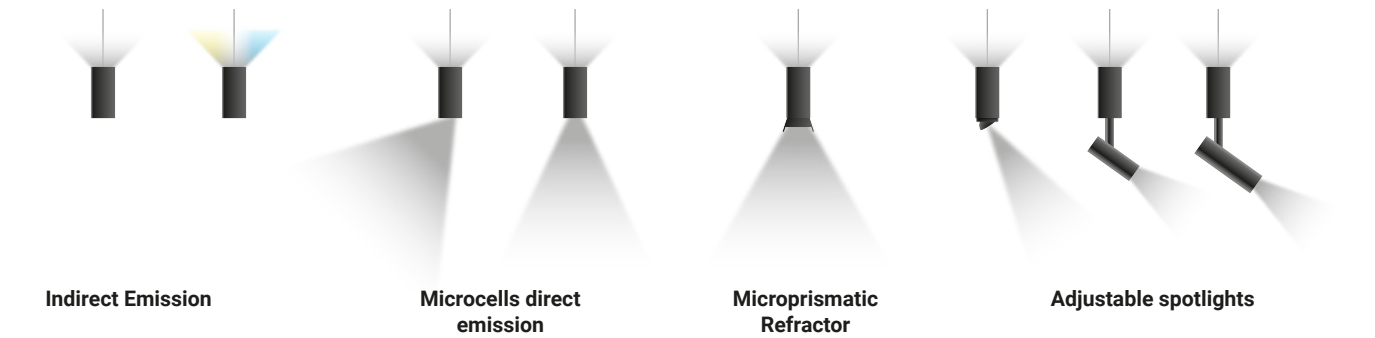


Asymmetric Module

The system is fitted with a microcells asymmetric diffuser. Equipped with high performance LEDs, the module guarantees wide uniformity of the illuminated walls, increasing the perception of the spaces lit by the system.

Adjustable Spotlights Module

Equipped with adjustable spotlights, the system defines not only office environments, but also multi-function areas that require accent lighting. In addition to the 2 different 7 and 12 watt protectors, the system also includes the optus_EX microprojectors that disappear inside the extruded profile thanks to the extremely reduced dimensions.



Visual comfort and wellness

Modus is a system optimised for Human Centric Lighting, conceived to improve time spent in work and study spaces based on the principles of the Circadian rhythm. The product was conceived and designed to provide extremely high visual and dwelling comfort for the residents, increasing wellness and improving productivity. On the upper part of the profile, a particular optics system was designed that allows a 150° opening of the light beam. The two mono-chromatic colour temperatures (3500°K or 4000K°) are joined by the Dynamic White technology (from 2700°K to 5000°K) for indirect ambient lighting intended to favour a long stay in the operational spaces. It is a flexible and completely adaptive system.




2700 K

5000 K

Wide range of accessories

Modus is a linear system made up of various lighting elements such as adjustable spotlights and projectors, modules with UGR<19 anti-glare cells, wall-washers (a single module lets you direct the asymmetric beam to the right or left) and linear modules with UGR<19. The latter are also available stand-alone in two lengths (1200 and 2400 mm). The vast range and the quick connection system facilitate the operations of replacing the fixtures or changing the lighting scenery. You can change accessories and scenery with a simple gesture, plus the system has the latest generation DALI protocol.

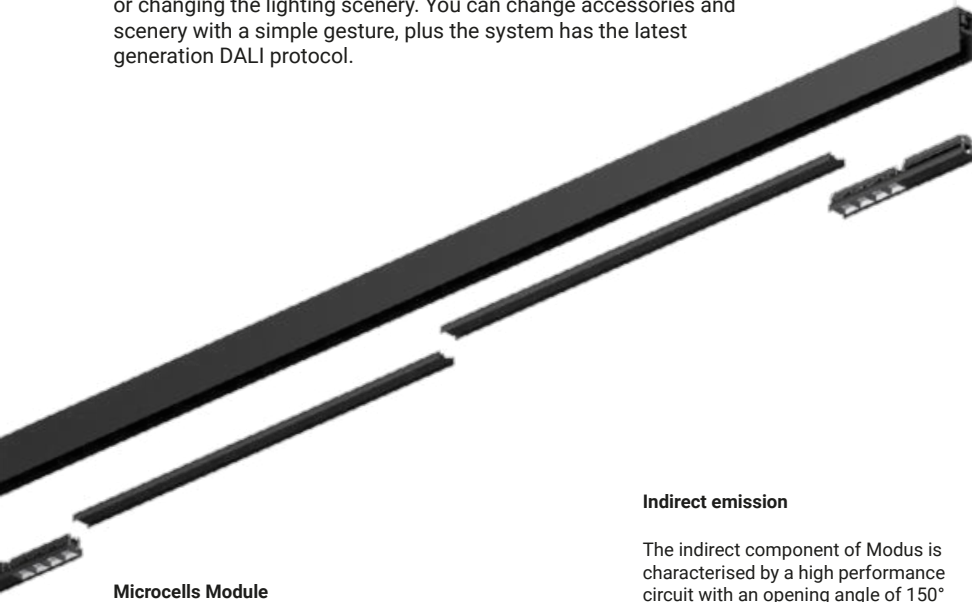

Microcells Module

The microcells direct light system with set-back optics (darklight) was designed to distribute the light beam in a clear and uniform way over the lit surface, ensuring significant comfort (UGR<19) without invading the surrounding work areas.



Indirect emission

The indirect component of Modus is characterised by a high performance circuit with an opening angle of 150° through the use of micro-optics distributed in the upper part of the chassis. Available with white light or with Dynamic white technology, Modus distributes the light in a uniform way over the entire surface of the ceiling, increasing visual comfort in the entire environment.



Microprismatic linear module

The module is available in 3 different dimensions to cover multiple design needs. It has a high performance LED circuit and guarantees a light distribution in a uniform way and with low glare levels (UGR<19) thanks to an optics system made up of the overlapping of microcells, batwing filter and microprismatic refractor.




Modus_M Micropismatic





Main lighting parameters

| | | |
|------------------------|--------|--------|
| UGR | <19 | - |
| Em Task light | >500lx | U0>0,6 |
| Em Area circ | >300lx | U0>0,4 |
| E. sfondo | >100lx | U0>0,1 |
| E. pareti | >75lx | U0>0,1 |
| E. soffitto | >50lx | U0>0,1 |
| E. cil. (120cm) | >150lx | U0>0,1 |
| E. cil. (160cm) | >75lx | U0>0,1 |


Check conducted on a "typical" office with dimensions 10x10 m (100mq), in a range from h270cm to h350cm. The values for intermediate situation at h300cm were indicated. Fixture placed at 230cm. Compliant reflection coefficients (0.7 ceiling, 0.5 wall and 0.2 floor). 160 x 360cm desk with 6 work stations.



Modus_M Indirect

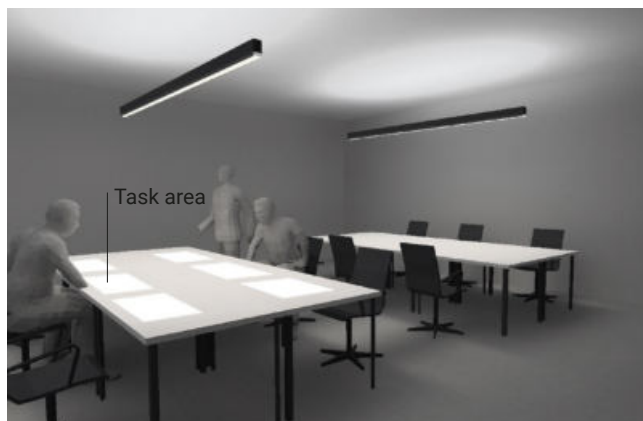

Modus_M Microprismatic Direct

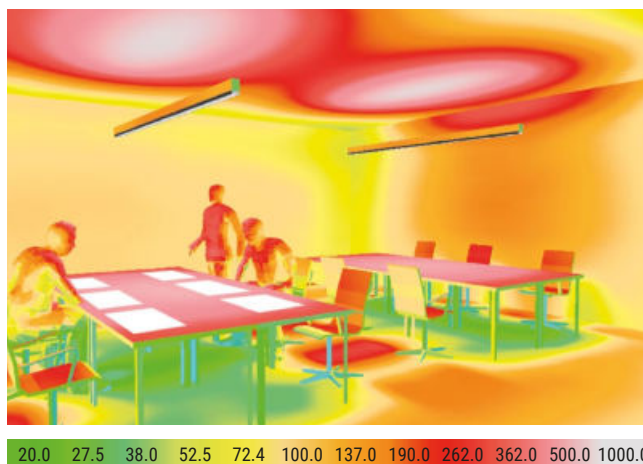


Modus_M Cell




Main lighting parameters

| | | |
|------------------------|--------|--------|
| UGR | <19 | - |
| Em Task light | >500lx | U0>0,6 |
| Em Area circ | >300lx | U0>0,4 |
| E. sfondo | >100lx | U0>0,1 |
| E. pareti | >75lx | U0>0,1 |
| E. soffitto | >50lx | U0>0,1 |
| E. cil. (120cm) | >50lx | U0>0,1 |
| E. cil. (160cm) | >50lx | U0>0,1 |


Check conducted on a "typical" office with dimensions 10x10 m (100mq), in a range from h270cm to h350cm. The values for intermediate situation at h300cm were indicated. Fixture placed at 230cm. Compliant reflection coefficients (0.7 ceiling, 0.5 wall and 0.2 floor). 160 x 360cm desk with 6 work stations.



Modus_M Indirect



Modus_M Cell Direct

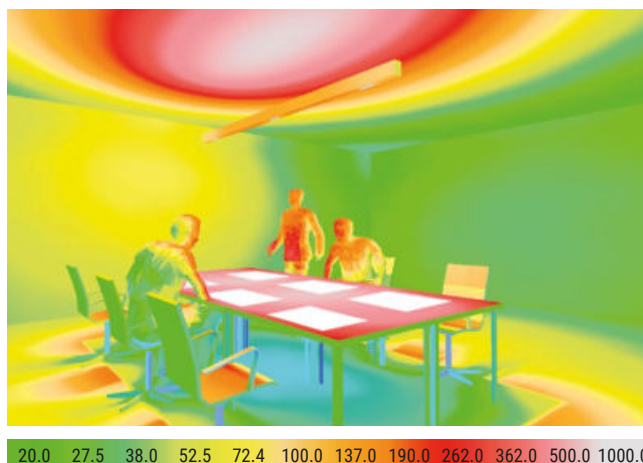



White - Black



White - White




Black - Black



Burnished - Black

Modus_M Master | Lines | 190-250 V AC | topLED




| 1200 mm - 22W DC - 24W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83712 | W 3500 | 3020 - 2421 | 00 General - |
| Black 83736 | N 4000 | 3175 - 2542 | |
| Burnished 83782 | | | |

| 1500 mm - 29W DC - 31W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83713 | W 3500 | 4027 - 3328 | 00 General - |
| Black 83737 | N 4000 | 4234 - 3389 | |
| Burnished 83783 | | | |

| 2400 mm - 47W DC - 51 W AC | CRI92 Cct | lm S - D | Optic |
|----------------------------|-----------|-------------|--------------|
| White 83714 | W 3500 | 6544 - 5259 | 00 General - |
| Black 83738 | N 4000 | 6880 - 5525 | |
| Burnished 83784 | | | |


| 3000 mm - 62W DC - 67W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83715 | W 3500 | 8558 - 6876 | 00 General - |
| Black 83739 | N 4000 | 8996 - 7220 | |
| Burnished 83785 | | | |

Modus_M Corner | Lines



| 150x150 mm | |
|-----------------------|--|
| White 83733 | |
| Black 83757 | |
| Burn Bk 83790 | |
| White Bk 83221 | |
| Black Wh 83222 | |

Modus_M Slave | Lines | 190-250 V AC | topLED





| 1200 mm - 22W DC - 24W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83716 | W 3500 | 3020 - 2421 | 00 General - |
| Black 83740 | N 4000 | 3175 - 2542 | |
| Burnished 83786 | | | |

| 1500 mm - 29W DC - 31W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83717 | W 3500 | 4027 - 3328 | 00 General - |
| Black 83741 | N 4000 | 4234 - 3389 | |
| Burnished 83787 | | | |

| 2400 mm - 47W DC - 51W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83718 | W 3500 | 6544 - 5259 | 00 General - |
| Black 83742 | N 4000 | 6880 - 5525 | |
| Burnished 83788 | | | |

| 3000 mm - 62W DC - 67W AC | CRI92 Cct | lm S - D | Optic |
|---------------------------|-----------|-------------|--------------|
| White 83719 | W 3500 | 8558 - 6876 | 00 General - |
| Black 83743 | N 4000 | 8996 - 7220 | |
| Burnished 83789 | | | |


Modus_M | Cap kits

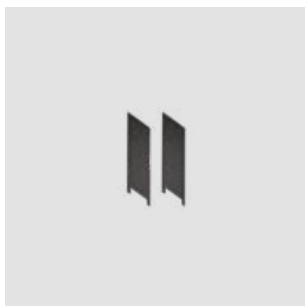

| 2 x | |
|------------------------|--|
| White 83108 | |
| Black 83109 | |
| Burnished 83110 | |


Maximum power connectable on a 10-metre line (accessories).

Master 1200 mm - 1500 mm Maximum 90 W
 Master 2400 mm - 3000 mm Maximum 140 W



max 10 m

Modus_M Master Dynamic-White | Lines | 190-250 V AC | topLED




| 1200 mm - 20W DC - 23W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83791 | D Dynamic | On Req | 00 General - |
| Black 83815 | | | |
| Burnished 83842 | | | |

| 1500 mm - 27W DC - 30W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83792 | D Dynamic | On Req | 00 General - |
| Black 83816 | | | |
| Burnished 83843 | | | |

| 2400 mm - 43W DC - 48W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83793 | D Dynamic | On Req | 00 General - |
| Black 83817 | | | |
| Burnished 83844 | | | |

| 3000 mm - 55W DC - 60W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83794 | D Dynamic | On Req | 00 General - |
| Black 83818 | | | |
| Burnished 83845 | | | |

Modus_M Slave Dynamic-White | Lines | 190-250 V AC | topLED




| 1200 mm - 20W DC - 23W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83795 | D Dynamic | On Req | 00 General - |
| Black 83819 | | | |
| Burnished 83846 | | | |

| 1500 mm - 27W DC - 30W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83796 | D Dynamic | On Req | 00 General - |
| Black 83820 | | | |
| Burnished 83847 | | | |

| 2400 mm - 43W DC - 48W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83797 | D Dynamic | On Req | 00 General - |
| Black 83821 | | | |
| Burnished 83848 | | | |



| 3000 mm - 55W DC - 60W AC | CRI80 Cct | Im S - D | Optic |
|---------------------------|-----------|----------|--------------|
| White 83798 | D Dynamic | On Req | 00 General - |
| Black 83822 | | | |
| Burnished 83849 | | | |

Modus_M Corner | Lines



| 150x150 mm |
|-----------------------|
| White 83733 |
| Black 83757 |
| Burn Bk 83790 |
| White Bk 83221 |
| Black Wh 83222 |

Modus_M | Cap kits



| 2 x |
|------------------------|
| White 83108 |
| Black 83109 |
| Burnished 83110 |


Maximum power connectable on a 10-metre line (accessories).

Master 1200 mm - 1500 mm Maximum 90 W
 Master 2400 mm - 3000 mm Maximum 140 W



max 10 m

Modus_M Microprismatic | Lines | 24 V DC | topLED




| 900 mm - 19W DC - CRI 92 | | Cct | lm S - D | Optic |
|--------------------------|--------------|--------|-------------|------------------|
| White | 83722 | W 3500 | 2362 - 1407 | 96 Batwing (73°) |
| Black | 83746 | N 4000 | 2484 - 1480 | |
| Allum. | 83760 | | | |

| 1200 mm - 24W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|------------------|
| White | 83723 | W 3500 | 3150 - 1877 | 96 Batwing (73°) |
| Black | 83747 | N 4000 | 3311 - 1973 | |
| Allum. | 83761 | | | |


| 1500 mm - 30W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|------------------|
| White | 83724 | W 3500 | 3937 - 2345 | 96 Batwing (73°) |
| Black | 83748 | N 4000 | 4139 - 2466 | |
| Allum. | 83762 | | | |

Modus_M Projectors | Lines | 24 V DC | powerLEDs 7W DC




| CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-----------|------------------|
| White 83731 | W 3500 | 569 - 478 | 10 Spot (20°) |
| Black 83755 | N 4000 | 614 - 515 | 30 Flood (31°) |
| | | | 45 W.Flood (47°) |

Modus_M Optus_EX | Lines | 24 V DC | powerLEDs | 5W DC




| Efficiency - CRI 92 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-----------|----------------|
| White | 83732 | W 3500 | 522 - 378 | 20 Spot (21°) |
| Black | 83756 | N 4000 | 561 - 406 | 35 Flood (32°) |

Modus_M Projectors | Lines | 24 V DC | arrayLED 12W DC




| CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|------------|----------------|
| White 83730 | W 3500 | 1284 - 966 | 15 Spot (17°) |
| Black 83754 | N 4000 | 1320 - 993 | 30 Flood (25°) |
| | | | 60 Flood (41°) |

Modus_M Cell_WW | Lines | 24 V DC | powerLEDs 12W DC




| CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|------------|-------------|
| White 83721 | W 3500 | 1281 - 586 | 07 Asymm. - |
| Black 83745 | N 4000 | 1383 - 633 | |

Modus_M Cell | Lines | 24 V DC | powerLEDs 12W DC



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 83720 | W 3500 | 1281 - 1085 | 60 W.Flood (56°) |
| Black 83744 | N 4000 | 1383 - 1172 | |

Modus_M | Lower buffer



| 150 mm |
|--------------------|
| White 83725 |
| Black 83749 |
| 300 mm |
| White 83729 |
| Black 83753 |
| 600 mm |
| White 83726 |
| Black 83750 |
| 900 mm |
| White 83727 |
| Black 83751 |
| 1200 mm |
| White 83728 |
| Black 83752 |





rollip

Materials

Aluminium profile

Polycarbonate diffuser




rollip range



| | PRO Recessed | 35_MC Recessed | 70_MC Recessed | 35_MS Surface | 60_MS Surface | 35_MP Pendant | 7035_MP Pendant | 60_MP Pendant |
|---------|---------------------------------------|---------------------------------------|--|---|---|----------------------------------|--------------------------------|---|
| 12W | 595 mm | - | - | - | - | - | - | - |
| 20W | - | 1002 mm 532x532 mm | 1002 mm | 1005 mm 530x530 mm | 1005 mm 530x530 mm | 1005 mm 530x530 mm | 1005 mm | 1005 mm |
| 21,5W | 512x512 mm | - | - | - | - | - | - | - |
| 22W | - | - | 1200 mm Stand-alone | - | - | - | - | - |
| 24W | 1185 mm Modular Stand-alone | - | - | - | - | - | - | - |
| 27W | - | - | - | 1505 mm | 1505 mm | 1505 mm | 1505 mm | 1505 mm |
| 30W | 1505 mm Modular Stand-alone | 1503 mm Modular Stand-alone | 1503 mm Modular Stand-alone | - | 1505 mm | - | - | - |
| 40W | - | 2004 mm | 1002 mm 2004 mm | 2005 mm | 2005 mm | 1005 mm 2005 mm 530x530 mm | 1005 mm 2005 mm | 1005 mm 2005 mm |
| 48W | - | - | 1200 mm Stand-alone | - | - | - | - | - |
| 54W | - | - | - | - | - | 1505 mm | 1505 mm | 1505 mm |
| 60W | - | 3006 mm | 1503 mm Stand-alone 3006 mm Modular | - | - | - | - | - |
| 80W | - | - | 2004 mm | - | - | 2005 mm | 2005 mm | 2005 mm |
| 120W | - | - | 3006 mm | - | - | - | - | - |
| Finish | <input type="checkbox"/> White | <input type="checkbox"/> White | <input type="checkbox"/> White | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White <input type="checkbox"/> Black | <input type="checkbox"/> White | <input type="checkbox"/> White | <input type="checkbox"/> White <input type="checkbox"/> Black |
| CRI 80 | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K |
| CRI 92 | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K | 3000K - 4000K |
| Optics | General Anti-glaring | General Asymmetric | General Asymmetric Anti-glaring | General | General Anti-glaring | General | General Anti-glaring | General |
| Control | On/Off - DALI 0/1-10V DALI PUSH | On/Off - DALI 0/1-10V DALI PUSH | On/Off - DALI 0/1-10V DALI PUSH | DALI2 DALI PUSH | DALI2 DALI PUSH | On/Off - DALI2 DALI PUSH | On/Off - DALI2 DALI PUSH | On/Off - DALI2 DALI PUSH |

Extensive range of products

35 and 70mm recessed versions that come in various "stand alone" devices, finished and completed in two different sizes, or modular modules in customised installations. Even more, 35mm driver-on-board single and double emission suspension models, stand alone or modular and modulable with corner connections. Rollip comes with a large and diversified range of products conceived to meet various professional light needs.

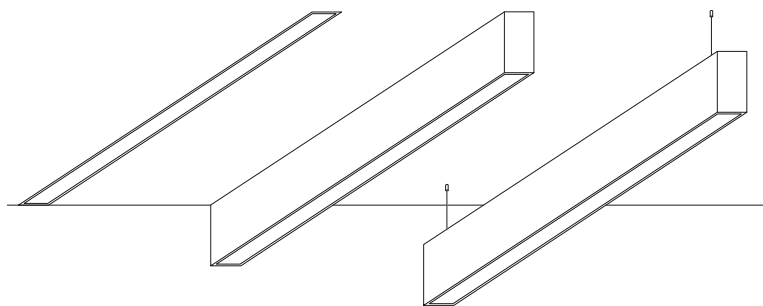

Continuous line

The easy installation of the ROLL DIFFUSER allows to obtain continuous lines measuring up to 50 metres in a single, simple assembly operation within drastically reduced times. The coupling fins allow to guarantee an IP54 index of protection.

Rollip comes with a 35 mm or 70 mm width, combined with diffused and asymmetric optics as well as with a UGR below 19 for use in offices and workplaces (Rollip70 version only).




Rollip PRO

The PRO version is the maximum engineering evolution of the Rollip range of products, by applying the OptiLight™ technology, with the typical pattern of laser micro-engravings to redistribute the light projecting from the PMMA diffuser, and the ensuing full control of the UGR for applications in work environments with video terminals. The minimal size, just 13 millimetres, allows to recess the product on the dropped ceiling without exceeding the plasterboard, given that the thickness of Rollip PRO is smaller: a major advantage lies in the presence of possible uprights or hindrances in the dropped ceiling.



Rollip_60

Rollip60 is innovative: an indirect light with an angle of 150°, clean and performing, comes out from the pre-assembled upper diffuser, in the lower part available the opaline roller (4 sizes, from 5 up to 50m) or the roller with UGR<19 filter (sections of 5 or 10m) makes the bi-emission version ideal for the complete lighting of workplaces that require compliance with the glare index

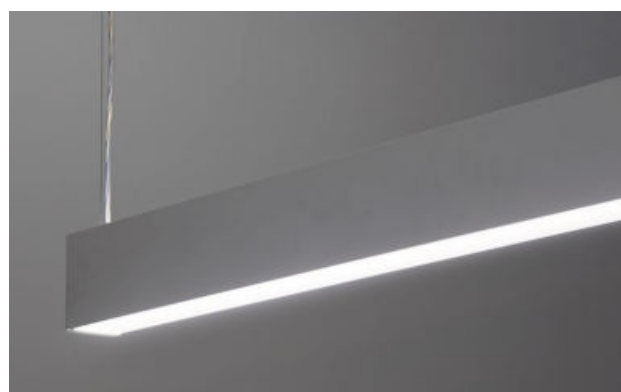

RollipPRO | Lines | 24 V DC | topLED




595 mm - 12W DC - CRI 80

| | | | |
|-------|--------------|---------------|---------------|
| White | 62470 | W 3000 | 1806 - On Req |
| | | N 4000 | 1841 - On Req |

595 mm - 12W DC - CRI 92

| | | | |
|-------|--------------|---------------|---------------|
| White | 65438 | W 3000 | 1470 - On Req |
| | | N 4000 | 1573 - On Req |




1185 mm - 24W DC - CRI 80

| | | | |
|-------|--------------|---------------|---------------|
| White | 62471 | W 3000 | 3612 - On Req |
| | | N 4000 | 3682 - On Req |

1185 mm - 24W DC - CRI 92

| | | | |
|-------|--------------|---------------|---------------|
| White | 65439 | W 3000 | 2940 - On Req |
| | | N 4000 | 3146 - On Req |




1505 mm - 30W DC - CRI 80

| | | | |
|-------|--------------|---------------|---------------|
| White | 62472 | W 3000 | 4577 - On Req |
| | | N 4000 | 4673 - On Req |

1505 mm - 30W DC - CRI 92

| | | | |
|-------|--------------|---------------|---------------|
| White | 65440 | W 3000 | 3733 - On Req |
| | | N 4000 | 4000 - On Req |




512 x 512 mm - 20 W DC - CRI 80

| | | | |
|-------|--------------|---------------|---------------|
| White | 82257 | W 3000 | 2772 - On Req |
| | | N 4000 | 2832 - On Req |

512 x 512 mm - 20 W DC - CRI 92


| | | | |
|-------|--------------|---------------|---------------|
| White | 65441 | W 3000 | 2268 - On Req |
| | | N 4000 | 2424 - On Req |

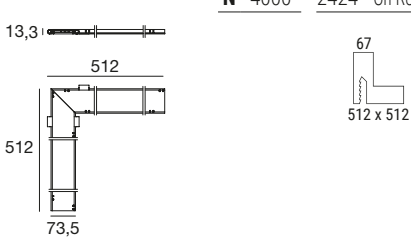

Electronics

| | | | | |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

RollipPRO | Roller diffuser





Opaline diffuser

| | | |
|---------|--------------|------|
| Opaline | 62461 | 5 m |
| Opaline | 62462 | 10 m |
| Opaline | 62463 | 20 m |

UGR<19 anti-glaring diffuser

| | | |
|---------|--------------|------|
| Opaline | 62464 | 5 m |
| Opaline | 62465 | 10 m |

RollipPRO | Cap kits



2 x


| | |
|-------|--------------|
| White | 62460 |
|-------|--------------|

RollipPRO_C | Lines | 24 V DC | topLED




| 1199 mm - 24W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 62473 | W 3000 | 3612 - 1562 | 00 General - |
| | | N 4000 | 3682 - 1592 | |

| 1199 mm - 24W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65442 | W 3000 | 2940 - 1271 | 00 General - |
| | | N 4000 | 3146 - 1359 | |

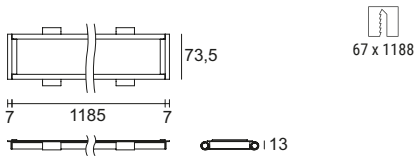

| 1519 mm - 30W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 62474 | W 3000 | 4577 - 1983 | 00 General - |
| | | N 4000 | 4673 - 2022 | |

| 1519 mm - 30W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65443 | W 3000 | 3733 - 1614 | 00 General - |
| | | N 4000 | 4000 - 1727 | |

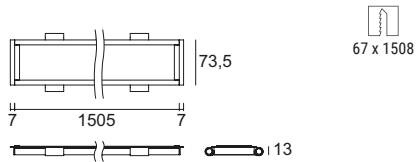

Electronics


| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |









| 1002 mm - 18W DC - CRI 80 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65204 | W 3000 | 2544 - On Req |
| | | N 4000 | 2620 - On Req |




| 1503 mm - 27W DC - CRI 80 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65205 | W 3000 | 3816 - On Req |
| | | N 4000 | 3942 - On Req |




| 2004 mm - 35W DC - CRI 80 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65206 | W 3000 | 5088 - On Req |
| | | N 4000 | 5256 - On Req |



| 3006 mm - 50W DC - CRI 80 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65207 | W 3000 | 7632 - On Req |
| | | N 4000 | 7884 - On Req |



| 532 x 532 mm - 19W DC - CRI 80 | | Cct | Im S - D |
|--------------------------------|--------------|--------|---------------|
| White | 65233 | W 3000 | 2544 - On Req |
| | | N 4000 | 2628 - On Req |

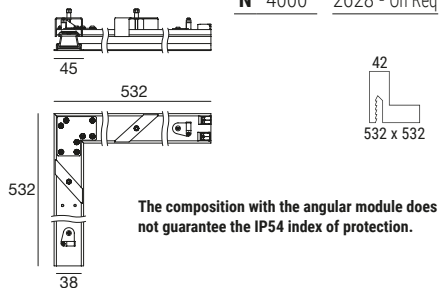


Electronics


| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF | ON/OFF | 0/1-10V | DALI PUSH | DALI |
| 75 W | 150 W | 150 W | 150 W | 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |




| 1002 mm - 18W DC - CRI 92 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65444 | W 3000 | 2064 - On Req |
| | | N 4000 | 2244 - On Req |

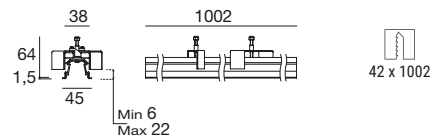


| 1503 mm - 27W DC - CRI 92 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65445 | W 3000 | 3096 - On Req |
| | | N 4000 | 3366 - On Req |




| 2004 mm - 35W DC - CRI 92 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65446 | W 3000 | 4128 - On Req |
| | | N 4000 | 4488 - On Req |



| 3006 mm - 50W DC - CRI 92 | | Cct | Im S - D |
|---------------------------|--------------|--------|---------------|
| White | 65447 | W 3000 | 6192 - On Req |
| | | N 4000 | 6732 - On Req |




| 532 x 532 mm - 19W DC - CRI 92 | | Cct | Im S - D |
|--------------------------------|--------------|--------|---------------|
| White | 65448 | W 3000 | 2064 - On Req |
| | | N 4000 | 2244 - On Req |

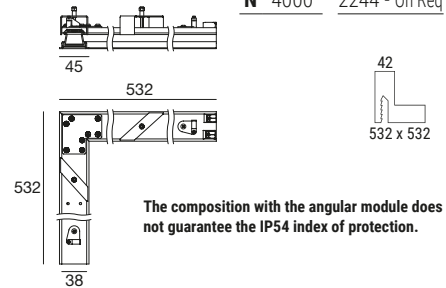

Electronics

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF | ON/OFF | 0/1-10V | DALI PUSH | DALI |
| 75 W | 150 W | 150 W | 150 W | 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |

Rollip35 | Roller diffuser



Opaline diffuser


| | | |
|---------|--------------|------|
| Opaline | 65212 | 5 m |
| Opaline | 65213 | 10 m |
| Opaline | 65214 | 20 m |
| Opaline | 65215 | 50 m |

Asymmetric diffuser

| | | |
|---------|--------------|------|
| Opaline | 65234 | 5 m |
| Opaline | 65235 | 10 m |


RTG 65212 / 65213 / 65214 / 65215 / 65234 / 65235

Rollip35 | Template

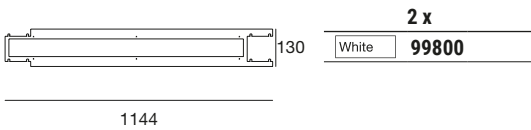

RTG 9980

Rollip35 | Cap kits




2 x

White **65219**

RTG 65219

Installation with template cod. 99800

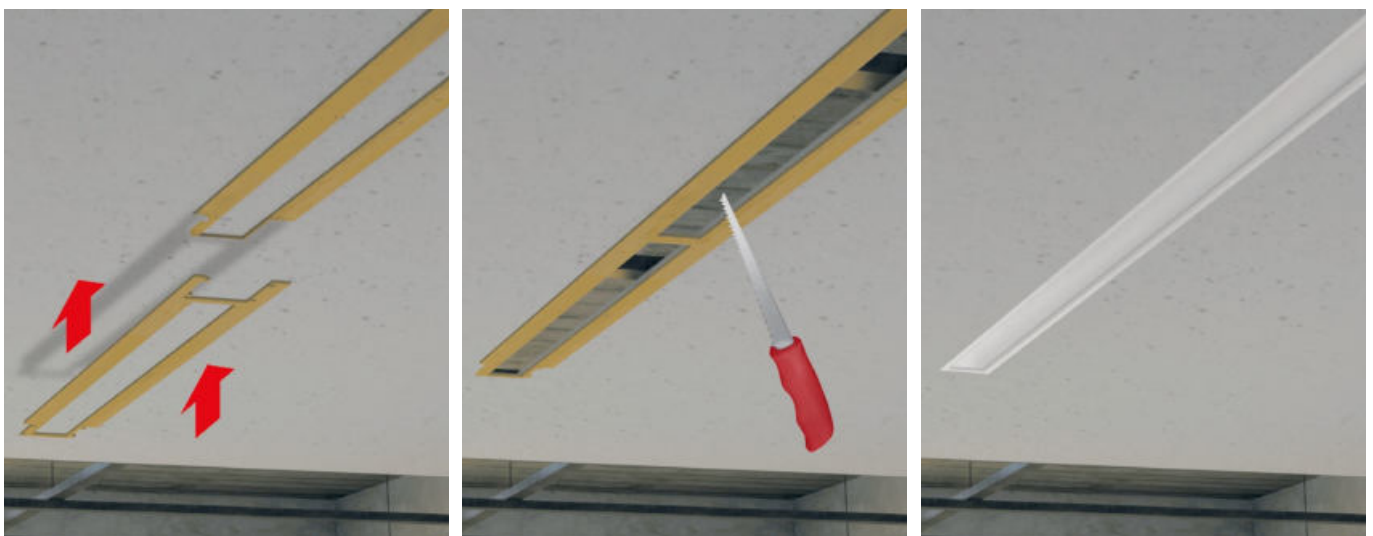




Joining kit included


| 1002 mm - 18W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65200 | W 3000 | 2544 - On Req |
| | | N 4000 | 2628 - On Req |

| 1002 mm - 18W DC - CRI 92 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65449 | W 3000 | 2064 - On Req |
| | | N 4000 | 2244 - On Req |




| 1503 mm - 27W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65201 | W 3000 | 3816 - On Req |
| | | N 4000 | 3942 - On Req |

| 1503 mm - 27W DC - CRI 92 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65451 | W 3000 | 3096 - On Req |
| | | N 4000 | 3366 - On Req |




| 2004 mm - 35W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65202 | W 3000 | 5088 - On Req |
| | | N 4000 | 5256 - On Req |

| 2004 mm - 35W DC - CRI 92 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65453 | W 3000 | 4128 - On Req |
| | | N 4000 | 4488 - On Req |




| 3006 mm - 50W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65203 | W 3000 | 7632 - On Req |
| | | N 4000 | 7884 - On Req |

| 3006 mm - 50W DC - CRI 92 | | Cct | lm-S | lm-D |
|---------------------------|-------|--------|---------------|------|
| White | 65455 | W 3000 | 6192 - On Req | |
| | | N 4000 | 6732 - On Req | |



| 551 x 551mm - 19W DC - CRI 80 | | Cct | lm S - D |
|-------------------------------|-------|--------|---------------|
| White | 65231 | W 3000 | 2544 - On Req |
| | | N 4000 | 2628 - On Req |

| 551 x 551mm - 19W DC - CRI 92 | | Cct | lm S - D |
|-------------------------------|-------|--------|---------------|
| White | 65457 | W 3000 | 2064 - On Req |
| | | N 4000 | 2244 - On Req |




The composition with the angular module does not guarantee the IP54 index of protection.



Joining kit included


| 1002 mm - 36W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65220 | W 3000 | 5088 - On Req |
| | | N 4000 | 5256 - On Req |

| 1002 mm - 36W DC - CRI 92 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65450 | W 3000 | 4128 - On Req |
| | | N 4000 | 4488 - On Req |




| 1503 mm - 54W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65221 | W 3000 | 7632 - On Req |
| | | N 4000 | 7884 - On Req |

| 1503 mm - 54W DC - CRI 92 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65452 | W 3000 | 6192 - On Req |
| | | N 4000 | 6732 - On Req |




| 2004 mm - 70W DC - CRI 80 | | Cct | lm S - D |
|---------------------------|-------|--------|----------------|
| White | 65222 | W 3000 | 10176 - On Req |
| | | N 4000 | 10512 - On Req |

| 2004 mm - 70W DC - CRI 92 | | Cct | lm S - D |
|---------------------------|-------|--------|---------------|
| White | 65454 | W 3000 | 8256 - On Req |
| | | N 4000 | 8976 - On Req |




| 3006 mm - 100W DC - CRI 80 | | Cct | lm S - D |
|----------------------------|-------|--------|----------------|
| White | 65223 | W 3000 | 15264 - On Req |
| | | N 4000 | 15768 - On Req |

| 3006 mm - 100W DC - CRI 92 | | Cct | lm S - D |
|----------------------------|-------|--------|----------------|
| White | 65456 | W 3000 | 12384 - On Req |
| | | N 4000 | 13464 - On Req |




| 551 x 551mm - 38W DC - CRI 80 | | Cct | lm S - D |
|-------------------------------|-------|--------|---------------|
| White | 65232 | W 3000 | 5088 - On Req |
| | | N 4000 | 5256 - On Req |

| 551 x 551mm - 38W DC - CRI 92 | | Cct | lm S - D |
|-------------------------------|-------|--------|---------------|
| White | 65458 | W 3000 | 4128 - On Req |
| | | N 4000 | 4488 - On Req |



The composition with the angular module does not guarantee the IP54 index of protection.

Rollip70 | Roller diffuser



Opaline diffuser

| | | |
|---------|--------------|------|
| Opaline | 65208 | 5 m |
| Opaline | 65209 | 10 m |
| Opaline | 65210 | 20 m |
| Opaline | 65211 | 50 m |

Asymmetric diffuser


| | | |
|---------|--------------|------|
| Opaline | 65238 | 5 m |
| Opaline | 65239 | 10 m |

UGR<19 anti-glaring diffuser (only 18W/m)

| | | |
|---------|--------------|------|
| Opaline | 65236 | 5 m |
| Opaline | 65237 | 10 m |

RTG 65208 / 65209 / 65210 / 65211 / 65238 / 65239 / 65236 / 65237

Rollip70 | Cap kits




2 x

White **65218**

RTG 65218

Rollip70 | Template




2 x

White **99801**

RTG 99801

Installation with template cod. 99801

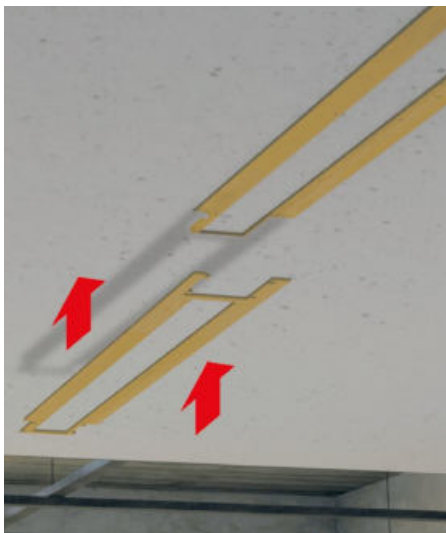


Pag. 310

RTG 65200W / 65201W / 65202W / 65231W


Electronics

| | | | | |
|--|---|---|---|--------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 160 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

Rollip35_C | Complete | Lines | 24 V DC | topLED




| 1216 mm - 23W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65216 | W 3000 | 3053 - 1625 | 00 General - |
| | | N 4000 | 3154 - 1746 | |
| 1216 mm - 23W DC - CRI 92 | | Cct | lm S - D | Optic |
| White | 65459 | W 3000 | 2477 - 1370 | 00 General - |
| | | N 4000 | 2693 - 1536 | |



| 1516 mm - 27W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65217 | W 3000 | 3816 - 2039 | 00 General - |
| | | N 4000 | 3942 - 2183 | |

| 1516 mm - 27W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65460 | W 3000 | 3096 - 1713 | 00 General - |
| | | N 4000 | 3366 - 1921 | |



Electronics

| 99374 | 99331 | 99332 | 83062 | 99787 |
|---------------------------------------|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 48 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |


Rollip70_C | Complete | Lines | 24 V DC | topLED



| 1216 mm - 23W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65225 | W 3000 | 3053 - 1902 | 00 General - |
| | | N 4000 | 3154 - 2053 | |
| 1216 mm - 23W DC - CRI 92 | | Cct | lm S - D | Optic |
| White | 65461 | W 3000 | 2477 - 1602 | 00 General - |
| | | N 4000 | 2693 - 1806 | |

| 1216 mm - 46W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65228 | W 3000 | 6360 - 3575 | 00 General - |
| | | N 4000 | 6570 - 3858 | |

| 1216 mm - 46W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65462 | W 3000 | 5160 - 3003 | 00 General - |
| | | N 4000 | 5610 - 3230 | |

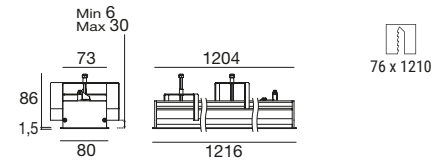


| 1516 mm - 27W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65226 | W 3000 | 3816 - 2378 | 00 General - |
| | | N 4000 | 3942 - 2567 | |

| 1516 mm - 27W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65463 | W 3000 | 3096 - 2003 | 00 General - |
| | | N 4000 | 3366 - 2257 | |

| 1516 mm - 54W DC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65229 | W 3000 | 7632 - 4469 | 00 General - |
| | | N 4000 | 7884 - 4825 | |

| 1516 mm - 54W DC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|--------------|
| White | 65464 | W 3000 | 6192 - 3768 | 00 General - |
| | | N 4000 | 6732 - 4245 | |

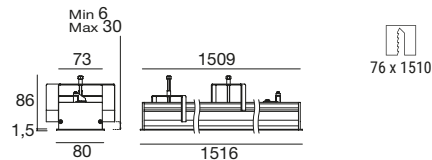


Electronics


| 99374 | 99331 | 99332 | 83062 | 99787 |
|---------------------------------------|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 48 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |




Rollip35_MS | Lines | 220-240 V AC | topLED




| 1005 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65260 | White | 65261 | W 3000 | 3000 - On Req |
| Black | 65292 | Black | 65293 | N 4000 | 3108 - On Req |
| 1005 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65497 | White | 65499 | W 3000 | 2439 - On Req |
| Black | 65498 | Black | 65500 | N 4000 | 2654 - On Req |




| 1505 mm - 27W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65262 | White | 65263 | W 3000 | 4158 - On Req |
| Black | 65294 | Black | 65295 | N 4000 | 4307 - On Req |
| 1505 mm - 27W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65501 | White | 65503 | W 3000 | 3380 - On Req |
| Black | 65502 | Black | 65504 | N 4000 | 3679 - On Req |



| 2005 mm - 42W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65264 | White | 65265 | W 3000 | 6000 - On Req |
| Black | 65296 | Black | 65297 | N 4000 | 6216 - On Req |
| 2005 mm - 42W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65505 | White | 65507 | W 3000 | 4878 - On Req |
| Black | 65506 | Black | 65508 | N 4000 | 5308 - On Req |




| 530 x 530 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|--------------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65266 | White | 65267 | W 3000 | 3000 - On Req |
| Black | 65298 | Black | 65299 | N 4000 | 3108 - On Req |
| 530 x 530 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65509 | White | 65511 | W 3000 | 2439 - On Req |
| Black | 65510 | Black | 65512 | N 4000 | 2654 - On Req |



Joining kit included

314

Rollip35 | Roller diffuser



Opaline diffuser

| | | |
|---------|--------------|------|
| Opaline | 65212 | 5 m |
| Black | 64005 | 5 m |
| Opaline | 65213 | 10 m |
| Black | 64015 | 10 m |
| Opaline | 65214 | 20 m |
| Black | 64025 | 20 m |
| Opaline | 65215 | 50 m |
| Black | 64035 | 50 m |


The diffuser with black finish has a performance loss of 40-50% compared to the opaline version

Asymmetric diffuser

| | | |
|---------|--------------|------|
| Opaline | 65234 | 5 m |
| Opaline | 65235 | 10 m |

RTG 65234 / 65235

Rollip35 | Cap kits




2 x

| | |
|-------|--------------|
| White | 64634 |
| Black | 65291 |


Rollip60_MS | Lines | 220-240 V | topLED




| 1005 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 82079 | White | 82080 | W 3000 | 3000 - On Req |
| Black | 82570 | Black | 82571 | N 4000 | 3108 - On Req |
| 1005 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65525 | White | 65527 | W 3000 | 2439 - On Req |
| Black | 65526 | Black | 65528 | N 4000 | 2654 - On Req |




| 1505 mm - 27W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 82081 | White | 82082 | W 3000 | 4158 - On Req |
| Black | 82572 | Black | 82573 | N 4000 | 4307 - On Req |
| 1505 mm - 27W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65529 | White | 65531 | W 3000 | 3380 - On Req |
| Black | 65530 | Black | 65532 | N 4000 | 3679 - On Req |




| 2005 mm - 42W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 82083 | White | 82084 | W 3000 | 6000 - On Req |
| Black | 82574 | Black | 82575 | N 4000 | 6216 - On Req |
| 2005 mm - 42W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65533 | White | 65535 | W 3000 | 4878 - On Req |
| Black | 65534 | Black | 65536 | N 4000 | 5308 - On Req |



| 539 x 539 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|--------------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 81865 | White | 81866 | W 3000 | 3000 - On Req |
| Black | 82598 | Black | 82599 | N 4000 | 3108 - On Req |
| 539 x 539 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65537 | White | 65539 | W 3000 | 2439 - On Req |
| Black | 65538 | Black | 65540 | N 4000 | 2654 - On Req |



Rollip60 | Roller diffuser



Opaline diffuser


| | | |
|---------|--------------|------|
| Opaline | 64297 | 5 m |
| Black | 64006 | 5 m |
| Opaline | 64298 | 10 m |
| Black | 64016 | 10 m |
| Opaline | 64299 | 20 m |
| Black | 64026 | 20 m |

The diffuser with black finish has a performance loss of 40-50% compared to the opaline version

UGR<19 anti-glaring diffuser

| | | |
|---------|--------------|------|
| Opaline | 64698 | 5 m |
| Opaline | 64699 | 10 m |

Rollip60 | Cap kits



2 x


| | |
|-------|--------------|
| White | 99840 |
| Black | 99982 |

Rollip35_MP | Lines | 220-240 V AC | topLED




| 1005 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65240 | White | 65241 | W 3000 | 3000 - On Req |
| Black | 65272 | Black | 65273 | N 4000 | 3108 - On Req |

| 1005 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65465 | White | 65467 | W 3000 | 2439 - On Req |
| Black | 65466 | Black | 65468 | N 4000 | 2654 - On Req |




| 1505 mm - 27W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65242 | White | 65243 | W 3000 | 4158 - On Req |
| Black | 65276 | Black | 65277 | N 4000 | 4307 - On Req |

| 1505 mm - 27W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65473 | White | 65475 | W 3000 | 3380 - On Req |
| Black | 65474 | Black | 65476 | N 4000 | 3679 - On Req |



| 2005 mm - 42W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65244 | White | 65245 | W 3000 | 6000 - On Req |
| Black | 65282 | Black | 65283 | N 4000 | 6216 - On Req |


| 2005 mm - 42W C - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|--------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65481 | White | 65483 | W 3000 | 4878 - On Req |
| Black | 65482 | Black | 65484 | N 4000 | 5308 - On Req |



First module always to be integrated with power supply kit.
All linear modules must be completed with at least one suspension kit to be installed at one of the ends

| 530x530 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65246 | White | 65247 | W 3000 | 3000 - On Req |
| Black | 65286 | Black | 65287 | N 4000 | 3108 - On Req |

| 530x530 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65489 | White | 65491 | W 3000 | 2439 - On Req |
| Black | 65490 | Black | 65492 | N 4000 | 2654 - On Req |

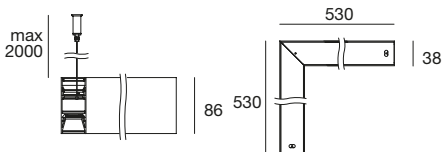


Non-electrifiable module.

Rollip35_MP | Lines | 220-240 V AC | topLED




| 1005 mm - 40W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65248 | White | 65249 | W 3000 | 6000 - On Req |
| Black | 65274 | Black | 65275 | N 4000 | 6216 - On Req |

| 1005 mm - 40W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65469 | White | 65471 | W 3000 | 4878 - On Req |
| Black | 65470 | Black | 65472 | N 4000 | 5308 - On Req |




| 1505 mm - 54W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65250 | White | 65251 | W 3000 | 8316 - On Req |
| Black | 65278 | Black | 65279 | N 4000 | 8614 - On Req |

| 1505 mm - 54W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65477 | White | 65479 | W 3000 | 6760 - On Req |
| Black | 65478 | Black | 65480 | N 4000 | 7358 - On Req |



| 2005 mm - 84W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|----------------|
| White | 65252 | White | 65253 | W 3000 | 12000 - On Req |
| Black | 65284 | Black | 65285 | N 4000 | 12432 - On Req |


| 2005 mm - 84W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|----------------|
| White | 65485 | White | 65487 | W 3000 | 9756 - On Req |
| Black | 65486 | Black | 65488 | N 4000 | 10616 - On Req |



First module always to be integrated with power supply kit.
All linear modules must be completed with at least one suspension kit to be installed at one of the ends


| 530x530mm - 40W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|-----------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65254 | White | 65255 | W 3000 | 6000 - On Req |
| Black | 65288 | Black | 65289 | N 4000 | 6216 - On Req |

| 530x530mm - 40W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|-----------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65493 | White | 65495 | W 3000 | 4878 - On Req |
| Black | 65494 | Black | 65496 | N 4000 | 5308 - On Req |

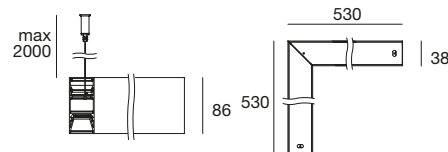

Non-electrifiable module.

Rollip35 | Roller diffuser



Opaline diffuser

| | | |
|---------|--------------|------|
| Opaline | 65212 | 5 m |
| Black | 64005 | 5 m |
| Opaline | 65213 | 10 m |
| Black | 64015 | 10 m |
| Opaline | 65214 | 20 m |
| Black | 64025 | 20 m |
| Opaline | 65215 | 50 m |
| Black | 64035 | 50 m |

The upper diffuser comes pre-mounted with the module

The diffuser with black finish has a performance loss of 40-50% compared to the opaline version


Asymmetric diffuser

| | | |
|---------|--------------|------|
| Opaline | 65234 | 5 m |
| Opaline | 65235 | 10 m |

The upper diffuser comes pre-mounted with the module

RTG 65234 / 65235

Rollip35 | Power supply kit



Single emission

| | |
|-------|--------------|
| White | 64639 |
| Black | 63300 |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 64660 |
| Black | 63301 |


Double emission

| | |
|-------|--------------|
| White | 64649 |
| Black | 63302 |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 64660 |
| Black | 63301 |


Rollip35 | Cap kits



2 x

| | |
|-------|--------------|
| White | 64634 |
| Black | 65291 |

Rollip35_MP | Suspension kit







The suspension kit comprises a single cable. A suspension kit for each single module of the installation needs to be bought.

Suspension kit

| | | |
|-------|--------------|-----|
| White | 64776 | 2 m |
| Black | 65290 | 2 m |

65248W

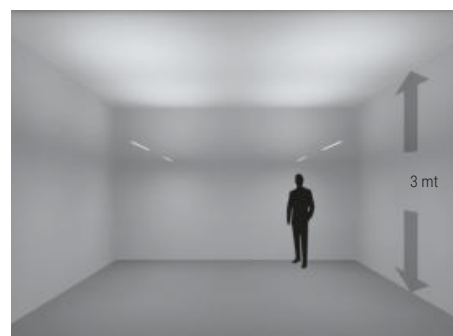


Rollip7035_MP | Lines | 220-240 V AC | topLED




| 1005 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 64272 | White | 64273 | W 3000 | 3000 - On Req |
| Black | 63945 | Black | 63946 | N 4000 | 3108 - On Req |

| 1005 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65513 | White | 65514 | W 3000 | 2439 - On Req |
| Black | 62781 | Black | 62782 | N 4000 | 2654 - On Req |




| 1505 mm - 27W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 64274 | White | 64275 | W 3000 | 4158 - On Req |
| Black | 63949 | Black | 63955 | N 4000 | 4307 - On Req |

| 1505 mm - 27W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65517 | White | 65518 | W 3000 | 3380 - On Req |
| Black | 62785 | Black | 62786 | N 4000 | 3679 - On Req |



| 2005 mm - 42W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 64276 | White | 64277 | W 3000 | 6000 - On Req |
| Black | 63958 | Black | 63959 | N 4000 | 6216 - On Req |

| 2005 mm - 42W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65521 | White | 65522 | W 3000 | 4878 - On Req |
| Black | 62789 | Black | 62791 | N 4000 | 5308 - On Req |




First module always to be integrated with power supply kit.
All linear modules must be completed with at least one suspension kit to be installed at one of the ends

Rollip7035_MP | Lines | 220-240 V AC | topLED




| 1005 mm - 40W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 64282 | White | 64283 | W 3000 | 6000 - On Req |
| Black | 63947 | Black | 63948 | N 4000 | 6216 - On Req |

| 1005 mm - 40W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65515 | White | 65516 | W 3000 | 4878 - On Req |
| Black | 62783 | Black | 62784 | N 4000 | 5308 - On Req |




| 1505 mm - 54W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 64284 | White | 64285 | W 3000 | 8316 - On Req |
| Black | 63956 | Black | 63957 | N 4000 | 8614 - On Req |

| 1505 mm - 54W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|---------------|
| White | 65519 | White | 65520 | W 3000 | 6760 - On Req |
| Black | 62787 | Black | 62788 | N 4000 | 7356 - On Req |




| 2005 mm - 84W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|----------------|
| White | 64286 | White | 64287 | W 3000 | 12000 - On Req |
| Black | 63965 | Black | 63966 | N 4000 | 12432 - On Req |

| 2005 mm - 84W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|--------------|--------------------|--------------|--------|----------------|
| White | 65523 | White | 65524 | W 3000 | 9756 - On Req |
| Black | 62792 | Black | 62793 | N 4000 | 10616 - On Req |



First module always to be integrated with power supply kit.
All linear modules must be completed with at least one suspension kit to be installed at one of the ends

Rollip7035 | Roller diffuser



Opaline diffuser

| | | |
|---------|--------------|------|
| Opaline | 65208 | 5 m |
| Black | 64045 | 5 m |
| Opaline | 65209 | 10 m |
| Black | 64055 | 10 m |
| Opaline | 65210 | 20 m |
| Black | 64065 | 20 m |
| Opaline | 65211 | 50 m |
| Black | 64075 | 50 m |

The upper diffuser comes pre-mounted with the module


The diffuser with black finish has a performance loss of 40-50% compared to the opaline version

UGR<19 anti-glaring diffuser

| | | |
|---------|--------------|------|
| Opaline | 65236 | 5 m |
| Opaline | 65237 | 10 m |

The upper diffuser comes pre-mounted with the module


Rollip7035 | Cap kits



2 x

| | |
|-------|--------------|
| White | 64280 |
| Black | 63976 |

Rollip7035 | Power supply kit



Single emission

| | |
|-------|--------------|
| White | 64639 |
| Black | 63300 |

Double emission

| | |
|-------|--------------|
| White | 64649 |
| Black | 63302 |


DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 64660 |
| Black | 63301 |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 64660 |
| Black | 63301 |

Rollip7035 | Suspension kit



The suspension kit comprises a single cable. A suspension kit for each single module of the installation needs to be bought.


Suspension kit

| | | |
|-------|--------------|-----|
| White | 64776 | 2 m |
| Black | 65290 | |


Rollip60_MP | Lines | 220-240 V AC | topLED




| 1005 mm - 20W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|-------|--------------------|-------|--------|---------------|
| White | 82085 | White | 82086 | W 3000 | 3000 - On Req |
| Black | 82576 | Black | 82577 | N 4000 | 3108 - On Req |
| 1005 mm - 20W AC - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65541 | White | 65543 | W 3000 | 2439 - On Req |
| Black | 65542 | Black | 65544 | N 4000 | 2654 - On Req |



| 1505 mm - 27W - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------|-------|--------------------|-------|--------|---------------|
| White | 82087 | White | 82088 | W 3000 | 4158 - On Req |
| Black | 82578 | Black | 82579 | N 4000 | 4307 - On Req |
| 1505 mm - 27W - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65549 | White | 65551 | W 3000 | 3380 - On Req |
| Black | 65550 | Black | 65552 | N 4000 | 3679 - On Req |




| 2005 mm - 42W - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------|-------|--------------------|-------|--------|---------------|
| White | 82089 | White | 82090 | W 3000 | 6000 - On Req |
| Black | 82580 | Black | 82581 | N 4000 | 6216 - On Req |
| 2005 mm - 42W - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 65557 | White | 65559 | W 3000 | 4878 - On Req |
| Black | 65558 | Black | 60889 | N 4000 | 5308 - On Req |



First module always to be integrated with power supply kit.
All linear modules must be completed with at least one suspension kit to be installed at one of the ends


| 539 x 539 mm - 20W - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|-----------------------------|-------|--------------------|-------|--------|---------------|
| White | 82101 | White | 82102 | W 3000 | 3000 - On Req |
| Black | 82592 | Black | 82593 | N 4000 | 3108 - On Req |
| 539 x 539 mm - 20W - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 60865 | White | 60867 | W 3000 | 2439 - On Req |
| Black | 60866 | Black | 60868 | N 4000 | 2654 - On Req |

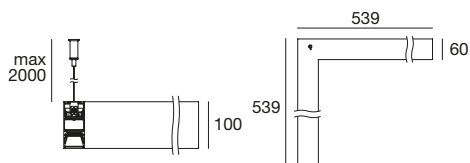


Rollip60_MP | Lines | 220-240 V AC | topLED




| 1005 mm - 40W AC - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|---------------------------|-------|--------------------|-------|--------|---------------|
| White | 82091 | White | 82092 | W 3000 | 5862 - On Req |
| Black | 82582 | Black | 82583 | N 4000 | 6072 - On Req |
| 1005 mm - 40W AC - CRI 92 | | DALI 2 | | Cct | lm S - D |
| White | 65545 | White | 65547 | W 3000 | 4767 - On Req |
| Black | 65546 | Black | 65548 | N 4000 | 5186 - On Req |



| 1505 mm - 54W - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------|-------|--------------------|-------|--------|---------------|
| White | 82093 | White | 82094 | W 3000 | 8228 - On Req |
| Black | 82584 | Black | 82585 | N 4000 | 8521 - On Req |
| 1505 mm - 54W - CRI 92 | | DALI 2 | | Cct | lm S - D |
| White | 65553 | White | 65555 | W 3000 | 6692 - On Req |
| Black | 65554 | Black | 65556 | N 4000 | 7279 - On Req |




| 2005 mm - 84W - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------|-------|--------------------|-------|--------|----------------|
| White | 82095 | White | 82096 | W 3000 | 12222 - On Req |
| Black | 82586 | Black | 82587 | N 4000 | 12680 - On Req |
| 2005 mm - 84W - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 60861 | White | 60863 | W 3000 | 9941 - On Req |
| Black | 60862 | Black | 60864 | N 4000 | 10833 - On Req |




First module always to be integrated with power supply kit.
All linear modules must be completed with at least one suspension kit to be installed at one of the ends

| 539 x 539 mm - 40 W - CRI 80 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
|------------------------------|-------|--------------------|-------|--------|---------------|
| White | 82103 | White | 82104 | W 3000 | 5797 - On Req |
| Black | 82594 | Black | 82595 | N 4000 | 6008 - On Req |
| 539 x 539 mm - 40 W - CRI 92 | | DALI 2 - DALI PUSH | | Cct | lm S - D |
| White | 83646 | White | 83648 | W 3000 | 4714 - On Req |
| Black | 83647 | Black | 83649 | N 4000 | 5131 - On Req |

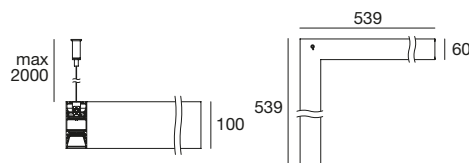

Rollip60 | Roller diffuser



Opaline diffuser

| | | |
|---------|--------------|------|
| Opaline | 64297 | 5 m |
| Black | 64006 | 5 m |
| Opaline | 64298 | 10 m |
| Black | 64016 | 10 m |
| Opaline | 64299 | 20 m |
| Black | 64026 | 20 m |

The upper diffuser comes pre-mounted with the module


The diffuser with black finish has a performance loss of 40-50% compared to the opaline version

UGR<19 anti-glaring diffuser

| | | |
|---------|--------------|------|
| Opaline | 64698 | 5 m |
| Opaline | 64699 | 10 m |

The upper diffuser comes pre-mounted with the module


Rollip60 | Cap kits



2 x

| | |
|-------|--------------|
| White | 99840 |
| Black | 99982 |

Rollip60 | Power supply kit



Single emission

| | |
|-------|--------------|
| White | 64639 |
| Black | 63300 |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 64660 |
| Black | 63301 |


Double emission

| | |
|-------|--------------|
| White | 64649 |
| Black | 63302 |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 64660 |
| Black | 63301 |

Rollip60_MP | Suspension kit



The suspension kit comprises a single cable. A suspension kit for each single module of the installation needs to be bought.

Suspension kit

| | | |
|-------|--------------|-----|
| White | 64776 | 2 m |
| Black | 65290 | 2 m |

Rollip35_PC | Lines | 220-240 V AC | topLED



| 1211 mm - 46W AC - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 65256 | W 3000 | 7296 - 3870 | 00 Gen+Gen |
| Black 65270 | N 4000 | 7577 - 4013 | |


DALI 2 - DALI PUSH

| |
|--------------------|
| White 65257 |
| Black 65271 |

| 1211 mm - 46W AC - CRI 92 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 60869 | W 3000 | 5947 - 3146 | 00 Gen+Gen |
| Black 60891 | N 4000 | 6475 - 3427 | |

DALI 2 - DALI PUSH

| |
|--------------------|
| White 60871 |
| Black 60872 |



| 1511 mm - 55W AC - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 65258 | W 3000 | 8316 - 4466 | 00 Gen+Gen |
| Black 65280 | N 4000 | 8614 - 4623 | |


DALI 2 - DALI PUSH

| |
|--------------------|
| White 65259 |
| Black 65281 |

| 1511 mm - 55W AC - CRI 92 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 60873 | W 3000 | 6760 - 3631 | 00 Gen+Gen |
| Black 60874 | N 4000 | 7358 - 3948 | |

DALI 2 - DALI PUSH

| |
|--------------------|
| White 60875 |
| Black 60876 |



Rollip7035_PC | Lines | 220-240 V AC | topLED



| 1211 mm - 46W AC - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 64288 | W 3000 | 7215 - 4152 | 00 Gen+UGR |
| Black 63967 | N 4000 | 7476 - 4301 | |


DALI 2 - DALI PUSH

| |
|--------------------|
| White 64289 |
| Black 63968 |

| 1211 mm - 46W AC - CRI 92 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 60877 | W 3000 | 5865 - 3375 | 00 Gen+UGR |
| Black 62794 | N 4000 | 6384 - 3673 | |

DALI 2 - DALI PUSH

| |
|--------------------|
| White 60878 |
| Black 62795 |



| 1511 mm - 55W AC - CRI 80 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 64278 | W 3000 | 8496 - 4811 | 00 Gen+UGR |
| Black 63969 | N 4000 | 8784 - 4984 | |


DALI 2 - DALI PUSH

| |
|--------------------|
| White 64279 |
| Black 63975 |


| 1511 mm - 55W AC - CRI 92 | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|------------|
| White 60879 | W 3000 | 6912 - 3911 | 00 Gen+UGR |
| Black 62796 | N 4000 | 7506 - 4256 | |

DALI 2 - DALI PUSH

| |
|--------------------|
| White 60892 |
| Black 62797 |




The complete Rollip7035_PC diffuser is UGR<19 at the lower part and opal at the upper part

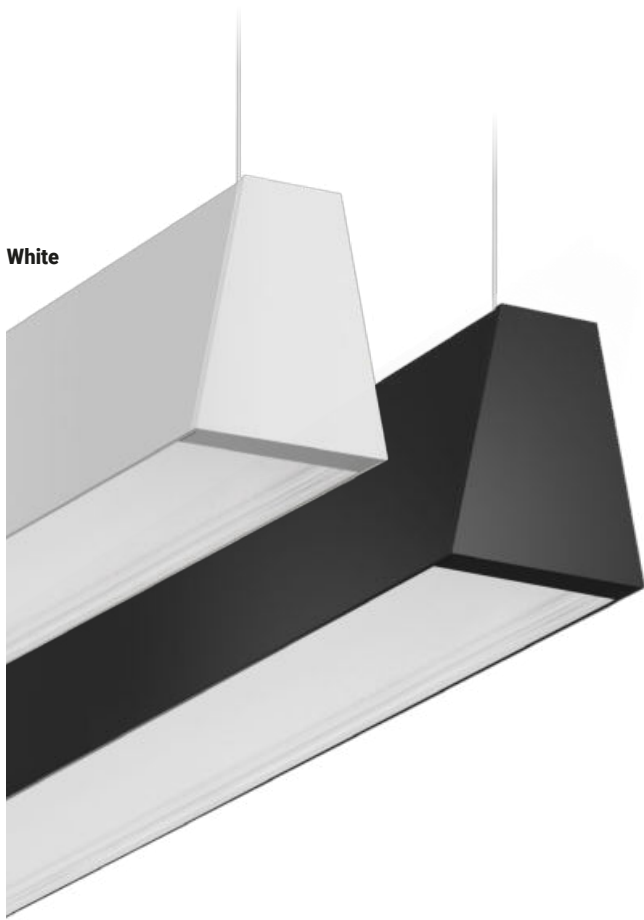


White

Black



64288N00



Photometric curve



Light beam



Floor plan

Linear System

Rollip60_PC | Lines | 220-240 V AC | topLED



| 1211 mm - 46W AC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|------------|
| White | 82097 | W 3000 | 7034 - 4143 | 00 Gen+UGR |
| Black | 82588 | N 4000 | 7287 - 4294 | |


DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 82098 |
| Black | 82589 |

| 1211 mm - 46W AC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|------------|
| White | 60881 | W 3000 | 5717 - 3369 | 00 Gen+UGR |
| Black | 60893 | N 4000 | 6220 - 3667 | |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 60883 |
| Black | 60884 |



| 1511 mm - 55W AC - CRI 80 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|------------|
| White | 82099 | W 3000 | 8228 - 4833 | 00 Gen+UGR |
| Black | 82590 | N 4000 | 8521 - 5009 | |


DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 82100 |
| Black | 82591 |

| 1511 mm - 55W AC - CRI 92 | | Cct | lm S - D | Optic |
|---------------------------|--------------|--------|-------------|------------|
| White | 60885 | W 3000 | 6692 - 3929 | 00 Gen+UGR |
| Black | 60886 | N 4000 | 7279 - 4277 | |

DALI 2 - DALI PUSH

| | |
|-------|--------------|
| White | 60887 |
| Black | 60888 |



The complete Rollip60_PC diffuser is UGR<19 at the lower part and opal at the upper part



clear

Materials

Aluminium body


PMMA diffuser



clear

New models for modular systems

The 2021 novelty features elements of various lengths and shapes designed to create a system with maximum modularity. The design of the new models. Clear_MP is designed to create a single, uninterrupted window of light. The corner modules allow the configurations of corner desks to be followed.

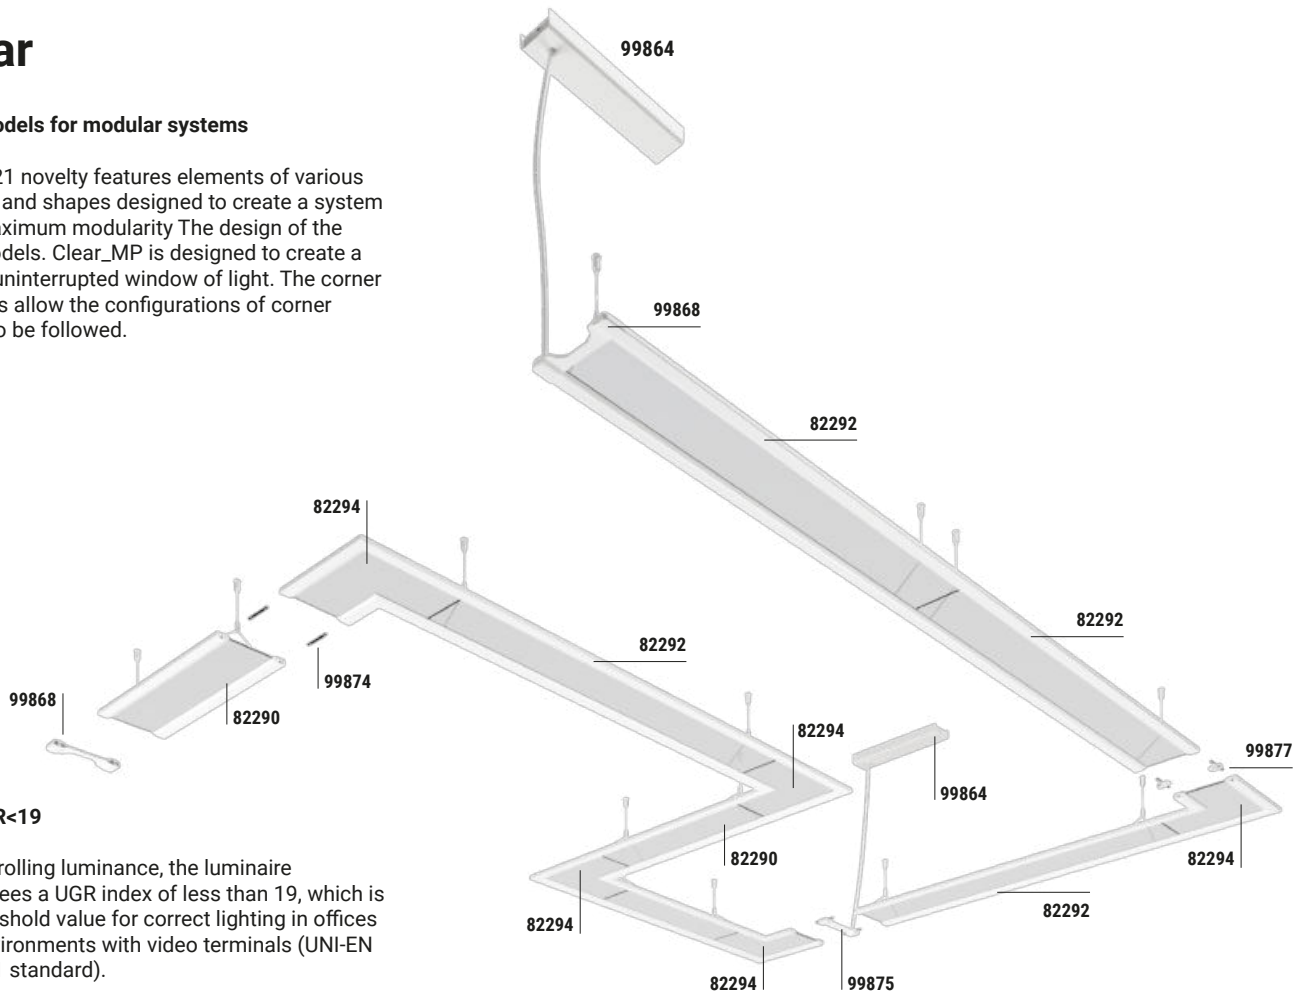

UGR<19

By controlling luminance, the luminaire guarantees a UGR index of less than 19, which is the threshold value for correct lighting in offices and environments with video terminals (UNI-EN 12464-1 standard).



OptiLight Technology square block texture

The transparent PMMA surface has a special pattern made up of micro laser incisions that deviate the photons emitted by the lateral source, channelling the emission downward and upward. The modular versions group the micro incisions in square texture arranged in series to adapt to the angular configurations. Linea Light Group uses this technology which keeps the product completely transparent when switched off. With the light fixture on, the interruption between one texture and another disappears and it provides uniform illumination.




Direct and indirect emission


The double emission solution is conceived to guarantee the correct light distribution in both directions: 55% of the emission is conveyed uniformly in the underlying plane, while the remaining 45% of indirect light allows to obtain good environmental lighting.

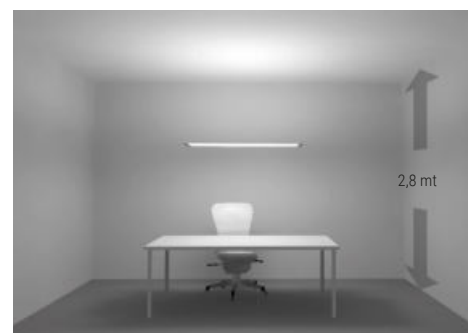


Clear_MP | Suspended luminaires | topLED



| 22,5W DC - CRI 92 | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|--------------|
| White | 82292 | W 3500 | 3168 - 2566 | 00 General - |
| Black | 82293 | N 4000 | 3196 - 2592 | |



| 11,25W DC - CRI 92 | | Cct | lm S - D | Optic |
|--------------------|--------------|--------|-------------|--------------|
| White | 82290 | W 3500 | 1584 - 1283 | 00 General - |
| Black | 82291 | N 4000 | 1598 - 1296 | |



| 7,5W DC - CRI 92 | | Cct | lm S - D | Optic |
|------------------|--------------|--------|---------------|--------------|
| White | 82294 | W 3500 | 1040 - On Req | 00 General - |
| Black | 82295 | N 4000 | 1065 - On Req | |

Accessories




| 1x | | description: |
|-------|--------------|-----------------------------|
| White | 99868 | End element for header feed |
| Black | 99869 | |



| 1x | | description: |
|-------|--------------|--|
| White | 99875 | Electrified coupling element for intermediate power supply |
| Black | 99876 | |



| 1x | | description: |
|-------|--------------|------------------|
| White | 99870 | Terminal element |
| Black | 99871 | |



| 2x | | description: |
|-------|--------------|--|
| Black | 99874 | Bracket for mechanical coupling of the modules |



| 1x | | description: |
|-------|--------------|---|
| White | 99872 | Adjustable hanging connection with rocker |
| Black | 99873 | |



| 2x | | description: |
|-------|--------------|---|
| White | 99877 | Intermediate junction element for power line interruption |
| Black | 99878 | |



| | | description: |
|-------|--------------|-------------------|
| White | 99860 | Driver 75W On/Off |
| Black | 99861 | |



| | | description: |
|-------|--------------|-----------------|
| White | 99862 | Driver 75W DALI |
| Black | 99863 | |



| | | description: |
|-------|--------------|--------------------|
| White | 99864 | Driver 150W On/Off |
| Black | 99865 | |



| | | description: |
|-------|--------------|------------------|
| White | 99866 | Driver 150W DALI |
| Black | 99867 | |







mini_albatros

Materials

Aluminium body


PMMA diffuser



mini_albatros range



Mini Albatros

| | |
|---|---|
| 37 W | 1135 x 338 mm Stand-alone 1125 x 338 mm Modular |
| 46 W | 1414 x 338 mm Stand-alone 1404 x 338 mm Modular |
| Finish | <input type="checkbox"/> White <input checked="" type="checkbox"/> Grey |
| CRI 92 | 3500K - 4000K |
| Optics | General |
| Control  | On/Off - DALI |

Light management

The aluminium extruded profile contains a driver (ON/OFF or DALI) and two topLED circuits, consisting of high efficiency LEDs for a longitudinal emission. This lamp offers high performance thanks to the power in question and top lighting performance, due to the optimal distribution of the flow which allows a 400 lux mean lighting on the entire work surface (considering a desk lit covering its entire work surface and positioned 80 cm from the floor).

UGR<19

By controlling luminance, the luminaire guarantees a UGR index of less than 19, which is the threshold value for correct lighting in offices and environments with video terminals (UNI-EN 12464-1 standard).




Design and modularity

The super slim PMMA panel makes the product minimal and non-invasive. This characteristic is above all observable with modular installations: combining master and slave modules together allows to create true light lines capable of lighting several work surfaces at the same time.

Minimum thickness even with DALI power supply

Mini Albatros are also available with DALI power supply on board, in any case maintaining a minimum thickness designed to guarantee the best design/light distribution ratio. The Mini Albatros DALI models are just 36 mm thick.


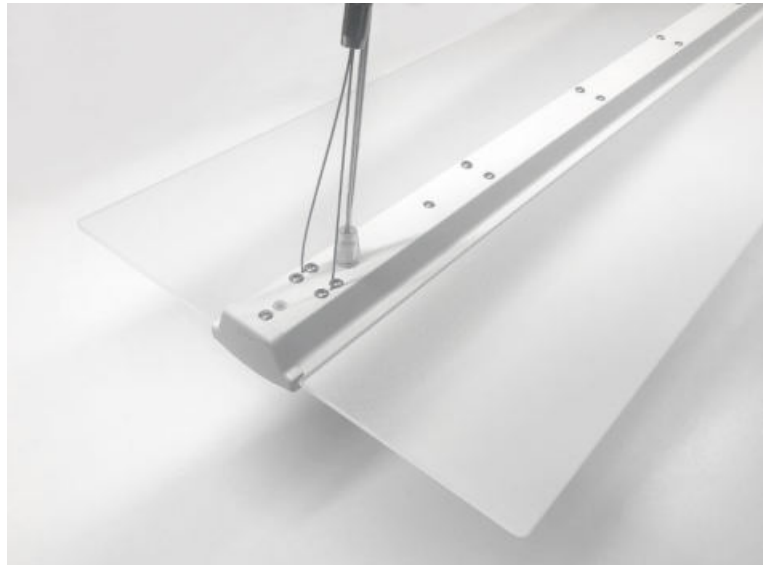


OptiLight Technology


The transparent PMMA surface has a special pattern consisting of laser micro-engravings which divert the photons emitted by the lateral source, conveying the emission downwards and upwards. The lined engraving of the edge avoids glare and improves the performance of the lamp. A Linea Light Group's technology, that keeps the product fully transparent when not lit; it emits a soft glare-free light when lit, for full visual comfort.

Direct and indirect emission

The double emission solution is conceived to guarantee the correct light distribution in both directions: 55% of the emission is conveyed uniformly in the underlying plane, while the remaining 45% of indirect light allows to obtain good environmental lighting.

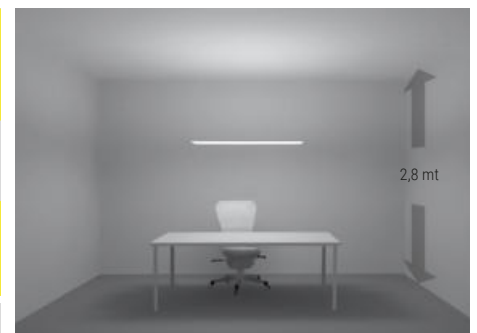

Mini Albatros | Suspended luminaires | 220-240 V AC | topLED 37 W DC - 44 W AC



| CRI 92 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 82834 | W 3500 | 4356 - 3974 | 00 General - |
| Grey 82835 | N 4000 | 4572 - 4181 | |

| CRI 92 - DALI | Cct | lm S - D | Optic |
|---------------|--------|-------------|--------------|
| White 82749 | W 3500 | 4356 - 3974 | 00 General - |
| Grey 82750 | N 4000 | 4572 - 4181 | |


Accessories Pag. 335

98428 White Ceiling Acc.

98429 Grey Ceiling Acc.

RTG 82749W00 / 82749N00

Mini Albatros | Suspended luminaires | 220-240 V AC | topLED 46 W DC - 55 W AC



| CRI 92 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 82836 | W 3500 | 5445 - 4968 | 00 General - |
| Grey 82837 | N 4000 | 5715 - 5226 | |


| CRI 92 - DALI | Cct | lm S - D | Optic |
|---------------|--------|-------------|--------------|
| White 82751 | W 3500 | 5445 - 4968 | 00 General - |
| Grey 82752 | N 4000 | 5715 - 5226 | |

Accessories Pag. 335

98428 White Ceiling Acc.

98429 Grey Ceiling Acc.

Mini Albatros_M master | Suspended luminaires | 220-240 V AC | topLED 37 W DC - 44 W AC



| CRI 92 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 82838 | W 3500 | 4356 - 3974 | 00 General - |
| Grey 82839 | N 4000 | 4572 - 4181 | |


| CRI 92 - DALI | Cct | lm S - D | Optic |
|---------------|--------|-------------|--------------|
| White 82823 | W 3500 | 4356 - 3974 | 00 General - |
| Grey 82824 | N 4000 | 4572 - 4181 | |

Accessories Pag. 335

98428 White Ceiling Acc.

98429 Grey Ceiling Acc.

Mini Albatros_M slave | Suspended luminaires | 220-240 V AC | topLED 37 W DC - 44 W AC



| CRI 92 | Cct | lm S - D | Optic |
|-------------|--------|-------------|--------------|
| White 82842 | W 3500 | 4356 - 3974 | 00 General - |
| Grey 82843 | N 4000 | 4572 - 4181 | |


| CRI 92 - DALI | Cct | lm S - D | Optic |
|---------------|--------|-------------|--------------|
| White 82827 | W 3500 | 4356 - 3974 | 00 General - |
| Grey 82828 | N 4000 | 4572 - 4181 | |

Accessories Pag. 335

98428 White Ceiling Acc.

98429 Grey Ceiling Acc.

Mini Albatros_M master | Suspended luminaires | 220-240 V AC | topLED 46 W DC - 55 W AC



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|--------------|
| White 82840 | W 3500 | 5445 - 4968 | 00 General - |
| Grey 82841 | N 4000 | 5715 - 5226 | |


| CRI 92 - DALI | Cct | lm S - D | Optic |
|--------------------|--------|-------------|--------------|
| White 82825 | W 3500 | 5445 - 4968 | 00 General - |
| Grey 82826 | N 4000 | 5715 - 5226 | |

Accessories Pag. 335

98428 White Ceiling Acc.

98429 Grey Ceiling Acc.

Mini Albatros_M slave | Suspended luminaires | 220-240 V AC | topLED 46 W DC - 55 W AC



| CRI 92 | Cct | lm S - D | Optic |
|--------------------|--------|-------------|--------------|
| White 82844 | W 3500 | 5445 - 4968 | 00 General - |
| Grey 82845 | N 4000 | 5715 - 5226 | |


| CRI 92 - DALI | Cct | lm S - D | Optic |
|--------------------|--------|-------------|--------------|
| White 82829 | W 3500 | 5445 - 4968 | 00 General - |
| Grey 82830 | N 4000 | 5715 - 5226 | |

Accessories Pag. 335

98428 White Ceiling Acc.

98429 Grey Ceiling Acc.

Fixing for false ceilings





White **98428**
suitable for: Mini Albatros / Mini Albatros_M

RTG 98428



Grey **98429**
suitable for: Mini Albatros / Mini Albatros_M

Albatros modular | Example of installation

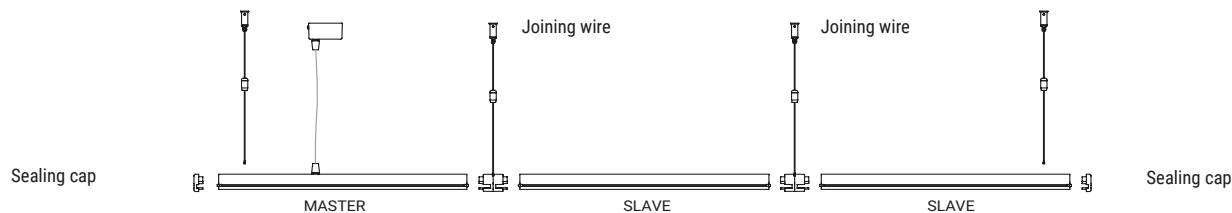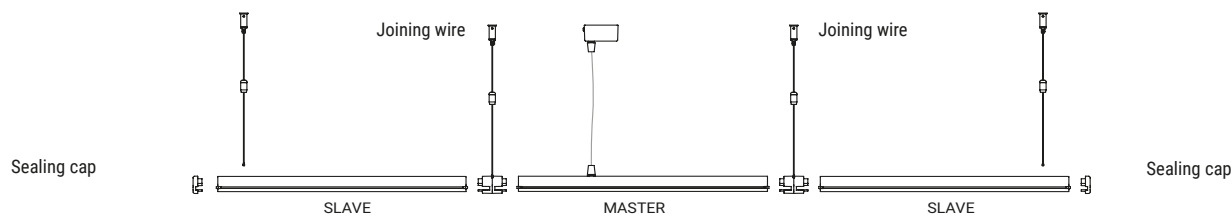



trail



Materials

Steel chassis

Aluminium body

High efficiency versatile system

Trail offers homogeneous and contrast-free lighting, a long-lasting and quality light capable of adapting to any environment of use: as a matter of fact, the modularity of the system allows to create customised configurations. The great energy efficiency (up to 176 lm/W) and low maintenance allow to reduce the operating costs as compared to conventional fluorescence systems.

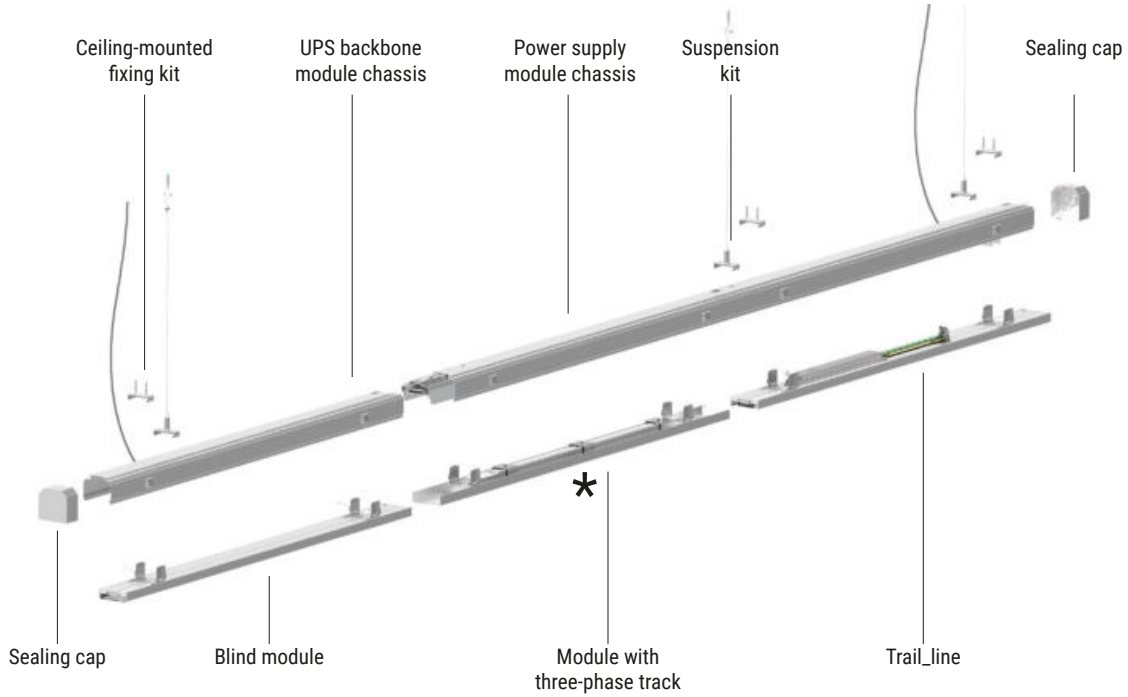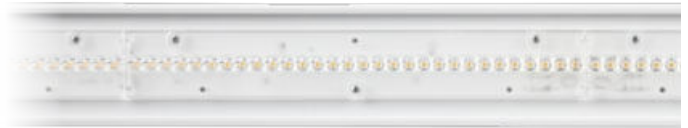

* do not install the module near the power cable

Quick installation

Continuous Trail lines are easy and quick to install: the new lock and quick release system of the guards allows the technician to operate totally freely, without needing any tools, and assembly times drop by 45% as compared to the previous version! Upon mounting the bearing structure, the quick-coupling system allows to position the single lighting bodies at will to obtain the most appropriate lighting and follow the arrangement of the elements in the environment.




Extensive range of products

Trail is an extremely versatile system, with various available solutions. Three powers, that can be combined with optics of choice among the available four: diffused emission; W. Flood for high heights and applications not strictly bound to the supermarket sector; single or double asymmetric emission, for light directed on one or two categories of displayed products, conceived for visually enhancing the quality of the goods.

| | Asymmetric | D. Asymmetric | General | W. Flood |
|---------|------------|---------------|---------|----------|
| 35 W AC | | | | |
| 47 W AC | | | | |
| 60 W AC | | | | |


Trunking system | Power module



| | | | | |
|-------|--------------|---------|--------|-------|
| White | 90911 | 1135 mm | ON/OFF | 3 pin |
| White | 90915 | 2270 mm | ON/OFF | 3 pin |

| | | | | |
|-------|--------------|---------|---------------|-------|
| White | 90913 | 1135 mm | ON/OFF / DALI | 7 pin |
| Black | 83651 | 1135 mm | ON/OFF / DALI | 7 pin |
| White | 90917 | 2270 mm | ON/OFF / DALI | 7 pin |
| Black | 83652 | 2270 mm | ON/OFF / DALI | 7 pin |


Trunking system | Trail_chassis | UPS backbone



| | | | | |
|-------|--------------|---------|--------|-------|
| White | 90903 | 1135 mm | ON/OFF | 3 pin |
| White | 90907 | 2270 mm | ON/OFF | 3 pin |

| | | | | |
|-------|--------------|---------|---------------|-------|
| White | 90905 | 1135 mm | ON/OFF / DALI | 7 pin |
| Black | 83653 | 1135 mm | ON/OFF / DALI | 7 pin |
| White | 90909 | 2270 mm | ON/OFF / DALI | 7 pin |
| Black | 83654 | 2270 mm | ON/OFF / DALI | 7 pin |

Trunking system | Trail_chassis | Auxiliary power supply




| | | | | |
|-------|---------------|---------|---------------|-------|
| White | 90905E | 1135 mm | ON/OFF / DALI | 7 pin |
| Black | 83655 | 1135 mm | ON/OFF / DALI | 7 pin |




Black

Trunking system | Trail_line | 220-240 V AC | topLED 34 W DC - 35 W AC




| 3 pin | Cct CRI 80 | lm S - D | Optic |
|-------------|------------|---------------|-------------------|
| White 90919 | N 4000 | 4557 - On req | 60 W.Flood (70°) |
| 7 pin | | | 00 General (110°) |
| White 90921 | | | 07 Asymm. - |
| DALI 7 pin | | | 69 D.Asymm. - |
| White 90923 | | | |

Trunking system | Trail_line | 220-240 V AC | topLED 46 W DC - 47 W AC




| 3 pin | Cct CRI 80 | lm S - D | Optic |
|-------------|------------|---------------|-------------------|
| White 90925 | N 4000 | 6186 - On req | 60 W.Flood (70°) |
| 7 pin | | | 00 General (110°) |
| White 90927 | | | 07 Asymm. - |
| DALI 7 pin | | | 69 D.Asymm. - |
| White 90929 | | | |

Trunking system | Trail_line | 220-240 V AC | topLED 58 W DC - 60 W AC



| 3 pin | Cct CRI 80 | lm S - D | Optic |
|-------------|------------|---------------|-------------------|
| White 90931 | N 4000 | 7522 - On req | 60 W.Flood (70°) |
| 7 pin | | | 00 General (110°) |
| White 90933 | | | 07 Asymm. - |
| DALI 7 pin | | | 69 D.Asymm. - |
| White 90935 | | | |
| Black 83656 | | | |


Trunking system | Three-phase adaptor



| |
|-------------|
| White 90952 |
| Black 83067 |

Module for track projectors.
Maximum load 3kg.
Sustained maximum power 60 W.

Trunking system | Suspension kit




| | |
|---------|--------------|
| 1500 mm | 90944 |
| 3000 mm | 90943 |

Steel cable adjustable at the base, required for the suspension installation and available in two versions, 1.5 m and 3 m versions.

Fixing interline 1.5 m


Trunking system | Sealing cap



| | |
|-------|--------------|
| White | 90946 |
| Black | 83068 |

Line neutral sealing cap.



Trunking system | Ceiling-mounted fixing kit



| |
|--------------|
| 90945 |
|--------------|

1x Steel bracket required for ceiling installation. Providing at least 1 bracket every 1.5 m of Trail_chassis module installed.

Trunking system | Cover



| | |
|-------|--------------|
| White | 90950 |
| Black | 83069 |

Blind cover module.



LANCIA ANTINCENDIO
ESTINTORE

LATTE FRESCO
YOGURT

2

LATTE UHT
ZUCCHERO

INFUSI
CAFFE

3

PRIMA COLAZIONE
FARINE

INNOVO LOCAL



ink

Materials

Rubber conductor cable

Aluminium accessories



Ink is a complete linear system

Ink revises the concept of the lighting fixture, disassembling and reassembling it so you can discover new shapes. Light becomes a redesigned wire, a thin, indirect-emission strip lets you cover and illuminate long distances, the same components, combined with the special extruded profile for wall/ceiling or with the new recessed profile, become light paths that decorate the environments. The cable also acts as a conductor where, on the lower part, various lighting elements can be connected: with diffused or UGR<19 emission, adjustable projectors even with focus optics and hanging lamps.



Ink is movement

To meet particular composition needs, small wall or ceiling brackets have been introduced which allow the cable to bend and, with the anchoring of the included LED strip, alternative lighting effects can be created.



84017 Clip for curves

Ink is fully equipped

The Ink system was implemented with new devices and accessories that increase its versatility and functionality. Three new projectors have been introduced: 6W, 12W, 12W Focus, 22W designed to meet all accent lighting needs. To complete the linear elements, a horizontal cylindrical diffuser has been inserted (900, 1200 mm) for all-around diffused lighting. A new recess-mounted electrified track solution comes alongside the existing system, letting you combine indirect lighting with detail lighting.



Ink is all light


The INK system introduces a new modular element that enhances the vast range that has made it famous. A new, cylindrical shape in opal polycarbonate that alternates on/off and Dali point-point versions, available for recessed, surface or hanging installation, the luce 360 module lets you create multiple solution, thanks in part to the different lengths of the profile.

**83943 Ink system_L
linear module 360°**

**83949 Ink system_LP
linear module 360°**



Ink system | Cable




| | | |
|-------|--------------|--------|
| Black | 81410 | 5+1 m |
| Black | 81411 | 10+1 m |
| Black | 84016 | 1 m* |

* E.g. **84016** x 13 pieces: cable on spool with total length of 13 metres
Only for surface or recessed mounting (not suspension).

RTG 81410 / 81411

Ink system_L | LED Strip



| CRI 92 - Basic 3,2 W/mt DC | Cct | lm S - D | Optic |
|----------------------------|---------------|-------------|---------------------|
| 82946 1 m | W 3000 | 404 - 271 | 00 General - |
| 82947 2,5 m | W 3000 | 1011 - 677 | |
| 82948 5 m | W 3000 | 2022 - 1354 | |

| CRI 92 - Hi-Flux 12,6 W/mt DC | Cct | lm S - D | Optic |
|-------------------------------|---------------|-------------|---------------------|
| 82949 1 m | W 3000 | 1510 - 1138 | 00 General - |
| 82950 2,5 m | W 3000 | 3777 - 2845 | |
| 82951 5 m | W 3000 | 7544 - 5690 | |

RTG 82946W00 / 82947W00 / 82948W00
82949W00 / 82950W00 / 82951W00

Ink system | Wall / ceiling extruded



| | | |
|-------|--------------|---------|
| Black | 81430 | Kit 2 x |
| Black | 81426 | Kit 5 x |

RTG 81430 / 81426

Ink system_L | LED Strip




| PTP dimming DALI PointToPoint | CRI 92 - Basic 3,2 W/mt DC | Cct | lm S - D | Optic |
|----------------------------------|----------------------------|-------------|---------------------|-------|
| 83990 1 m | W 3000 | 404 - 271 | 00 General - | |
| 83991 2,5 m | W 3000 | 1010 - 677 | | |
| 83992 5 m | W 3000 | 2020 - 1354 | | |

| PTP dimming DALI PointToPoint | CRI 92 - Hi-Flux 12,6 W/mt DC | Cct | lm S - D | Optic |
|----------------------------------|-------------------------------|-------------|---------------------|-------|
| 83987 1 m | W 3000 | 1510 - 1138 | 00 General - | |
| 83988 2,5 m | W 3000 | 3777 - 2845 | | |
| 83989 5 m | W 3000 | 7544 - 5690 | | |

RTG 83987W00 / 83988W00 / 83989W00
83990W00 / 83991W00 / 83992W00

Ink system_L | Linear module Diffused




| CRI 92 - 11W DC - L 300 mm | Cct | lm S - D | Optic |
|----------------------------|--------|-------------|--------------|
| Black 83943 | W 3000 | 1040 - 652 | 00 General - |
| CRI 92 - 22W DC - L 600 mm | | | |
| Black 83944 | W 3000 | 2081 - 1350 | 00 General - |
| CRI 92 - 33W DC - L 900 mm | | | |
| Black 83945 | W 3000 | 3120 - 1985 | 00 General - |



| CRI 92 - 11W DC - L 486 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|-------------|--------------|
| Black 83972 | W 3000 | 1040 - 652 | 00 General - |
| CRI 92 - 22W DC - L 786 mm | | | |
| Black 83973 | W 3000 | 2081 - 1350 | 00 General - |
| CRI 92 - 33W DC - L 1086 mm | | | |
| Black 83974 | W 3000 | 3120 - 1985 | 00 General - |

RTG 83943W00 / 83944W00 / 83945W00
83972W00 / 83973W00 / 83974W00

Ink system_L | Linear module




| CRI 92 - 11W DC - L 300 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|--------------|
| Black 82914 | W 3000 | 1040 - 396 | 00 General - |
| CRI 92 - 22W DC - L 600 mm | | | |
| Black 82916 | W 3000 | 2081 - 791 | 00 General - |



| CRI 92 - 11W DC - L 465 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|--------------|
| Black 83968 | W 3000 | 1040 - 396 | 00 General - |
| CRI 92 - 22W DC - L 765 mm | | | |
| Black 83969 | W 3000 | 2081 - 791 | 00 General - |

RTG 82914W00 / 82916W00 / 83968W00 / 83969W00

Ink system_L UGR | Anti-glaring linear module




| CRI 92 - 7W DC - L 300 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|----------------|
| Black 82918 | W 3000 | 641 - 260 | 30 Flood (34°) |
| CRI 92 - 14W DC - L 600 mm | | | |
| Black 82920 | W 3000 | 1282 - 520 | 30 Flood (34°) |




| CRI 92 - 7W DC - L 465 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|----------------|
| Black 83970 | W 3000 | 641 - 260 | 30 Flood (34°) |
| CRI 92 - 14W DC - L 800 mm | | | |
| Black 83971 | W 3000 | 1282 - 520 | 30 Flood (34°) |

RTG 82918W30 / 82920W30 / 83970W30 / 83971W30

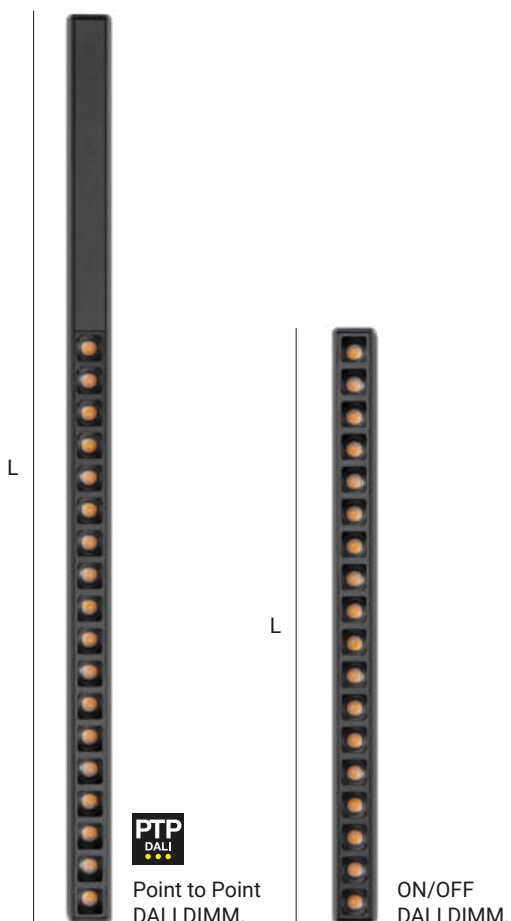


Ink system_LP | Linear Suspension 360°



| CRI 92 - 27W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|-------------|--------------|
| Black 83949 | W 3000 | 3180 - 1983 | 00 General - |
| CRI 92 - 35W DC - L 1200 mm | | | |
| Black 83950 | W 3000 | 4063 - 2560 | 00 General - |

RTG 83949W00 / 83950W00

Ink system_LP | Linear Suspension




| CRI 92 - 22W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|--------------|
| Black 82928 | W 3000 | 2081 - 738 | 00 General - |
| CRI 92 - 29W DC - L 1200 mm | | | |
| Black 82930 | W 3000 | 2744 - 950 | 00 General - |



| CRI 92 - 22W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|--------------|
| Black 83980 | W 3000 | 2081 - 738 | 00 General - |
| CRI 92 - 29W DC - L 1200 mm | | | |
| Black 83981 | W 3000 | 2744 - 950 | 00 General - |

RTG 82928W00 / 82930W00 / 83980W00 / 83981W00

Ink system_LP UGR | Anti-glaring linear Suspension





| CRI 92 - 9W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|----------------|
| Black 82932 | W 3000 | 781 - 274 | 30 Flood (34°) |
| CRI 92 - 12W DC - L 1200 mm | | | |
| Black 82944 | W 3000 | 1041 - 352 | 30 Flood (34°) |



| CRI 92 - 9W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|----------------|
| Black 83982 | W 3000 | 781 - 274 | 30 Flood (34°) |
| CRI 92 - 12W DC - L 1200 mm | | | |
| Black 83983 | W 3000 | 1041 - 377 | 30 Flood (34°) |

RTG 82932W30 / 82944W30 / 83982W30 / 83983W30

Ink system_P | Suspension




| CRI 92 - 6W DC - L 104 mm | Cct | lm-S | lm-D | Optic |
|---------------------------|--------|-----------|------|------------------|
| Black 82926 | W 3000 | 709 - 468 | | 45 W.Flood (47°) |



| CRI 92 - 6W DC - L 225 mm | Cct | lm S - D | Optic |
|---------------------------|--------|-----------|------------------|
| Black 83979 | W 3000 | 709 - 468 | 45 W.Flood (47°) |

RTG 82926W45 / 83979W45

Ink system_SP | Projector




| CRI 92 - 6W DC - L 104mm | Cct | lm S - D | Optic |
|--------------------------|--------|-----------|---|
| Black 82922 | W 3000 | 709 - 440 | 10 Spot (21°) 30 Flood (31°) 45 Flood (41°) |



| CRI 92 - 6W DC - L 225mm | Cct | lm S - D | Optic |
|--------------------------|--------|-----------|---|
| Black 83975 | W 3000 | 709 - 440 | 10 Spot (21°) 30 Flood (31°) 45 Flood (41°) |

RTG 82922W10 / 82922W30 / 82922W45
83975W10 / 83975W30 / 83975W45

Ink system_SP Focus | Projector





| CRI 92 - 12W DC - L 104mm | Cct | lm S - D | Optic |
|---------------------------|--------|---------------|--------------------|
| Black 83947 | W 3000 | 1234 - 0n req | 85 Focus (16°-33°) |



| CRI 92 - 12W DC - L 225mm | Cct | lm S - D | Optic |
|---------------------------|--------|---------------|--------------------|
| Black 83977 | W 3000 | 1234 - 0n req | 85 Focus (16°-33°) |

RTG 83947W85 / 83977W85

Ink system_SP | Projector





| CRI 92 - 12W DC - L 104mm | Cct | lm S - D | Optic |
|---------------------------|--------|------------|---|
| Black 83946 | W 3000 | 1068 - 675 | 10 Spot (18°) 30 Flood (32°) 45 W.Flood (48°) |



| CRI 92 - 12W DC - L 225mm | Cct | lm S - D | Optic |
|---------------------------|--------|------------|---|
| Black 83976 | W 3000 | 1068 - 675 | 10 Spot (18°) 30 Flood (32°) 45 W.Flood (48°) |

RTG 83946W10 / 83946W30 / 83946W45
83976W10 / 83976W30 / 83976W45

Ink system_SP | Projector




| CRI 92 - 22W DC - L 114mm | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|---|
| Black 83948 | W 3000 | 2534 - 1976 | 20 Spot (20°) 35 Flood (35°) 60 W.Flood (62°) |



| CRI 92 - 22W DC - L 225mm | Cct | lm S - D | Optic |
|---------------------------|--------|-------------|---|
| Black 83978 | W 3000 | 2534 - 1976 | 20 Spot (20°) 35 Flood (35°) 60 W.Flood (62°) |



RTG 83948W20 / 83948W35 / 83948W60
83978W20 / 83978W35 / 83978W60

Ink system | Wall / ceiling Recessed profile



| | | |
|-------|--------------|---------|
| Black | 84012 | 1000 mm |
| Black | 84013 | 2000 mm |
| Black | 84014 | 3000 mm |

Ink system | Recessed corner




Black **84015**




81419
Included

Ink system | Recessed corner-OUT



Black **84074**

Ink system | Cable




| | | |
|-------|--------------|--------|
| Black | 81410 | 5+1 m |
| Black | 81411 | 10+1 m |
| Black | 84016 | 1 m* |

* E.g. **84016** x 13 pieces: cable on spool with total length of 13 metres
Only for surface or recessed mounting (not suspension).

RTG **81410 / 81411**

Ink system | Recessed corner-IN




Black **84073**

Ink system | Closing plug



2 x
Black **83153**



81421
Included

Recessed Ink system


The new Ink system upgrade allows for use of the recessed profile in three different sizes:

- **84012** 1000 mm
- **84013** 2000 mm
- **84014** 3000 mm

the cable should be positioned inside the profile. available in the usual sizes and a new version on request:


- **81410** 5000 mm
- **81411** 1000 0mm
- **84016*** on request

* E.g. **84016** x 13 pieces: cable on spool with total length of 13 metres
Only for surface or recessed mounting (not suspension).

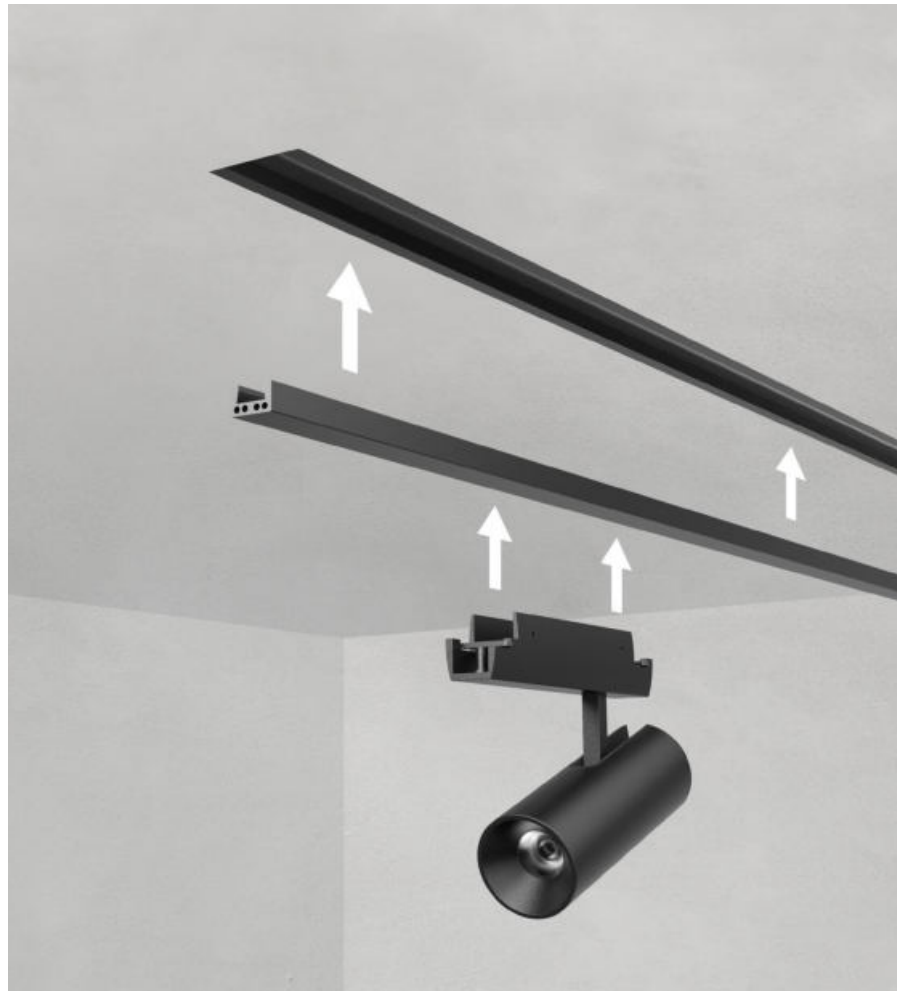


Recessed connection modules

The new recessed modules are designed with a new connection system that guarantees stability and safety. Using the included hex wrench, lodging the fixture in the recessed mount becomes extremely simple.

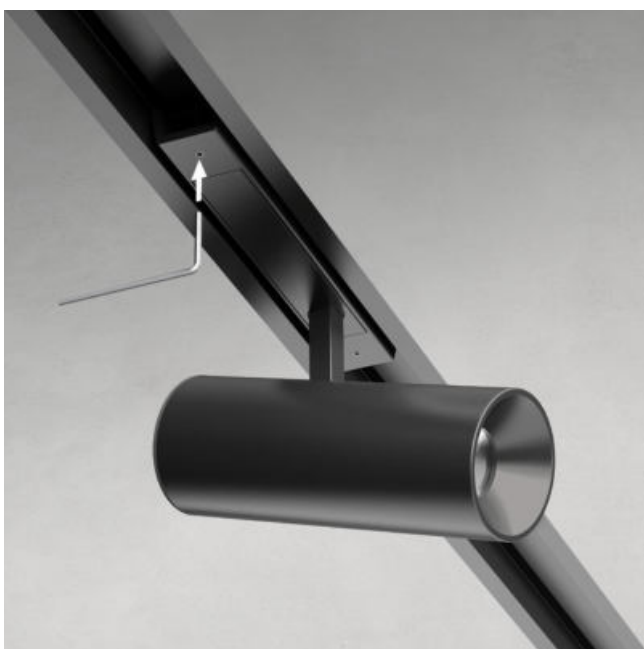

Ink system_L UGR | Recessed anti-glaring linear module




| CRI 92 - 7W DC - L 300 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|----------------|
| Black 83954 | W 3000 | 641 - 260 | 30 Flood (34°) |
| CRI 92 - 14W DC - L 600 mm | | | |
| Black 83955 | W 3000 | 1282 - 520 | 30 Flood (34°) |



| CRI 92 - 7W DC - L 502 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|----------------|
| Black 83995 | W 3000 | 641 - 260 | 30 Flood (34°) |
| CRI 92 - 14W DC - L 802 mm | | | |
| Black 83996 | W 3000 | 1282 - 520 | 30 Flood (34°) |


Ink system_L | Recessed linear module



| CRI 92 - 11W DC - L 300 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|--------------|
| Black 83952 | W 3000 | 1040 - 396 | 00 General - |
| CRI 92 - 22W DC - L 600 mm | | | |
| Black 83953 | W 3000 | 2081 - 791 | 00 General - |





| CRI 92 - 11W DC - L 502 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|--------------|
| Black 83993 | W 3000 | 1040 - 396 | 00 General - |
| CRI 92 - 22W DC - L 802 mm | | | |
| Black 83994 | W 3000 | 2081 - 791 | 00 General - |

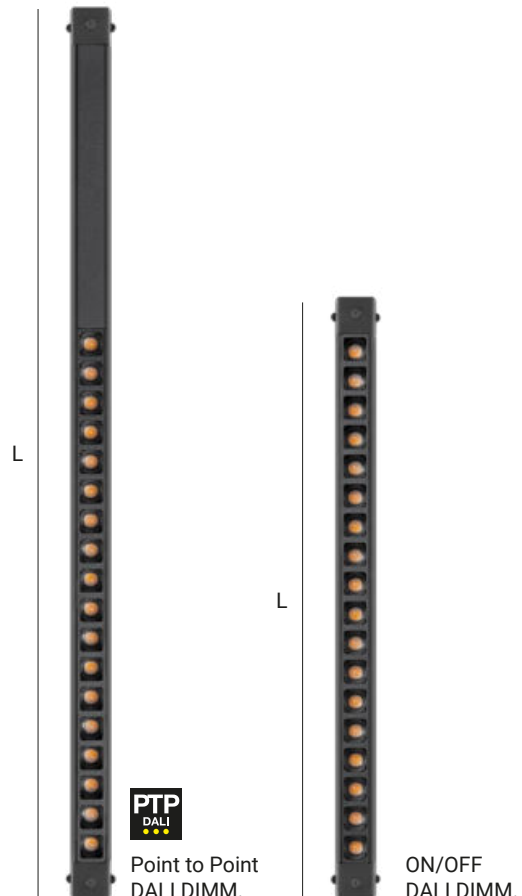




URAMAKAO
URAMAKERIA DO BRAZIL

Ink system_LP | Recessed 360° linear suspension



| CRI 92 - 27W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|-------------|--------------|
| Black 83965 | W 3000 | 3180 - 1983 | 00 General - |
| CRI 92 - 35W DC - L 1200 mm | | | |
| Black 83966 | W 3000 | 4063 - 2560 | 00 General - |

Ink system_LP UGR | Recessed Anti-glaring linear suspension





| CRI 92 - 9W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|----------------|
| Black 83963 | W 3000 | 781 - 275 | 30 Flood (34°) |
| CRI 92 - 12W DC - L 1200 mm | | | |
| Black 83964 | W 3000 | 1041 - 377 | 30 Flood (34°) |



| CRI 92 - 9W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|----------------|
| Black 84004 | W 3000 | 781 - 275 | 30 Flood (34°) |
| CRI 92 - 12W DC - L 1200 mm | | | |
| Black 84005 | W 3000 | 1041 - 377 | 30 Flood (34°) |

Ink system_LP | Recessed linear suspension





| CRI 92 - 22W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|--------------|
| Black 83961 | W 3000 | 2081 - 738 | 00 General - |
| CRI 92 - 29W DC - L 1200 mm | | | |
| Black 83962 | W 3000 | 2744 - 950 | 00 General - |



| CRI 92 - 22W DC - L 900 mm | Cct | lm S - D | Optic |
|-----------------------------|--------|------------|--------------|
| Black 84002 | W 3000 | 2081 - 738 | 00 General - |
| CRI 92 - 29W DC - L 1200 mm | | | |
| Black 84003 | W 3000 | 2744 - 950 | 00 General - |

Ink system_P | Recessed suspension




| CRI 92 - 6W DC - L 141 mm | Cct | lm S - D | Optic |
|---------------------------|--------|-----------|------------------|
| Black 83960 | W 3000 | 709 - 468 | 45 W.Flood (47°) |



| CRI 92 - 6W DC - L 262 mm | Cct | lm S - D | Optic |
|---------------------------|--------|-----------|------------------|
| Black 84001 | W 3000 | 709 - 468 | 45 W.Flood (47°) |

Ink system_SP | Recessed projector





| CRI 92 - 6W DC - L 141 mm | Cct | lm S - D | Optic |
|---------------------------|--------|-----------|---|
| Black 83956 | W 3000 | 709 - 440 | 10 Spot (21°) 30 Flood (31°) 45 Flood (41°) |



| CRI 92 - 6W DC - L 262 mm | Cct | lm S - D | Optic |
|---------------------------|--------|-----------|---|
| Black 83997 | W 3000 | 709 - 440 | 10 Spot (21°) 30 Flood (31°) 45 Flood (41°) |

Ink system_SP | Recessed projector




| CRI 92 - 12W DC - L 141 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|---|
| Black 83957 | W 3000 | 1068 - 675 | 10 Spot (18°) 30 Flood (32°) 45 W.Flood (48°) |



| CRI 92 - 12W DC - L 262 mm | Cct | lm S - D | Optic |
|----------------------------|--------|------------|---|
| Black 83998 | W 3000 | 1068 - 675 | 15 Spot (18°) 30 Flood (32°) 45 W.Flood (48°) |

Ink system_SP Focus | Recessed projector





| CRI 92 - 12W DC - L 141 mm | Cct | lm S - D | Optic |
|----------------------------|--------|---------------|--------------------|
| Black 83958 | W 3000 | 1234 - On req | 85 Focus (16°-33°) |



| CRI 92 - 12W DC - L 262 mm | Cct | lm S - D | Optic |
|----------------------------|--------|---------------|--------------------|
| Black 83999 | W 3000 | 1234 - On req | 85 Focus (16°-33°) |

Ink system_SP | Recessed projector





| CRI 92 - 22W DC - L 151 mm | Cct | lm S - D | Optic |
|----------------------------|--------|-------------|---|
| Black 83959 | W 3000 | 2534 - 1976 | 20 Spot (20°) 35 Flood (35°) 60 W.Flood (62°) |



| CRI 92 - 22W DC - L 262 mm | Cct | lm S - D | Optic |
|----------------------------|--------|-------------|---|
| Black 84000 | W 3000 | 2534 - 1976 | 20 Spot (20°) 35 Flood (35°) 60 W.Flood (62°) |


Ink system | 220-240 V AC | ON/OFF driver with cover



| | | |
|-------|--------------|-------|
| Black | 81413 | 120 W |
| Black | 81414 | 180 W |

RTG 81413 / 81414


Ink system | 220-240 V AC | Remote ON/OFF driver



| | | | |
|-------|--------------|------------------------|--------|
| White | 81416 | 120 W - Output 24 V DC | 300 mm |
| White | 81417 | 180 W - Output 24 V DC | 345 mm |

RTG 81416 / 81417

Ink system | DALI PUSH 0/1-10V | dimmer converter




| | | |
|-------|--------------|---------------------------|
| White | 83042 | 288 W Max - Input 24 V DC |
|-------|--------------|---------------------------|

To be completed with driver 24 V DC

RTG 83042



Ink system | Junction box



| | |
|-------|--------------|
| Black | 81424 |
|-------|--------------|

RTG 81424

Ink system | DALI PUSH 0/1-10V | dimmer converter




| | | |
|-------|--------------|---------------------------|
| White | 83041 | 120 W Max - Input 24 V DC |
|-------|--------------|---------------------------|

To be completed with driver 24 V DC

RTG 83041

Ink system | Remote converter DALI 2 PointToPoint





| | | |
|-------|--------------|---------------------------|
| White | 84018 | 180 W Max - Input 24 V DC |
|-------|--------------|---------------------------|

To be completed with driver 24 V DC

RTG 84018






Ink system | Cross fitting





Black **81418**

Ink system | L-shaped fitting




Black **81419**

Ink system | T-shaped fitting




Black **81420**

Ink system | Wall / ceiling sealing cap




Black **81421**

Ink system | 60x60 mounting bracket




Kit

- 84010** 3 brackets x 2 profiles
- 84011** 3 brackets x 5 profiles

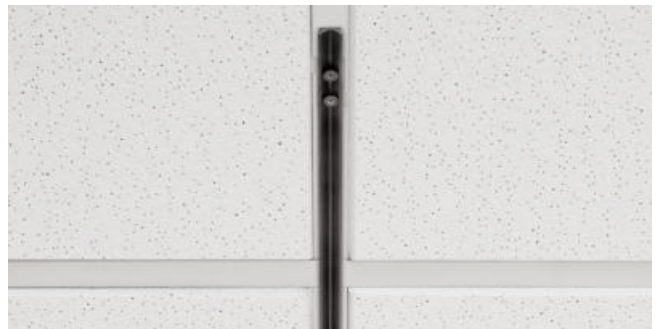

Ink system | Clips for curves





2x

Black **84017**





Ink system | Cardboard fixing




Black **81422** 2 x kit

Ink system | Swivel wall fixing




Black **81423** 2 x kit

Ink system | Steel support and cable



Black **81425**

Ink system | Template



Black **83186**

Ink system | Cable shear



81427

Pag. 359

RTG 81422 / 81423 / 81425 / 81427

Pag. 358

RTG 84017 / 84010 / 84011 / 81421 / 81420 / 81419 / 81418

Linear System

A close-up photograph of a white architectural profile, likely a door or window frame, set against a grey wall. The profile has a multi-faceted, fluted design. The lighting is soft, highlighting the texture of the wall and the smooth surface of the profile.

fylo+


Materials

Aluminium profile


Quartz powder resin and mixed
construction site material




fylo+ range

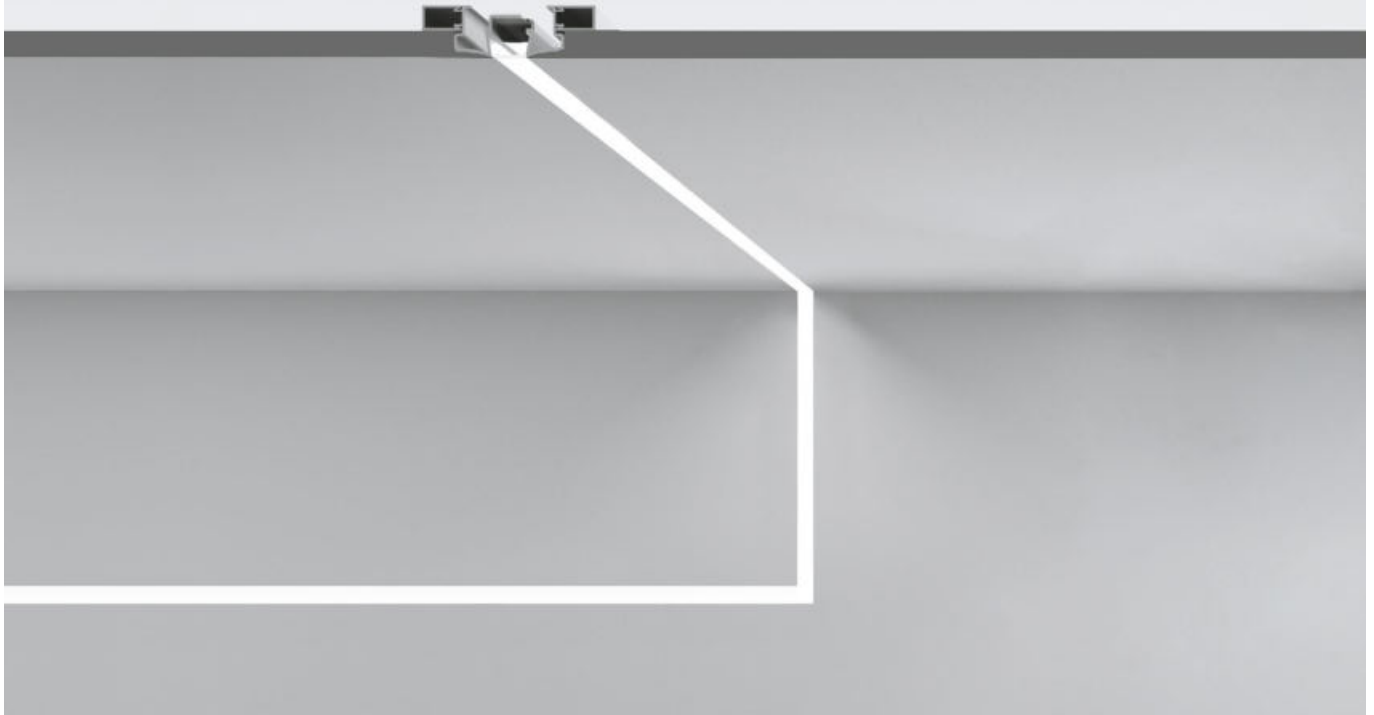


Direct



Recessed

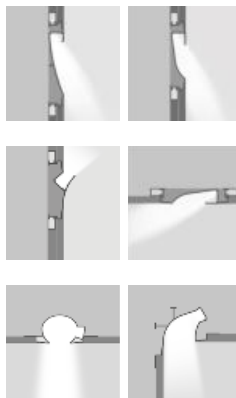


Surface



| | | | |
|-------------------|---|---|---|
| Lenght | 1000 mm 2000 mm Custom 1100 - 1900 mm (min. 100 mm) | 1000 mm 2000 mm Custom 1100 - 1900 mm (min. 100 mm) | 1000 mm 2000 mm Custom 1100 - 1900 mm (min. 100 mm) |
| LED source | Inflex LED Strip | Inflex LED Strip | Inflex LED Strip |
| Control | On/Off DALI 0/1-10 V | On/Off DALI 0/1-10 V | On/Off DALI 0/1-10 V |

More light, more efficiency

The choice of aluminium, lightened due to the specific design developed for the profiles section, allows to exploit the surface of the module as a diffuser enhancing the light performance available for the range of products.

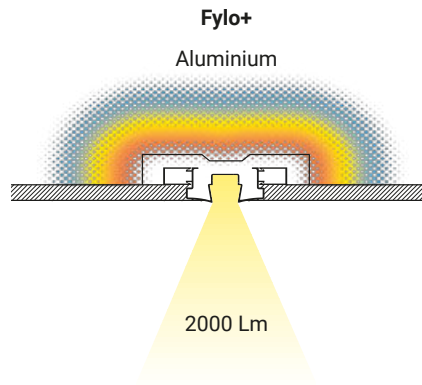

reddot award
winner

PATENTED

Continuous line


The new ROLL DIFFUSER was designed to create continuous light lines. Once coupled at the ends, the special polycarbonate reel unwinds following the profile along its entire length: this solution allows avoiding complex installation operations, replaced by a single, simple assembly operations with drastically reduced times. With the equipment lit, the diffuser screens and harmonises the light emitted by the source, reducing glaring drastically even when observed directly.




Quick installation

The profiles are snap-coupled on a dedicated bracket. Special plastic elements were introduced into the rear of the profiles, in the linear guides where they slide. Fixing is not bound to a pre-established point and so it can be installed as the installation technician wishes.

Fylo+ Surface





Bring the profile
closer to the bracket



Push the product firmly
against the bracke


Fylo+ Recessed




Fylo+ Recessed is provided for cardboard wall-mounted installation. For installation on existing walls is sufficient to remove the lateral flaps included in the profile.

Installation process

Fylo+ keeps the aesthetics intact as compared to the previous versions. Once installed, the profiles are concealed fully camouflaging with the surrounding architecture; the integrated light concept allows to customise the spaces with unique and precious light details.

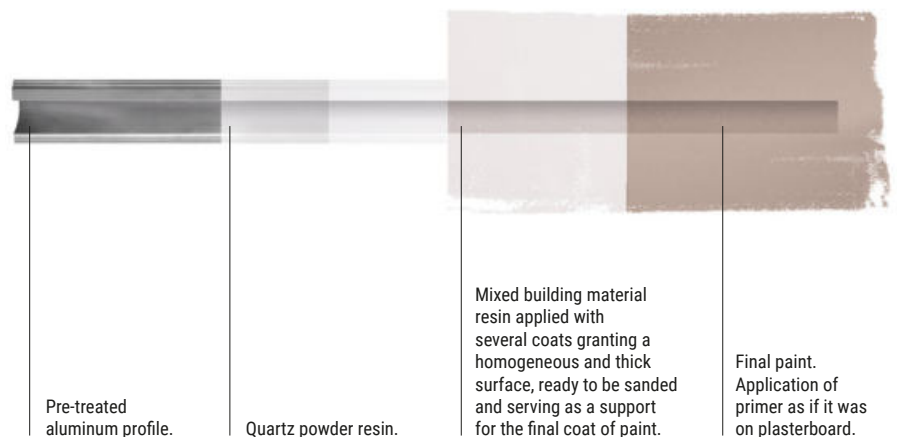

Fylo_Direct

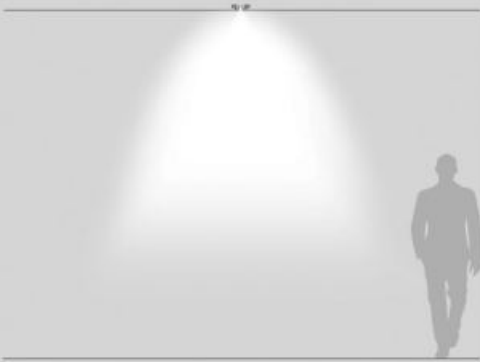

65180 - 65181

Fylo_Recessed



65006 - 65007



65003 - 65004



65027 - 65028



65009 - 65010



65012 - 65013

Fylo_Surface



65015 - 65016



65018 - 65019




65021 - 65022




65024 - 65025

Fylo+ Direct_1 | Reel diffuser | Recessed linear light



57xL.



| | | L mm |
|-------|--------------|---------|
| White | 65180 | 1000 |
| White | 65181 | 2000 |
| White | 65187 | custom* |

Accessories Pag. 369

- 65184** Opaline diffuser L roller 5 m
- 65183** Opaline diffuser L roller 10 m
- 65182** Opaline diffuser L roller 20 m
- 62900** Outer casing for dropped ceiling

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65187.

RTG 65180 / 65181

Fylo+ | Light units - LED Strip



type

Ribbon **Pag. 900**

Dropper **Pag. 908**


Electronics

| 99374 | 99331 | 99332 | 83062 | 99787 |
|---------------------------------------|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 48 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

Fylo+ Recessed_1 | Recessed linear light body



97xL.



| | | L mm |
|-------|--------------|---------|
| White | 65027 | 1000 |
| White | 65028 | 2000 |
| White | 65032 | custom* |

Accessories Pag. 369

- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling


The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.
For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65032.

Fylo+ Recessed_3 | Recessed linear light body



113xL.



| | | L mm |
|-------|--------------|---------|
| White | 65003 | 1000 |
| White | 65004 | 2000 |
| White | 65046 | custom* |

Accessories Pag. 369

- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling


The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.
For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65046.

Fylo+ Recessed_2 | Recessed linear light body



182xL.



| | | L mm |
|-------|--------------|---------|
| White | 65006 | 1000 |
| White | 65007 | 2000 |
| White | 65045 | custom* |


Accessories Pag. 369

- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling


The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.
For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65045.

Fylo+ Recessed_4 | Recessed linear light body



94xL



| | | L mm |
|-------|--------------|---------|
| White | 65009 | 1000 |
| White | 65010 | 2000 |
| White | 65047 | custom* |

Accessories Pag. 369

- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.


For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65047.

RTG 65009 / 65010

Fylo+ Recessed_5 | Recessed linear light body



65xL



| | | L mm |
|-------|--------------|---------|
| White | 65012 | 1000 |
| White | 65013 | 2000 |
| White | 65048 | custom* |

Accessories Pag. 369



- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.

For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65048.

Fylo+ Surface_1 | Surface light body



| | | L mm |
|-------|--------------|---------|
| White | 65015 | 1000 |
| White | 65016 | 2000 |
| White | 65049 | custom* |

Accessories Pag. 369


- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling
- 65008** Sealing caps 2 pcs

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65049.

RTG 65015 / 65016

Fylo+ Surface_3 | Surface light body



| | | L mm |
|-------|--------------|---------|
| White | 65021 | 1000 |
| White | 65022 | 2000 |
| White | 65058 | custom* |



Accessories Pag. 369

- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling
- 65014** Sealing caps 2 pcs

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65058.

Fylo+ Surface_2 | Surface light body



| | | L mm |
|-------|--------------|---------|
| White | 65018 | 1000 |
| White | 65019 | 2000 |
| White | 65053 | custom* |

Accessories Pag. 369


- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling
- 65011** Sealing caps 2 pcs

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65053.

RTG 65018 / 65019

Fylo+ Surface_4 | Angular light body



| | | L mm |
|-------|--------------|---------|
| White | 65024 | 1000 |
| White | 65025 | 2000 |
| White | 65059 | custom* |

Accessories Pag. 369

- 65054** Opaline diffuser 1pcs L 1 m
- 65055** Opaline diffuser 5pcs L 1 m
- 62900** Outer casing for dropped ceiling
- 65097** Sealing caps 2 pcs

The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65059.

RTG 65025

Fylo+ | Light units - LED Strip



type

Ribbon **Pag. 900**

Dropper **Pag. 908**

Electronics

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

Accessories




description
65184 Opaline diffuser 5 m
suitable for: Fylo+ Direct_1 / Fylo+ Recessed_Y




description
65183 Opaline diffuser 10 m
suitable for: Fylo+ Direct_1 / Fylo+ Recessed_Y




description
65182 Opaline diffuser 20 m
suitable for: Fylo+ Direct_1 / Fylo+ Recessed_Y




description
62900 Outer casing
suitable for: Fylo+ Direct_1 / Fylo+ Recessed_1
Fylo+ Recessed_2 / Fylo+ Recessed_3
Fylo+ Recessed_4 / Fylo+ Recessed_5
Fylo+ Recessed_Y / Fylo+ Surface_1 / Fylo+ Surface_2
Fylo+ Surface_3 / Fylo+ Surface_4




description
65054 Opaline diffuser 1 m
suitable for: Fylo+ Recessed_1 / Fylo+ Recessed_2
Fylo+ Recessed_3 / Fylo+ Recessed_4
Fylo+ Recessed_5 / Fylo+ Surface_1 / Fylo+ Surface_2
Fylo+ Surface_3 / Fylo+ Surface_4




description
65055 Opaline diffuser 1 m x 5pcs
suitable for: Fylo+ Recessed_1 / Fylo+ Recessed_2
Fylo+ Recessed_3 / Fylo+ Recessed_4
Fylo+ Recessed_5 / Fylo+ Surface_1 / Fylo+ Surface_2
Fylo+ Surface_3 / Fylo+ Surface_4




2x **description**
65008 Sealing caps
suitable for: Fylo+ Surface_1



2x **description**
65011 Sealing caps
suitable for: Fylo+ Surface_2



2x **description**
65014 Sealing caps
suitable for: Fylo+ Surface_3



2x **description**
65097 Sealing caps
suitable for: Fylo+ Surface_4






archicove

Materials

Aluminium body

Polycarbonate diffuser


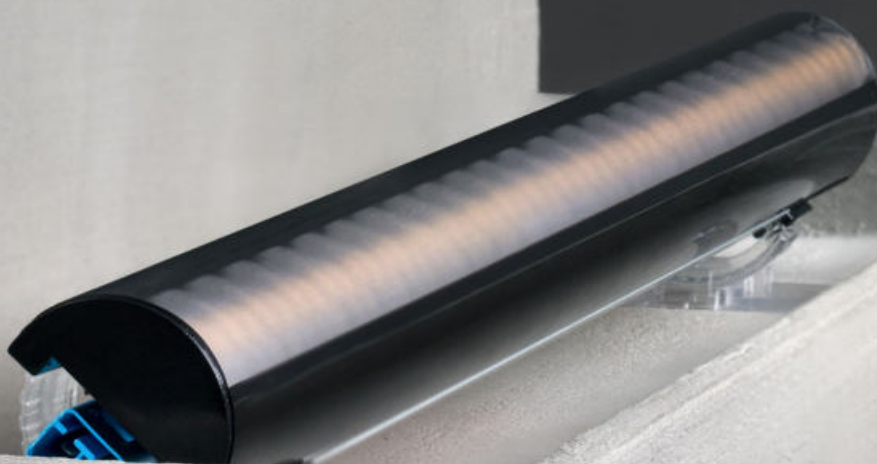






Archicove | Linear profiles | 24 V DC | topLED



| CRI 80 - 9W DC | | Cct | lm S - D | Optic |
|----------------|--------------|--------|------------|--------------------------|
| Black | 94110 | M 2700 | 979 - 620 | 30 Flood (34°) |
| | | W 3000 | 1044 - 662 | 60 W.Flood (60°) |
| | | N 4000 | 1092 - 692 | 00 General (128°) |
| | | | | 07 Asymm. - |



| CRI 80 - 27W DC | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|-------------|--------------------------|
| Black | 94115 | M 2700 | 2925 - 1855 | 30 Flood (34°) |
| | | W 3000 | 3132 - 1986 | 60 W.Flood (60°) |
| | | N 4000 | 3276 - 2077 | 00 General (128°) |
| | | | | 07 Asymm. - |




Electronics

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

Accessories and cables Pag. 375



Equipment equipped with male and female connectors, conceived for quick installation of a continuous row.





Precise light beam adjustment option by setting the rotation angle of the LED profile.


Archicove On/Off | Linear profiles | 190-240 V AC | topLED




| CRI 80 - 9W DC - 10W AC | | Cct | lm S - D | Optic |
|-------------------------|--------------|--------|------------|--------------------------|
| Black | 92023 | M 2700 | 979 - 620 | 30 Flood (34°) |
| | | W 3000 | 1044 - 662 | 60 W.Flood (60°) |
| | | N 4000 | 1092 - 692 | 00 General (128°) |
| | | | | 07 Asymm. - |



| CRI 80 - 27W DC - 30W AC | | Cct | lm S - D | Optic |
|--------------------------|--------------|--------|-------------|--------------------------|
| Black | 92025 | M 2700 | 2925 - 1855 | 30 Flood (34°) |
| | | W 3000 | 3132 - 1986 | 60 W.Flood (60°) |
| | | N 4000 | 3276 - 2077 | 00 General (128°) |
| | | | | 07 Asymm. - |



Accessories and cables Pag. 375

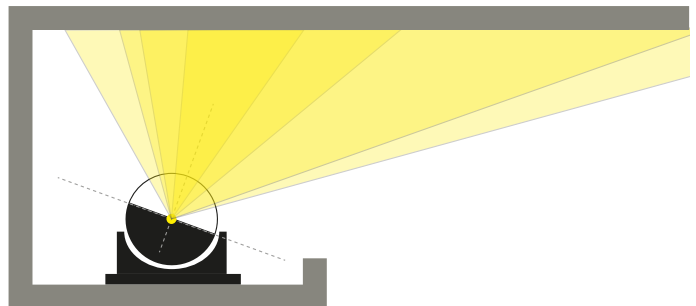

The extensive variety of optics offers a wide choice of solutions. Above all, it allows to redefine the cove lighting concept: not only softly diffused indirect light, but also a tool to be used to enhance the architecture with more or less narrow dimensions.

Accessories



| | description |
|--------------|---------------------|
| 98699 | Steel support plate |
| 98781 | Steel support plate |

suitable for: Archicove / Archicove On/Off

Cables



| | description |
|--------------|-------------|
| 98879 | Supply 24V |

suitable for: Archicove




| | description |
|--------------|---------------|
| 98878 | Extension 24V |

suitable for: Archicove



| | description |
|--------------|-----------------|
| 98713 | Supply 190~250V |

suitable for: Archicove On/Off




| | description |
|--------------|--------------------|
| 98716 | Extension 190~250V |

suitable for: Archicove On/Off

Kaplica | Hockberg, Poland



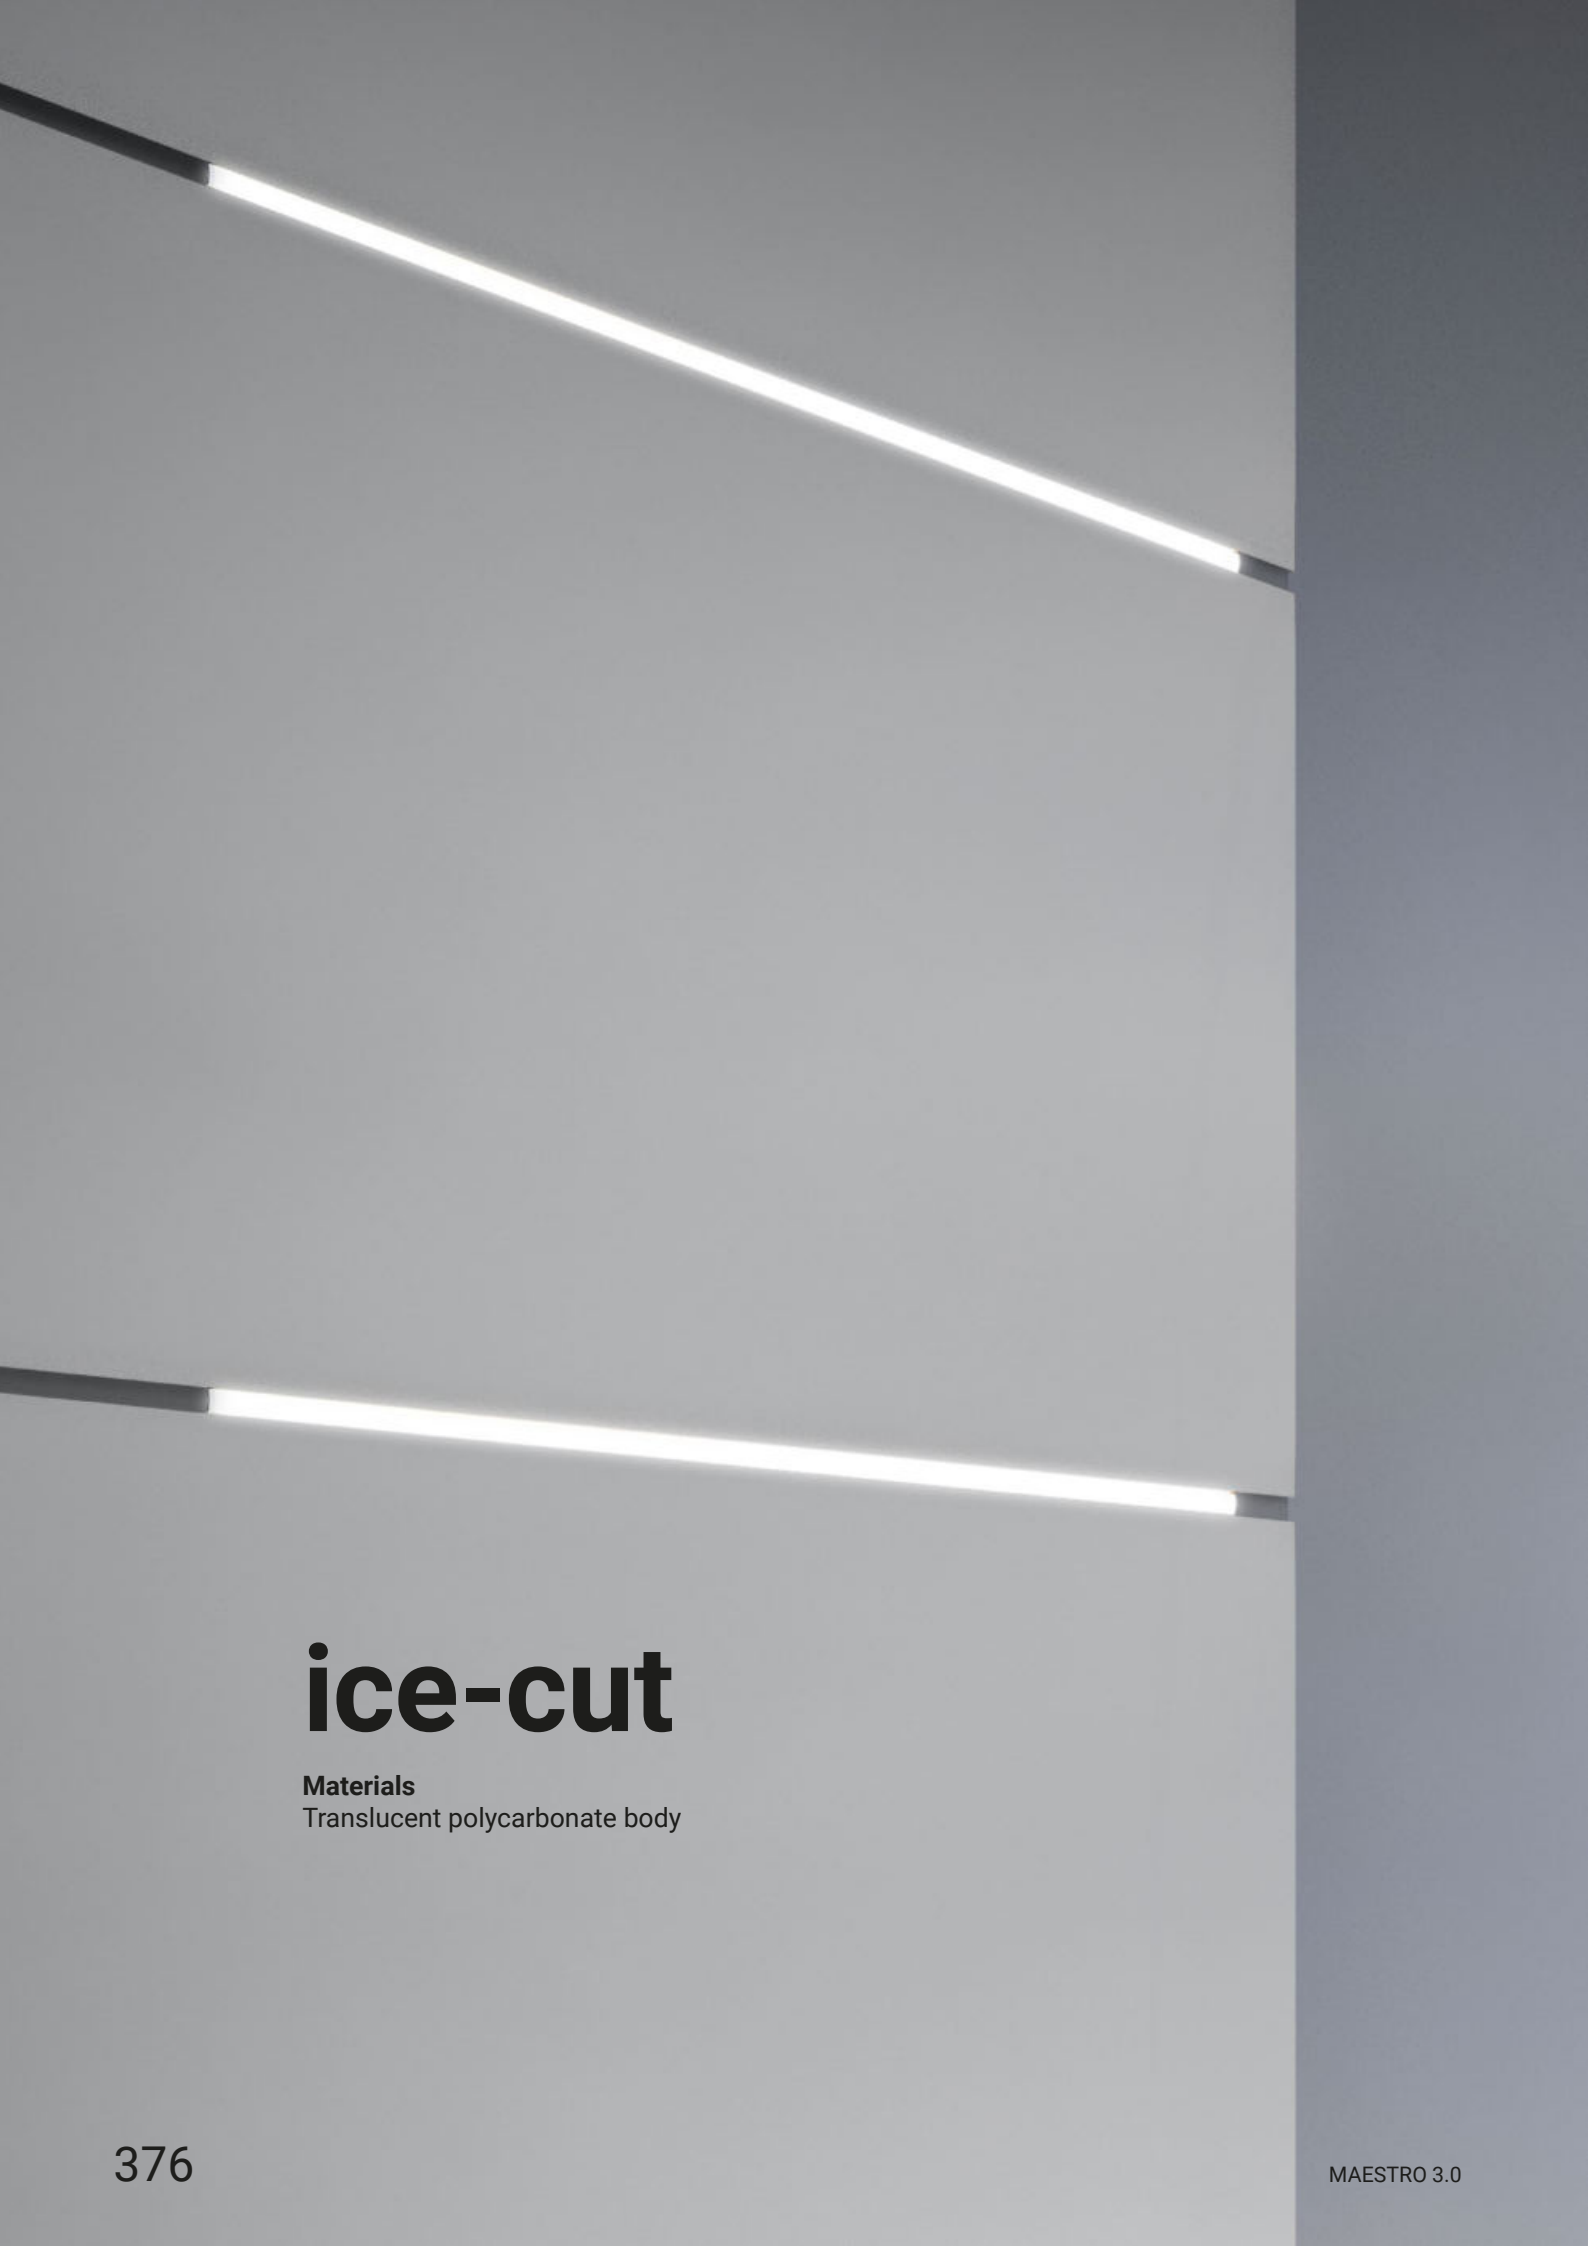



ice-cut

Materials

Translucent polycarbonate body



Ice-Cut | Linear profiles | 24 V DC | topLED



| L 512 mm CRI 80 - 6W DC | Cct | lm S - D | Optic |
|-------------------------|---------------|-----------|---------------------|
| Opaline 81247 | M 2700 | 420 - 244 | 00 General - |
| | W 3000 | 438 - 265 | |
| | N 4000 | 478 - 289 | |



Electronics

| 99374 | 83018 | 99332 | 99722 |
|---|---|--|---|
| ON/OFF 1 - 12 art. p 210 x 148 x h 25 | PUSH 1 - 12 art. p 210 x 149 x h 30 | 0/1-10V 1 - 25 art. p 150 x 160 x h 35 | DALI 1 - 20 art. p 191 x 163 x h 38 |

| L 1012 mm CRI 80 - 12W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-----------|---------------------|
| Opaline 81249 | M 2700 | 840 - 488 | 00 General - |
| | W 3000 | 875 - 530 | |
| | N 4000 | 956 - 579 | |



Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|--|---|
| ON/OFF 1 - 6 art. p 210 x 148 x h 25 | PUSH 1 - 6 art. p 210 x 149 x h 30 | 0/1-10V 1 - 12 art. p 150 x 160 x h 35 | DALI 1 - 10 art. p 191 x 163 x h 38 |

| L 1512 mm CRI 80 - 18W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|------------|---------------------|
| Opaline 81251 | M 2700 | 1260 - 731 | 00 General - |
| | W 3000 | 1313 - 794 | |
| | N 4000 | 1434 - 868 | |



Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 4 art. p 210 x 148 x h 25 | PUSH 1 - 8 art. p 210 x 149 x h 30 | 0/1-10V 1 - 8 art. p 150 x 160 x h 35 | DALI 1 - 6 art. p 191 x 163 x h 38 |

| L 2012 mm CRI 80 - 24W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|---------------------|
| Opaline 81253 | M 2700 | 1680 - 975 | 00 General - |
| | W 3000 | 1750 - 1060 | |
| | N 4000 | 1912 - 1157 | |





Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 3 art. p 210 x 148 x h 25 | PUSH 1 - 3 art. p 210 x 149 x h 30 | 0/1-10V 1 - 6 art. p 150 x 160 x h 35 | DALI 1 - 5 art. p 191 x 163 x h 38 |

Accessories Pag. 379

Ice-Cut | Linear profiles | 24 V DC | topLED



| L 512 mm CRI 92 - 6W DC | Cct | lm S - D | Optic |
|-------------------------|---------------|-----------|---------------------|
| Opaline 81248 | W 3000 | 373 - 225 | 00 General - |
| | N 4000 | 409 - 248 | |



Electronics

| 99374 | 83018 | 99332 | 99722 |
|---|---|--|---|
| ON/OFF 1 - 12 art. p 210 x 148 x h 25 | PUSH 1 - 12 art. p 210 x 149 x h 30 | 0/1-10V 1 - 25 art. p 150 x 160 x h 35 | DALI 1 - 20 art. p 191 x 163 x h 38 |

| L 1012 mm CRI 92 - 12W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-----------|---------------------|
| Opaline 81250 | W 3000 | 745 - 451 | 00 General - |
| | N 4000 | 818 - 496 | |



Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|--|---|
| ON/OFF 1 - 6 art. p 210 x 148 x h 25 | PUSH 1 - 6 art. p 210 x 149 x h 30 | 0/1-10V 1 - 12 art. p 150 x 160 x h 35 | DALI 1 - 10 art. p 191 x 163 x h 38 |

| L 1512 mm CRI 92 - 18W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|------------|---------------------|
| Opaline 81252 | W 3000 | 1118 - 676 | 00 General - |
| | N 4000 | 1227 - 743 | |



Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 4 art. p 210 x 148 x h 25 | PUSH 1 - 8 art. p 210 x 149 x h 30 | 0/1-10V 1 - 8 art. p 150 x 160 x h 35 | DALI 1 - 6 art. p 191 x 163 x h 38 |

| L 2012 mm CRI 92 - 24W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|------------|---------------------|
| Opaline 81254 | W 3000 | 1490 - 903 | 00 General - |
| | N 4000 | 1636 - 991 | |



Electronics



| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 3 art. p 210 x 148 x h 25 | PUSH 1 - 3 art. p 210 x 149 x h 30 | 0/1-10V 1 - 6 art. p 150 x 160 x h 35 | DALI 1 - 5 art. p 191 x 163 x h 38 |

Accessories Pag. 379

Pag. 379

RTG 95437W00

Ice-Cut_F | Linear profiles | 24 V DC | topLED



| L 510 mm CRI 80 - 6W DC | Cct | lm S - D | Optic |
|-------------------------|---------------|-----------|---------------------|
| Opaline 95436 | M 2700 | 420 - 244 | 00 General - |
| | W 3000 | 438 - 265 | |
| | N 4000 | 478 - 289 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|---|---|--|---|
| ON/OFF 1 - 12 art. p 210 x 148 x h 25 | PUSH 1 - 12 art. p 210 x 149 x h 30 | 0/1-10V 1 - 25 art. p 150 x 160 x h 35 | DALI 1 - 20 art. p 191 x 163 x h 38 |

| L 1010 mm CRI 80 - 12 W DC | Cct | lm S - D | Optic |
|----------------------------|---------------|-----------|---------------------|
| Opaline 95437 | M 2700 | 840 - 488 | 00 General - |
| | W 3000 | 875 - 530 | |
| | N 4000 | 956 - 579 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|--|---|
| ON/OFF 1 - 6 art. p 210 x 148 x h 25 | PUSH 1 - 6 art. p 210 x 149 x h 30 | 0/1-10V 1 - 12 art. p 150 x 160 x h 35 | DALI 1 - 10 art. p 191 x 163 x h 38 |

| L 1510 mm CRI 80 - 18W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|------------|---------------------|
| Opaline 95438 | M 2700 | 1260 - 731 | 00 General - |
| | W 3000 | 1313 - 794 | |
| | N 4000 | 1434 - 868 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 4 art. p 210 x 148 x h 25 | PUSH 1 - 8 art. p 210 x 149 x h 30 | 0/1-10V 1 - 8 art. p 150 x 160 x h 35 | DALI 1 - 6 art. p 191 x 163 x h 38 |

| L 2010 mm CRI 80 - 24W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|---------------------|
| Opaline 95822 | M 2700 | 1680 - 975 | 00 General - |
| | W 3000 | 1750 - 1060 | |
| | N 4000 | 1912 - 1157 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 3 art. p 210 x 148 x h 25 | PUSH 1 - 3 art. p 210 x 149 x h 30 | 0/1-10V 1 - 6 art. p 150 x 160 x h 35 | DALI 1 - 5 art. p 191 x 163 x h 38 |


Accessories Pag. 379

Accessories



Multiple outlet cable



| | |
|-----------------------------------|------------------|
| 89121 | Conn. F - 300 mm |
| suitable for: Ice-Cut / Ice-Cut_F | |



Extension for multiple outlets

| | |
|-----------------------------------|-------------------|
| 89123 | Conn. M + F - 1 m |
| 89125 | Conn. M + F - 3 m |
| suitable for: Ice-Cut / Ice-Cut_F | |

Ice-Cut_F | Linear profiles | 24 V DC | topLED



| L 510 mm CRI 92 - 6 W DC | Cct | lm S - D | Optic |
|--------------------------|---------------|-----------|---------------------|
| Opaline 97846 | W 3000 | 373 - 225 | 00 General - |
| | N 4000 | 409 - 248 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|---|---|--|---|
| ON/OFF 1 - 12 art. p 210 x 148 x h 25 | PUSH 1 - 12 art. p 210 x 149 x h 30 | 0/1-10V 1 - 25 art. p 150 x 160 x h 35 | DALI 1 - 20 art. p 191 x 163 x h 38 |

| L 1010 mm CRI 92 - 12 W DC | Cct | lm S - D | Optic |
|----------------------------|---------------|-----------|---------------------|
| Opaline 97847 | W 3000 | 745 - 451 | 00 General - |
| | N 4000 | 818 - 496 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|--|---|
| ON/OFF 1 - 6 art. p 210 x 148 x h 25 | PUSH 1 - 6 art. p 210 x 149 x h 30 | 0/1-10V 1 - 12 art. p 150 x 160 x h 35 | DALI 1 - 10 art. p 191 x 163 x h 38 |

| L 1510 mm CRI 92 - 18W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|---------------------|
| Opaline 97848 | W 3000 | 1118 - 676 | 00 General - |
| | N 4000 | 1227 - 1078 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 4 art. p 210 x 148 x h 25 | PUSH 1 - 8 art. p 210 x 149 x h 30 | 0/1-10V 1 - 8 art. p 150 x 160 x h 35 | DALI 1 - 6 art. p 191 x 163 x h 38 |

| L 2010 mm CRI 92 - 24W DC | Cct | lm S - D | Optic |
|---------------------------|---------------|------------|---------------------|
| Opaline 97849 | W 3000 | 1492 - 903 | 00 General - |
| | N 4000 | 1636 - 991 | |

Electronics

| 99374 | 83018 | 99332 | 99722 |
|--|--|---|--|
| ON/OFF 1 - 3 art. p 210 x 148 x h 25 | PUSH 1 - 3 art. p 210 x 149 x h 30 | 0/1-10V 1 - 6 art. p 150 x 160 x h 35 | DALI 1 - 5 art. p 191 x 163 x h 38 |

Accessories Pag. 379



Multiple outlet cable

| | |
|-----------------------------------|-----------------|
| 89119 | Conn. 6 M - 1 m |
| suitable for: Ice-Cut / Ice-Cut_F | |



2 x Description

| | |
|-------------------------|--------------|
| 98398 | Fixing clips |
| suitable for: Ice-Cut_F | |



Path markers



path markers range index


Step




Envelope




Petit




Quara




Dot



Vissa




Ilamt







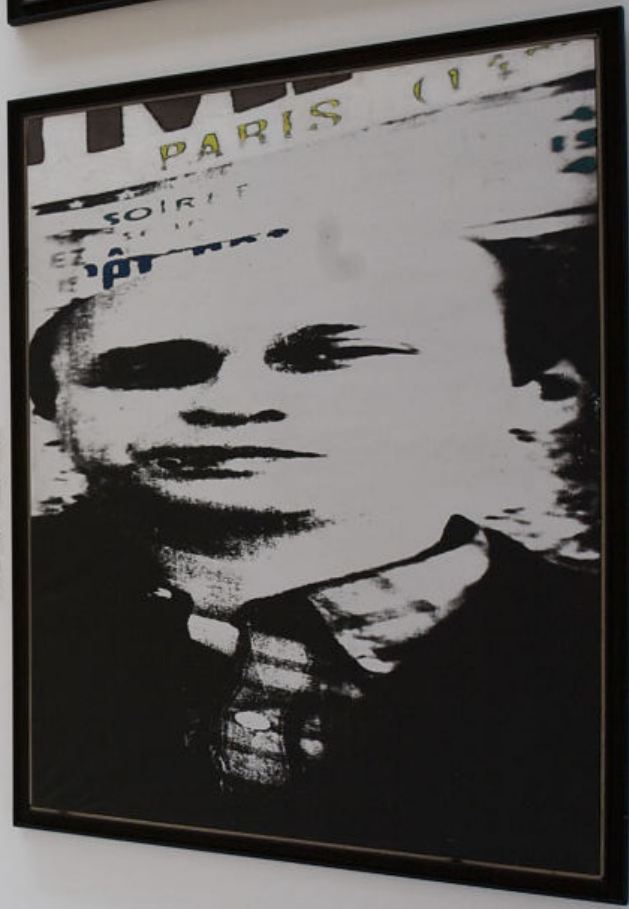


Small vertical text label, possibly a title or description, located to the left of the portrait.



step

Materials
Aluminium body

Step | Path-marker | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|----------|--------------------|
| Chrome 81323 | M 2700 | 136 - 64 | 07 Asymm. - |
| Nickel 81324 | W 3000 | 145 - 68 | |
| Brass 81325 | N 4000 | 159 - 73 | |
| White 81326 | | | |
| Black 81327 | | | |


Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|--|--|---|--|---|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |

RTG 81323W07 / 81326W07

Recessed casing Pag. 387


Recessed casing



description

99850 Template


suitable for: Step



envelope

Materials
Aluminium body

Envelope_1 | Path-marker | powerLED 1 W DC 350 mA




| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|------------------------|---------------|----------|-------------------|
| White 96976 | M 2700 | 136 - 26 | 07 Asymm - |
| Grey 96978 | W 3000 | 145 - 28 | |
| DarkBrown 96979 | N 4000 | 155 - 30 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 389

Envelope_2 | Path-marker | powerLED 1 W DC 350 mA




| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|---------------------|
| White 96971 | M 2700 | 136 - On req | 18 General - |
| Grey 96973 | W 3000 | 145 - On req | |
| DarkBrown 96974 | N 4000 | 155 - On req | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 389

Envelope_4 | Path-marker | powerLED 1 W DC 350 mA




| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|---------------------|
| White 96966 | M 2700 | 136 - On req | 18 General - |
| Grey 96968 | W 3000 | 145 - On req | |
| DarkBrown 96969 | N 4000 | 155 - On req | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 389

Recessed casing



| description | type |
|------------------------------|------------|
| 84336 Recessed casing | PVC |

suitable for: Envelope_1 / Envelope_2 / Envelope_4




petit


Materials

Brass or aluminium body

Petit_R | Path-marker | powerLED 1 W DC 350 mA



15



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|--------------------|
| White | 92316 | M 2700 | 98 - On req | 05 N.Spot - |
| Nickel | 92318 | W 3000 | 107 - On req | |
| | | N 4000 | 114 - On req | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|---|---|--|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |


Recessed casing Pag. 393

RTG 92316W05

Petit_Q | Path-marker | powerLED 1 W DC 350 mA



15



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|-----------------------|
| White | 92324 | M 2700 | 98 - On req | 05 N.Spot (6°) |
| Nickel | 92326 | W 3000 | 107 - On req | |
| | | N 4000 | 114 - On req | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|---|---|--|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |


Recessed casing Pag. 393

RTG 92324W05

Petit_R | Path-marker | powerLED 1,5 W DC 500 mA



15



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|-----------------------|
| White | 92320 | M 2700 | 130 - On req | 05 N.Spot (6°) |
| Nickel | 92322 | W 3000 | 143 - On req | |
| | | N 4000 | 152 - On req | |

Electronics


| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|---|---|---|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |

Recessed casing Pag. 393

Petit_Q | Path-marker | powerLED 1,5 W DC 500 mA



15





| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|-----------------------|
| White | 92328 | M 2700 | 130 - On req | 05 N.Spot (6°) |
| Nickel | 92330 | W 3000 | 143 - On req | |
| | | N 4000 | 152 - On req | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|---|---|---|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |

Recessed casing Pag. 393

Petit_R | Path-marker | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|-----------------------|
| White | 92405 | M 2700 | 136 - On req | 05 N.Spot (6°) |
| Nickel | 92407 | W 3000 | 145 - 119 | |
| | | N 4000 | 159 - 127 | |



Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 138 x 1 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 1 22 x h 21 | |

Recessed casing Pag. 393

RTG 92405W05

Petit_R | Path-marker | powerLED 2 W DC 630 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|-----------------------|
| White | 92409 | M 2700 | 219 - On req | 05 N.Spot (6°) |
| Nickel | 92411 | W 3000 | 233 - 191 | |
| | | N 4000 | 249 - 204 | |


Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 103 x 1 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 art. p 138 x 1 22 x h 21 | |

Recessed casing Pag. 393

RTG 92409W05

Petit_Q | Path-marker | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|-----------------------|
| White | 92413 | M 2700 | 136 - On req | 05 N.Spot (6°) |
| Nickel | 92415 | W 3000 | 145 - 119 | |
| | | N 4000 | 159 - 127 | |



Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 138 x 1 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 1 22 x h 21 | |

Recessed casing Pag. 393

RTG 92413W05

Petit_Q | Path-marker | powerLED 2 W DC 630 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|---------------------|
| White | 92417 | M 2700 | 219 - On req | 05 N.Spot 6° |
| Nickel | 92419 | W 3000 | 233 - 191 | |
| | | N 4000 | 249 - 204 | |


Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 103 x 1 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 art. p 138 x 1 22 x h 21 | |


Recessed casing Pag. 393

RTG 92417W05


Recessed casing




| | description | type |
|--|-----------------|------|
| 84335 | Recessed casing | PVC |
| suitable for: Petit_R 1W 20 mm / Petit_Q 1W 20 mm | | |




| | description | type |
|--|-----------------|------|
| 84917 | Recessed casing | PVC |
| suitable for: Petit_R 1,5W / Petit_Q 1,5W | | |



| | description | type |
|--|-----------------|------|
| 84336 | Recessed casing | PVC |
| suitable for: Petit_R 1W 40mm / Petit_Q 1W 40mm | | |




| | description | type |
|--|-----------------|------|
| 84915 | Recessed casing | PVC |
| suitable for: Petit_R 1W 40mm / Petit_Q 1W 40mm | | |



| | description | type |
|--|-----------------|------|
| 84901 | Recessed casing | PVC |
| suitable for: Petit_R 2W / Petit_Q 2W | | |






quara

Materials
Aluminium body

Quara_R | Path-marker | powerLED 1 W DC 350 mA



20




| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|------------------------|---------------|----------|-------------------|
| White 93508 | M 2700 | 98 - 7 | 07 Asym. - |
| Grey 93513 | W 3000 | 107 - 8 | |
| DarkBrown 93515 | N 4000 | 114 - 8 | |
| Steel 93516 | | | |

Electronics


| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 122 x h 21 | |

RTG 93508W07 / 93513W07 / 93515W07

Quara_Q | Path-marker | powerLED 1 W DC 350 mA



20



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|------------------------|---------------|----------|-------------------|
| White 93517 | M 2700 | 100 - 7 | 07 Asym. - |
| Grey 93518 | W 3000 | 107 - 8 | |
| DarkBrown 93519 | N 4000 | 114 - 8 | |
| Steel 93520 | | | |

Electronics


| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 122 x h 21 | |

RTG 93517W07 / 93518W07 / 93519W07

Quara_R | Path-marker | powerLED 2 W DC 630 mA



52



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Nickel 86402 | M 2700 | 219 - On req | 70 W.Flood - |
| | W 3000 | 233 - 167 | |
| | N 4000 | 249 - 178 | |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |




| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|----------|---------------------|
| Nickel 83582 | M 2700 | 233 - 79 | 70 W.Flood - |
| | W 3000 | 249 - 84 | |
| | N 4000 | 266 - 90 | |

RTG 86402W70 / 86402N70

Quara_Q | Path-marker | powerLED 2 W DC 630 mA



52



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Nickel 86564 | M 2700 | 219 - On req | 70 W.Flood - |
| | W 3000 | 233 - 167 | |
| | N 4000 | 249 - 178 | |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 103 x 158 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |




| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|----------|---------------------|
| Nickel 83586 | M 2700 | 233 - 79 | 70 W.Flood - |
| | W 3000 | 249 - 84 | |
| | N 4000 | 266 - 90 | |

RTG 86564W70 / 86564N70

Recessed casing



| description | type |
|--------------------------------------|------------|
| 98950 Recessed casing | PVC |
| suitable for: Quara_R 1W/ Quara_Q 1W | |



| description | type |
|---------------------------------------|------------|
| 84338 Recessed casing | PVC |
| suitable for: Quara_R 2W / Quara_Q 2W | |

dot

Materials

Anodised aluminium body
Polycarbonate diffuser



Dot_R | Path-marker | powerLED 1 W DC 350 mA



25



Ø27


| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|----------------------|---------------|----------|-------------------------|
| Opaline 93521 | M 2700 | 136 - 53 | 00 General (79°) |
| | W 3000 | 145 - 56 | |
| | N 4000 | 159 - 60 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 397

Dot_Q | Path-marker | powerLED 1 W DC 350 mA



25



□25


| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|----------------------|---------------|----------|-------------------------|
| Opaline 93522 | M 2700 | 136 - 53 | 00 General (79°) |
| | W 3000 | 145 - 56 | |
| | N 4000 | 159 - 60 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 397

Recessed casing



| description | type |
|------------------------------|------------|
| 98992 Recessed casing | PVC |

suitable for: Dot_R 1W / Dot_Q 1W


Path markers




vissa

Materials
Brass body

Vissa_R | Path-marker | powerLED 0,7 W DC 220 mA



30



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|----------|-------------------------|
| Chrome 86717 | M 2700 | 60 - 46 | 00 General (91°) |
| Nickel 86718 | W 3000 | 66 - 51 | |
| | C 5000 | 75 - 58 | |

Electronics


| 99307 | 83007 | 99198 | 99361 | 99362 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 149 x 137 x h 30 | 0/1-10V 4 - 12 art. p 150 x 143 x h 29 | DALI 4 - 12 art. p 150 x 143 x h 29 |

Accessories Pag. 399


RTG 86717W00 / 86718W00



Vissa_Q | Path-marker | powerLED 0,7 W DC 220 mA



30



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|----------|-------------------------|
| Chrome 86719 | M 2700 | 60 - 46 | 00 General (91°) |
| Nickel 86720 | W 3000 | 66 - 51 | |
| | C 5000 | 75 - 58 | |

Electronics

| 99307 | 83007 | 99198 | 99361 | 99362 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 149 x 137 x h 30 | 0/1-10V 4 - 12 art. p 150 x 143 x h 29 | DALI 4 - 12 art. p 150 x 143 x h 29 |

Accessories Pag. 399

RTG 86720W00

Accessories



| description |
|---|
| 84952 Washer for installation on parquet |
| suitable for: Vissa_R / Vissa_Q |




| description |
|--|
| 84995 Recessed casing |
| suitable for: Vissa_R / Vissa_Q |



ilamt

Materials
Brass body

Ilamt | Wall light | powerLED 1 W DC 350 mA




| Efficiency - CRI 80 | | Cct | lm S - D | Optic | |
|---------------------|--------------|---------------|--------------|-------------------|-------|
| White | 93986 | M 2700 | 136 - On req | 15 Spot | (21°) |
| Nickel | 93988 | W 3000 | 145 - 111 | 30 Flood | (27°) |
| | | N 4000 | 159 - 118 | 60 W.Flood | (61°) |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 401

Ilamt | Wall light | powerLED 2 W DC 630 mA




| Efficiency - CRI 80 | | Cct | lm S - D | Optic | |
|---------------------|--------------|---------------|--------------|-------------------|-------|
| White | 93566 | M 2700 | 219 - On req | 10 Spot | (23°) |
| Nickel | 86679 | W 3000 | 233 - 116 | 30 Flood | (44°) |
| | | N 4000 | 249 - 140 | 50 W.Flood | (62°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |

Recessed casing Pag. 401

Ilamt66 | Wall light | powerLED 2 W DC 630 mA




| Efficiency - CRI 80 | | Cct | lm S - D | Optic | |
|---------------------|--------------|---------------|--------------|-------------------|-------|
| White | 97086 | M 2700 | 219 - On req | 08 Spot | (11°) |
| Nickel | 97088 | W 3000 | 233 - 200 | 15 Flood | (34°) |
| | | N 4000 | 249 - 214 | 30 Flood | (44°) |
| | | | | 60 W.Flood | (72°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |


Recessed casing Pag. 401

Recessed casing




| | description | type |
|--------------|-----------------|------|
| 84337 | Recessed casing | PVC |

suitable for: Ilamt 1W



| | description | type |
|--------------|-----------------|------|
| 84349 | Recessed casing | PVC |

suitable for: Ilamt 2W / Ilamt66 2W

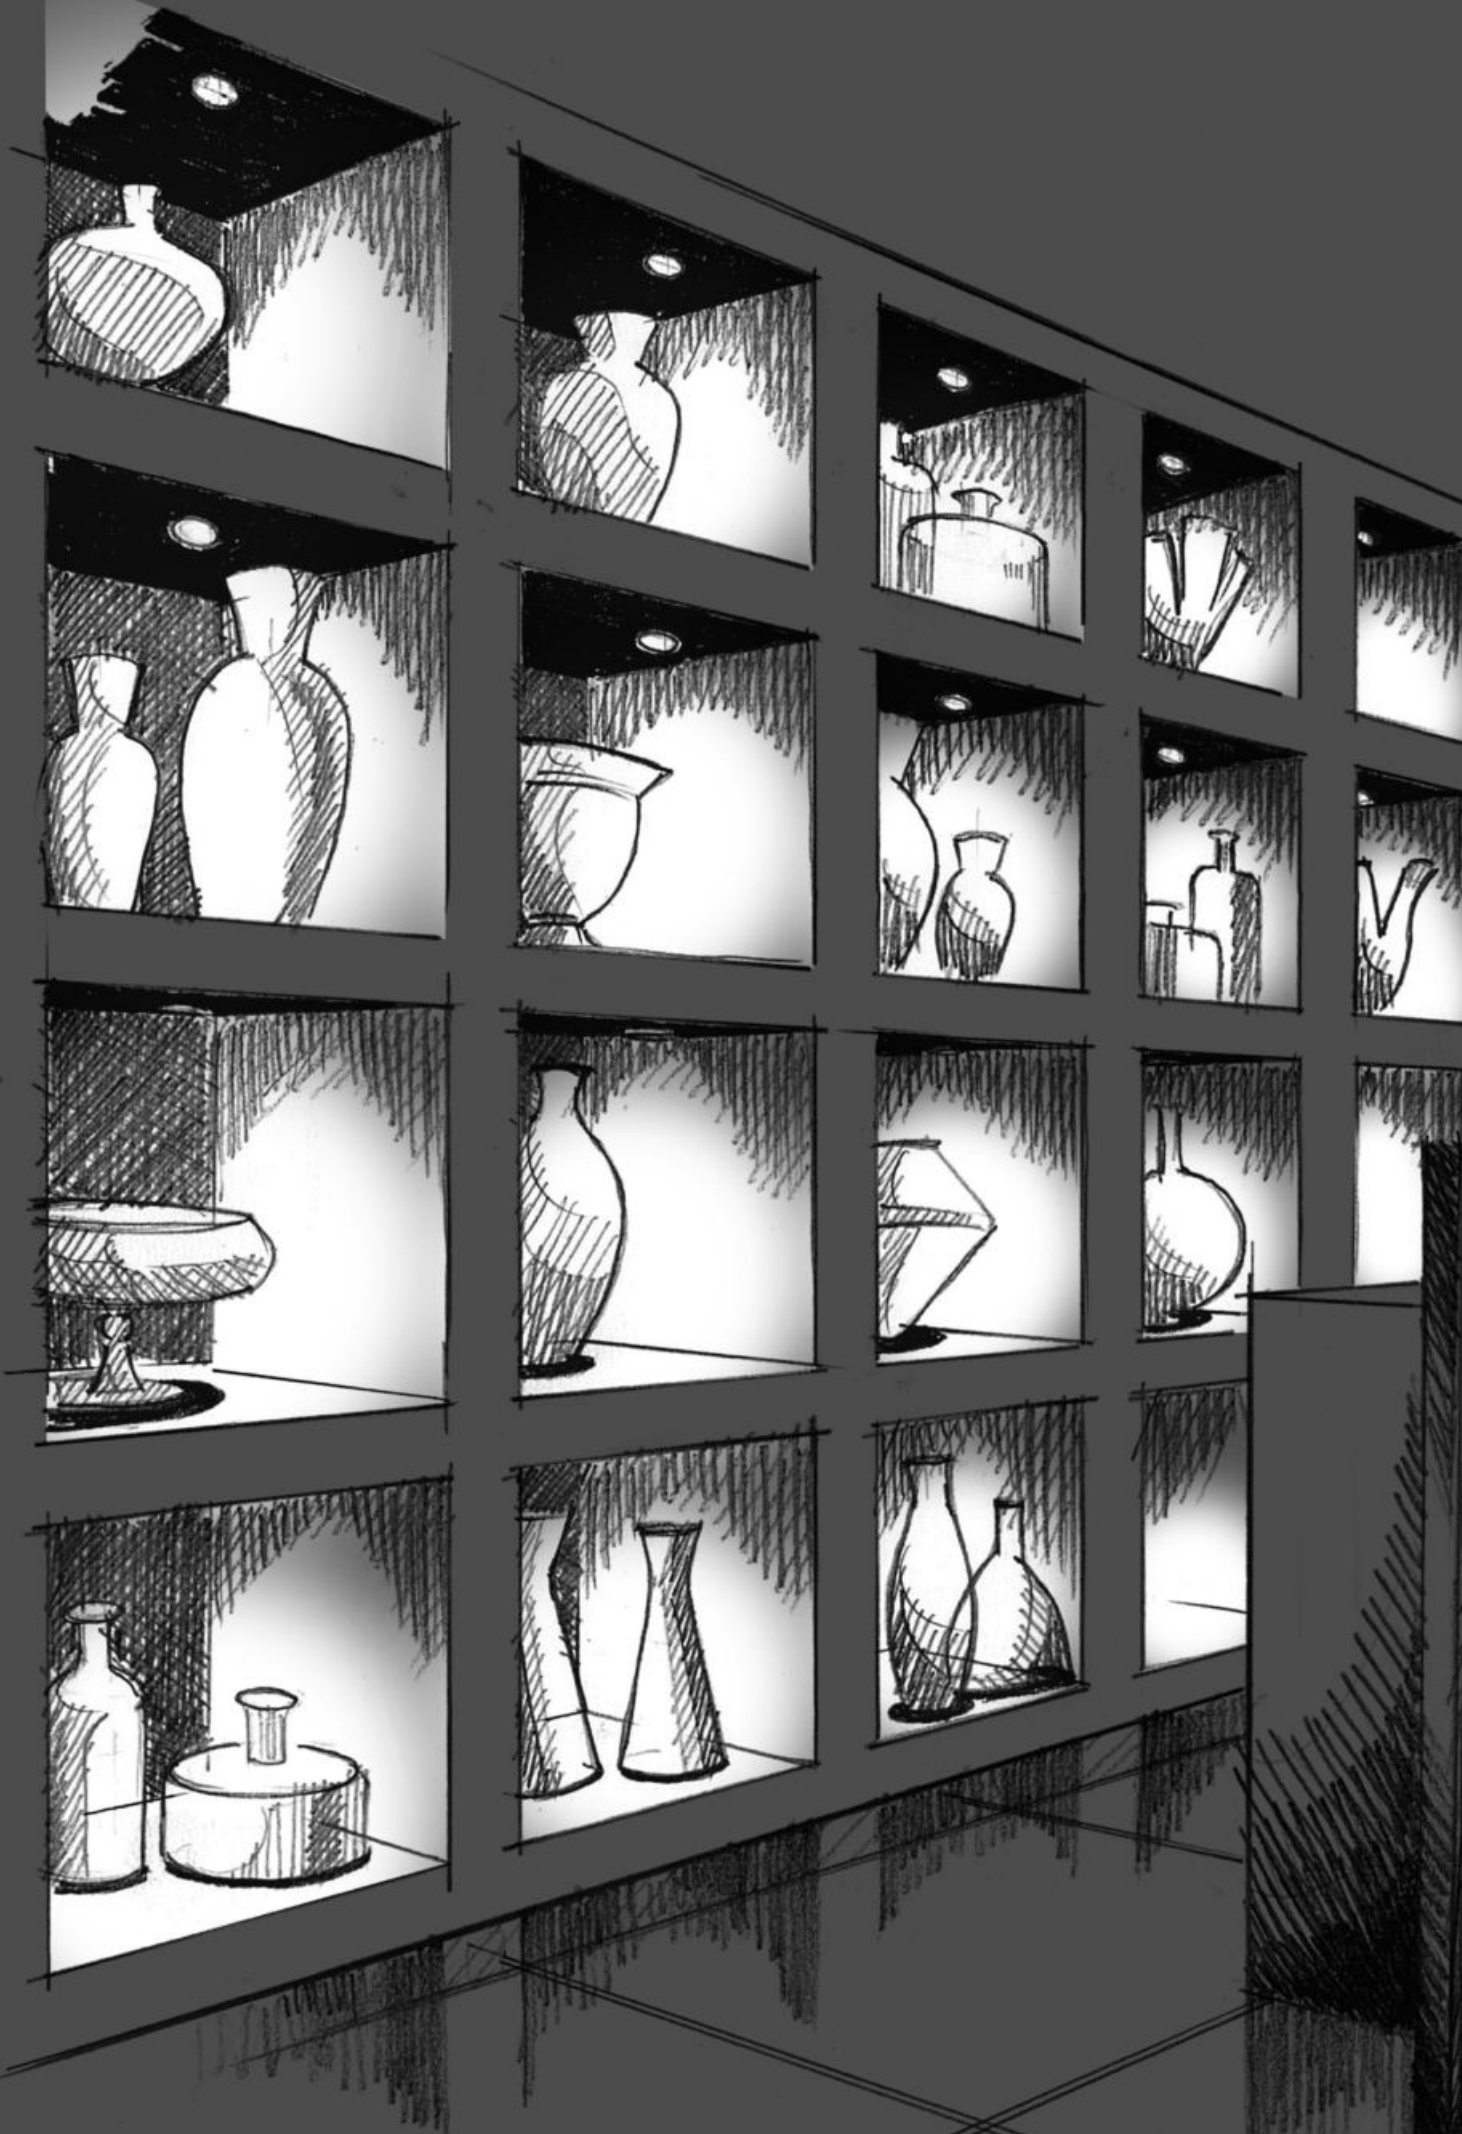



Small spotlights

small spotlights range index

Bibok

Bibok



409

Aspho

Aspho_R



412


Aspho_Q



414

Nitum

Nitum_R



417

Nitum_Q



418

Picrol

Picrol



421

Ghilea

Ghilea



423

Crystals

Beriel



426

Elin



430

Ture



431

Gude



432

Calypto

Calypto



435










bibok

Materials
Brass body

Bibok | Decorative spotlight | 24 V DC | 5mmLED 0,5 W DC



| | Cct | Im S - D | Optic |
|---------------------|--------|--------------|----------------|
| White 91366 | W 3000 | 42 - On req. | 30 Flood (45°) |
| Chrome 85335 | C 5000 | 58 - On req. | |


Electronics

| 89408 | 99374 | 83018 | 99332 | 99722 |
|--|---|---|---|--|
| ON/OFF 1 - 10 art. p 138 x l 22 x h 21 | ON/OFF 1 - 140 art. p 210 x l 48 x h 25 | PUSH 1 - 140 art. p 210 x l 48 x h 25 | 0/1-10V 1 - 280 art. p 150 x l 160 x h 35 | DALI 1 - 220 art. p 191 x l 163 x h 38 |
| | | | | |

Recessed casing Pag. 409

RTG 91366W30 / 91366C30 / 85335W30 / 85335C30

Bibok | Decorative spotlight | powerLED 1,5 W DC 500 mA





| | Cct | Im S - D | Optic |
|---------------------|--------|-----------|----------------|
| White 91349 | W 3000 | 143 - 122 | 70 Flood (45°) |
| Chrome 85979 | N 4000 | 152 - 130 | |
| | C 5000 | 185 - 158 | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |
| | | | | | |

Recessed casing Pag. 409

Bibok | Decorative spotlight | powerLED 1 W DC 350 mA



| | Cct | Im S - D | Optic |
|---------------------|--------|-----------|----------------|
| White 91348 | W 3000 | 107 - 91 | 70 Flood (45°) |
| Chrome 85976 | N 4000 | 114 - 97 | |
| | C 5000 | 139 - 119 | |

| | Cct | Im S - D | Optic |
|---------------------|--------|-----------|------------------|
| White 91350 | W 3000 | 107 - 96 | 12 W.Flood (53°) |
| Chrome 85575 | N 4000 | 114 - 102 | |
| | C 5000 | 139 - 125 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |
| | | | | | |

Recessed casing Pag. 409

RTG 85575W12 / 91348W70 / 85976W70

Recessed casing



| description | type |
|------------------------------|------|
| 84916 Recessed casing | PVC |

suitable for: Bibok 1W



| description | type |
|------------------------------|------|
| 84917 Recessed casing | PVC |

suitable for: Bibok 1,5W



aspho

Materials


Brass or steel body



Aspho_R | Decorative spotlight | 24 V DC | 5mmLED 0,5 W DC



15



| | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|-------------------------|
| White 88417 | W 3000 | 45 - On req. | 30 W.Flood (45°) |
| Chrome 85001 | C 5000 | 58 - On req. | |
| Nickel 85002 | | | |

Electronics

| 89408 | 99374 | 83018 | 99332 | 99722 |
|--|---|---|--|---|
| ON/OFF 1 - 10 art. p 138 x l 22 x h 21 | ON/OFF 1 - 140 art. p 210 x l 48 x h 25 | PUSH 1 - 140 art. p 210 x l 48 x h 25 | 0/1-10V 1 - 280 art. p 150 x l 60 x h 35 | DALI 1 - 220 art. p 191 x l 63 x h 38 |
| | | | | |


Recessed casing Pag. 414

RTG 88417W30 / 88417C30 / 85001W30 / 85001C30 / 85002W30

Aspho_R | Decorative spotlight | powerLED 1,5 W DC 500 mA



15



| | Cct | Im S - D | Optic |
|---------------------|---------------|---------------|-----------------------|
| White 91344 | M 2700 | 130 - On req. | 70 Flood (44°) |
| Chrome 85959 | W 3000 | 143 - 122 | |
| Nickel 85960 | N 4000 | 152 - 130 | |
| | C 5000 | 185 - 158 | |

| | Cct | Im S - D | Optic |
|---------------------|---------------|---------------|-------------------------|
| White 91346 | M 2700 | 130 - On req. | 12 W.Flood (52°) |
| Chrome 85947 | W 3000 | 143 - 128 | |
| Nickel 85948 | N 4000 | 152 - 136 | |
| | C 5000 | 185 - 166 | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |
| | | | | | |


Recessed casing Pag. 414

RTG 91344W70 / 85959W70 / 85960W70

Aspho_R | Decorative spotlight | powerLED 1 W DC 350 mA



15



| | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|-----------------------|
| White 91340 | M 2700 | 98 - On req. | 70 Flood (44°) |
| Chrome 85025 | W 3000 | 107 - 91 | |
| Nickel 85026 | N 4000 | 114 - 97 | |
| | C 5000 | 139 - 119 | |

| | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|-------------------------|
| White 88418 | M 2700 | 98 - On req. | 12 W.Flood (52°) |
| Chrome 85013 | W 3000 | 107 - 96 | |
| Nickel 85014 | N 4000 | 114 - 102 | |
| | C 5000 | 139 - 125 | |


Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |
| | | | | | |

Recessed casing Pag. 414

RTG 91340W70 / 91340N70 / 85025W70 / 85025N70 / 85025C70
85026W70 / 85026N70 / 85027W70 / 86875W70 / 88418W12
85013W12 / 85014W12

Aspho_R | Decorative spotlight | 24 V DC | 5mmLED 1,5 W DC



| | Cct | Im S - D | Optic |
|---------------------|-------|----------|------------------|
| White 91352 | Z RGB | | 30 W.Flood (45°) |
| Chrome 86707 | | | |
| Nickel 86708 | | | |


Electronics

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------------------|--|--------------------------|-----------------------------------|--|
| Dimmer RF 1-140 art. | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX 1-140 art. | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |
| | | | | |

Recessed casing Pag. 414

RTG 91352Z30 / 86708Z30

Aspho_R | Decorative spotlight | powerLED 2,1 W DC 220 mA



| | Cct | Im S - D | Optic |
|---------------------|-------|----------|----------------|
| White 91354 | Z RGB | | 70 Flood (42°) |
| Chrome 86730 | | | |
| Nickel 86731 | | | |

| | Cct | Im S - D | Optic |
|---------------------|-------|----------|---------------|
| White 91362 | Z RGB | | 12 E.W.Flood- |
| Chrome 87214 | | | |
| Nickel 87215 | | | |

Electronics



| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |
| | | | | |



Cables Pag. 960

Recessed casing Pag. 414

Aspho_Q | Decorative spotlight | 24 V DC | 5mmLED 0,5 W DC



15

| | Cct | Im S - D | Optic |
|---------------------|---------------|-------------|-----------------------|
| White 91339 | W 3000 | 45 - On req | 30 Flood (45°) |
| Chrome 85004 | C 5000 | 58 - On req | |
| Nickel 85005 | | | |


Electronics

| 89408 | 99374 | 83018 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 10 art. p 138 x 122 x h 21 | ON/OFF 1 - 140 art. p 210 x 148 x h 25 | PUSH 1 - 140 art. p 210 x 148 x h 25 | 0/1-10V 1 - 280 art. p 150 x 160 x h 35 | DALI 1 - 220 art. p 191 x 163 x h 38 |



Recessed casing Pag. 414

Aspho_Q | Decorative spotlight | powerLED 1,5 W DC 500 mA



15

| CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|-------------------------|
| White 91345 | M 2700 | 130 - On req | 70 W.Flood (45°) |
| Chrome 85962 | W 3000 | 143 - 122 | |
| Nickel 85963 | N 4000 | 152 - 130 | |
| | C 5000 | 185 - 158 | |

| CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|-----------------------|
| White 91347 | M 2700 | 130 - On req | 12 Flood (44°) |
| Chrome 85950 | W 3000 | 143 - 128 | |
| Nickel 85951 | N 4000 | 152 - 130 | |
| | C 5000 | 185 - 158 | |

Electronics



| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|--|--|--|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | |



Recessed casing Pag. 414

414

Aspho_Q | Decorative spotlight | powerLED 1 W DC 350 mA



15

| CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|-------------|-----------------------|
| White 91341 | M 2700 | 98 - On req | 70 Flood (44°) |
| Chrome 85028 | W 3000 | 107 - 91 | |
| Nickel 85029 | N 4000 | 114 - 97 | |
| | C 5000 | 139 - 119 | |

| CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|-------------|-------------------------|
| White 91343 | M 2700 | 98 - On req | 12 W.Flood (52°) |
| Chrome 85016 | W 3000 | 107 - 96 | |
| Nickel 85017 | N 4000 | 114 - 102 | |
| | C 5000 | 139 - 125 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|--|--|---|--|---|--|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 122 x h 21 | |




Recessed casing Pag. 414

RTG 91341W70


Recessed casing



| description | type |
|--|------------|
| 84916 Recessed casing | PVC |
| suitable for: Aspho_R 0,5W / Aspho_R 1W / Aspho_R 1,5W(RGB) / Aspho_Q 0,5W / Aspho_Q 1W | |



| description | type |
|--|------------|
| 84335 Recessed casing | PVC |
| suitable for: Aspho_R 0,5W / Aspho_R 1W / Aspho_Q 0,5W / Aspho_Q 1W | |



| description | type |
|---|------------|
| 84917 Recessed casing | PVC |
| suitable for: Aspho_R 1,5W / Aspho_R 2,1W / Aspho_Q 1,5W | |






nitum

Materials
Brass or steel body

Nitum_R | Decorative spotlight | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|-----------|--|
| White 88421 | M 2700 | 136 - 105 | 10 Flood (34°) |
| Chrome 85043 | W 3000 | 145 - 113 | 30 Flood (44°) |
| Nickel 85044 | N 4000 | 155 - 120 | 50 W.Flood (72°) |
| Steel 86881 | C 5000 | 165 - 137 | 70 E.W.Flood(82°) 12 E.W.Flood(113°) 00 General - |

Electronics


| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 419

RTG 88421W30 / 85043W30 / 85044W10
85044W30 / 85044W00 / 85044W50

Nitum_R | Decorative spotlight | powerLED 2 W DC 630 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|-----------|--|
| White 88423 | M 2700 | 219 - 169 | 10 Flood (34°) |
| Chrome 85059 | W 3000 | 233 - 180 | 30 Flood (44°) |
| Nickel 85060 | N 4000 | 249 - 193 | 50 W.Flood (72°) |
| Steel 86883 | C 5000 | 266 - 220 | 70 E.W.Flood(82°) 12 E.W.Flood(113°) 00 General - |

Electronics


| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 419

RTG 88423M30 / 88423W10 / 88423W30 / 88423W50
88423W00 / 88423N30 / 85059W30 / 85059W50
85060W10 / 85060W30 / 85060W50

Nitum_R | Decorative spotlight | powerLED 2,1 W DC 220 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|--------------|----------|-------------------------|
| White 88568 | Z RGB | | 15 Spot (21°) |
| Chrome 86612 | | | 30 Flood (27°) |
| Nickel 86613 | | | 60 W.Flood (50°) |
| Steel 86674 | | | 00 General - |

Electronics

| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |




Cables Pag. 960

Recessed casing Pag. 419

RTG 88568Z30 / 88568Z60 / 86612Z60

Small Spotlight

Nitum_Q | Decorative spotlight | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|-----------|--|
| White 88422 | M 2700 | 136 - 105 | 10 Flood (34°) |
| Chrome 85045 | W 3000 | 145 - 113 | 30 Flood (44°) |
| Nickel 85046 | N 4000 | 155 - 120 | 50 W.Flood (72°) |
| Steel 86882 | C 5000 | 165 - 137 | 70 E.W.Flood(82°) 12 E.W.Flood(113°) 00 General - |

Electronics


| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 419

RTG 88422W30

Nitum_Q | Decorative spotlight | powerLED 2,1 W DC 220 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|--------------|----------|-------------------------|
| White 88569 | Z RGB | | 15 Spot - |
| Chrome 86614 | | | 30 Flood (27°) |
| Nickel 86615 | | | 60 W.Flood (50°) |
| Steel 86675 | | | 00 General - |

Electronics


| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |



Cables Pag. 960

Recessed casing Pag. 419

Nitum_Q | Decorative spotlight | powerLED 2 W DC 630 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|-----------|--|
| White 88424 | M 2700 | 219 - 169 | 10 Flood (34°) |
| Chrome 85061 | W 3000 | 233 - 180 | 30 Flood (44°) |
| Nickel 85062 | N 4000 | 249 - 193 | 50 W.Flood (72°) |
| Steel 86884 | C 5000 | 266 - 220 | 70 E.W.Flood(82°) 12 E.W.Flood(113°) 00 General - |

Electronics


| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 419

RTG 88424W30 / 88424W50 / 85061W30 / 85062W30


Recessed casing



| | description | type |
|--|-----------------|------|
| 84915 | Recessed casing | PVC |
| suitable for: Nitum_R 1W / Nitum_Q 1W | | |




| | description | type |
|---|-----------------|------|
| 84901 | Recessed casing | PVC |
| suitable for: Nitum_R 2W / Nitum_R 2,1W Nitum_Q 2W / Nitum_Q 2,1W | | |



| | description | type |
|--|-----------------|------|
| 84336 | Recessed casing | PVC |
| suitable for: Nitum_R 1W / Nitum_Q 1W | | |

Watergate hotel | Washington, USA

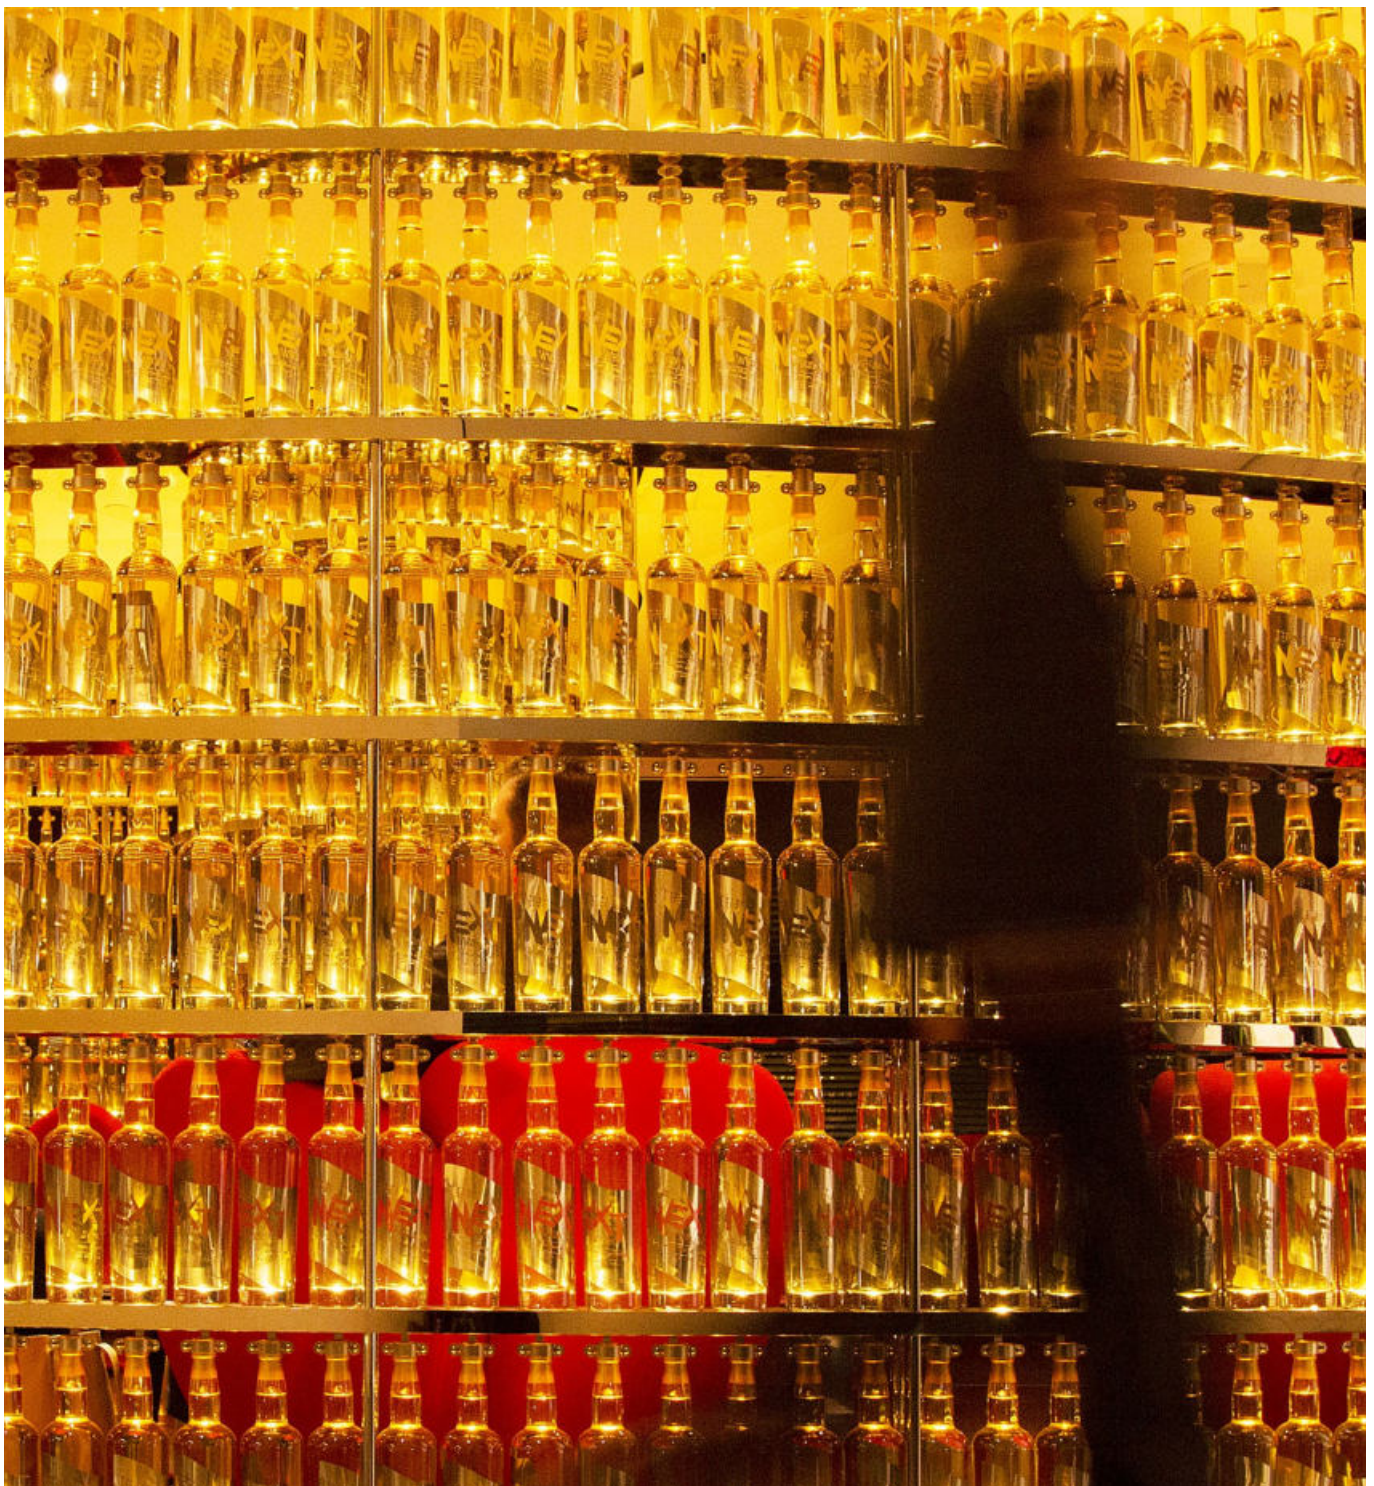




picrol

Materials

Brass or polyamide body

Picrol | Decorative spotlight | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|--------------|------------------|
| White | 92256 | M 2700 | 136 - On req | 30 W.Flood (45°) |
| Black | 92258 | W 3000 | 145 - 100 | 50 W.Flood (52°) |
| Chrome | 92259 | N 4000 | 155 - 106 | 70 W.Flood (76°) |
| | | C 5000 | 165 - 121 | |

Electronics


| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 421

RTG 92256W30 / 92256W70 / 92258W30 / 92259W30

Picrol | Decorative spotlight | powerLED 1,5 W DC 500 mA



Installable only with its specific outer casing

| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|--------------|---------------|
| White | 91365 | M 2700 | 187 - On req | 10 Spot - |
| Chrome | 86408 | W 3000 | 199 - On req | 30 Flood - |
| | | N 4000 | 213 - On req | 50 W.Flood - |
| | | | | 70 E.W.Flood- |
| | | | | 12 E.W.Flood- |
| | | | | 00 General - |

Electronics


| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 421

Small Spotlight

Picrol | Decorative spotlight | powerLED 1 W DC 350 mA



Installable only with its specific outer casing

| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|--------------|---------------|
| White | 91364 | M 2700 | 136 - On req | 10 Spot - |
| Chrome | 86407 | W 3000 | 145 - On req | 30 Flood - |
| | | N 4000 | 155 - On req | 50 W.Flood - |
| | | | | 70 E.W.Flood- |
| | | | | 12 E.W.Flood- |
| | | | | 00 General - |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 421

Recessed casing




| description | type |
|------------------------------|------|
| 98049 Recessed casing | PVC |

suitable for: Picrol 1W Ø25




| description | type |
|------------------------------|------|
| 84901 Recessed casing | PVC |

suitable for: Picrol 1,5W




| description | type |
|------------------------------|------|
| 84336 Recessed casing | PVC |

suitable for: Picrol 1W Ø30



| description | type |
|------------------------------|------|
| 84955 Recessed casing | PVC |

suitable for: Picrol 1W Ø30



| description | type |
|------------------------------|------|
| 84956 Recessed casing | PVC |


suitable for: Picrol 1,5W



ghilea

Materials
Aluminium body

Ghilea | Decorative spotlight | powerLED 2 W DC 630 mA



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|-----------|----------------|
| White 97044 | M 2700 | 219 - 146 | 15 Spot (21°) |
| Black 97045 | W 3000 | 233 - 155 | 30 Flood (32°) |
| Nickel 97189 | N 4000 | 249 - 166 | |
| Chrome 97047 | | | |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC |
|---|---|--|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |



Recessed casing Pag. 423


RTG 97044W30

Eos Hotel | Lecce, Italy




Small Spotlight

Recessed casing



| | description | type |
|--------------|-----------------|------|
| 84902 | Recessed casing | PVC |

suitable for: Ghilea

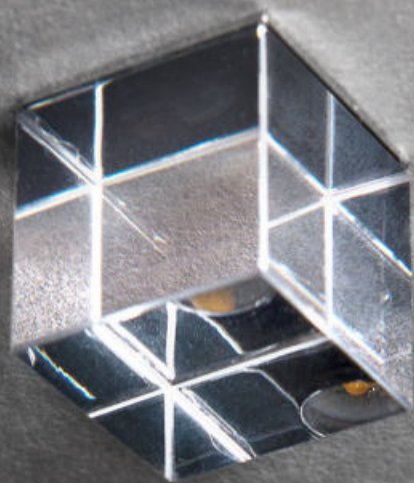

crystals

Materials

Brass body


Transparent prismatic ground crystal diffuser



Reception

ALMAR
JESOLO
FIVE STAR RESORT & SPA

Beriel | Crystal spotlight | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Chrome 92285 | M 2700 | 98 - On req | 00 General - |
| | W 3000 | 106 - On req | |
| | N 4000 | 112 - On req | |
| | C 5000 | 137 - On req | |

Electronics


| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

RTG 92285W00

Beriel | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Chrome 87324 | M 2700 | 130 - On req | 00 General - |
| | W 3000 | 140 - On req | |
| | N 4000 | 149 - On req | |
| | C 5000 | 182 - On req | |

Electronics


| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

RTG 87324W00

Beriel | Crystal spotlight | powerLED 2,1 W DC 220 mA



| Cct | Im S - D | Optic |
|---------------------|--------------|---------------------|
| Chrome 87325 | Z RGB | 00 General - |

Electronics

| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |




Cables Pag. 960
Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 1 W DC 350 mA



15



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|---------------------|
| Chrome | 83681 | M 2700 | 98 - On req | 00 General - |
| | | W 3000 | 106 - On req | |
| | | N 4000 | 112 - On req | |
| | | C 5000 | 137 - On req | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|---|---|--|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |




Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 1,5 W DC 500 mA



15



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|---------------------|
| Chrome | 83682 | M 2700 | 130 - On req | 00 General - |
| | | W 3000 | 140 - On req | |
| | | N 4000 | 149 - On req | |
| | | C 5000 | 182 - On req | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|---|---|---|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |




Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 2,1 W DC 220 mA




15



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------------|----------|---------------------|
| Chrome | 83683 | Z RGB | | 00 General - |

Electronics


| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |



Cables Pag. 960

Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 1 W DC 350 mA



15

| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Chrome 83678 | M 2700 | 98 - On req | 00 General - |
| | W 3000 | 106 - On req | |
| | N 4000 | 112 - On req | |
| | C 5000 | 137 - On req | |


Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 1,5 W DC 500 mA



15

| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Chrome 83679 | M 2700 | 130 - On req | 00 General - |
| | W 3000 | 140 - On req | |
| | N 4000 | 149 - On req | |
| | C 5000 | 182 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 2,1 W DC 220 mA




15

| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|--------------|----------|---------------------|
| Chrome 83680 | Z RGB | | 00 General - |


Electronics

| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |



Cables Pag. 960
Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 1 W DC 350 mA



15

| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Chrome 83675 | M 2700 | 98 - On req | 00 General - |
| | W 3000 | 106 - On req | |
| | N 4000 | 112 - On req | |
| | C 5000 | 137 - On req | |


Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC |
|--|--|---|--|---|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | ON/OFF 6 - 12 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |



Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 1,5 W DC 500 mA



15

| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|---------------|--------------|---------------------|
| Chrome 83676 | M 2700 | 130 - On req | 00 General - |
| | W 3000 | 140 - On req | |
| | N 4000 | 149 - On req | |
| | C 5000 | 182 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|--|--|--|--|---|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x 122 x h 21 | ON/OFF 2 - 3 art. p 138 x 122 x h 21 | ON/OFF 3 - 6 art. p 138 x 122 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x 122 x h 21 | 24V DC converter DALI 1 art. p 138 x 122 x h 21 | 99374 75W 99331 150W |



Recessed casing Pag. 433

Beriel | Crystal spotlight | powerLED 2,1 W DC 220 mA




15

| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|--------------|----------|---------------------|
| Chrome 83677 | Z RGB | | 00 General - |


Electronics

| 99703+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|---------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |



Cables Pag. 960
Recessed casing Pag. 433

Elin | Crystal spotlight | 24 V DC | 5mmLED 0,5 W DC



| | Cct | Im S - D | Optic |
|---------------------|--------------------------------|--------------------------|---------------------|
| Chrome 87337 | W 3000 C 5000 | On request On request | 00 General - |


Electronics

| 89408 | 99374 | 83018 | 99332 | 99722 |
|--|---|---|--|---|
| ON/OFF 1 - 10 art. p 138 x l 22 x h 21 | ON/OFF 1 - 140 art. p 210 x l 48 x h 25 | PUSH 1 - 140 art. p 210 x l 48 x h 25 | 0/1-10V 1 - 280 art. p 150 x l 60 x h 35 | DALI 1 - 220 art. p 191 x l 63 x h 38 |
| | | | | |

Recessed casing Pag. 433

RTG 87337W00

Elin | Crystal spotlight | powerLED 1 W DC 350 mA



| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|--|---|---------------------|
| Chrome 91200 | M 2700 W 3000 N 4000 C 5000 | 98 - On req 106 - On req 112 - On req 137 - On req | 00 General - |



Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |
| | | | | | |

Recessed casing Pag. 433

RTG 91200W00

Elin | Crystal spotlight | 24 V DC | 5mmLED 0,5 W DC



| | Cct | Im S - D | Optic |
|---------------------|--------------|----------|---------------------|
| Chrome 87340 | Z RGB | | 00 General - |

Electronics

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------------------|--|--------------------------|-----------------------------------|--|
| Dimmer RF 1-140 art. | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX 1-140 art. | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |
| | | | | |




Cables Pag. 960

Recessed casing Pag. 433

RTG 87340Z00

Elin | Crystal spotlight | powerLED 1,5 W DC 500 mA




| Efficiency - CRI 80 | Cct | Im S - D | Optic |
|---------------------|--|--|-------------------------|
| Chrome 87323 | M 2700 W 3000 N 4000 C 5000 | 130 - On req 140 - On req 149 - On req 182 - On req | 00 W.Flood (48°) |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |
| | | | | | |

Recessed casing Pag. 433

Ture | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|---------------------|
| Chrome | 87350 | M 2700 | 130 - On req | 00 General - |
| | | W 3000 | 140 - On req | |
| | | N 4000 | 149 - On req | |
| | | C 5000 | 182 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|---|---|---|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |



Recessed casing Pag. 433

Ture | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|---------------------|
| Chrome | 87353 | M 2700 | 187 - On req | 00 General - |
| | | W 3000 | 199 - On req | |
| | | N 4000 | 213 - On req | |
| | | C 5000 | 227 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|---|---|---|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |



Recessed casing Pag. 433

Ture | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|---------------------|
| Chrome | 87356 | M 2700 | 187 - On req | 00 General - |
| | | W 3000 | 199 - On req | |
| | | N 4000 | 213 - On req | |
| | | C 5000 | 227 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC |
|---|---|---|---|--|---------------------------------------|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | 99374 75W 99331 150W |



Recessed casing Pag. 433

Gude | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|--------------------------|
| Chrome | 87330 | M 2700 | 130 - On req | 00 E.W.Flood(99°) |
| | | W 3000 | 140 - On req | |
| | | N 4000 | 149 - On req | |
| | | C 5000 | 182 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

Gude | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|--------------------------|
| Chrome | 87332 | M 2700 | 187 - On req | 00 E.W.Flood(99°) |
| | | W 3000 | 199 - On req | |
| | | N 4000 | 213 - On req | |
| | | C 5000 | 227 - On req | |


Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

Gude | Crystal spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|--------------|--------------------------|
| Chrome | 87335 | M 2700 | 187 - On req | 00 E.W.Flood(99°) |
| | | W 3000 | 199 - On req | |
| | | N 4000 | 213 - On req | |
| | | C 5000 | 227 - On req | |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |



Recessed casing Pag. 433

Recessed casing




| | description | type |
|--|-----------------|------|
| 84335 | Recessed casing | PVC |
| suitable for: Beriel 1W / Elin 0,5W / Elin 1W | | |




| | description | type |
|--|-----------------|------|
| 84916 | Recessed casing | PVC |
| suitable for: Elin 0,5W / Elin 1W | | |



| | description | type |
|--|-----------------|------|
| 84917 | Recessed casing | PVC |
| suitable for: Beriel 1,5W / Beriel 2,1W Elin 1,5W / Ture 1,5W Ø13 / Gude 1,5W 20mm | | |



| | description | type |
|---|-----------------|------|
| 84954 | Recessed casing | PVC |
| suitable for: Ture 1,5W Ø31 / Gude 1,5W 30mm | | |




| | description | type |
|---|-----------------|------|
| 84901 | Recessed casing | PVC |
| suitable for: Ture 1,5W Ø41 / Gude 1,5W 40mm | | |



calypto

Materials
Brass body

Calypto | Movable spotlight | powerLED 1,5 W DC 500 mA



| Efficiency - CRI 80 | Cct | lm S - D | Optic |
|---------------------|---------------|-----------|--------------------------|
| Chrome 87067 | W 3000 | 199 - 154 | 30 W.Flood (45°) |
| Nickel 87068 | N 4000 | 213 - 165 | 50 W.Flood (72°) |
| | | | 70 E.W.Flood(82°) |

Electronics

| 99195 | 89146 | 99377 | 99709 | 99712 | + driver 24V DC 99374 75W 99331 150W |
|---|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 2 - 3 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |
| | | | | | |

Recessed casing Pag. 435


Recessed casing




| description | type |
|------------------------------|------------|
| 84349 Recessed casing | PVC |

suitable for: Calypto

Small Spotlight

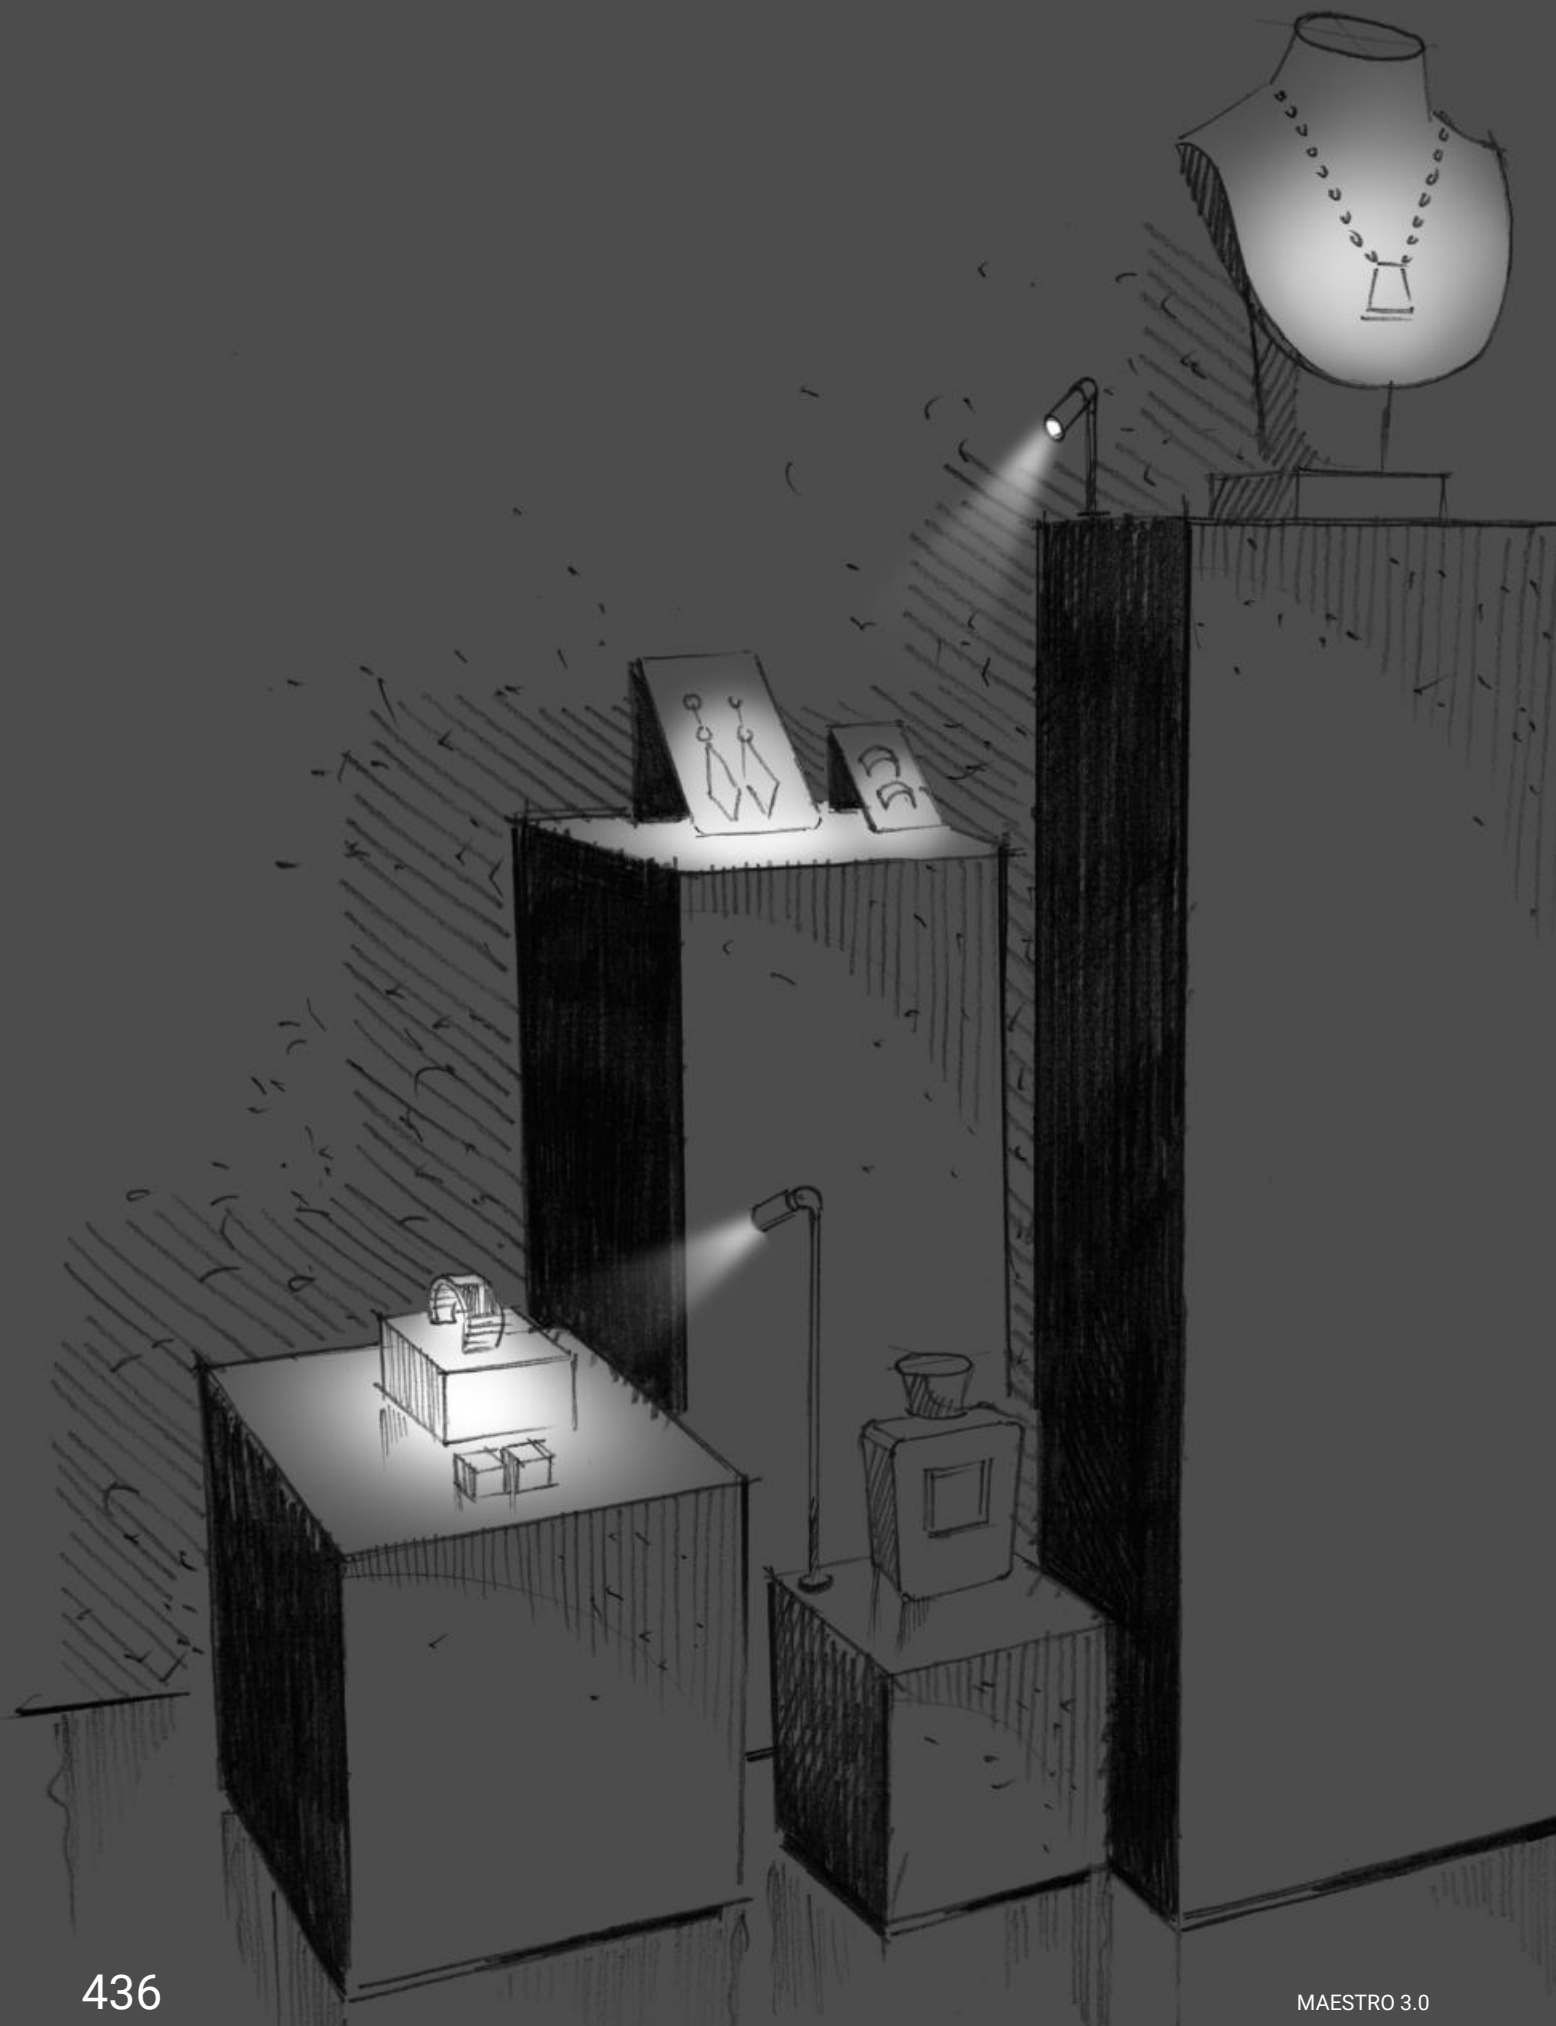


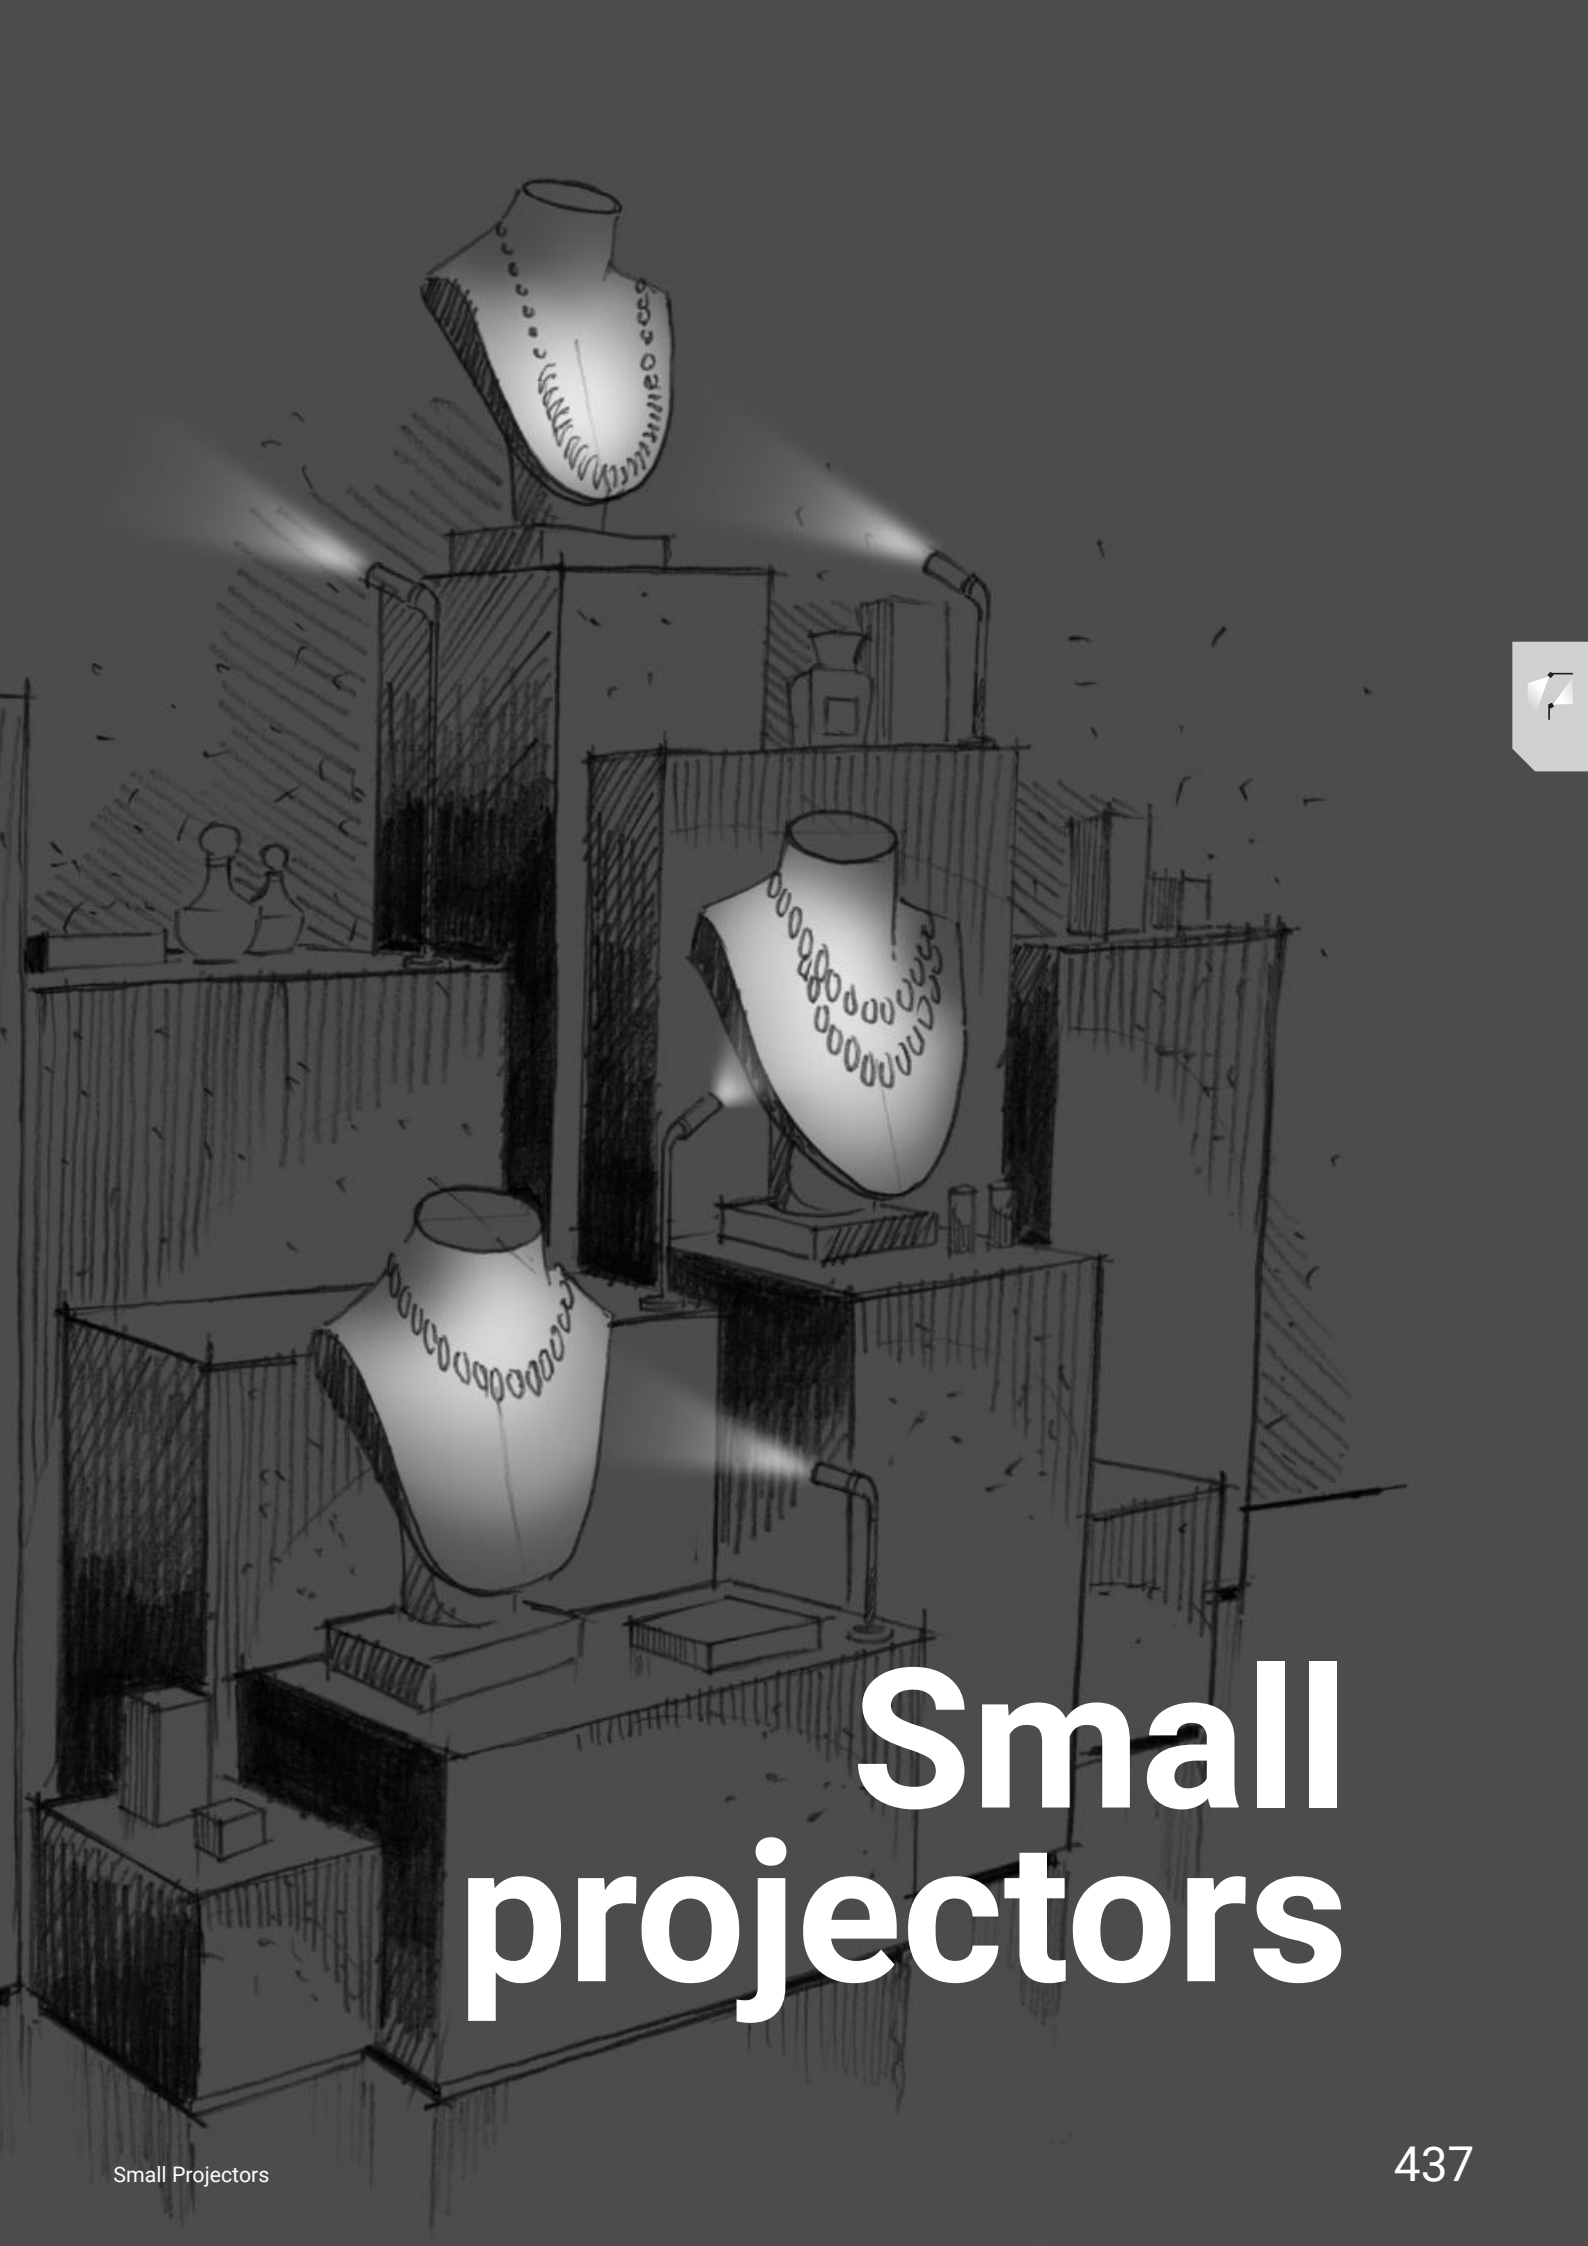


Small projectors

small projectors range index

Eyelet

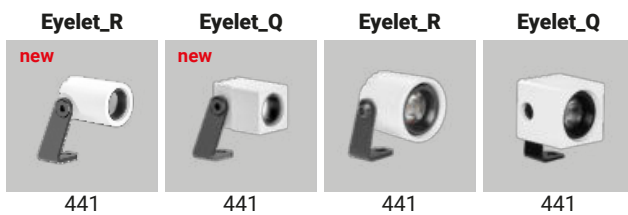

Tee









eyelet

Materials
Aluminium body

Eyelet_R | Movable spotlight | powerLED 1 W DC 350 mA





| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|----------|-----------------------|
| White | 82619 | M 2700 | 145 - 74 | 20 Spot (20°) |
| Black | 82620 | W 3000 | 145 - 79 | 35 Flood (34°) |
| Grey | 82621 | N 4000 | 155 - 84 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 138 x 1 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 1 22 x h 21 | |

RTG 82619W20

Eyelet_Q | Movable spotlight | powerLED 1 W DC 350 mA




| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|----------|-----------------------|
| White | 82622 | M 2700 | 136 - 74 | 20 Spot (20°) |
| Black | 82623 | W 3000 | 144 - 79 | 35 Flood (34°) |
| Grey | 82624 | N 4000 | 155 - 84 | |

Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 138 x 1 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x 1 22 x h 21 | |

RTG 82622W20

Eyelet_R | Movable spotlight | powerLED 2 W DC 630 mA




| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-----------|-------------------------|
| White | 96984 | M 2700 | 219 - 172 | 15 Spot (23°) |
| Black | 96985 | W 3000 | 233 - 154 | 30 Flood (28°) |
| Grey | 96986 | N 4000 | 249 - 165 | 60 W.Flood (65°) |

Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 103 x 1 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 art. p 138 x 1 22 x h 21 | |

Eyelet_Q | Movable spotlight | powerLED 2 W DC 630 mA



| Efficiency - CRI 80 | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-----------|-------------------------|
| White | 97336 | M 2700 | 219 - 172 | 15 Spot (23°) |
| Black | 97337 | W 3000 | 233 - 154 | 30 Flood (28°) |
| Grey | 97338 | N 4000 | 249 - 165 | 60 W.Flood (65°) |


Electronics

| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x 1 22 x h 21 | ON/OFF 3 - 6 art. p 138 x 1 22 x h 21 | ON/OFF 6 - 12 art. p 103 x 1 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x 1 22 x h 21 | 24V DC converter DALI 1 art. p 138 x 1 22 x h 21 | |

tee

Materials
Aluminium body




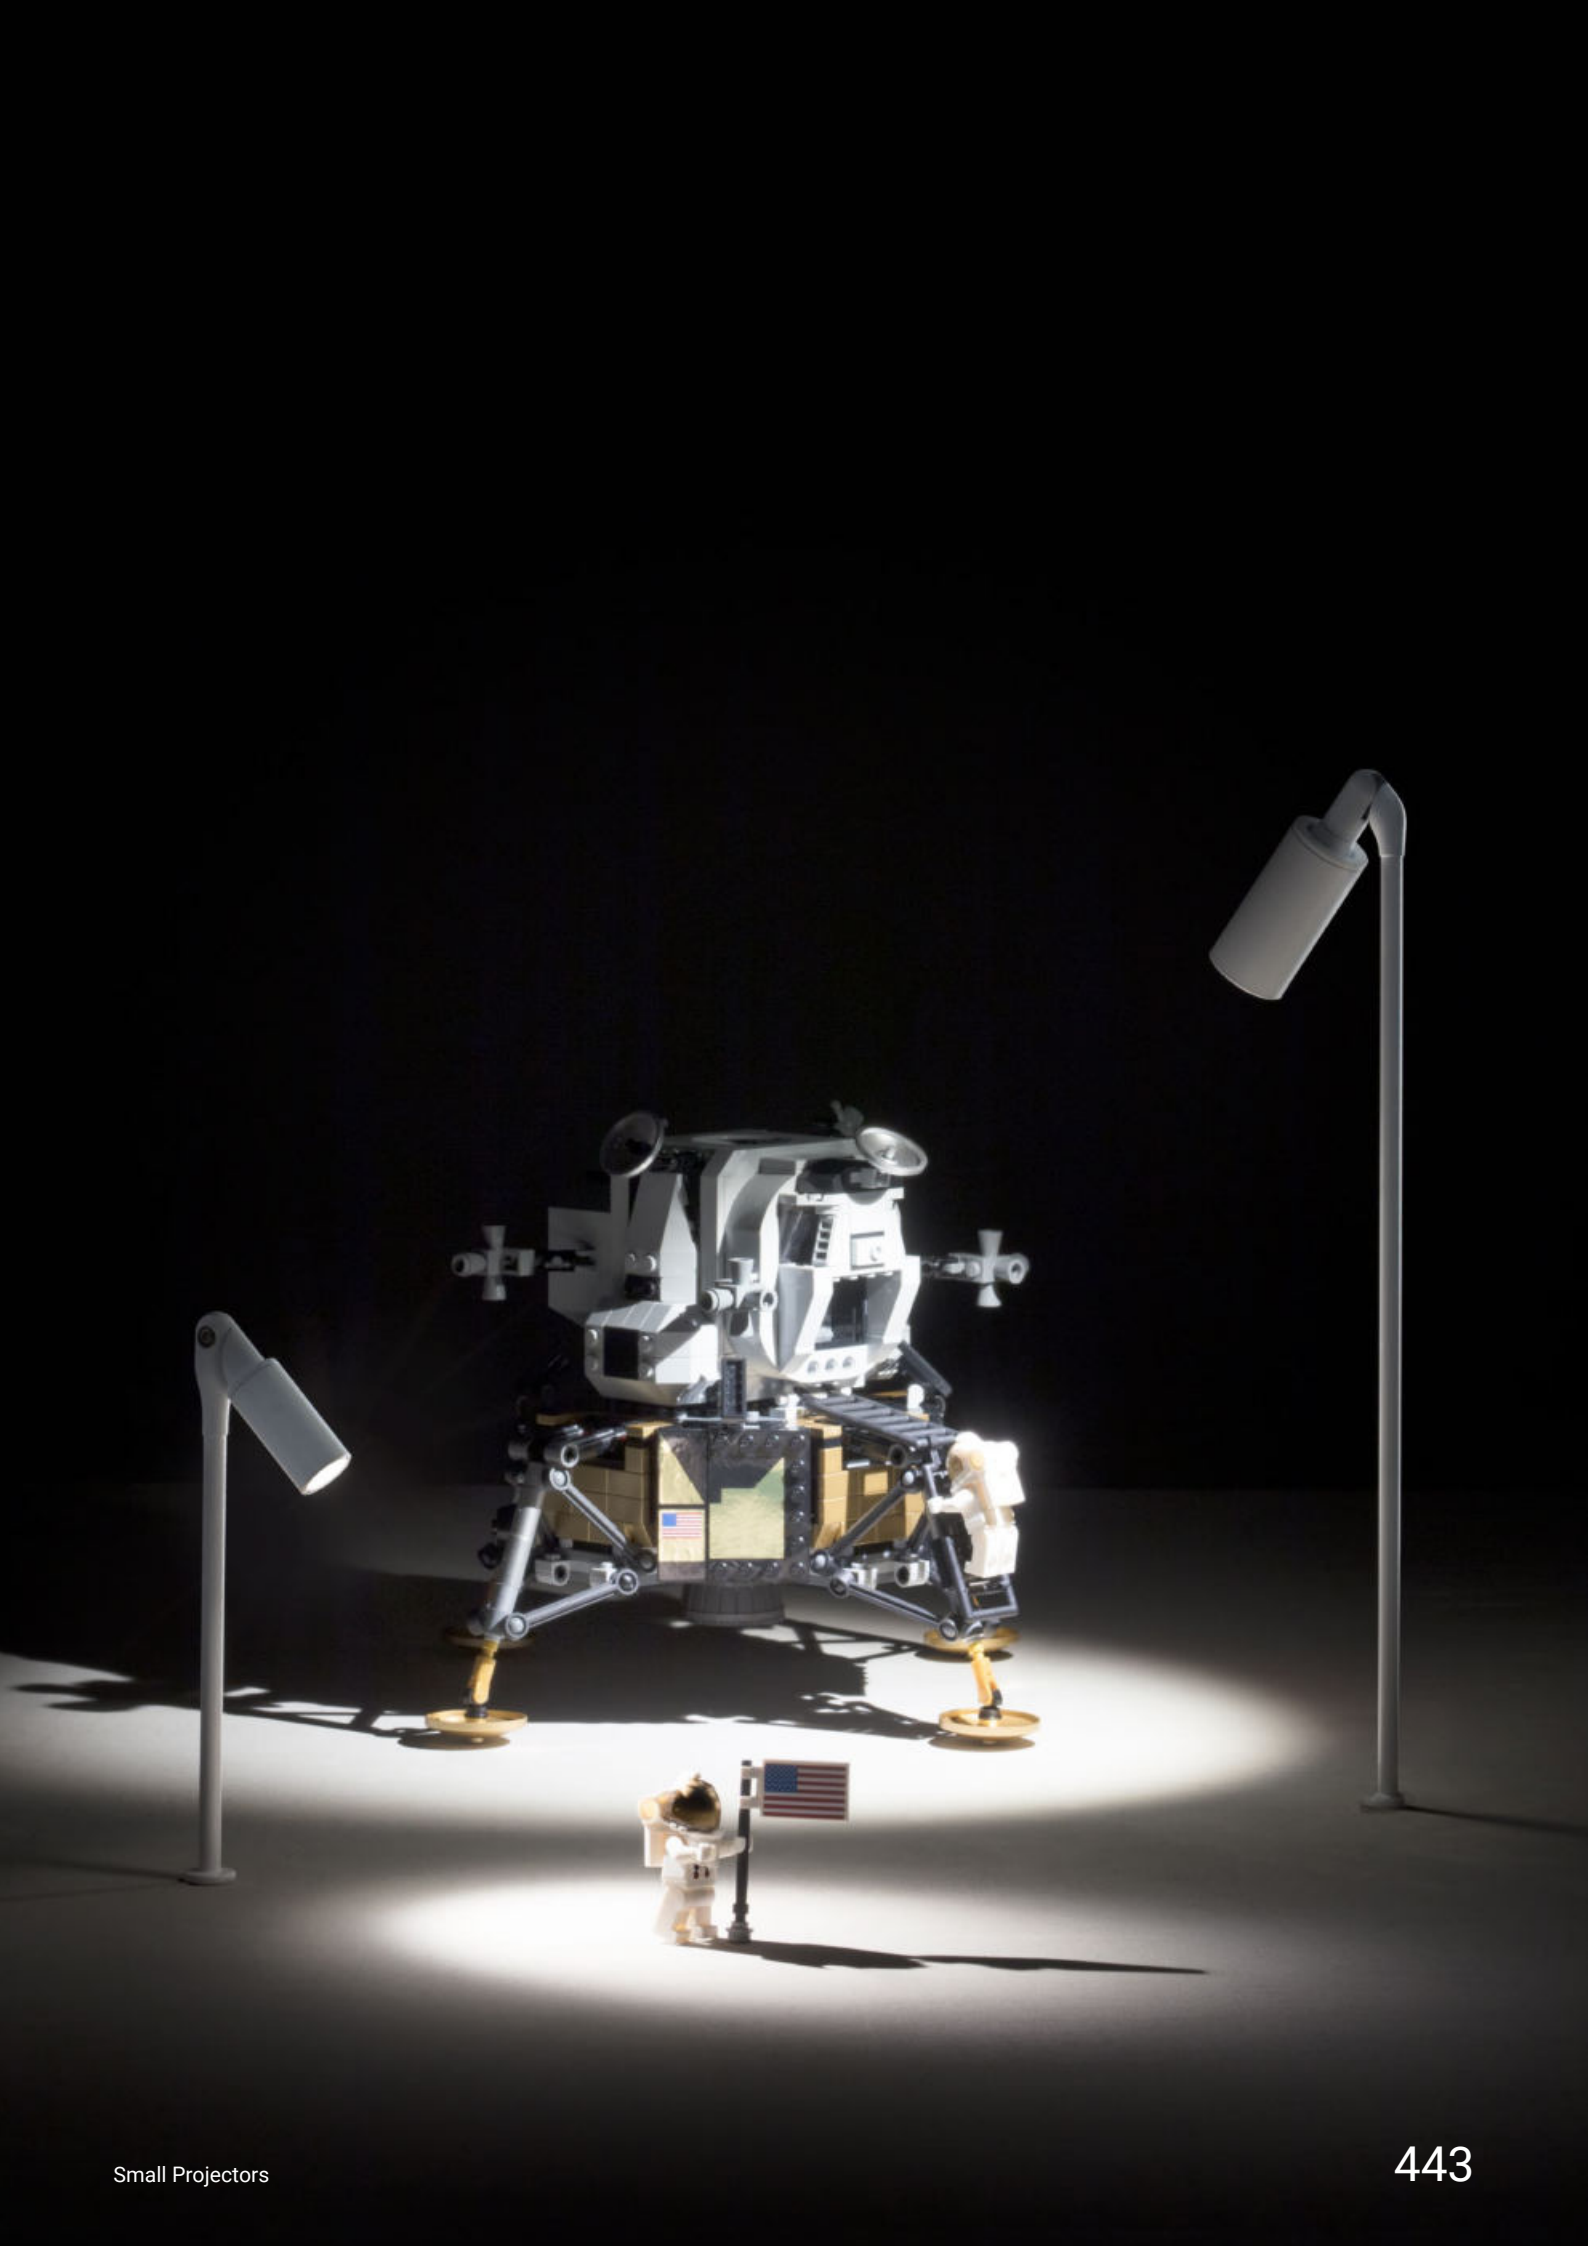


Tee_1 | Movable Spotlight | powerLED 1 W DC 350 mA




| H. 23 mm - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|----------|---------------------------|
| White 90503 | W 3000 | 145 - 56 | 85 Focus 13° - 43° |
| Black 90504 | N 4000 | 159 - 60 | |
| Chrome 90505 | C 5000 | 165 - 63 | |
| Nickel 90506 | | | |



| H. 100 mm - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|----------|---------------------------|
| White 90499 | W 3000 | 145 - 56 | 85 Focus 13° - 43° |
| Black 90500 | N 4000 | 159 - 60 | |
| Chrome 90501 | C 5000 | 165 - 63 | |
| Nickel 90502 | | | |




| H. 300 mm - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|----------|---------------------------|
| White 90495 | W 3000 | 145 - 56 | 85 Focus 13° - 43° |
| Black 90496 | N 4000 | 159 - 60 | |
| Chrome 90497 | C 5000 | 165 - 63 | |
| Nickel 90498 | | | |




Electronics

| 89144 | 89145 | 99375 | 99708 | 99711 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 138 x l 22 x h 21 | 24V DC converter 0/1-10V 1 - 4 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 - 4 art. p 138 x l 22 x h 21 | |


Tee_2 | Movable Spotlight | powerLED 2 W DC 630 mA




| H. 23 mm - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|-----------|---------------------------|
| White 90515 | W 3000 | 233 - 109 | 85 Focus 13° - 53° |
| Black 90516 | N 4000 | 249 - 116 | |
| Chrome 90517 | C 5000 | 266 - 124 | |
| Nickel 90518 | | | |



| H. 100 mm - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|-----------|---------------------------|
| White 90511 | W 3000 | 233 - 109 | 85 Focus 13° - 53° |
| Black 90512 | N 4000 | 249 - 116 | |
| Chrome 90513 | C 5000 | 266 - 124 | |
| Nickel 90514 | | | |




| H. 300 mm - CRI 80 | Cct | lm S - D | Optic |
|---------------------|--------|-----------|---------------------------|
| White 90507 | W 3000 | 233 - 109 | 85 Focus 13° - 53° |
| Black 90508 | N 4000 | 249 - 116 | |
| Chrome 90509 | C 5000 | 266 - 124 | |
| Nickel 90510 | | | |



Electronics


| 89147 | 99376 | 99105 | 99710 | 99713 | + driver 24V DC 99374 75W 99331 150W |
|---|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 138 x l 22 x h 21 | ON/OFF 3 - 6 art. p 138 x l 22 x h 21 | ON/OFF 6 - 12 art. p 103 x l 58 x h 27 | 24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21 | 24V DC converter DALI 1 art. p 138 x l 22 x h 21 | |

Tee_1 & Tee_2 | Fixing accessory with springs for recessed installation




| | |
|--------|--------------|
| White | 98972 |
| Black | 98973 |
| Chrome | 98974 |
| Nickel | 98975 |

Tee_1 & Tee_2 | Accessory with threaded pin for recessed installation




| | |
|--------|--------------|
| White | 98980 |
| Black | 98981 |
| Chrome | 98982 |
| Nickel | 98983 |

Tee_1 & Tee_2 | Accessory with fixing screws for surface installation



| | |
|--------|--------------|
| White | 98976 |
| Black | 98977 |
| Chrome | 98978 |
| Nickel | 98979 |

Tee_1 & Tee_2 | Driver-holder base for ceiling-mounted installation (driver excluded)



| | |
|--------|--------------|
| White | 99503 |
| Black | 99504 |
| Chrome | 99505 |
| Nickel | 99506 |

Tee_1 driver



89148
ON/OFF
1 - 2 art.
For base

Tee_2 driver



89151
ON/OFF
1 - 2 art.
For base

Environment Care Lighting

In collaboration with



Useful light that protects health and well-being - in any environment, at any time.




High colour rendering (CRI 90).



Illuminated and sanitised environments



Energy saving




Up to 70% reduction in bacterial load



Counteracts the onset of infections


Places of use

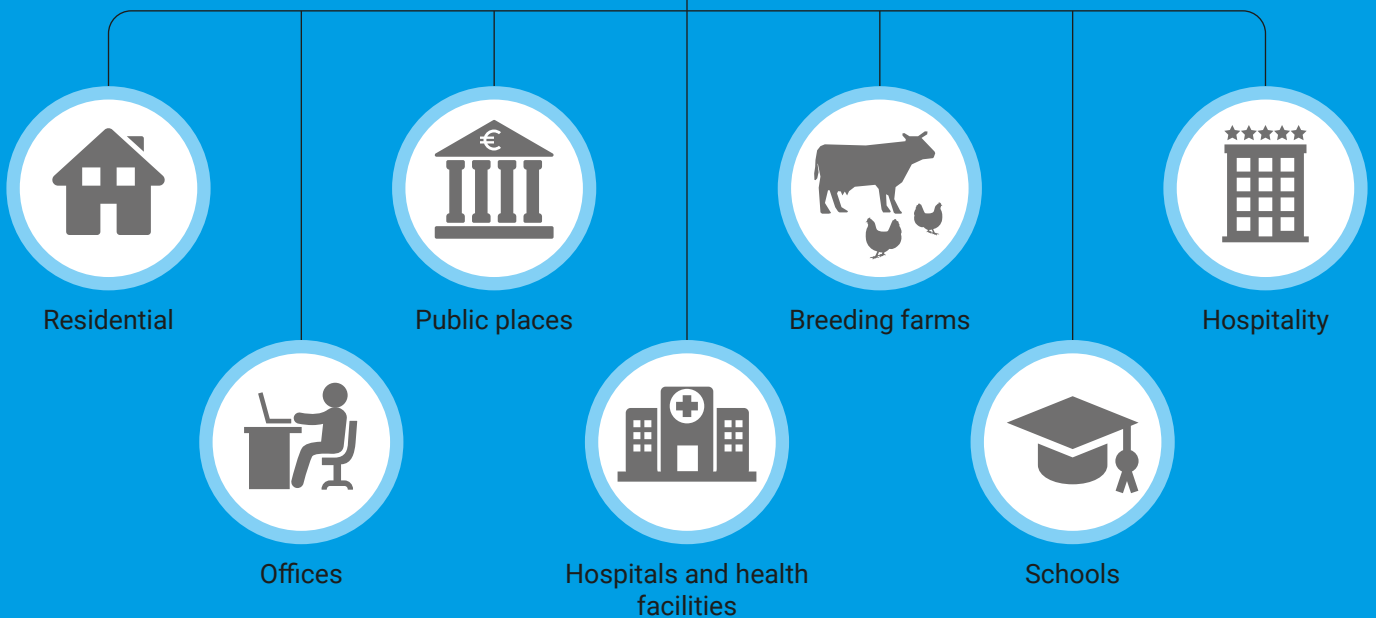



PROBLEM

The protection of hygiene in the shared spaces of our daily lives is becoming increasingly important. Today's methods of sanitising environments are not only expensive and invasive but also force the user to change their habits.



SOLUTION

Linea Light Group introduces Environment Care Lighting, a technology developed in collaboration with the University of Strathclyde in Glasgow which, thanks to a wavelength of light of 405 nm, sanitises surfaces, preventing the onset of infections, guaranteeing renewed wellbeing in the environment in which it is used and reducing the bacterial load by up to 70%. It was found that after a 10-hour test, the reduction of the bacterial load already reaches 35%.

Environment Care Lighting involves the use of a blue-dominant LED source combined with a white powerLED, thus achieving a dual functionality: lighting and disinfecting the environment at the same time. The use of high colour rendering LEDs makes it possible to illuminate the room by emphasising colours and surfaces.



LIVABLE LIGHT

405 nm technology avoids the use of costly UV technology, which, using frequencies between 240 and 260 nm, does not allow for permanence during irradiation, as well as substantially altering the organoleptic properties of the food as well as being harmful. Environment Care Lighting protects people and their wellbeing in all the working environments where they spend most of the day.



WHERE



The luminaires in the i-LèD collection that use Environment Care Lighting technology are Woofer and Rollip, both of which feature dual ignition to keep the antibacterial function active even when the white light is off.

These luminaires, whose materials have been specially designed to maximise the effectiveness of their technology, are perfect for the lighting of multifunctional environments, office areas, retail outlets, public places, residential areas, and controlled livestock farms.





WoofeR_R

Example of use on volumes of 3 m x 2 m x h 2.7 m.
Effective area 6 sqm.

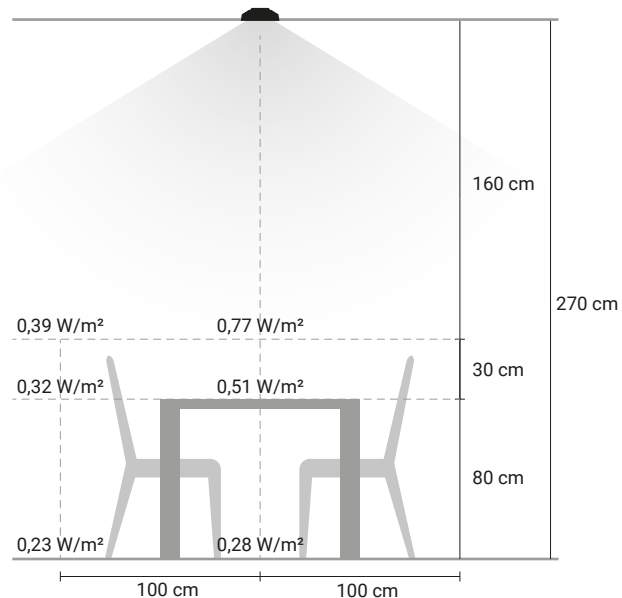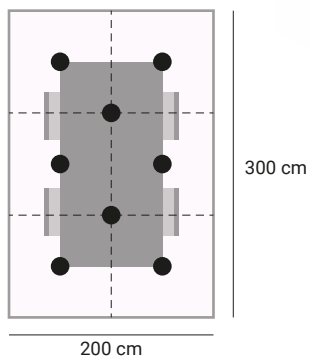



WoofeR_RX

Example of use on volumes of 3 m x 3 m x h 2.7 m.
Effective area 9 sqm.

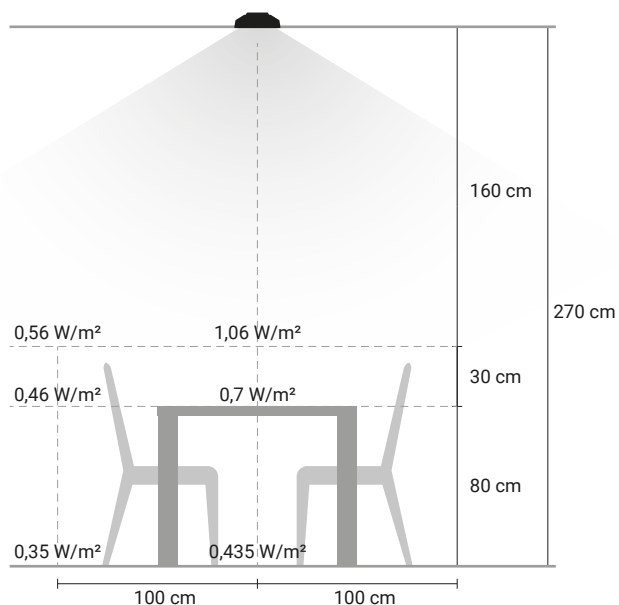
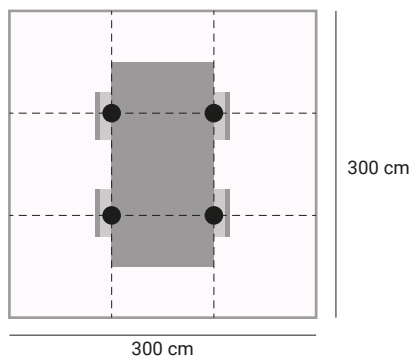


Rollip60_PC

Example of use on volumes of 4 m x 3 m x h 2.7 m.
Effective area 12 sqm.

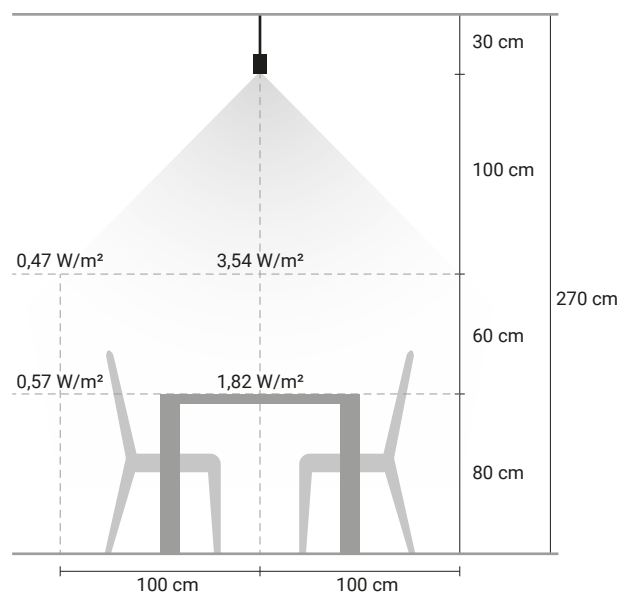
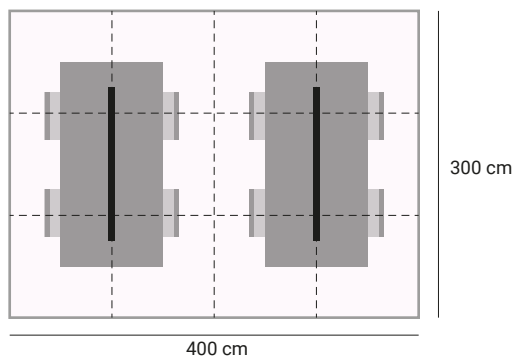


Woofers_R | Downlight | 100-240 V AC | topLED 15W DC - 16,5W AC | 405nm



| Efficiency - CRI 90 | Cct | lm S - D | Optic |
|---------------------|--------|------------|------------|
| White 84023 | T 3500 | 1000 - 748 | 00 General |

Woofers_RX | Downlight | 100-240 V AC | topLED 24W DC - 26,5W AC | 405 nm




| Efficiency - CRI 90 | Cct | lm S - D | Optic |
|---------------------|--------|-------------|------------|
| White 84024 | T 3500 | 1770 - 1377 | 00 General |


Rollip60_PC | Lines | 220-240 V | topLED | 405nm



| 1211 mm - 62W DC - 68W AC - CRI 90 | Cct | lm S - D | Optic |
|------------------------------------|--------|-------------|------------|
| White 84079 | T 3500 | 5385 - 3830 | 00 General |
| Black 84080 | | | |



| 1511 mm - 78,5W DC - 85W AC - CRI 90 | Cct | lm S - D | Optic |
|--------------------------------------|--------|-------------|------------|
| White 84081 | T 3500 | 7217 - 5132 | 00 General |
| Black 84082 | | | |



Dual independent lighting:

Day: White light + λ 405 Nm light

Night: λ 405 Nm light




Emergency

A large green square with rounded corners and a white border, containing the letters 'EM' in a bold, white, sans-serif font. The square is centered on the page and overlaps the architectural drawing background.

EM

emergency range index


Fled

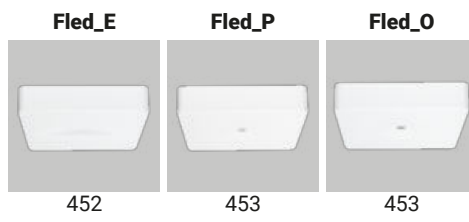

Onsight



Fled_E | Escape route | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC




| Standard | Cct | Im S - D | Optic |
|-------------|------|---------------|----------|
| White 62504 | 6500 | 227 - On req. | Elliptic |

| UPS | Cct | Im S - D | Optic |
|-------------|------|---------------|----------|
| White 64804 | 6500 | 227 - On req. | Elliptic |

Recessed casing Pag. 455


Fled_E | Escape route | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | Im S - D | Optic |
|-------------|------|---------------|----------|
| White 62514 | 6500 | 227 - On req. | Elliptic |

| UPS | Cct | Im S - D | Optic |
|-------------|------|---------------|----------|
| White 64814 | 6500 | 227 - On req. | Elliptic |

Fled_P | Escape route | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC




| Standard | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 62524 | 6500 | 227 - On req. | General |

| UPS | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 64824 | 6500 | 227 - On req. | General |

Recessed casing Pag. 455


Fled_P | Escape route | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 62534 | 6500 | 227 - On req. | General |

| UPS | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 64834 | 6500 | 227 - On req. | General |

Fled_O | Escape route | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC




| Standard | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 62544 | 6500 | 227 - On req. | General |

| UPS | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 64844 | 6500 | 227 - On req. | General |

Recessed casing Pag. 455


Fled_O | Escape route | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 62554 | 6500 | 227 - On req. | General |

| UPS | Cct | Im S - D | Optic |
|--------------------|------|---------------|---------|
| White 64854 | 6500 | 227 - On req. | General |

Onsight_W | Escape signal | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62500.L | 6500 | 227 - On req. | General |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62501.L | 6500 | 227 - On req. | General |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62500.R | 6500 | 227 - On req. | General |




| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62501.R | 6500 | 227 - On req. | General |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62500.U | 6500 | 227 - On req. | General |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62501.U | 6500 | 227 - On req. | General |

Onsight_SF | Escape signal | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62520.L | 6500 | 227 - On req. | General |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62521.L | 6500 | 227 - On req. | General |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62520.R | 6500 | 227 - On req. | General |




| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62521.R | 6500 | 227 - On req. | General |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62520.U | 6500 | 227 - On req. | General |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------|
| White 62521.U | 6500 | 227 - On req. | General |

Onsight_W | Escape signal | 220-240 V AC | powerLED 4 W DC - 4,5 W AC



| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62510.L | 6500 | 330 - On req. | General - 60° |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62511.L | 6500 | 330 - On req. | General - 60° |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62510.R | 6500 | 330 - On req. | General - 60° |





| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62511.R | 6500 | 330 - On req. | General - 60° |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62510.U | 6500 | 330 - On req. | General - 60° |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62511.U | 6500 | 330 - On req. | General - 60° |

Onsight_SF | Escape signal | 220-240 V AC | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62530.U | 6500 | 227 - On req. | General - 60° |




| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62531.U | 6500 | 227 - On req. | General - 60° |

| Standard | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62530.S | 6500 | 227 - On req. | General - 60° |



| UPS | Cct | lm S - D | Optic |
|---------------|------|---------------|---------------|
| White 62531.S | 6500 | 227 - On req. | General - 60° |

Onsight_RF | Escape signal | 220-240 V | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62540.L | 6500 | 227 - On req. | General |



| UPS | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62541.L | 6500 | 227 - On req. | General |

| Standard | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62540.R | 6500 | 227 - On req. | General |




| UPS | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62541.R | 6500 | 227 - On req. | General |

| Standard | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62540.U | 6500 | 227 - On req. | General |



| UPS | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62541.U | 6500 | 227 - On req. | General |

Onsight_RF | Escape signal | 220-240 V | powerLED 1,5 W DC - 1,7 W AC



| Standard | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62550.U | 6500 | 227 - On req. | General |



| UPS | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62551.U | 6500 | 227 - On req. | General |


| Standard | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62550.S | 6500 | 227 - On req. | General |



| UPS | Cct | Im S - D | Optic |
|---------------|------|---------------|---------|
| White 62551.S | 6500 | 227 - On req. | General |

Recessed casing Pag. 455

Onsight | Features




| | |
|-----------------------------|---|
| LAMP BODY | die cast aluminium |
| DIFFUSOR | PMMA |
| SIGNAL | screen-printed image UNI EN ISO 7010:2012 |
| SIGNAL COLOUR | white/green |
| POWER SUPPLY (62500) | driver kit + Ni-Cd 7.2 V 1600 mA/h batteries |
| POWER SUPPLY (62510) | driver kit + Ni-Cd 4.8 V 1600 mA/h batteries |
| OPERATIVE DURATION | 1 hour (charge time 12 hours) up to 3 hours (charge time 24 hours) |
| AUTO-TEST | yes, with incorporated signalling LED |
| IP | 40 |
| CONSUMPTION | 1,7 W / 4,5 W |

Recessed casing



description

89373 Recessed casings
suitable for: Fled_E 1,5W / Fled_P 1,5W / Fled_O 1,5W
 Onsight_RF 1,5W




Switchable (on/off) in the presence of mains via switch on SL input (switched line). Automatic reset following battery and/or LED lamp replacement. Electronic multi-level charging system. Supplied with 3,000 mAh battery pack.

| | range | output | input | eff. | PF | surge |
|--------------|-----------|----------------|-------------|------|-----|-------|
| 99355 | Universal | 6-60V 40-400mA | 220~240V AC | 86% | 0.5 | 4 kV |


| | |
|--------------------------------------|---|
| Frequency | 50-60 Hz |
| Nominal input current | 40 mA (30 A inrush current with cold start) |
| Outout voltage (without load) | 6-60V |
| TA Operating temperature | -25 +50 °C |
| Max casing temperature TC | 70 °C |
| Control interface | Switch Line, Rest mode |

| | |
|---------------------------------|--|
| Protections | Overtemperature, overload, overvoltage, short-circuit, open circus |
| Charge current | 200 mA |
| Emergency output current | 400-40 mA |
| Emergency power | 2,4W |
| Emergency output current | 20 h |

| | |
|------------------------|---|
| Reference norms | IEC 61347-2-7:2011, IEC 61347-2-7:2011/AMD1:2017, IEC 61347-1:2015, IEC 61347-1:2015/AMD1:2017, EN 61347-1:2015, EN 61347-2-7:2012+A1:2019, EN 55015:2013/A1:2015, EN61547:2009, EN 61000-3-2: 2014, EN 61000-3-3: 2013 |
|------------------------|---|

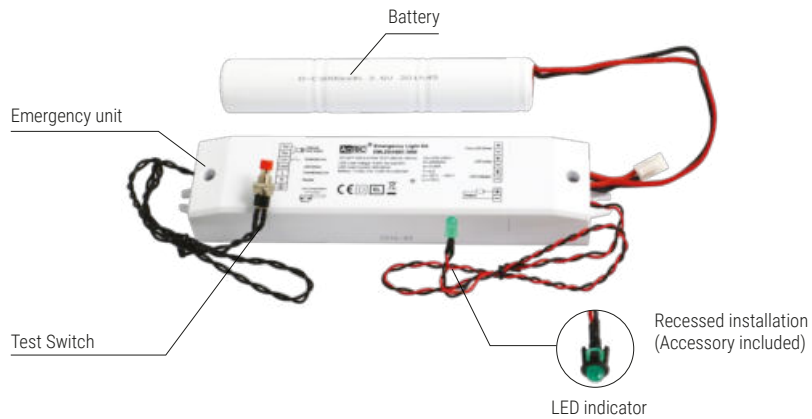


Unswitch Switch

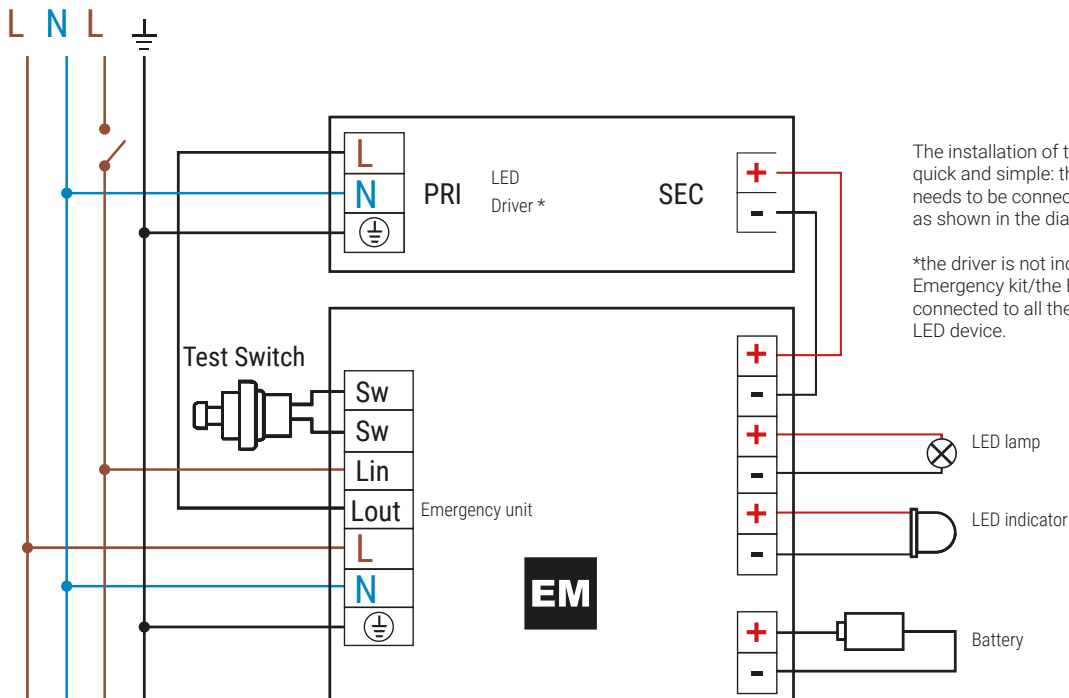

The installation of the emergency kit is quick and simple: the Emergency unit only needs to be connected to the LED driver as shown in the diagram.

*the driver is not included in the Emergency kit/the Emergency kit can be connected to all the original drivers of the LED device.

Emergency light kit | Emergency




- Maintained or non maintained operation
- Suitable for electronic driver, dimmable electronic driver
- Adjustable version dip-switch, constant current or constant voltage to power LED to LED modules
- Connected to power supplies with maximum output voltage and current 90V and 2A
- Automatic operation
- High temperature NiCd batteries
- Charge indicator with FROR led cable
- Protection device against extensive discharge
- MAT4 DALI self diagnosis system with external module
- Charging device with supply is reinforced insulation able to recharge the battery normally after the test in clause 22.3 of the IEC 61347-2-7:2007.
- Supplied with 3,000 mAh battery pack.

| | range | output | input | PF |
|----------------|----------------|----------------|-------------|-----|
| KIT0014 | Universal C.C. | 9-57V 350-60mA | 220~240V AC | 0.5 |
| | Universal C.V. | 24V 2000mA | | |

| | |
|--------------------------------------|------------------------|
| Frequency | 50-60 Hz |
| Nominal input current | 20 mA |
| Outout voltage (without load) | 9-57V C.C. / 24V C.V. |
| TA Operating temperature | 0 +50 °C |
| Max casing temperature TC | 70 °C |
| Control interface | Switch Line, Rest mode |

| | |
|---------------------------------|--|
| Protections | Overtemperature, overload, overvoltage, short-circuit, open circus |
| Emergency output current | 350-60 mA C.C. / 2000mA C.V. |
| Emergency power | 3,4W |
| Recharging time | 24 h |

| | |
|------------------------|--|
| Reference norms | EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2 |
|------------------------|--|

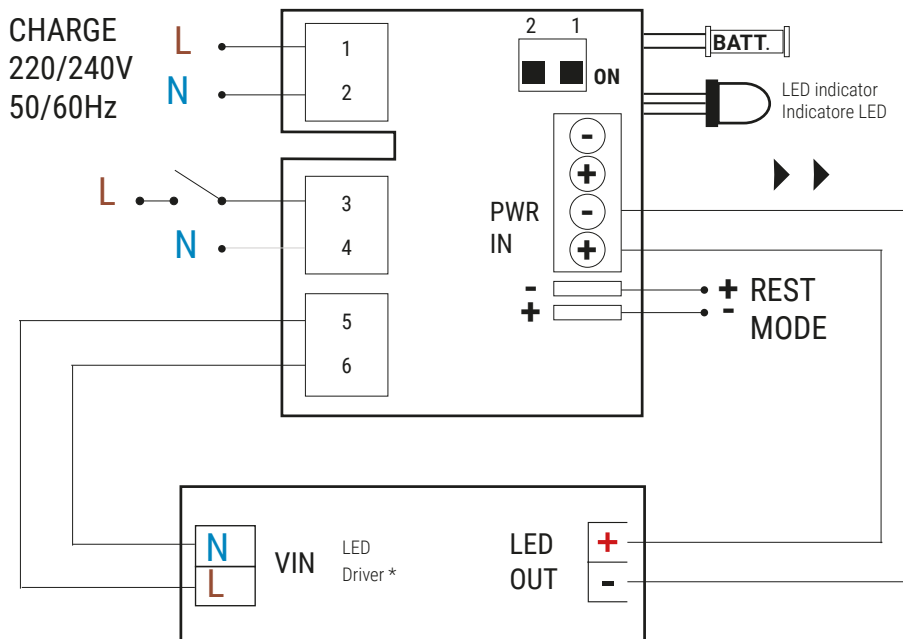


LED SOURCE

The installation of the emergency kit is quick and simple: the Emergency unit only needs to be connected to the LED driver as shown in the diagram.

*the driver is not included in the Emergency kit/the Emergency kit can be connected to all the original drivers of the LED device.



Ceiling lamps

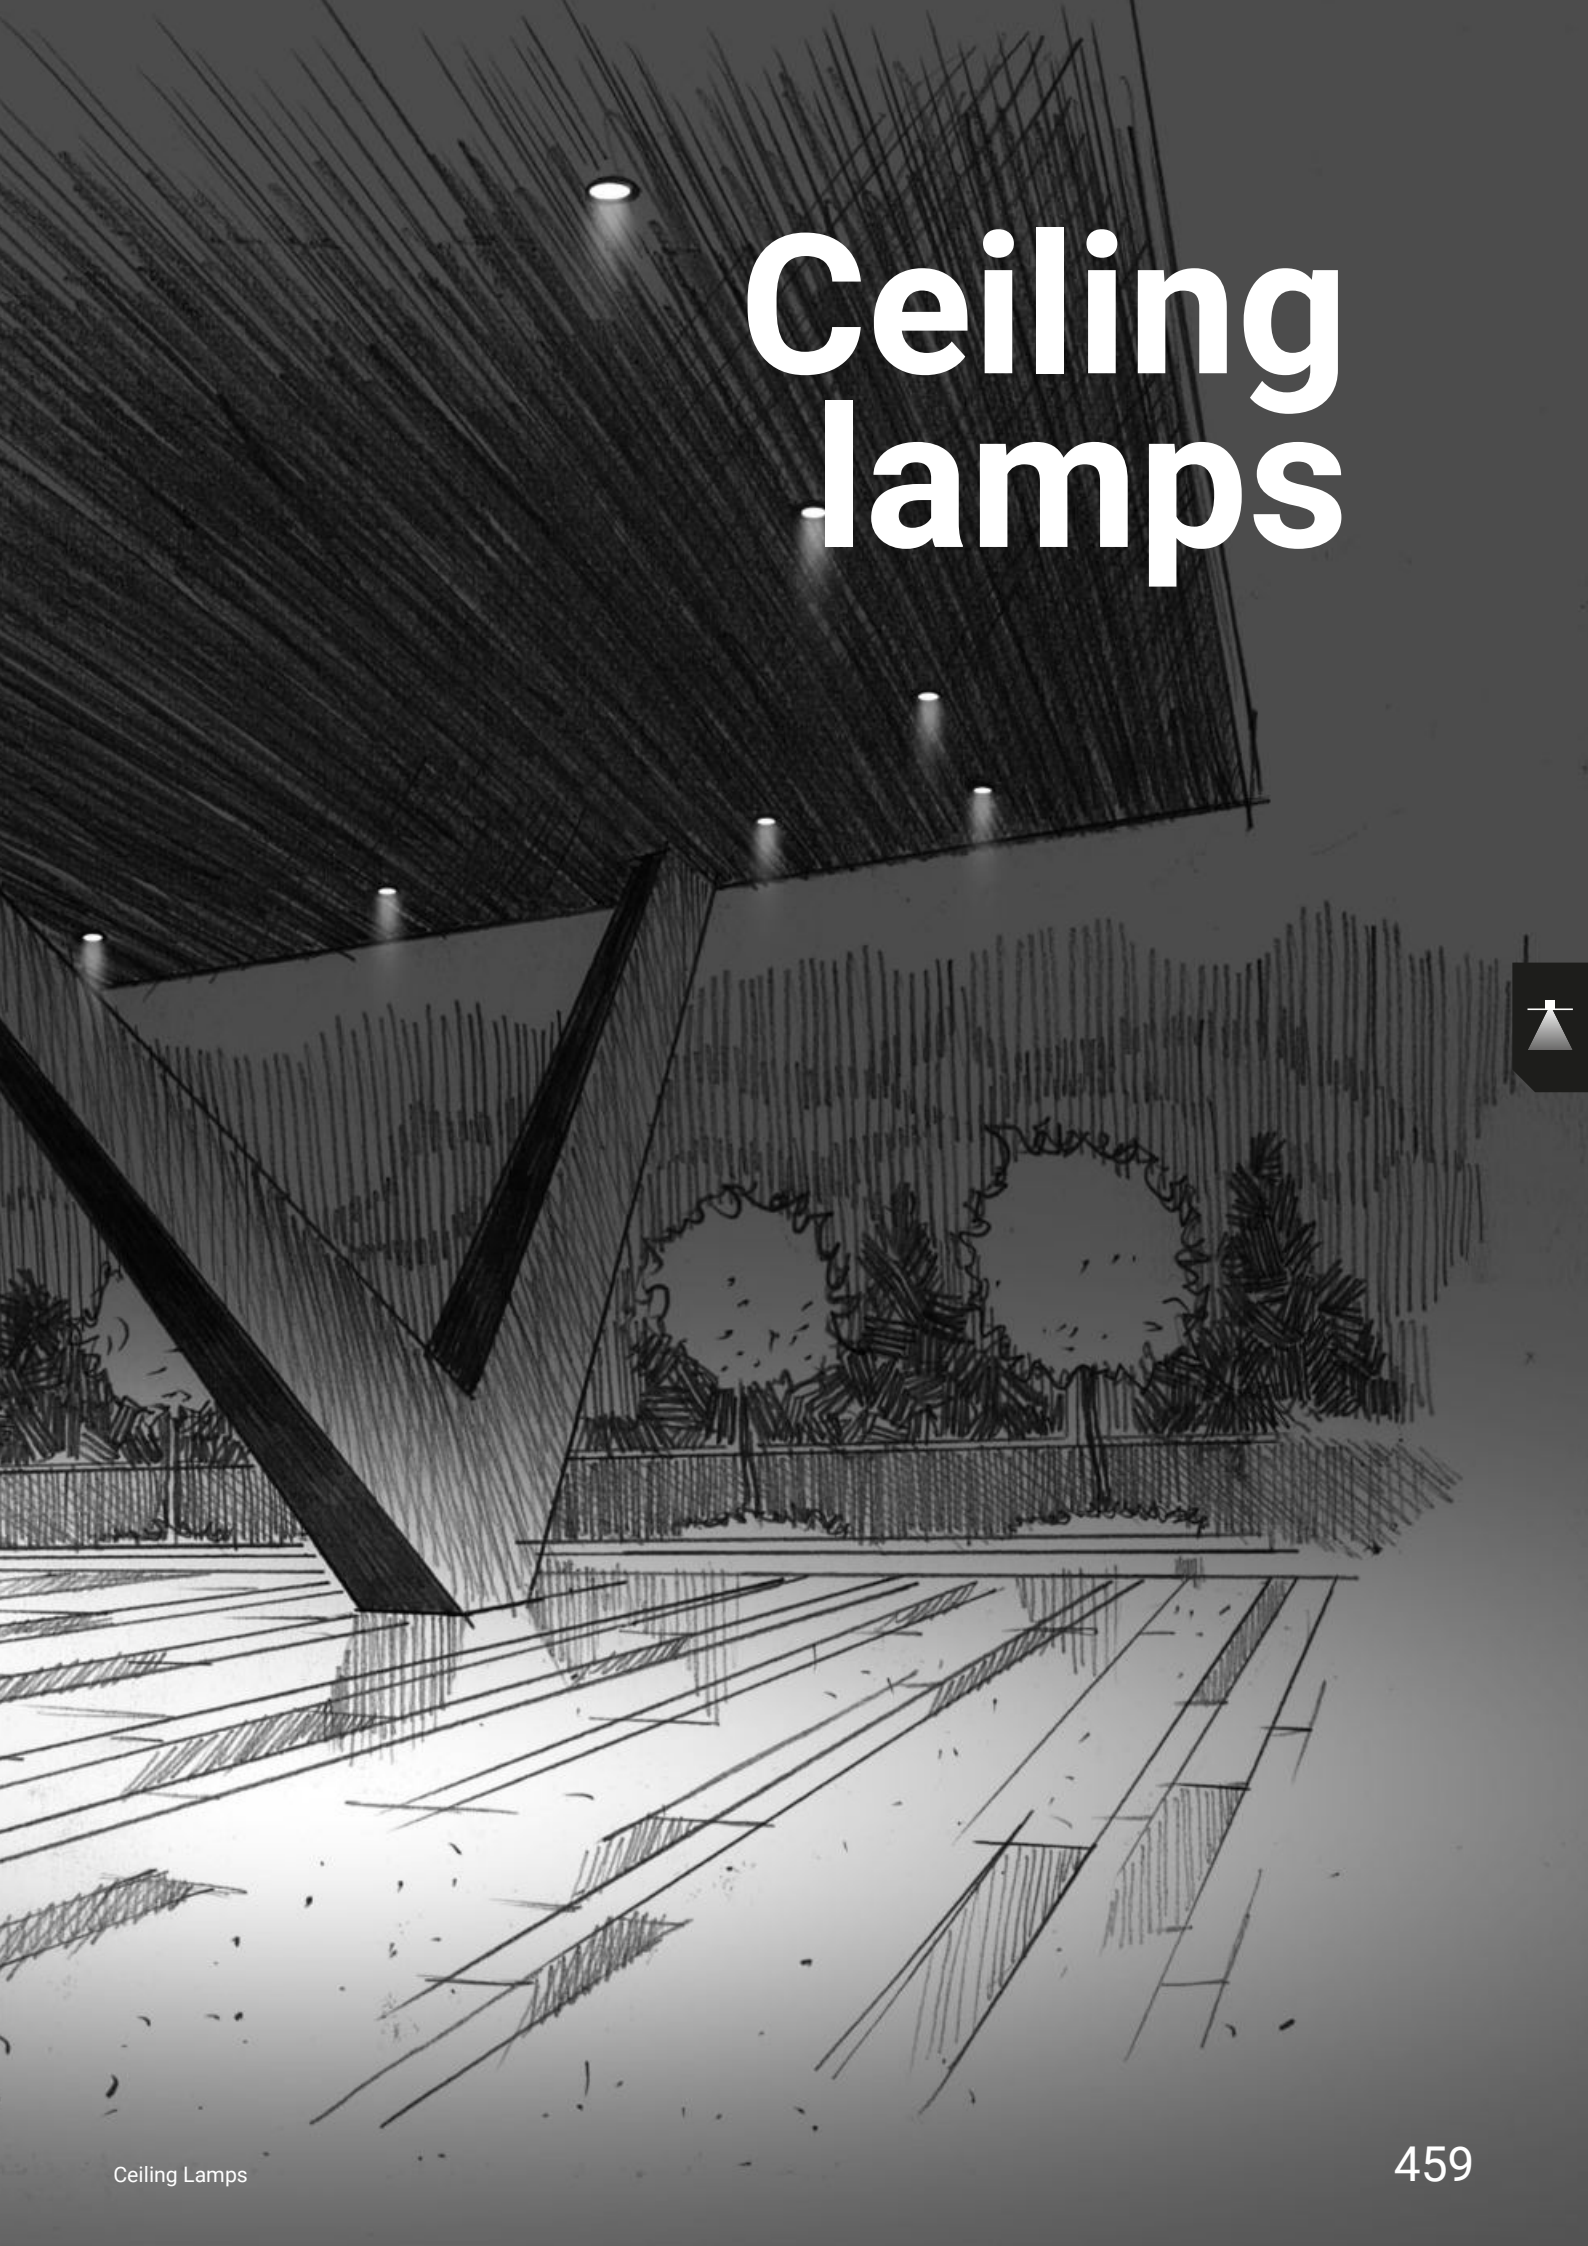

ceiling lamps range index


Guardian

Guardian



465

Guardian_J



465

Orma

Orma_C



472

Orma_CJ



472

Portik

Portik_R



478

Portik_Q



479










guardian

Materials

Aluminium body

Anodised aluminium flange

Guardian | Downlight | 198-264 V AC | powerLED 7,2 W DC - 8,5 W AC




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-----------|------------------|
| White | 81893 | M 2700 | 760 - 568 | 15 Spot (17°) |
| Black | 81916 | W 3000 | 760 - 568 | 30 Flood (26°) |
| Grey | 81838 | N 4000 | 821 - 613 | 60 W.Flood (51°) |
| | | | | 07 Asymm. - |

| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-----------|----------------|
| White | 81894 | M 2700 | 760 - 453 | 15 Spot (14°) |
| Black | 81917 | W 3000 | 760 - 453 | 30 Spot (24°) |
| Grey | 81839 | N 4000 | 821 - 489 | 60 Flood (42°) |

Recessed casing Pag. 467


Guardian_J | Downlight | 198-264 V AC | powerLED 7,2 W DC - 8,5 W AC




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-----------|------------------|
| White | 81895 | M 2700 | 760 - 558 | 20 Spot (20°) |
| Black | 81918 | W 3000 | 760 - 558 | 30 Flood (30°) |
| Grey | 81840 | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Recessed casing Pag. 467


81909W07




Photometric curve



Light beam

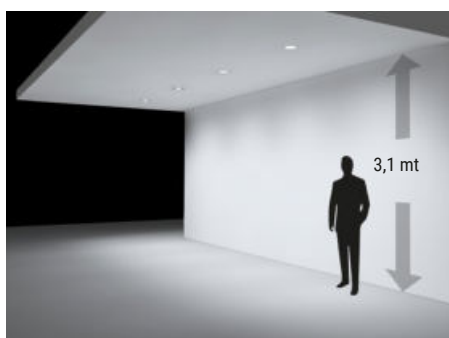


3,1 mt



Floor plan

Guardian | Downlight | 198-264 V AC | arrayLED 12,6 W DC - 14,1 W AC




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-------------|------------------|
| White | 81896 | M 2700 | 1843 - 1098 | 15 Spot (14°) |
| Black | 81919 | W 3000 | 1921 - 1144 | 30 Flood (33°) |
| Grey | 81841 | N 4000 | 2028 - 1208 | 60 W.Flood (64°) |

| | | Cct | lm S - D | Optic |
|-------|--------------|--------|------------|-------------|
| White | 81899 | M 2700 | 1683 - 769 | 07 Asymm. - |
| Black | 81922 | W 3000 | 1808 - 800 | |
| Grey | 81844 | N 4000 | 1949 - 846 | |

| | | HC | Cct | lm S - D | Optic |
|-------|--------------|----|------|------------|------------------|
| White | 81897 | M | 2700 | 1843 - 668 | 15 Spot (14°) |
| Black | 81920 | W | 3000 | 1921 - 696 | 30 Flood (29°) |
| Grey | 81842 | N | 4000 | 2028 - 735 | 60 W.Flood (50°) |

Recessed casing Pag. 467


Guardian_J | Downlight | 198-264 V AC | arrayLED 12,6 W DC - 14,1 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-------------|------------------|
| White | 81904 | M 2700 | 1843 - 978 | 15 Spot (16°) |
| Black | 81927 | W 3000 | 1921 - 1020 | 35 Flood (30°) |
| Grey | 81849 | N 4000 | 2028 - 1077 | 45 W.Flood (46°) |

Recessed casing Pag. 467

Guardian | Downlight | 198-264 V AC | arrayLED 12,6 W DC - 14,1 W AC





| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-------------|------------------|
| White | 81900 | M 2700 | 1843 - 1098 | 15 Spot (14°) |
| Black | 81923 | W 3000 | 1921 - 1144 | 30 Flood (33°) |
| Grey | 81845 | N 4000 | 2028 - 1208 | 60 W.Flood (64°) |

| | | Cct | lm S - D | Optic |
|-------|--------------|--------|------------|-------------|
| White | 81903 | M 2700 | 1683 - 769 | 07 Asymm. - |
| Black | 81926 | W 3000 | 1808 - 800 | |
| Grey | 81848 | N 4000 | 1949 - 846 | |

| | | HC | Cct | lm S - D | Optic |
|-------|--------------|----|------|------------|------------------|
| White | 81901 | M | 2700 | 1849 - 668 | 15 Spot (14°) |
| Black | 81924 | W | 3000 | 1921 - 696 | 30 Flood (29°) |
| Grey | 81846 | N | 4000 | 2028 - 735 | 60 W.Flood (50°) |

Recessed casing Pag. 467


Guardian_J | Downlight | 198-264 V AC | arrayLED 12,6 W DC - 14,1 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-------------|------------------|
| White | 81905 | M 2700 | 1843 - 978 | 15 Spot (16°) |
| Black | 81928 | W 3000 | 1921 - 1020 | 35 Flood (30°) |
| Grey | 81850 | N 4000 | 2028 - 1077 | 45 W.Flood (46°) |

Recessed casing Pag. 467

Guardian | Downlight | 198-264 V AC | arrayLED 30 W DC - 33,6 W AC




| | Cct | Im S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 81906 | M 2700 | 4088 - 3159 | 15 Spot (18°) |
| Black 81929 | W 3000 | 4372 - 3293 | 30 Flood (32°) |
| Grey 81867 | N 4000 | 4702 - 3475 | 60 W.Flood (57°) |

| | Cct | Im S - D | Optic |
|--------------------|--------|-------------|-------------|
| White 81909 | M 2700 | 3167 - 1408 | 07 Asymm. - |
| Black 81932 | W 3000 | 3401 - 1467 | |
| Grey 81870 | N 4000 | 3667 - 1548 | |

| | HC | Cct | Im S - D | Optic |
|--------------------|--------|-------------|------------------|-------|
| White 81907 | M 2700 | 4088 - 1743 | 15 Spot (18°) | |
| Black 81930 | W 3000 | 4372 - 1816 | 30 Flood (28°) | |
| Grey 81868 | N 4000 | 4702 - 1918 | 60 W.Flood (42°) | |

Recessed casing Pag. 467


Guardian_J | Downlight | 198-264 V AC | arrayLED 30 W DC - 33,6 W AC




| | Cct | Im S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 81914 | M 2700 | 4088 - 2945 | 15 Spot (18°) |
| Black 81937 | W 3000 | 4372 - 3068 | 35 Flood (34°) |
| Grey 81875 | N 4000 | 4702 - 3240 | 45 W.Flood (58°) |

Recessed casing Pag. 467

Recessed casing for brick or concrete-mounted installation




| description |
|---|
| 99673 Recessed casing suitable for: Guardian 7,2W / Guardian_J 7,2W |



| description |
|--|
| 83048 Recessed casing suitable for: Guardian DALI 12,6W / Guardian_J DALI 12,6W |

Guardian | Downlight | 198-264 V AC | arrayLED 30 W DC - 33,6 W AC





| DALI | Cct | Im S - D | Optic |
|--------------------|--------|---------------|------------------|
| White 81910 | M 2700 | 4088 - 3159 | 15 Spot (18°) |
| Black 81933 | W 3000 | 4372 - 3293 | 30 Flood (32°) |
| Grey 81871 | N 4000 | 4702 - On req | 60 W.Flood (57°) |

| DALI | Cct | Im S - D | Optic |
|--------------------|--------|-------------|-------------|
| White 81913 | M 2700 | 3167 - 1408 | 07 Asymm. - |
| Black 81936 | W 3000 | 3401 - 1467 | |
| Grey 81874 | N 4000 | 3667 - 1548 | |

| DALI | HC | Cct | Im S - D | Optic |
|--------------------|--------|-------------|------------------|-------|
| White 81911 | M 2700 | 4088 - 1743 | 15 Spot (18°) | |
| Black 81934 | W 3000 | 4372 - 1816 | 30 Flood (28°) | |
| Grey 81872 | N 4000 | 4702 - 1918 | 60 W.Flood (42°) | |

Recessed casing Pag. 467

Guardian_J | Downlight | 198-264 V AC | arrayLED 30 W DC - 33,6 W AC



| DALI | Cct | Im S - D | Optic |
|--------------------|--------|-------------|------------------|
| White 81915 | M 2700 | 4088 - 2945 | 15 Spot (18°) |
| Black 81938 | W 3000 | 4372 - 3068 | 35 Flood (34°) |
| Grey 81876 | N 4000 | 4702 - 3240 | 45 W.Flood (58°) |

Recessed casing Pag. 467



| description |
|---|
| 99674 Recessed casing suitable for: Guardian 12,6W / Guardian_J 12,6W |



| description |
|--|
| 99675 Recessed casing suitable for: Guardian 30W / Guardian DALI 30W Guardian_J 30W / Guardian_J DALI 30W |



orma

Materials

Aluminium body

AISI 316L stainless steel flange



orma_c range



| | _C Ceiling | _CJ Ceiling Adjustable |
|--------------------|---------------------------------------|-----------------------------------|
| 4W/5W | 64 mm | 64 mm |
| 8W/9W | 97 mm | 97 mm |
| 12W/13W | 138 mm | 138 mm |
| Accessories | HC DL | HC |
| Finish | Steel Alu | Steel Alu |
| CRI 80 | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Spot - Flood - Wide Flood Elliptic | Spot - Flood Wide Flood |
| Driver | On/Off - 1/10 V - DALI | On/Off - 1/10 V - DALI |
| Current | C.C. C.V. | C.C. C.V. |
| | 55 mm 86 mm 127 mm | 55 mm 86 mm 127 mm |

Small overall dimensions

A small-footprint downlight, from 46 to barely 50 mm, with a small flange and Optics designed to fit inside the body. This smart solution makes the product easier to install.



Visual comfort

Depending on how the light is positioned, its beam can be optimised using the appropriate accessory. The honeycomb filter screens secondary light and reduces direct glare, while maintaining the same high and diffuse quality.

If the light is installed in a grazing position and you wish to light only part of the wall, you can use the darklight filter to section part of the beam and prevent direct glare even close to the source.



Orma



Orma
+ honeycomb



Orma
+ darklight


The range

A wide range of lighting options, including three Optics: spot, medium flood, and flood. There are also three sizes, and a choice of AC or DC. The Orma_C downlight range includes CJ swivel versions, which can be adjusted with a screwdriver without opening the body.



± 25° (8 W - 13 W)
± 20° (4 W)

Orma_C | Downlight | powerLED



| C.C. - 4W DC 350 mA | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81223 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (48°) |
| | | | | 25 Elliptic - |

| HC 4W 350 DC mA | | Cct | lm S - D | Optic |
|-----------------|--------------|---------------|-----------|-----------------------|
| Steel/Alu | 81224 | M 2700 | 490 - 186 | 15 Spot (20°) |
| | | W 3000 | 490 - 186 | 30 Flood (25°) |
| | | N 4000 | 529 - 201 | 60 Flood (37°) |

| DL 4W DC 350 mA | | Cct | lm S - D | Optic |
|-----------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81225 | M 2700 | 490 - 193 | 15 Spot (22°) |
| | | W 3000 | 490 - 193 | 30 Flood (30°) |
| | | N 4000 | 529 - 208 | 60 W.Flood (55°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |
| | | |


| C.V. - 5W DC 24 V DC | | Cct | lm S - D | Optic |
|----------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81226 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (48°) |
| | | | | 25 Elliptic - |

| HC C.V. - 5W DC 24 V DC | | Cct | lm S - D | Optic |
|-------------------------|--------------|---------------|-----------|-----------------------|
| Steel/Alu | 81227 | M 2700 | 490 - 186 | 15 Spot (20°) |
| | | W 3000 | 490 - 186 | 30 Flood (25°) |
| | | N 4000 | 529 - 201 | 60 Flood (37°) |

| DL C.V. - 5W DC 24 V DC | | Cct | lm S - D | Optic |
|-------------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81228 | M 2700 | 490 - 193 | 15 Spot (22°) |
| | | W 3000 | 490 - 193 | 30 Flood (30°) |
| | | N 4000 | 529 - 208 | 60 W.Flood (55°) |

Electronics


| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |
| | | | | |



RTG 81223W30 / 81223W60

Recessed casing Pag. 473

Orma_CJ | Downlight | powerLED



| C.C. - 4W DC 350 mA | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81241 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (49°) |



Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |
| | | |

| C.V. - 5W DC 24 V DC | | Cct | lm S - D | Optic |
|----------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81242 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (49°) |


Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |
| | | | | |

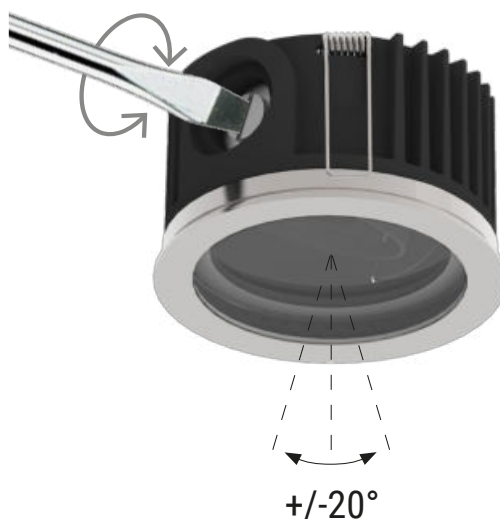

Recessed casing Pag. 473

Orma_C | Downlight | arrayLED



| C.C. - 8W DC 220 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 81229 | M 2700 | 1088 - 858 | 15 Spot (15°) |
| | W 3000 | 1088 - 894 | 30 Flood (31°) |
| | N 4000 | 1173 - 944 | 60 W.Flood (61°) |

| HC C.C. - 8W DC 220 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 81230 | M 2700 | 1088 - 619 | 15 Spot (15°) |
| | W 3000 | 1088 - 645 | 30 Flood (27°) |
| | N 4000 | 1173 - 681 | 60 W.Flood (49°) |

| DL C.C. - 8W DC 220 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 81231 | M 2700 | 1088 - 575 | 15 Spot (16°) |
| | W 3000 | 1088 - 599 | 30 Flood (29°) |
| | N 4000 | 1173 - 633 | 60 W.Flood (53°) |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |



| C.V. - 9W DC 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81232 | M 2700 | 1209 - 954 | 15 Spot (15°) |
| | W 3000 | 1209 - 996 | 30 Flood (31°) |
| | N 4000 | 1303 - 1052 | 60 W.Flood (61°) |

| HC C.V. - 9W DC 24 V DC | Cct | lm S - D | Optic |
|-------------------------|---------------|------------|-------------------------|
| Steel/Alu 81233 | M 2700 | 1209 - 687 | 15 Spot (15°) |
| | W 3000 | 1209 - 716 | 30 Flood (27°) |
| | N 4000 | 1303 - 756 | 60 W.Flood (49°) |

| DL C.V. - 9W DC 24 V DC | Cct | lm S - D | Optic |
|-------------------------|---------------|------------|-------------------------|
| Steel/Alu 81234 | M 2700 | 1209 - 639 | 15 Spot (16°) |
| | W 3000 | 1209 - 666 | 30 Flood (29°) |
| | N 4000 | 1303 - 703 | 60 W.Flood (53°) |

Electronics


| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1-2 art. p 92 x l 117 x h 38 | ON/OFF 1-5 art. p 115 x l 140 x h 50 | ON/OFF 1-15 art. p 150 x l 60 x h 35 | 0/1-10V 1-15 art. p 150 x l 60 x h 35 | DALI 1-12 art. p 191 x l 63 x h 38 |



C.V. version with converter integrated in the lamp body

RTG 81229W30 / 81229W60

Orma_CJ | Downlight | arrayLED



| C.C. - 8W DC 220 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 81243 | M 2700 | 1088 - 858 | 15 Spot (15°) |
| | W 3000 | 1088 - 894 | 30 Flood (31°) |
| | N 4000 | 1173 - 944 | 60 W.Flood (61°) |

| HC C.C. - 8W DC 220 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 82452 | M 2700 | 1072 - 619 | 15 Spot (15°) |
| | W 3000 | 1117 - 645 | 30 Flood (27°) |
| | N 4000 | 1100 - 681 | 60 W.Flood (49°) |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |



| C.V. - 9W DC 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81244 | M 2700 | 1209 - 954 | 15 Spot (15°) |
| | W 3000 | 1209 - 996 | 30 Flood (31°) |
| | N 4000 | 1303 - 1052 | 60 W.Flood (61°) |

| HC C.V. - 9W DC 24 V DC | Cct | lm S - D | Optic |
|-------------------------|---------------|------------|-------------------------|
| Steel/Alu 82453 | M 2700 | 1209 - 687 | 15 Spot (15°) |
| | W 3000 | 1209 - 716 | 30 Flood (27°) |
| | N 4000 | 1303 - 756 | 60 W.Flood (49°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1-2 art. p 92 x l 117 x h 38 | ON/OFF 1-5 art. p 115 x l 140 x h 50 | ON/OFF 1-15 art. p 150 x l 60 x h 35 | 0/1-10V 1-15 art. p 150 x l 60 x h 35 | DALI 1-12 art. p 191 x l 63 x h 38 |




C.V. version with converter integrated in the lamp body

Recessed casing




| description | type |
|---|------|
| 89373 Recessed casing | |
| suitable for: Orma_C Ø64 / Orma_CJ Ø64 Orma_C Ø97 / Orma_CJ Ø97 | |



| description | type |
|---|------|
| 89374 Recessed casing | |
| suitable for: Orma_C Ø64 / Orma_CJ Ø64 Orma_C Ø97 / Orma_CJ Ø97 | |

Orma_C | Downlight | arrayLED



| C.C. - 12W DC 350 mA | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81235 | M 2700 | 1724 - 1379 | 15 Spot (14°) |
| | W 3000 | 1724 - 1379 | 30 Flood (31°) |
| | N 4000 | 1854 - 1485 | 60 W.Flood (61°) |

| HC C.C. - 12W DC 350 mA | Cct | lm S - D | Optic |
|-------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81236 | M 2700 | 1724 - 981 | 15 Spot (13°) |
| | W 3000 | 1724 - 981 | 30 Flood (28°) |
| | N 4000 | 1854 - 1055 | 60 W.Flood (49°) |

| DL C.C. - 12W DC 350 mA | Cct | lm S - D | Optic |
|-------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81237 | M 2700 | 1724 - 1094 | 15 Spot (14°) |
| | W 3000 | 1724 - 1094 | 30 Flood (29°) |
| | N 4000 | 1854 - 1178 | 60 W.Flood (52°) |

Electronics

99183 **83100**

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

| C.V. - 13 W DC 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81238 | M 2700 | 1724 - 1379 | 15 Spot (14°) |
| | W 3000 | 1724 - 1379 | 30 Flood (31°) |
| | N 4000 | 1854 - 1485 | 60 W.Flood (61°) |

| HC C.V. - 13 W DC 24 V DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81239 | M 2700 | 1724 - 981 | 15 Spot (13°) |
| | W 3000 | 1724 - 981 | 30 Flood (28°) |
| | N 4000 | 1854 - 1055 | 60 W.Flood (49°) |

| DL C.V. - 13 W DC 24 V DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81240 | M 2700 | 1724 - 1094 | 15 Spot (14°) |
| | W 3000 | 1724 - 1094 | 30 Flood (29°) |
| | N 4000 | 1854 - 1178 | 60 W.Flood (52°) |

Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1-3 art. 1-10 art. 1-10 art. 1-8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 160 x h 35 p 150 x l 160 x h 35 p 191 x l 63 x h 38



C.V. version with converter integrated in the lamp body



Recessed casing Pag. 474

Recessed casing



| description |
|--|
| 99749 Recessed light casing (to be completed with universal grille 99750) |
| suitable for: Orma_C Ø138 / Orma_CJ Ø138 |

Orma_CJ | Downlight | arrayLED



| C.C. - 12W DC 350 mA | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81245 | M 2700 | 1724 - 1317 | 15 Spot (22°) |
| | W 3000 | 1724 - 1317 | 30 Flood (33°) |
| | N 4000 | 1854 - 1417 | 60 W.Flood (61°) |

| HC C.C. - 12W DC 350 mA | Cct | lm S - D | Optic |
|-------------------------|---------------|-------------|-------------------------|
| Steel/Alu 82454 | M 2700 | 1724 - 935 | 15 Spot (20°) |
| | W 3000 | 1724 - 935 | 30 Flood (27°) |
| | N 4000 | 1854 - 1005 | 60 W.Flood (48°) |

Electronics

99183 **83100**

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

| C.V. - 13 W DC 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81246 | M 2700 | 1724 - 1317 | 15 Spot (22°) |
| | W 3000 | 1724 - 1317 | 30 Flood (33°) |
| | N 4000 | 1854-1417 | 60 W.Flood (61°) |

| HC C.V. - 13 W DC 24 V DC | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|-------------------------|
| Steel/Alu 82455 | M 2700 | 1724 - 935 | 15 Spot (20°) |
| | W 3000 | 1724 - 935 | 30 Flood (27°) |
| | N 4000 | 1854 - 1005 | 60 W.Flood (48°) |

Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1-3 art. 1-10 art. 1-10 art. 1-8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 160 x h 35 p 150 x l 160 x h 35 p 191 x l 63 x h 38

C.V. version with converter integrated in the lamp body

Recessed casing Pag. 474



| description |
|---|
| 99750 Universal grille for recessed light casing 99749 |
| suitable for: Orma_C Ø138 / Orma_CJ Ø138 |






portik

Materials
Aluminium body



Portik_R | Ceiling luminaires | 198-264 V AC | arrayLED 6,5 W DC - 7,5 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 81851 | M 2700 | 770 - 646 | 15 Spot (14°) |
| Black | 81852 | W 3000 | 770 - 646 | 30 Flood (39°) |
| Grey | 81853 | N 4000 | 831 - 697 | 60 W.Flood (67°) |
| DarkBrown | 81854 | | | |

Portik_R | Ceiling luminaires | arrayLED 6,5 W DC 630mA




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 83685 | M 2700 | 770 - 646 | 15 Spot (14°) |
| Black | 83686 | W 3000 | 770 - 646 | 30 Flood (39°) |
| Grey | 83687 | N 4000 | 831 - 697 | 60 W.Flood (67°) |
| DarkBrown | 83688 | | | |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 122 x h 26 |

RTG 81851W60 / 83685M30 / 83686M30



Portik_R | Ceiling luminaires | 198-264 V AC | arrayLED



| 25 W DC - 28 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81877 | M 2700 | 3606 - 2578 | 15 Spot (18°) |
| Black | 81878 | W 3000 | 3758 - 2687 | 30 Flood (26°) |
| Grey | 81879 | N 4000 | 3967 - 2837 | 60 W.Flood (56°) |
| DarkBrown | 81880 | | | |

| 34 W DC - 39 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81371 | M 2700 | 5232 - 3342 | 15 Spot (18°) |
| Black | 81372 | W 3000 | 5453 - 3484 | 30 Flood (26°) |
| Grey | 81373 | N 4000 | 5756 - 3677 | 60 W.Flood (56°) |
| DarkBrown | 81374 | | | |

Portik_R | Ceiling luminaires | 198-264 V AC | arrayLED 12,5 W DC - 14 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 81855 | M 2700 | 1724 - 1231 | 15 Spot (12°) |
| Black | 81856 | W 3000 | 1724 - 1231 | 30 Flood (31°) |
| Grey | 81857 | N 4000 | 1854 - 1324 | 60 W.Flood (62°) |
| DarkBrown | 81858 | | | |

Portik_R | Ceiling luminaires | arrayLED 12,5 W DC 350mA




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 83693 | M 2700 | 1724 - 1231 | 15 Spot (12°) |
| Black | 83694 | W 3000 | 1724 - 1231 | 30 Flood (31°) |
| Grey | 83695 | N 4000 | 1854 - 1324 | 60 W.Flood (62°) |
| DarkBrown | 83696 | | | |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |



RTG 81855W60

Portik_R | Ceiling luminaires | 198-264 V AC | arrayLED 33 W DC - 36 W AC



| DALI | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 81885 | M 2700 | 4179 - 3197 | 15 Spot (18°) |
| Black | 81886 | W 3000 | 4471 - 3333 | 30 Flood (26°) |
| Grey | 81887 | N 4000 | 4805 - 3518 | 60 W.Flood (56°) |
| DarkBrown | 81888 | | | |

Portik_Q | Up-Light | 198-264 V AC | arrayLED 6,5 W DC - 7,5 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 80618 | M 2700 | 770 - 557 | 15 Spot (15°) |
| Black | 80619 | W 3000 | 770 - 597 | 30 Flood (37°) |
| Grey | 80620 | N 4000 | 831 - 645 | 60 W.Flood (62°) |
| DarkBrown | 80621 | | | |

Portik_Q | Ceiling luminaires | arrayLED 6,5 W DC 630mA





| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 83689 | M 2700 | 770 - 557 | 15 Spot (15°) |
| Black | 83690 | W 3000 | 770 - 597 | 30 Flood (37°) |
| Grey | 83691 | N 4000 | 831 - 645 | 60 W.Flood (62°) |
| DarkBrown | 83692 | | | |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 122 x h 26 |


Portik_Q | Ceiling luminaires | 198-264 V AC | arrayLED



| 25 W DC - 28 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81881 | M 2700 | 3606 - 2580 | 15 Spot (17°) |
| Black | 81882 | W 3000 | 3758 - 2689 | 30 Flood (26°) |
| Grey | 81883 | N 4000 | 3967 - 2839 | 60 W.Flood (47°) |
| DarkBrown | 81884 | | | |

| 34 W DC - 39 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|------------------|
| White | 81375 | M 2700 | 5232 - 3343 | 15 Spot (17°) |
| Black | 81376 | W 3000 | 5453 - 3485 | 30 Flood (26°) |
| Grey | 81377 | N 4000 | 5756 - 3678 | 60 W.Flood (47°) |
| DarkBrown | 81378 | | | |

Portik_Q | Ceiling luminaires | 198-264 V AC | arrayLED 12,5 W DC - 14 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 80622 | M 2700 | 1724 - 1231 | 15 Spot (12°) |
| Black | 80623 | W 3000 | 1724 - 1231 | 30 Flood (31°) |
| Grey | 80624 | N 4000 | 1854 - 1324 | 60 W.Flood (62°) |
| DarkBrown | 80625 | | | |

Portik_Q | Ceiling luminaires | arrayLED 12,5 W DC 350mA





| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 83697 | M 2700 | 1724 - 1231 | 15 Spot (12°) |
| Black | 83698 | W 3000 | 1724 - 1231 | 30 Flood (31°) |
| Grey | 83699 | N 4000 | 1854 - 1324 | 60 W.Flood (62°) |
| DarkBrown | 83700 | | | |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

Portik_Q | Ceiling luminaires | 198-264 V AC | arrayLED 33 W DC - 36 W AC



| DALI | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 81889 | M 2700 | 4179 - 3199 | 15 Spot (17°) |
| Black | 81890 | W 3000 | 4471 - 3334 | 30 Flood (26°) |
| Grey | 81891 | N 4000 | 4805 - 3519 | 60 W.Flood (47°) |
| DarkBrown | 81892 | | | |




Wall lamps




wall lamps range index

Vedette

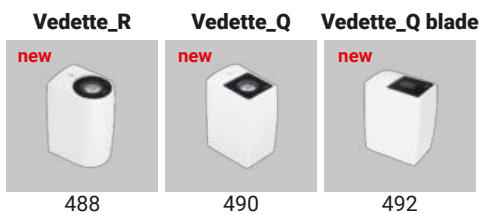


Nail



Cicada



Cem

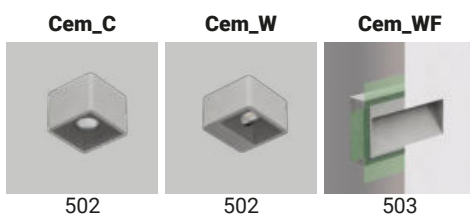

Ardilla66



Per












vedette

Materials
Aluminium body




Vedette_R Single emission | Wall light | 198-264 V AC | powerLED 4 W DC - 4,5 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 82773 | M 2700 | 490 - 298 | 15 Spot (14°) |
| Black | 82774 | W 3000 | 490 - 298 | 30 Flood (32°) |
| Grey | 82775 | N 4000 | 529 - 301 | 45 Flood (44°) |
| DarkBrown | 82776 | | | 00 General - |
| Sand | 82777 | | | |

Vedette_R Single emission | Wall light | 198-264 V AC | arrayLED 8 W DC - 9 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82793 | M 2700 | 1072 - 725 | 15 Spot (18°) |
| Black | 82794 | W 3000 | 1117 - 753 | 30 Flood (36°) |
| Grey | 82795 | N 4000 | 1180 - 794 | 60 W.Flood (66°) |
| DarkBrown | 82796 | | | 00 General - |
| Sand | 82797 | | | |

Vedette_R Single emission | Wall light | 198-264 V AC | arrayLED 14 W DC - 15,5 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82813 | M 2700 | 1735 - 1255 | 15 Spot (13°) |
| Black | 82814 | W 3000 | 1808 - 1306 | 30 Flood (33°) |
| Grey | 82815 | N 4000 | 1909 - 1379 | 60 W.Flood (63°) |
| DarkBrown | 82816 | | | 00 General - |
| Sand | 82817 | | | |

Vedette_R Double emission | Wall light | 198-264 V AC | powerLED 8 W DC - 9 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 82778 | M 2700 | 980 - 596 | 15 Spot (14°) |
| Black | 82779 | W 3000 | 980 - 596 | 30 Flood (32°) |
| Grey | 82780 | N 4000 | 1058 - 644 | 45 Flood (44°) |
| DarkBrown | 82781 | | | 00 General - |
| Sand | 82782 | | | |

Vedette_R Double emission | Wall light | 198-264 V AC | arrayLED 16 W DC - 18 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82798 | M 2700 | 2144 - 1454 | 15 Spot (18°) |
| Black | 82799 | W 3000 | 2234 - 1511 | 30 Flood (36°) |
| Grey | 82800 | N 4000 | 2360 - 1595 | 60 W.Flood (66°) |
| DarkBrown | 82801 | | | 00 General - |
| Sand | 82802 | | | |

Vedette_R Double emission | Wall light | 198-264 V AC | arrayLED 28 W DC - 30 W AC






| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82818 | M 2700 | 3470 - On req | 15 Spot (13°) |
| Black | 82819 | W 3000 | 3616 - On req | 30 Flood (33°) |
| Grey | 82820 | N 4000 | 3818 - On req | 60 W.Flood (63°) |
| DarkBrown | 82821 | | | 00 General - |
| Sand | 82822 | | | |

Vedette_Q Single emission | Wall light | 198-264 V AC | powerLED 4 W DC - 4,5 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 82763 | M 2700 | 490 - 298 | 15 Spot (14°) |
| Black | 82764 | W 3000 | 490 - 298 | 30 Flood (32°) |
| Grey | 82765 | N 4000 | 529 - 301 | 45 Flood (44°) |
| DarkBrown | 82766 | | | 00 General - |
| Sand | 82767 | | | |

Vedette_Q Single emission | Wall light | 198-264 V AC | arrayLED 8 W DC - 9 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82783 | M 2700 | 1072 - 725 | 15 Spot (18°) |
| Black | 82784 | W 3000 | 1117 - 753 | 30 Flood (36°) |
| Grey | 82785 | N 4000 | 1180 - 794 | 60 W.Flood (66°) |
| DarkBrown | 82786 | | | 00 General - |
| Sand | 82787 | | | |

Vedette_Q Single emission | Wall light | 198-264 V AC | arrayLED 14 W DC - 15,5 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82803 | M 2700 | 1735 - 1255 | 15 Spot (13°) |
| Black | 82804 | W 3000 | 1808 - 1306 | 30 Flood (30°) |
| Grey | 82805 | N 4000 | 1909 - 1379 | 60 W.Flood (63°) |
| DarkBrown | 82806 | | | 00 General - |
| Sand | 82807 | | | |

Vedette_Q Double emission | Wall light | 198-164 V AC | powerLED 8 W DC - 9 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 82768 | M 2700 | 980 - 596 | 15 Spot (14°) |
| Black | 82769 | W 3000 | 980 - 596 | 30 Flood (32°) |
| Grey | 82770 | N 4000 | 1058 - 644 | 45 Flood (44°) |
| DarkBrown | 82771 | | | 00 General - |
| Sand | 82772 | | | |

Vedette_Q Double emission | Wall light | 198-264 V AC | arrayLED 16 W DC - 18 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82788 | M 2700 | 2144 - 1454 | 15 Spot (18°) |
| Black | 82789 | W 3000 | 2234 - 1511 | 30 Flood (36°) |
| Grey | 82790 | N 4000 | 2360 - 1595 | 60 W.Flood (66°) |
| DarkBrown | 82791 | | | 00 General - |
| Sand | 82792 | | | |

Vedette_Q Double emission | Wall light | 198-264 V AC | arrayLED 28 W DC - 30 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 82808 | M 2700 | 3470 - 2510 | 15 Spot (13°) |
| Black | 82809 | W 3000 | 3616 - 2622 | 30 Flood (30°) |
| Grey | 82810 | N 4000 | 3818 - 2760 | 60 W.Flood (63°) |
| DarkBrown | 82811 | | | 00 General - |
| Sand | 82812 | | | |

Vedette_Q blade Single emission | Wall light | 198-264 V AC | powerLED 6 W DC - 7,2 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 97048 | M 2700 | 657 - On req | 05 N.Spot (4°) |
| Black | 97049 | W 3000 | 699 - On req | |
| Grey | 97050 | N 4000 | 747 - On req | |
| DarkBrown | 97051 | | | |
| Sand | 82515 | | | |

Vedette_Q blade Double emission | Wall light | 198-264 V AC | powerLED 12 W DC - 13 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 97185 | M 2700 | 1314 - On req | 05 N.Spot (4°) |
| Black | 97186 | W 3000 | 1398 - On req | |
| Grey | 97187 | N 4000 | 1494 - On req | |
| DarkBrown | 97188 | | | |
| Sand | 82516 | | | |



Vedette_Q blade Double emission | Wall light | 198-264 V AC | arrayLED 12 W DC - 13,5 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|---------------------|
| White | 97052 | M 2700 | 1342 - On req | 56 5°+ 60° - |
| Black | 97053 | W 3000 | 1486 - On req | |
| Grey | 97054 | N 4000 | 1684 - On req | |
| DarkBrown | 97055 | | | |
| Sand | 82517 | | | |



Optic 5° powerLED

Vedette_Q blade Single emission | Wall light | 198-264 V AC | powerLED 24 W DC - 28,8 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 91599 | M 2700 | 2288 - On req | 05 N.Spot (4°) |
| Black | 91600 | W 3000 | 2288 - On req | |
| Grey | 91601 | N 4000 | 2463 - On req | |
| DarkBrown | 91602 | | | |
| Sand | 82518 | | | |

Vedette_Q Asymm. Single emission | Wall light | 198-264 V AC | powerLED 6 W DC - 7,2 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|--------------------|
| White | 81574 | M 2700 | 685 - 532 | 07 Asymm. - |
| Black | 81575 | W 3000 | 739 - 554 | |
| Grey | 81576 | N 4000 | 985 - 585 | |
| DarkBrown | 81577 | | | |
| Sand | 82519 | | | |

Vedette_Q Asymm Double emission | Wall light | 198-264 V AC | powerLED 13,5 W DC - 16,5 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 81578 | M 2700 | 1324 - On req | 62 Asymm. +5° - |
| Black | 81579 | W 3000 | 1413 - On req | 63 Asymm. +30° - |
| Grey | 81580 | N 4000 | 1730 - On req | 64 Asymm. +60° - |
| DarkBrown | 81581 | | | |
| Sand | 82520 | | | |

Vedette_Q asymmetric | Wall light | 198-264 V AC | arrayLED 14 W DC - 15 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|------------------|
| White | 81582 | M 2700 | 2077 - 840 | 07 Asymm. |
| Black | 81583 | W 3000 | 2165 - 874 | |
| Grey | 81584 | N 4000 | 2285 - 923 | |
| DarkBrown | 81585 | | | |

Vedette_Q Asymm Double emission | Wall light | 198-264 V AC | arrayLED 28 W DC - 30 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 81586 | M 2700 | 3812 - On req | 62 Asymm. +5° - |
| Black | 81587 | W 3000 | 3973 - On req | 63 Asymm. +30° - |
| Grey | 81588 | N 4000 | 4194 - On req | 64 Asymm. +60° - |
| DarkBrown | 81589 | | | |

Optic 5° powerLED

nail


Materials

Aluminium body

Diffuser in polycarbonate



Nail_W | Wall light | 180-264 V AC | arrayLED 6,5 W DC - 7 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|---------------------|
| White | 84184 | M 2700 | 552 - 371 | 00 General - |
| BK Grey | 84185 | W 3000 | 591 - 397 | |
| DarkBrown | 84186 | N 4000 | 638 - 429 | |
| Grey | 84187 | | | |
| Primer | 84188 | | | |

Radial optics

Outdoor LED fixture with on-board power supply, equipped with hidden light source which, thanks to optics designed by Linealight in house and made from a single block of methacrylate, creates an extremely low luminance emission with a 360° radial light beam.



Paintable finish

In addition to the four different finishes, Nail is available in primer finish so the fixture can be painted to match the architecture in which it is installed.







cicada



Materials
Aluminium body

Cicada Single emission | Wall light | 198-264 V AC | arrayLED 6,5 W DC - 8 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------------|
| White | 83614 | M 2700 | 1072 - 713 | 00 General - |
| Black | 83615 | W 3000 | 1117 - 743 | 12 E.W.Flood (96°) |
| Grey | 83616 | N 4000 | 1180 - 785 | |
| DarkBrown | 83617 | | | |

Cicada Double emission | Wall light | 198-264 V AC | arrayLED 13 W DC - 16 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|--------------------|
| White | 83618 | M 2700 | 2144 - 1426 | 00 General - |
| Black | 83619 | W 3000 | 2234 - 1485 | 12 E.W.Flood (96°) |
| Grey | 83620 | N 4000 | 2360 - 1569 | |
| DarkBrown | 83621 | | | |

Cicada Single emission | Wall light | 198-264 V AC | arrayLEDs 13 W DC - 16 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|---------------------|
| White | 83622 | M 2700 | 2144 - 1437 | 00 General - |
| Black | 83623 | W 3000 | 2234 - 1497 | 12 E.W.Flood (101°) |
| Grey | 83624 | N 4000 | 2360 - 1580 | |
| DarkBrown | 83625 | | | |

Cicada Double emission | Wall light | 198-264 V AC | arrayLEDs 26 W DC - 30 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|---------------------|
| White | 83626 | M 2700 | 4288 - 2874 | 00 General - |
| Black | 83627 | W 3000 | 4468 - 2993 | 12 E.W.Flood (101°) |
| Grey | 83628 | N 4000 | 4720 - 3161 | |
| DarkBrown | 83629 | | | |






cem

Materials
Concrete body





cem lighting concept

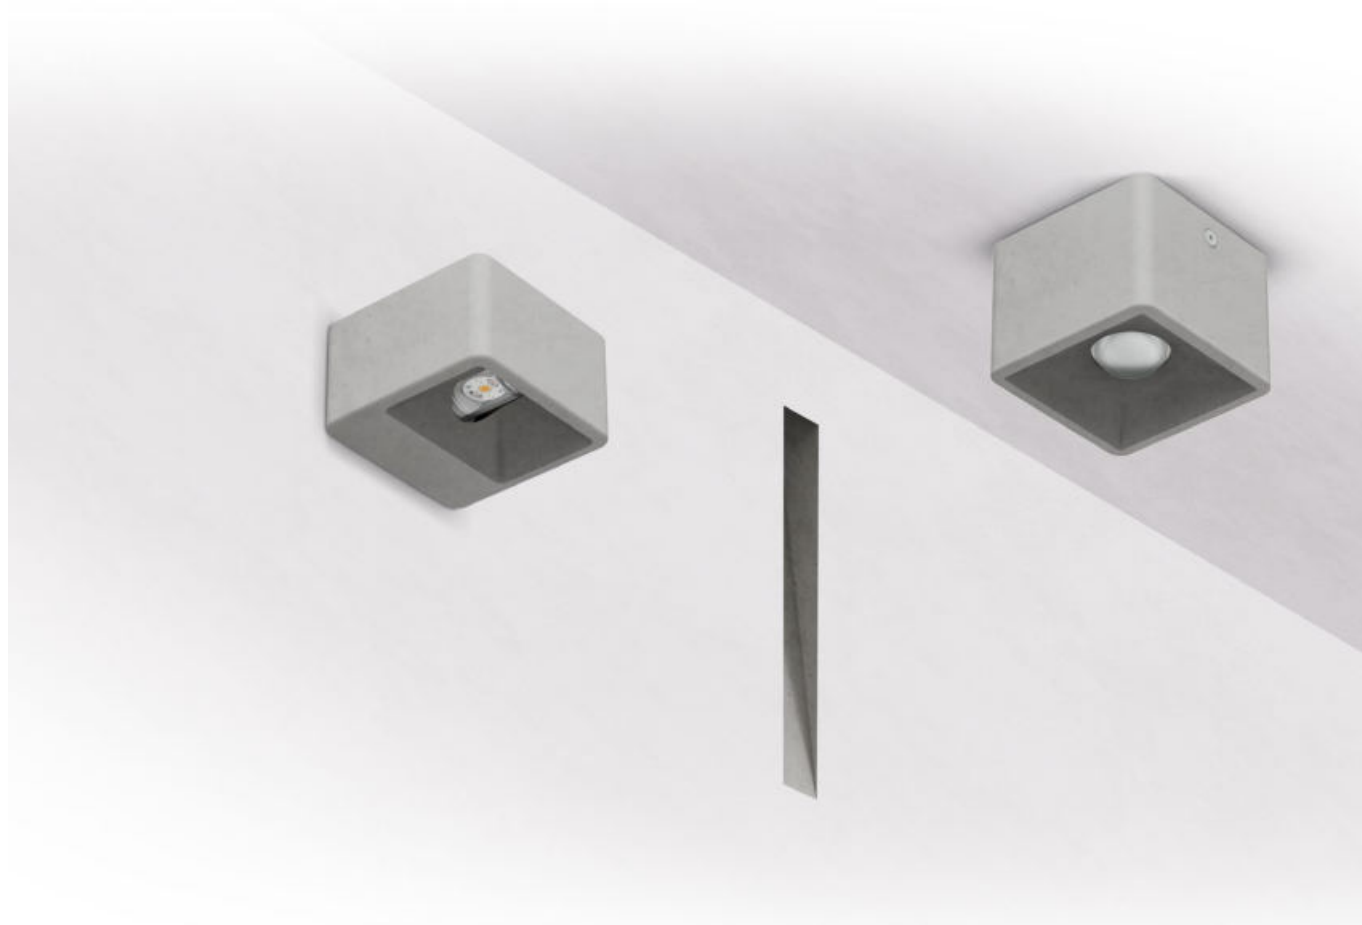


| | _W Wall | _WF Wall Frameless | _C Ceiling |
|----------------|-------------------------------------|------------------------------|----------------------|
| 1,5W | 159 x 59 mm | 450 x 130 mm | - |
| 6,5W | 72 x 120 mm | - | 90 x 120 mm |
| 7,5W | - | 210 x 370 mm | - |
| 14W | 72 x 350 mm | - | - |
| Finish | Cement | Cement | Cement |
| CRI 80 | 3000K - 4000K | 3000K | 3000K - 4000K |
| Optics | General Extra Wide Flood (1,5 W) | General | Flood |
| Control | On/Off | On/Off - DALI | On/Off |

Cem_C | Ceiling Lights | 220-240 V | arrayLED 6,5 W DC - 8 W AC




| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|-------------------------|
| Cement | 64564 | W 3000 | 770 - On req | 70 W.Flood (68°) |
| | | N 4000 | 831 - On req | |

Cem_W | Wall Lights | 100-240 V | arrayLED 6,5 W DC - 9 W AC




| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|---------------------|
| Cement | 64561 | W 3000 | 876 - On req | 00 General - |
| | | N 4000 | 946 - On req | |

Cem_W | Wall Lights | 100-240 V | arrayLED 6,5 W DC - 9 W AC






| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|---------------------|
| Cement | 64560 | W 3000 | 876 - On req | 00 General - |
| | | N 4000 | 946 - On req | |

Cem_W | Wall Lights | 180-264 V | topLED 14 W DC - 16,8 W AC




| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|---------------------|
| Cement | 64562 | W 3000 | 2218 - 1230 | 00 General - |
| | | N 4000 | 2321 - 1345 | |

64562W00




Cem_W | Wall Lights | 100-240 V | powerLED 1,5 W DC - 2,5 W AC



| | | Cct | Im S - D | Optic |
|--------|--------------|--------|----------|--------------------|
| Cement | 64563 | W 3000 | 199 - 73 | 60 E.W.Flood(120°) |
| | | N 4000 | 213 - 73 | |

Cem_WF | Wall Lights | powerLED 1,5 W DC 500 mA






| | | Cct | Im S - D | Optic |
|--------|--------------|--------|--------------|--------------|
| Cement | 64506 | W 3000 | 199 - On req | 00 General - |

Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|---|---|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 174 x h 27 | ON/OFF 2 - 3 art. p 65 x l 174 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 503

Cem_WF | Wall Lights | topLED 7,5 W DC 180 mA




| | | Cct | Im S - D | Optic |
|--------|--------------|--------|-----------|--------------|
| Cement | 64505 | W 3000 | 975 - 370 | 00 General - |

Electronics


| 99716 |
|---|
| ON/OFF 1 art. p 65 x l 174 x h 27 |

Recessed casing Pag. 503

Recessed casing



| description |
|----------------------------------|
| 65002 Recessed casing |
| suitable for: Cem_WF 1,5W |




| description |
|----------------------------------|
| 65005 Recessed casing |
| suitable for: Cem_WF 7,5W |



ardilla66

Materials
Aluminium body



Ardilla66 Single emission | Wall light | 198-264 V AC | powerLED 4,1 W DC - 5,7 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|---------------------|
| White | 94167 | M 2700 | 490 - 267 | 00 General - |
| Black | 94168 | W 3000 | 490 - 267 | |
| Grey | 94169 | N 4000 | 529 - 289 | |
| DarkBrown | 94170 | | | |

RTG 94167W00



Ardilla66 Double emission | Wall light | 198-264 V AC | powerLED 7,6 DC - 10 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|---------------------|
| White | 94204 | M 2700 | 980 - 562 | 00 General - |
| Black | 94208 | W 3000 | 980 - 562 | |
| Grey | 94209 | N 4000 | 1058 - 607 | |
| DarkBrown | 94214 | | | |

RTG 94204W00

Ardilla66 Double emission | Wall light | 198-264 V AC | powerLED 7,6 DC - 10 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 94215 | M 2700 | 980 - 373 | 61 General +6° - |
| Black | 94223 | W 3000 | 980 - 373 | |
| Grey | 94224 | N 4000 | 1058 - 403 | |
| DarkBrown | 94411 | | | |




per

Materials

Aluminium or AISI 316L
stainless steel body

Per | Wall light | powerLED 4 W DC 630 mA




| | | Cct | Im S - D | Optic |
|-----------|--------------|--------------------------|--------------|--------------------|
| White | 92619 | M 2700 | 438 - On req | 12 E.W.Flood (95°) |
| Steel | 92622 | W 3000 | 466 - 316 | |
| Grey | 92620 | N 4000 | 498 - 337 | |
| DarkBrown | 92621 | R - G - B - Y on request | | |

Electronics


| 89420 | 99179 | 99186 | 83102 |
|--|---|---|---|
| ON/OFF 1 art. p 66 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | ON/OFF 3 - 6 art. p 92 x l 117 x h 38 | DALI 1 - 7 art. p 54 x l 122 x h 26 |


RTG 92619W12

Easy installation

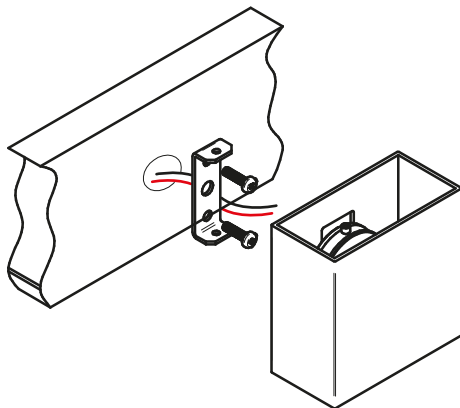


H-Farm | Treviso, Italy

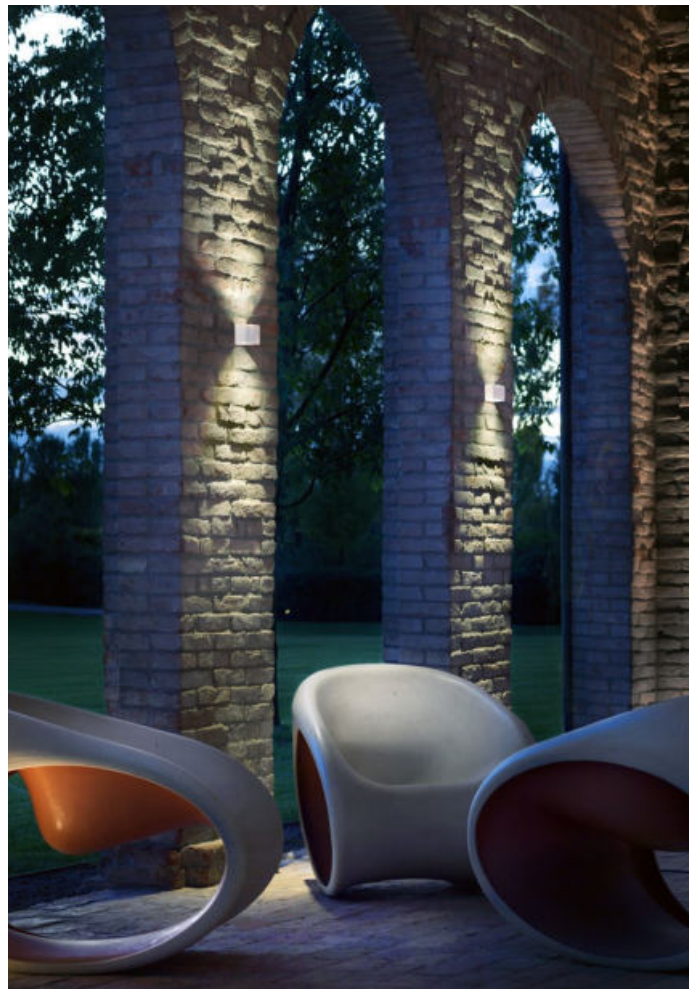

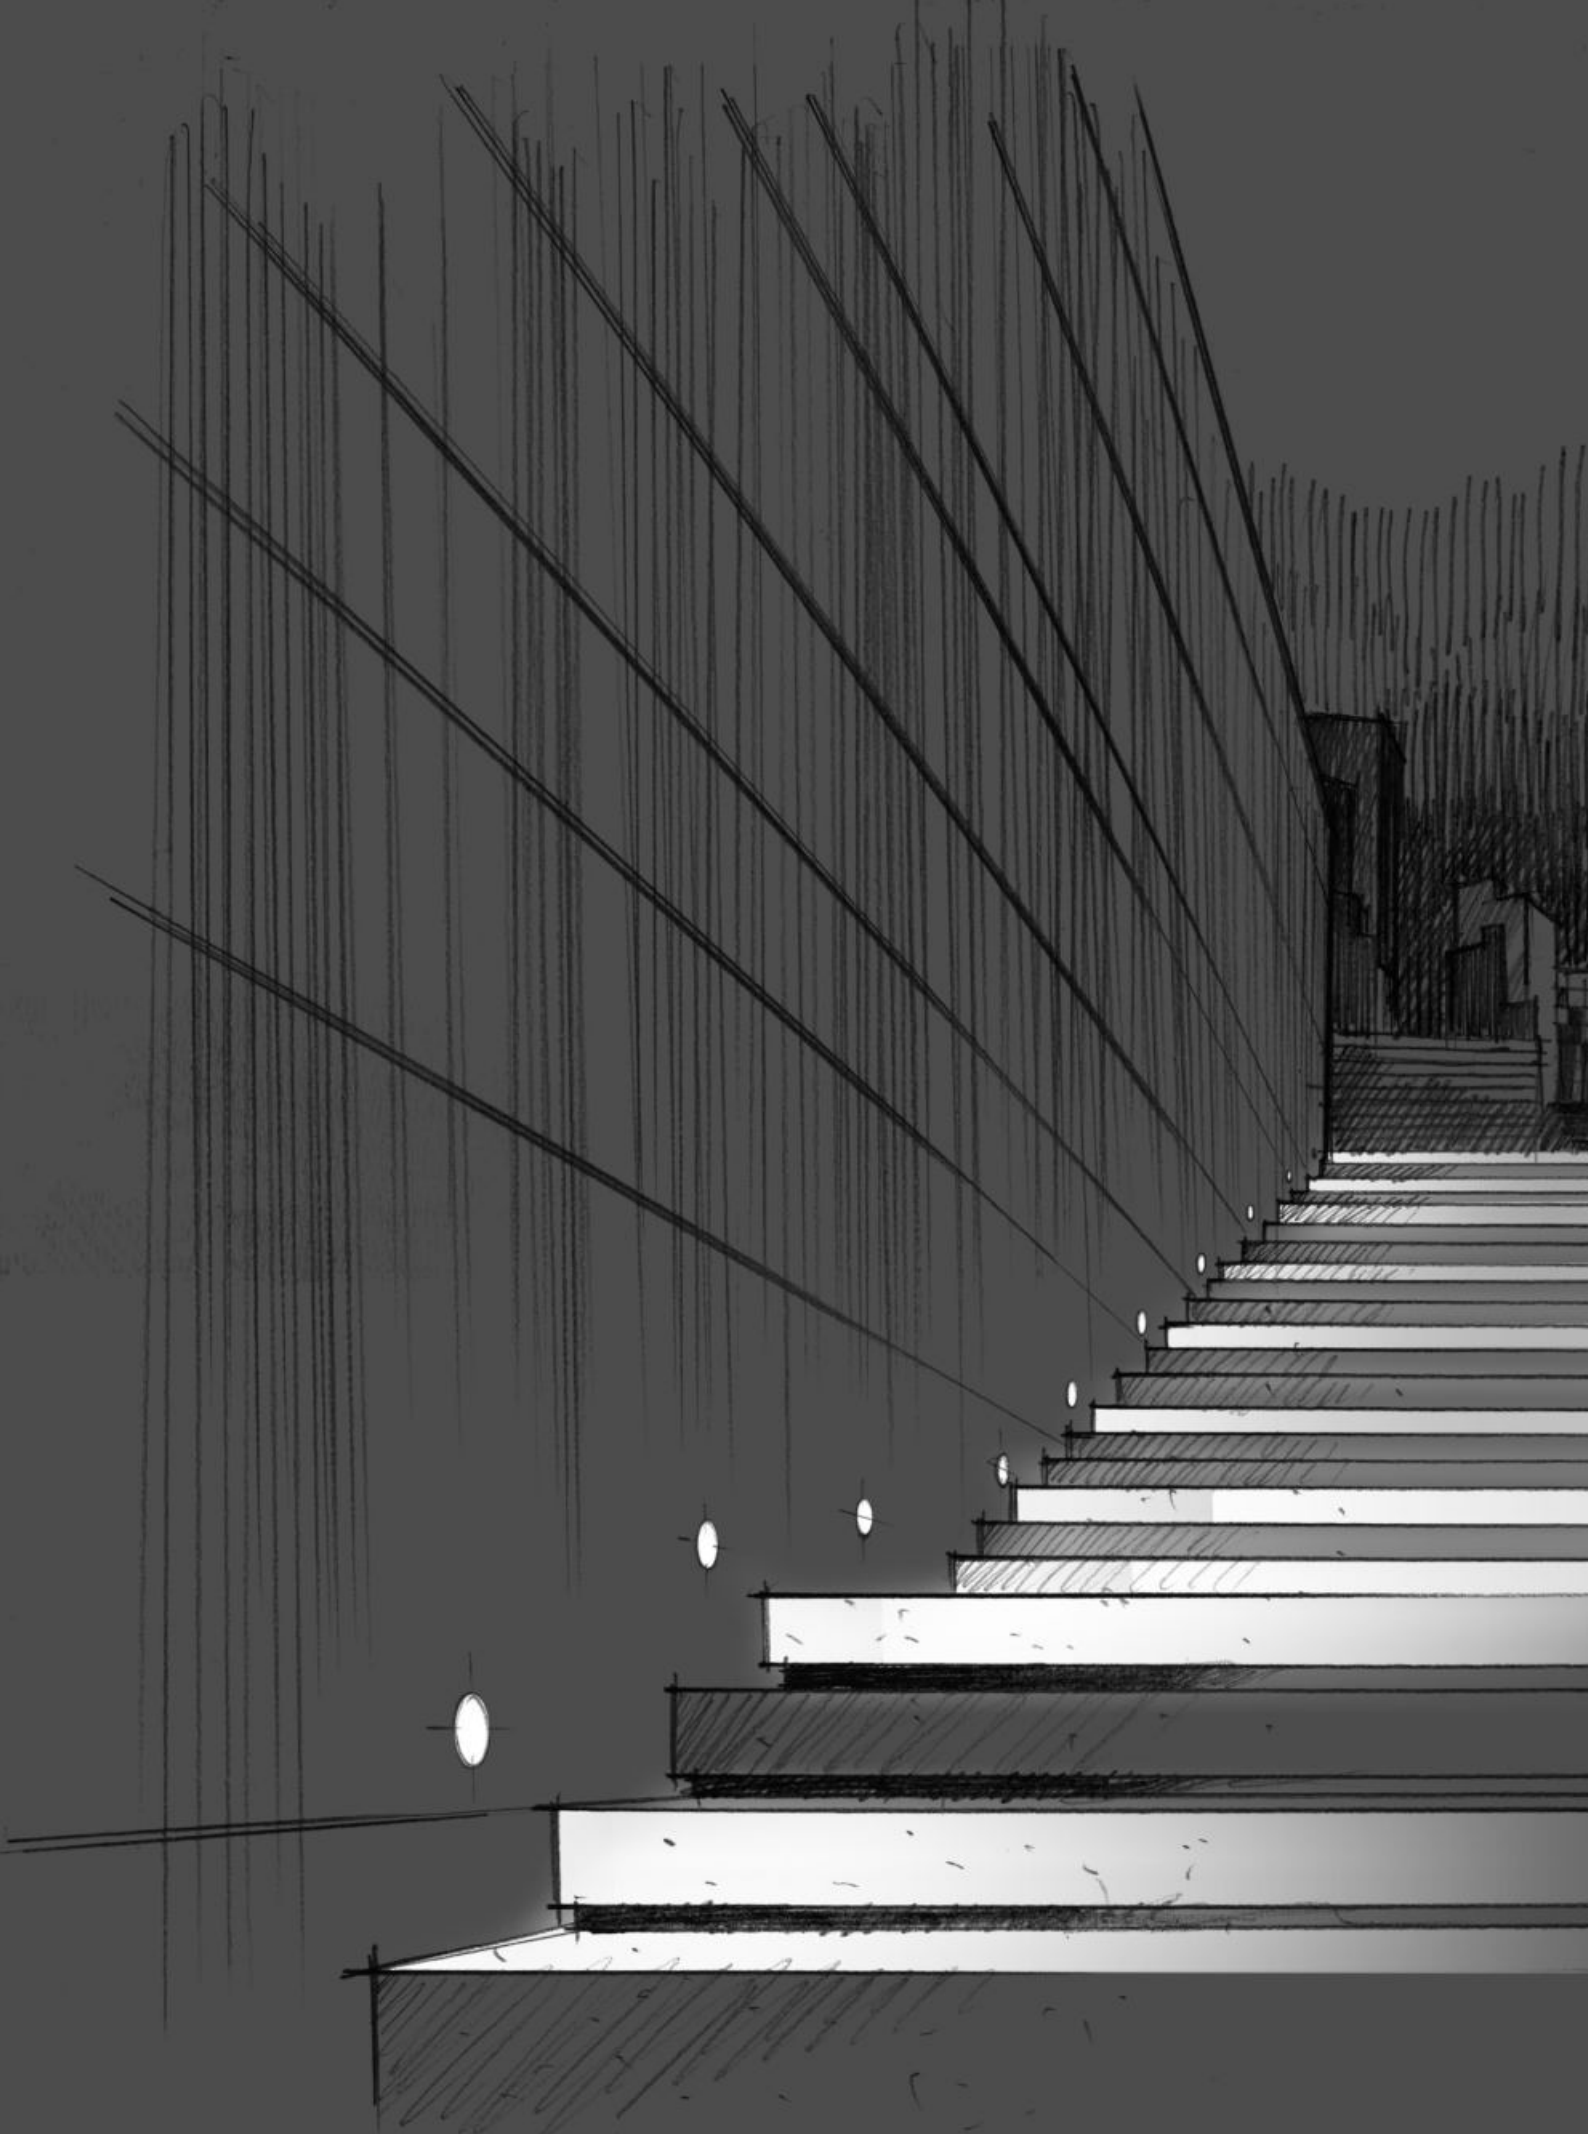


Wall path markers

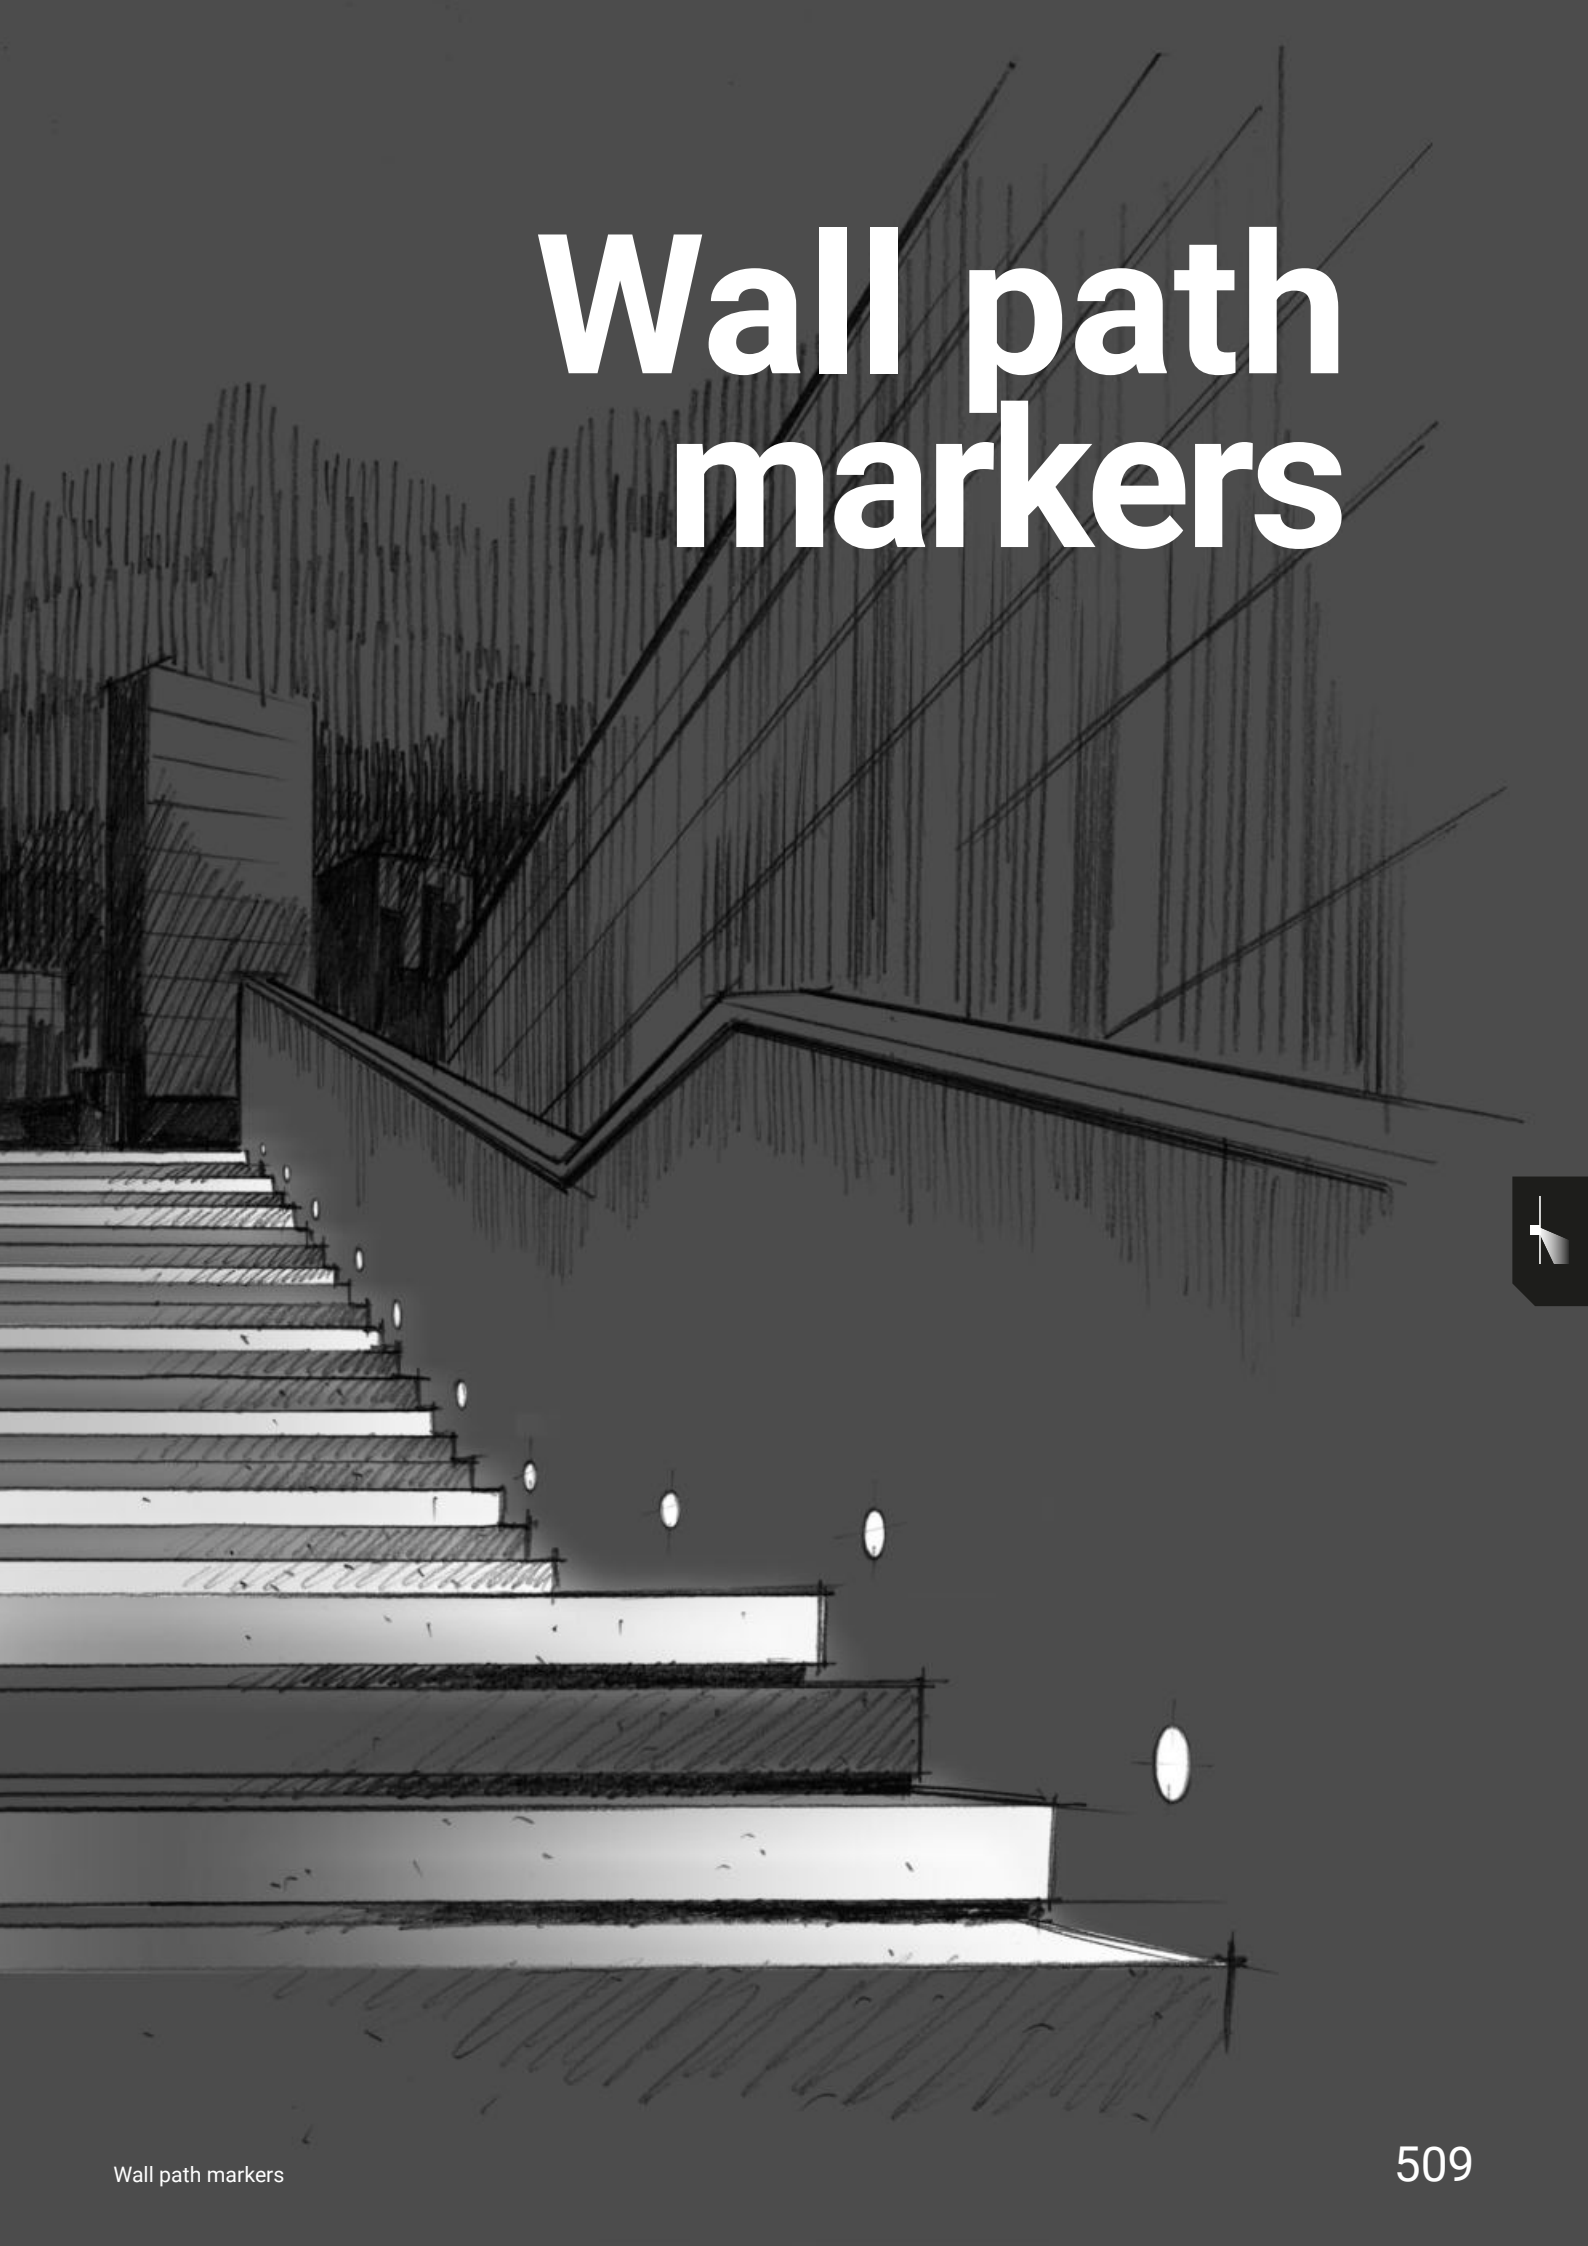

wall path-markers range index

OptiWall




Envelope



Intake



Orma




Step66




Chim




Quara

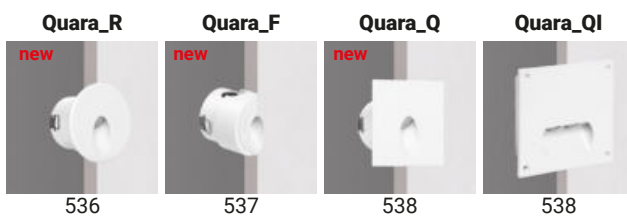


Cut




Clip

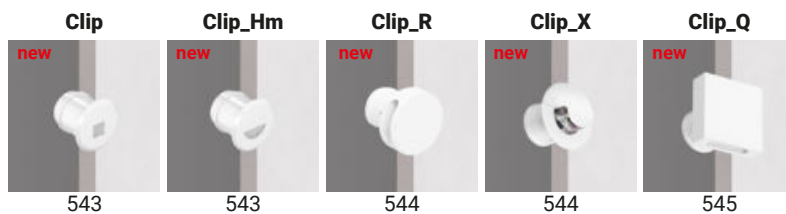

Sand



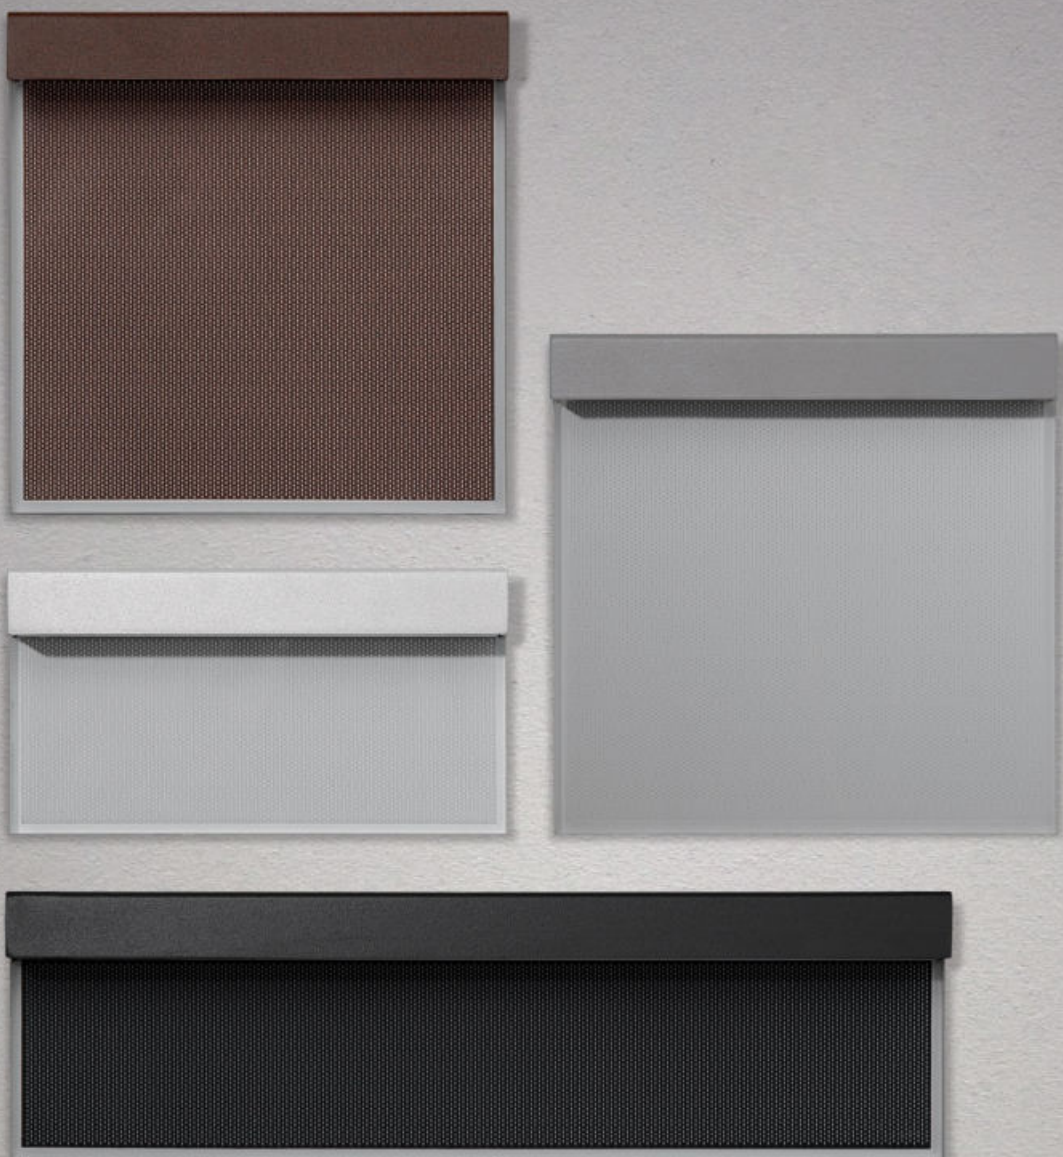

optiwall

Materials

Aluminium body

Transparent PMMA diffuser



Revolutionary step lights

Optiwall revolutionises the path marker concept: it's not so much a wall light as a light window that uses the microincisions of Optilight Technology™ to reduce dazzle to zero. The light isn't just asymmetrically projected onto the ground, but also provides softer and deeper ambient illumination that highlights surrounding features.



optilight

IP65

Ultra thin


Optiwall's unique slinline design, as little as 18 mm thick, also incorporates smart features like invisible screws and a bracket that nestles inside the body.




Fixing bracket





81296W0



Photometric curve




Light beam

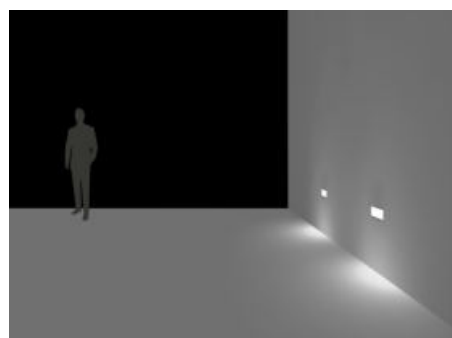

Floor plan

Optiwall | Path-marker | 24 V DC | topLED 3,5 W DC





| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|--------------------|
| White | 81296 | M 2700 | 366 - 198 | 07 Asymm. - |
| Grey | 81297 | W 3000 | 384 - 207 | |
| DarkBrown | 81298 | N 4000 | 401 - 217 | |
| BK Grey | 81299 | | | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|---|--|
| ON/OFF 1 - 4 art. p 80 x l 100 x h 31 | ON/OFF 1 - 6 art. p 92 x l 117 x h 38 | ON/OFF 1 - 13 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 42 art. p 150 x l 60 x h 35 | DALI 1 - 26 art. p 191 x l 63 x h 38 |

Optiwall | Path-marker | 24 V DC | topLED 3,5 W DC




| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|--------------------|
| White | 81300 | M 2700 | 366 - 187 | 07 Asymm. - |
| Grey | 81301 | W 3000 | 384 - 191 | |
| DarkBrown | 81302 | N 4000 | 401 - 200 | |
| BK Grey | 81303 | | | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|---|--|
| ON/OFF 1 - 4 art. p 80 x l 100 x h 31 | ON/OFF 1 - 6 art. p 92 x l 117 x h 38 | ON/OFF 1 - 13 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 42 art. p 150 x l 60 x h 35 | DALI 1 - 26 art. p 191 x l 63 x h 38 |

Optiwall | Path-marker | 24 V DC | topLED 7 W DC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|--------------------|
| White | 81304 | M 2700 | 732 - 454 | 07 Asymm. - |
| Grey | 81305 | W 3000 | 767 - 476 | |
| DarkBrown | 81306 | N 4000 | 803 - 498 | |
| BK Grey | 81307 | | | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 3 art. p 92 x l 117 x h 38 | ON/OFF 1 - 6 art. p 115 x l 140 x h 50 | ON/OFF 1 - 21 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 21 art. p 150 x l 60 x h 35 | DALI 1 - 17 art. p 191 x l 63 x h 38 |





envelope

Materials
Aluminium body



envelope range



| | Envelope_1 Square | Envelope_R Round | Envelope_W Wall |
|---|---|---|---|
| 1 W | 40 x 40 mm | ø 40 mm | 120 x 88 mm |
| 6 W | | | 170 x 168 mm |
| 9,5 W / 16 W | | | 270 x 125 mm |
| Finish | <div style="display: flex; flex-wrap: wrap; gap: 2px;"> <div style="border: 1px solid black; padding: 2px;">White</div> <div style="border: 1px solid black; padding: 2px;">Grey</div> <div style="border: 1px solid black; padding: 2px;">BK Grey</div> <div style="border: 1px solid black; padding: 2px;">DarkBrown</div> <div style="border: 1px solid black; padding: 2px;">Black</div> <div style="border: 1px solid black; padding: 2px;">Brass</div> </div> | <div style="display: flex; flex-wrap: wrap; gap: 2px;"> <div style="border: 1px solid black; padding: 2px;">White</div> <div style="border: 1px solid black; padding: 2px;">Grey</div> <div style="border: 1px solid black; padding: 2px;">BK Grey</div> <div style="border: 1px solid black; padding: 2px;">DarkBrown</div> <div style="border: 1px solid black; padding: 2px;">Black</div> <div style="border: 1px solid black; padding: 2px;">Brass</div> </div> | <div style="display: flex; flex-wrap: wrap; gap: 2px;"> <div style="border: 1px solid black; padding: 2px;">White</div> <div style="border: 1px solid black; padding: 2px;">Grey</div> <div style="border: 1px solid black; padding: 2px;">BK Grey</div> <div style="border: 1px solid black; padding: 2px;">DarkBrown</div> </div> |
| topLED | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K | 2700K - 3000K - 4000K |
| Optics | Asymmetric | Asymmetric | Asymmetric |
|  Driver | On/Off - DALI | On/Off - DALI | On/Off - 0/1-10 V - DALI |
|  Driver | - | - | On/Off |

Simple, elegant and minimalist


Envelope consists of a single compact element, with the screws hidden from view. The bayonet fitting makes it quick and easy to install, and the casing can be concealed for even greater aesthetic impact. Can also be fitted using a bracket.




Finishes

- white RAL9003
- classic grey RAL9006
- anthracite grey RAL7021
- dark brown
- black
- brass

Only for
Envelope_1
Envelope_R





Only for
Envelope_1
Envelope_R




Recessed optic, asymmetric design

The recessed source is hidden from view, so the unit offers full cutoff: all you see is the clean, attractive beam. The slightly asymmetric design directs it towards the path.

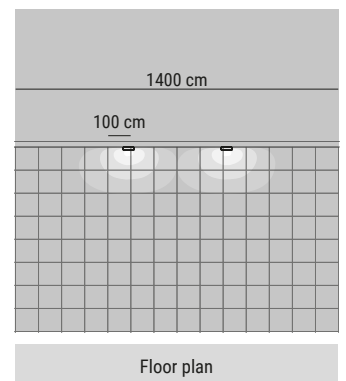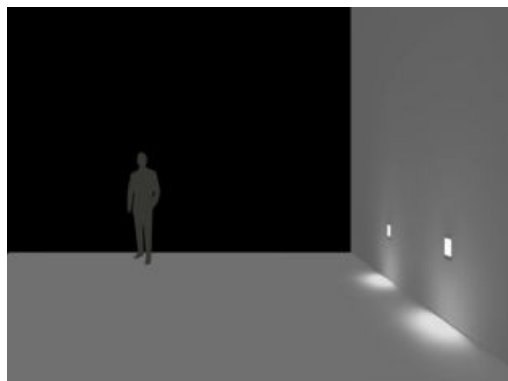

Envelope_1 | Path-marker | powerLED 1 W DC 350 mA



29

| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 96976 | M 2700 | 136 - 26 | 07 Asymm. - |
| Grey | 96978 | W 3000 | 145 - 28 | |
| BK Grey | 80605 | N 4000 | 155 - 30 | |
| DarkBrown | 96979 | | | |
| Black | 96977 | | | |
| Brass | 83613 | | | |


Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 521

RTG 96976W07 / 96976N07 / 96978W07 / 96979W07 / 80605W07

Envelope_W | Path-marker | 24 V DC | topLED 1 W DC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 97167 | W 3000 | 136 - 89 | 07 Asymm. - |
| Grey | 97169 | N 4000 | 136 - 93 | |
| BK Grey | 81339 | | | |
| DarkBrown | 81340 | | | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|--|--|---|--|---|
| ON/OFF 1 - 14 art. p 80 x l 100 x h 31 | ON/OFF 1 - 24 art. p 92 x l 117 x h 38 | ON/OFF 1 - 48 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 150 art. p 150 x l 60 x h 35 | DALI 1 - 120 art. p 191 x l 63 x h 38 |

RTG 97167W07

Envelope_R | Path-marker | powerLED 1 W DC 350 mA



29


| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 83601 | M 2700 | 136 - 26 | 07 Asymm. - |
| Grey | 83603 | W 3000 | 145 - 28 | |
| BK Grey | 84071 | N 4000 | 155 - 30 | |
| DarkBrown | 83604 | | | |
| Black | 83602 | | | |
| Brass | 84072 | | | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 521

Envelope_W | Path-marker | 24 V DC | topLED 1 W DC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 97170 | W 3000 | 136 - 89 | 07 Asymm. - |
| Grey | 97172 | N 4000 | 136 - 93 | |
| BK Grey | 81341 | | | |
| DarkBrown | 81342 | | | |


Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|--|--|---|--|---|
| ON/OFF 1 - 14 art. p 80 x l 100 x h 31 | ON/OFF 1 - 24 art. p 92 x l 117 x h 38 | ON/OFF 1 - 48 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 150 art. p 150 x l 60 x h 35 | DALI 1 - 120 art. p 191 x l 63 x h 38 |

 **Recessed casing Pag. 521**

RTG 97170W07

Envelope_W | Path-marker | 198-264 V AC | topLED 6 W DC - 8 W AC


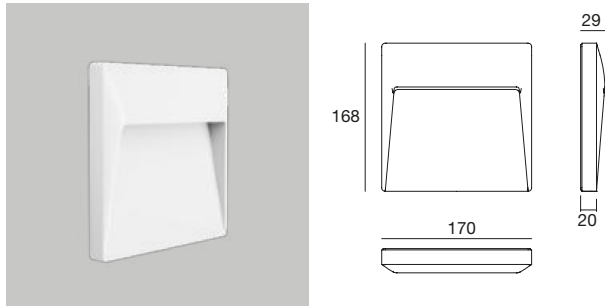


| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|-------------|
| White | 81343 | M 2700 | 669 - 442 | 07 Asymm. - |
| Grey | 81291 | W 3000 | 699 - 464 | |
| BK Grey | 81290 | N 4000 | 724 - 482 | |
| DarkBrown | 81292 | | | |

RTG 81343W07

Recessed casing Pag. 521

Envelope_W | Path-marker | 198-264 V AC | topLED

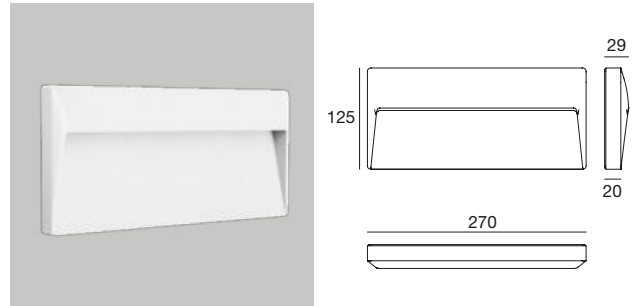


| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------|
| White | 81344 | M 2700 | 1115 - 679 | 07 Asymm. - |
| Grey | 81294 | W 3000 | 1166 - 713 | |
| BK Grey | 81293 | N 4000 | 1207 - 742 | |
| DarkBrown | 81295 | | | |


| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| White | 81512 | M 2700 | 1705 - 1038 | 07 Asymm. - |
| Grey | 81510 | W 3000 | 1782 - 1086 | |
| BK Grey | 81509 | N 4000 | 1846 - 1130 | |
| DarkBrown | 81511 | | | |

Recessed casing Pag. 521


Solution with outer casing (Envelope_W 6W - 9,5W - 16W)

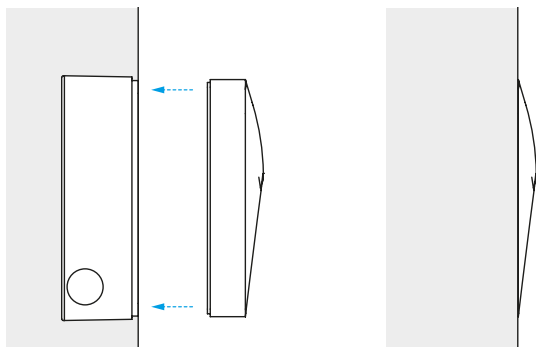

Recessed casing



| description | type |
|---------------------------------------|------|
| 84336 Recessed casing | PVC |
| suitable for: Envelope_1 - Envelope_R | |




| description | type |
|---------------------------------------|------|
| 84915 Recessed casing | PVC |
| suitable for: Envelope_1 - Envelope_R | |



| description |
|--|
| 98111 Recessed casing (standard box mod. 503) |
| suitable for: Envelope_W 1 W |



| description |
|------------------------------|
| 99744 Recessed casing |
| suitable for: Envelope_W 6 W |



| description |
|-----------------------------------|
| 99745 Recessed casing |
| suitable for: Envelope_W 9,5-16 W |








intake

Materials

Aluminium body

AISI 316L stainless steel flange

Intake_L | Path-marker | 100-240 V AC | topLED 6 W DC - 7 W AC





| | | Cct | Im S - D | Optic |
|-------|--------------|--------|-----------|--------------------|
| Steel | 97714 | W 3000 | 672 - 369 | 07 Asymm. - |
| | | N 4000 | 714 - 396 | |

RTG 97714W07

Recessed casing Pag. 525


Intake_L | Path-marker | 100-240 V AC | topLED 13 W DC - 18 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|--------|------------|--------------------|
| Steel | 97715 | W 3000 | 1344 - 738 | 07 Asymm. - |
| | | N 4000 | 1428 - 785 | |


Recessed casing Pag. 525

IntakePRO | Linear profiles | 80-265V AC | topLED | 15 W DC - 17 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|--------|--------------|--------------------|
| Steel | 83874 | W 3000 | 895 - On req | 07 Asymm. - |
| | | N 4000 | 937 - On req | |


Recessed casing Pag. 525




Recessed casing



| | description |
|----------------------------------|-----------------|
| 98496 | Recessed casing |
| suitable for: Intake_L 6W | |



| | description |
|-----------------------------------|-----------------|
| 98497 | Recessed casing |
| suitable for: Intake_L 12W | |



| | description |
|--------------------------------|-----------------|
| 98577 | Recessed casing |
| suitable for: IntakePRO | |




orma

Materials

Aluminium body

AISI 316L stainless steel flange

Orma_AM | Up-Light | powerLED



| C.C. - 4W DC 350 mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|--------------------|
| Steel Alu 83631 | M 2700 | 490 - 129 | 07 Asymm. - |
| | W 3000 | 490 - 129 | |
| | N 4000 | 529 - 139 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |


| C.V. 24 V - 5W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|--------------------|
| Steel Alu 83633 | M 2700 | 490 - 129 | 07 Asymm. - |
| | W 3000 | 490 - 129 | |
| | N 4000 | 529 - 139 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 529

Orma_AM | Up-Light | arrayLED



| C.C. - 12W DC 350 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83639 | M 2700 | 1724 - 597 | 07 Asymm. - |
| | W 3000 | 1724 - 597 | |
| | N 4000 | 1854 - 642 | |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 24 V - 13W DC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83641 | M 2700 | 1724 - 597 | 07 Asymm. - |
| | W 3000 | 1724 - 597 | |
| | N 4000 | 1854 - 642 | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 529

Orma_AM | Up-Light | arrayLED



| C.C. - 8W DC 220 mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83635 | M 2700 | 1088 - 300 | 07 Asymm. - |
| | W 3000 | 1088 - 312 | |
| | N 4000 | 1173 - 330 | |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 24 V - 9W DC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83637 | M 2700 | 1209 - 333 | 07 Asymm. - |
| | W 3000 | 1209 - 347 | |
| | N 4000 | 1303 - 366 | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 529

Orma_IM | Up-Light | powerLED



| C.C. 4W DC 350 mA | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|--------------------|
| Steel Alu 83630 | M 2700 | 490 - 129 | 07 Asymm. - |
| | W 3000 | 490 - 129 | |
| | N 4000 | 529 - 139 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |


| C.V. 24 V - 5W DC | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|--------------------|
| Steel Alu 83632 | M 2700 | 490 - 129 | 07 Asymm. - |
| | W 3000 | 490 - 129 | |
| | N 4000 | 529 - 139 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 529

Orma_IM | Up-Light | arrayLED



| C.C. - 12W DC 350 mA | Cct | Im S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83638 | M 2700 | 1724 - 597 | 07 Asymm. - |
| | W 3000 | 1724 - 597 | |
| | N 4000 | 1854 - 642 | |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |



| C.V. 24 V - 13W DC | Cct | Im S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83640 | M 2700 | 1724 - 597 | 07 Asymm. - |
| | W 3000 | 1724 - 597 | |
| | N 4000 | 1854 - 642 | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 529

Orma_IM | Up-Light | arrayLED



| C.C. - 8W DC 220 mA | Cct | Im S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83634 | M 2700 | 1088 - 300 | 07 Asymm. - |
| | W 3000 | 1088 - 312 | |
| | N 4000 | 1173 - 330 | |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 24 V - 9W DC | Cct | Im S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel Alu 83636 | M 2700 | 1209 - 333 | 07 Asymm. - |
| | W 3000 | 1209 - 347 | |
| | N 4000 | 1303 - 366 | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 529

Recessed casing



| | description | type |
|--|------------------|------|
| 99650 | Recessed casings | PVC |
| suitable for: Orma_AM 4W / Orma_AM 5W / Orma_IM 4W / Orma_IM 5W | | |



| | description | type |
|--|------------------|------|
| 99651 | Recessed casings | PVC |
| suitable for: Orma_AM 8W / Orma_AM 9W / Orma_IM 8W / Orma_IM 9W | | |



| | description | type |
|--|------------------|------|
| 99652 | Recessed casings | PVC |
| suitable for: Orma_AM 12W / Orma_AM 13W / Orma_IM 12W / Orma_IM 13W | | |



| | description | type |
|--|------------------|------|
| 99560 | Recessed casings | PVC |
| suitable for: Orma_AM 4W / Orma_AM 5W | | |



| | description | type |
|--|------------------|------|
| 99563 | Recessed casings | PVC |
| suitable for: Orma_AM 8W / Orma_AM 9W | | |



| | description | type |
|--|------------------|------|
| 99564 | Recessed casings | PVC |
| suitable for: Orma_AM 12W / Orma_AM 13W | | |



| | description | type |
|--|------------------|------|
| 99855 | Recessed casings | PVC |
| suitable for: Orma_AM 4W / Orma_AM 5W | | |






| | description | type |
|--|------------------|------|
| 99856 | Recessed casings | PVC |
| suitable for: Orma_AM 8W / Orma_AM 9W | | |



| | description | type |
|--|------------------|------|
| 99857 | Recessed casings | PVC |
| suitable for: Orma_AM 12W / Orma_AM 13W | | |

Half Moon Optics

Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Moon optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

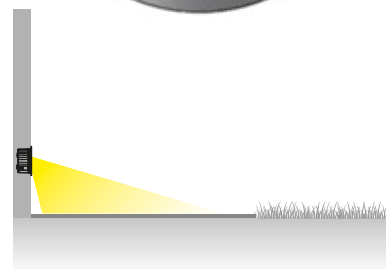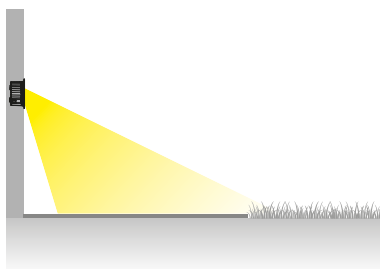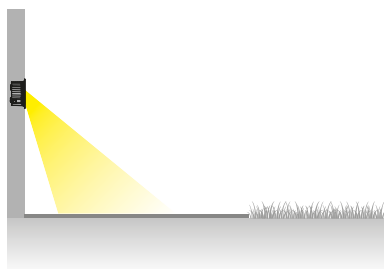


Thanks to the tilting system built into the optics compartment, Orma Half Moon is able to adapt to different installation heights, defining the diffusion of the light up to the 3 metres away from the source.



step

Materials
Aluminium body

Step66 | Path-marker | powerLED 1 W DC 350 mA





| Efficiency | Cct | lm S - D | Optic |
|------------------------|---------------|----------|--------------------|
| Chrome 82741 | M 2700 | 136 - 60 | 07 Asymm. - |
| White 82742 | W 3000 | 145 - 64 | |
| Grey 82743 | N 4000 | 155 - 70 | |
| DarkBrown 82744 | | | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 531

Step66 | Path-marker | 176-264 V AC | powerLED 1 W DC - 1,5 W AC




| Efficiency | Cct | lm S - D | Optic |
|------------------------|---------------|----------|--------------------|
| Chrome 82745 | M 2700 | 145 - 60 | 07 Asymm. - |
| White 82746 | W 3000 | 154 - 64 | |
| Grey 82747 | N 4000 | 165 - 70 | |
| DarkBrown 82748 | | | |

RTG 82746W07 / 82748W07

Recessed casing Pag. 531

Recessed casing



description

| | |
|--|----------|
| 99931 | Template |
| suitable for: Step66 1W / Step66 1,5W | |

Wall path markers




chim

Materials

Nylon body

AISI 316L stainless steel flange

Chim | Path-marker | 190-250 V AC | powerLED 4 W DC - 4,8 W AC




| | Cct | Im S - D | Optic |
|--------------------|---------------|--------------|---------------------------|
| Steel 92681 | M 2700 | 438 - On req | 12 E.W.Flood(107°) |
| | W 3000 | 466 - 316 | |
| | N 4000 | 498 - 337 | |

Recessed casing Pag. 533

RTG 92681W12

Recessed casing



| | description |
|------------------------------|-----------------|
| 98009 | Recessed casing |
| suitable for: Chim 4W | |

Private apartments | Jesolo, Italy



Wall path markers




quara

Materials

Aluminium or AISI 316L
stainless steel body



Quara_R | Path-marker | powerLED 2 W DC 630 mA



52

| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------------|
| White | 85543 | M 2700 | 219 - 109 | 70 E.W.Flood(104°) |
| Grey | 85542 | W 3000 | 233 - 116 | |
| DarkBrown | 87988 | N 4000 | 249 - 125 | |
| Sand | 82512 | | | |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 539

RTG 85543W70 / 85543N70 / 85542W70 / 87988W70

Quara_R | Path-marker | 190-250 V AC | powerLED 2W DC - 2,7W AC




52

| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------------|
| White | 83579 | M 2700 | 233 - 109 | 70 E.W.Flood(104°) |
| Grey | 83580 | W 3000 | 249 - 116 | |
| DarkBrown | 83581 | N 4000 | 266 - 125 | |

Recessed casing Pag. 539

RTG 83579W70 / 83580W70 / 83581W70

Quara_R | Path-marker | 24 V DC | powerLED 1,5 W DC



29



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|--------------|------------|
| Steel | 84075 | M 2700 | 188 - On req | 07 Asymm - |
| DarkBrown | 84076 | W 3000 | 199 - On req | |
| Brass | 84077 | N 4000 | 213 - On req | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|---|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 60 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 539

Quara_RI | Path-marker | powerLED 2 W DC 630 mA



52

| | | Cct | lm S - D | Optic |
|-------|--------------|--------|----------|------------------|
| Steel | 92671 | M 2700 | 219 - 79 | 70 W.Flood (74°) |
| | | W 3000 | 233 - 84 | |
| | | N 4000 | 249 - 90 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 539

RTG 92671W70

Quara_F | Path-marker | powerLED 1 W DC 350 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|-------------------------|
| White | 86460 | M 2700 | 136 - 67 | 70 W.Flood (74°) |
| | | W 3000 | 145 - 71 | |
| | | N 4000 | 155 - 76 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 539

RTG 86460M70 / 86460W70 / 86460N70

Quara_F | Path-marker | powerLED 1 W DC 350 mA





| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|-------------------------|
| White | 84078 | M 2700 | 98 - 36 | 70 W.Flood (63°) |
| | | W 3000 | 106 - 38 | |
| | | N 4000 | 112 - 41 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 539

Quara_Q | Path-marker | powerLED 2 W DC 630 mA



52

| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------------|
| White | 86563 | M 2700 | 219 - 109 | 70 E.W.Flood(104°) |
| Grey | 86562 | W 3000 | 233 - 116 | |
| DarkBrown | 87989 | N 4000 | 249 - 125 | |
| Sand | 82513 | | | |



Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 539

RTG 86563W70 / 86563N70 / 86562W70 / 87989W70

Quara_Q | Path-marker | 190-250 V AC | powerLED 2 W DC - 2,7 W AC





52

| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------------|
| White | 83583 | M 2700 | 233 - 109 | 70 E.W.Flood(104°) |
| Grey | 83584 | W 3000 | 249 - 116 | |
| DarkBrown | 83585 | N 4000 | 266 - 125 | |

Recessed casing Pag. 539

RTG 83583W70 / 83584W70 / 83585W70

Quara_QI | Path-marker | powerLED 2 W DC 630 mA



52

| | | Cct | lm S - D | Optic |
|-------|--------------|--------|----------|------------------|
| Steel | 92672 | M 2700 | 219 - 79 | 70 W.Flood (74°) |
| | | W 3000 | 233 - 84 | |
| | | N 4000 | 249 - 90 | |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 539

RTG 92672W70

Quara_QI | Path-marker | 198-264 V AC | powerLED 4 W DC - 4,8 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 92238 | M 2700 | 438 - 251 | 70 W.Flood (75°) |
| Grey | 92239 | W 3000 | 466 - 267 | |
| DarkBrown | 92240 | N 4000 | 498 - 285 | |
| Sand | 82514 | | | |


Recessed casing Pag. 539

RTG 92238W70 / 92239W70 / 92240W70


Recessed casing




| | description | type |
|-----------------------------------|-----------------|------|
| 83155 | Recessed casing | PVC |
| suitable for: Quara_F 0,7W | | |



| | description | type |
|-----------------------------------|------------------|------|
| 84918 | Recessed casings | PVC |
| suitable for: Quara_R 1,5W | | |



| | description | type |
|--|-----------------|------|
| 84338 | Recessed casing | PVC |
| suitable for: Quara_R 2W / Quara_RI 2W Quara_F 1W / Quara_Q 2W / Quara_QI 2W | | |



| | description | type |
|----------------------------------|-----------------|------|
| 98050 | Recessed casing | PVC |
| suitable for: Quara_QI 4W | | |




cut

Materials
Aluminium body

Cut_R | Path-marker | powerLED 2 W DC 630 mA



52




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|----------|----------------|
| White | 92513 | M 2700 | 219 - 26 | 05 Flood (17°) |
| Grey | 92514 | W 3000 | 233 - 27 | |
| | | N 4000 | 249 - 29 | |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Cut_Q | Path-marker | powerLED 2 W DC 630 mA



52




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|----------|----------------|
| White | 92558 | M 2700 | 219 - 26 | 05 Flood (17°) |
| Grey | 92559 | W 3000 | 233 - 27 | |
| | | N 4000 | 249 - 29 | |

Electronics


| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

RTG 92558W05

Almar Hotel | Jesolo, Italy

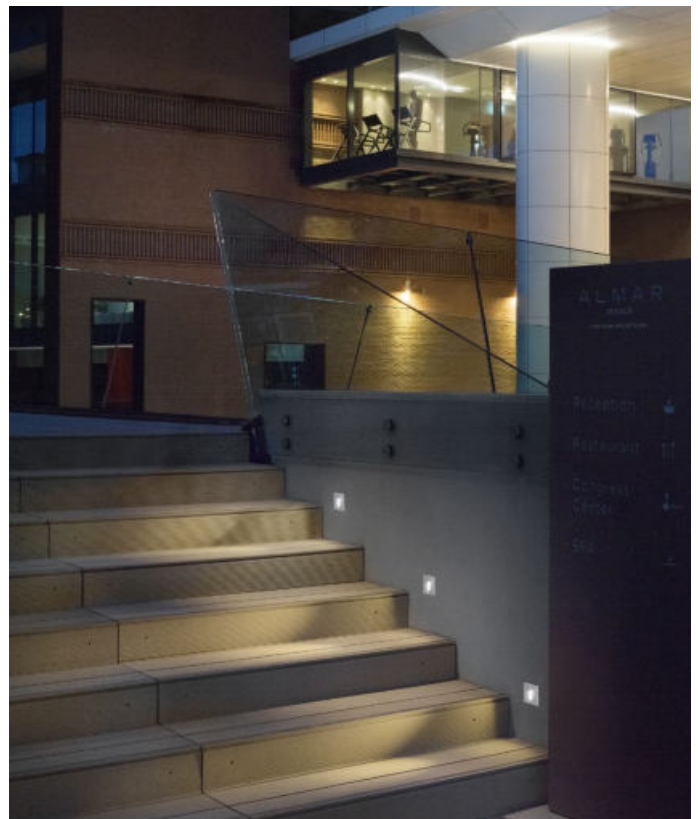

Recessed casing



| description | type |
|------------------------------|------|
| 84338 Recessed casing | PVC |

suitable for: Cut_R 2W / Cut_Q 2W

Wall path markers



clip

Materials
Aluminium body

Clip | Wall-path markers | powerLED 1 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 82707 | M 2700 | 136 - 39 | 07 Asymm. - |
| Grey | 82708 | W 3000 | 145 - 42 | |
| DarkBrown | 82709 | N 4000 | 155 - 45 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 545

Clip | Wall-path markers | powerLED 1 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 82704 | M 2700 | 136 - 24 | 07 Asymm. - |
| Grey | 82705 | W 3000 | 145 - 25 | |
| DarkBrown | 82706 | N 4000 | 155 - 27 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 545

Clip_Hm | Wall-path markers | powerLED 1 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|----------|-------------|
| White | 82701 | M 2700 | 136 - 40 | 07 Asymm. - |
| Grey | 82702 | W 3000 | 145 - 42 | |
| DarkBrown | 82703 | N 4000 | 155 - 45 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 545

Clip_Hm | Wall-path markers | powerLED 1 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|----------|-------------|
| Steel | 82710 | M 2700 | 136 - 35 | 07 Asymm. - |
| | | W 3000 | 145 - 37 | |
| | | N 4000 | 155 - 39 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 545

Clip_R | Wall light | powerLED 2 W DC 630 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|---------------------------|
| White | 92271 | W 3000 | 233 - 108 | 70 E.W.Flood (92°) |
| Grey | 92272 | N 4000 | 249 - 115 | |
| Steel | 92273 | C 5000 | 266 - 132 | |



R - G - B - Y on request

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 545

Clip_R | Wall light | powerLED 2 W DC 350 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|---------------------------|
| White | 92281 | W 3000 | 290 - 135 | 70 E.W.Flood (92°) |
| Grey | 92282 | N 4000 | 320 - 144 | |
| Steel | 92283 | C 5000 | 330 - 164 | |


R - G - B - Y on request

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|---|---|
| ON/OFF 1 art. p 66 x l 74 x h 27 | ON/OFF 2 - 3 art. p 66 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | DALI 1 - 7 art. p 54 x l 122 x h 26 |

Recessed casing Pag. 545

Clip_X | Wall light | powerLED 2 W DC 630 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|--------------------------|
| White | 92311 | W 3000 | 233 - 174 | 70 W.Flood (123°) |
| Grey | 92312 | N 4000 | 249 - 186 | |
| Steel | 92313 | C 5000 | 266 - 212 | |

R - G - B - Y on request

Electronics


| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 545

Clip_Q | Wall light | powerLED 2 W DC 630 mA



29



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|---------------------------|
| White | 92291 | W 3000 | 233 - 108 | 70 E.W.Flood (92°) |
| Grey | 92292 | N 4000 | 249 - 115 | |
| Steel | 92293 | C 5000 | 266 - 132 | |

R - G - B - Y on request

Electronics


| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 545

Clip_Q | Wall light | powerLED 2 W DC 350 mA



29



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|---------------------------|
| White | 92301 | W 3000 | 290 - 144 | 70 E.W.Flood (92°) |
| Grey | 92302 | N 4000 | 310 - 154 | |
| Steel | 92303 | C 5000 | 330 - 176 | |


R - G - B - Y on request

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|---|---|
| ON/OFF 1 art. p 66 x l 74 x h 27 | ON/OFF 2 - 3 art. p 66 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | DALI 1 - 7 art. p 54 x l 122 x h 26 |


Recessed casing Pag. 545

Recessed casing




| 99676 | description | type |
|--------------|------------------|------|
| | Recessed casings | PVC |

suitable for: Clip_Hm Ø 25



| 84915 | description | type |
|--------------|-----------------|------|
| | Recessed casing | PVC |

suitable for: Clip / Clip_Hm Ø 35 / Clip_R / Clip_X / Clip_Q



| 84336 | description | type |
|--------------|-----------------|------|
| | Recessed casing | PVC |

suitable for: Clip / Clip_Hm Ø 35 / Clip_R / Clip_X / Clip_Q




sand

Materials

Brass body

Opalescent polycarbonate diffuser

Sand_R | Path-marker | powerLED 1 W DC 350 mA




| | Cct | lm S - D | Optic |
|-------------|----------------------|-----------|-------------------|
| White 92260 | W 3000 | 145 - 85 | 00 General (180°) |
| | N 4000 | 155 - 90 | |
| | C 5000 | 165 - 103 | |
| | B Blue | | |
| | R - G - Y on request | | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

RTG 92260W00

Sand_Q | Path-marker | powerLED 1 W DC 350 mA




| | Cct | lm S - D | Optic |
|-------------|----------------------|-----------|-------------------|
| White 92262 | W 3000 | 145 - 85 | 00 General (180°) |
| | N 4000 | 155 - 90 | |
| | C 5000 | 165 - 103 | |
| | B Blue | | |
| | R - G - Y on request | | |

Electronics


| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

RTG 92262W00

Recessed casing




| | description | type |
|--------------------------------------|-----------------|------|
| 84915 | Recessed casing | PVC |
| suitable for: Sand_R / Sand_Q | | |




| | description | type |
|--------------------------------------|-----------------|------|
| 84336 | Recessed casing | PVC |
| suitable for: Sand_R / Sand_Q | | |

Wall path markers

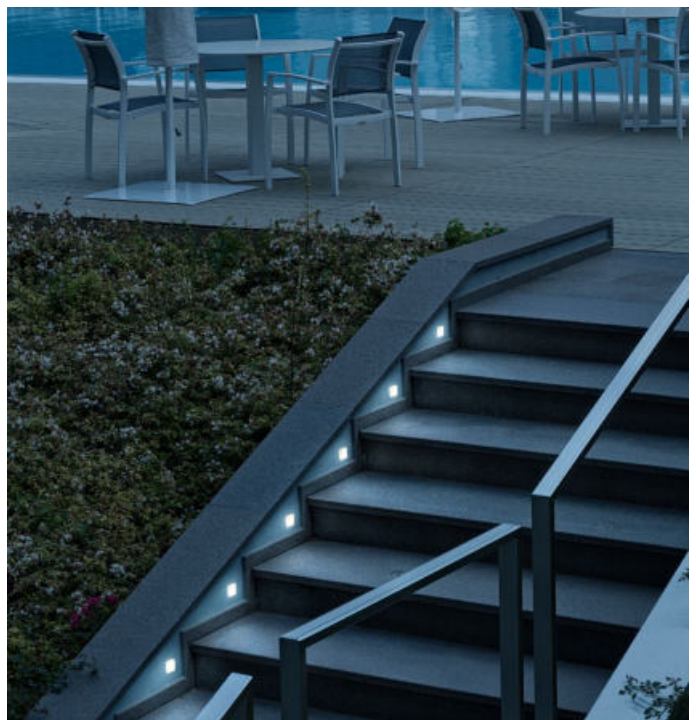



Uplights

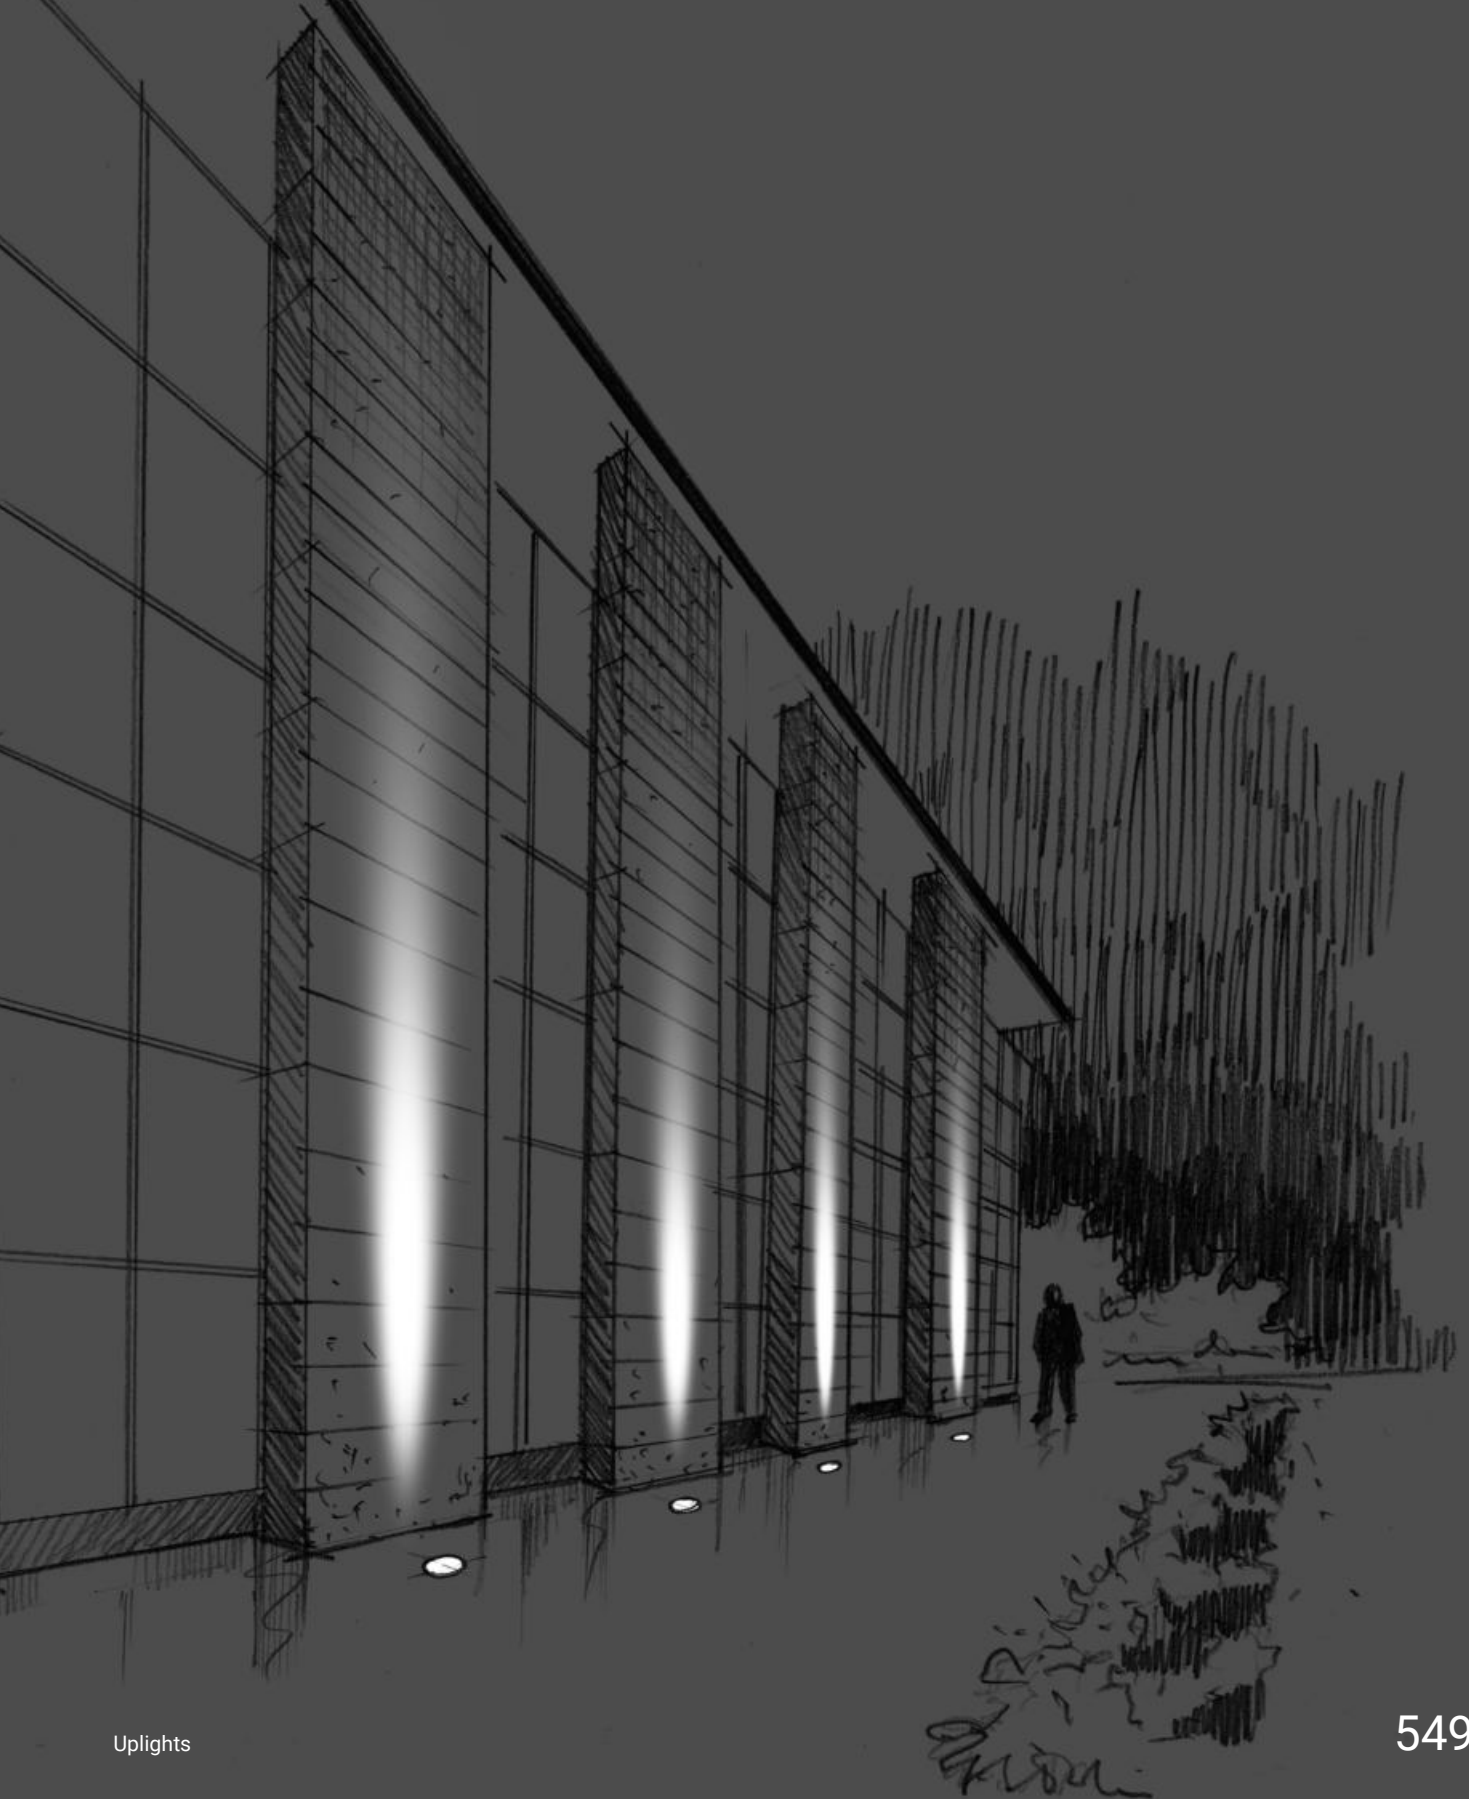

uplights and in-ground lamps range index

Suelo




Orma



Beret



Zalex



Fasim



Concentrica



Alcor



Astropek



Footpad







uplights and in-ground lamps

Engineering innovation

Our new families of recessed uplights use high-quality materials such as aluminium for the body, AISI 316 stainless steel for the flange (providing added durability in high-salinity environments), and tempered glass for the optical compartment. These, combined with miniaturised components, have played a key role in the engineering design process, and made the Linea Light Group uplight range perfect for every need.



Drive-over capability

Ultra-hardwearing materials and the specific positioning of the casing mean that each range will support a weight of up to five tonnes.



Safety systems

We have developed specific safety systems to protect the uplights against corrosion and make them very durable. They also incorporate overvoltage and electrostatic discharge protection, and systems to protect the integrity of the circuits from moisture and internal condensation (AquaStop) formation.



OVP



TCS system



IP68

A combination of technology know-how, carefully chosen materials and advanced safety systems offer total IP68 protection against dust and solid particles, spray, and short-term immersion in water.




Lasting quality

Linea Light Group products with topLED sources have a lifespan of over 72,000 hours! And that doesn't mean the LEDs go out after that time, but only that they reached 70% of the initial luminous flux with a 90% reliability of compliance with the parameter. Even more impressively, array LED and powerLED modules have a tested and guaranteed life of over 223,000 hours, and a zero failure rate.



LED i-LED B10
90% reliability
of the L parameter




Common LEDs on the market B50
50% reliability
of the L parameter

MacAdam step <2

To ensure that colours remain uniform over time and between different products used for the same project, we choose the best LED manufacturers to main consistency.

Our standard of quality is a MacAdam step of less than 2, meaning that differences between LEDs are not visible to the human eye.

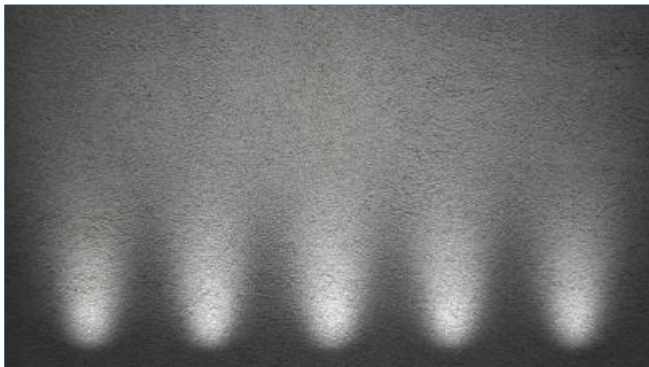

i-LED MacAdam < 2




Chromatic inhomogeneity - competitors

Colour range

LEDs give you access to a wide range of colour temperatures, from warm white (2,700K) to daylight tones (5,000K), for total design versatility. As well as white light, the RGB range offers static or

dynamic coloured effects, and the introduction of RGBW, in which white is separate from red, green and blue in the diode, lets you obtain the right mix for your project alongside a very pure white.

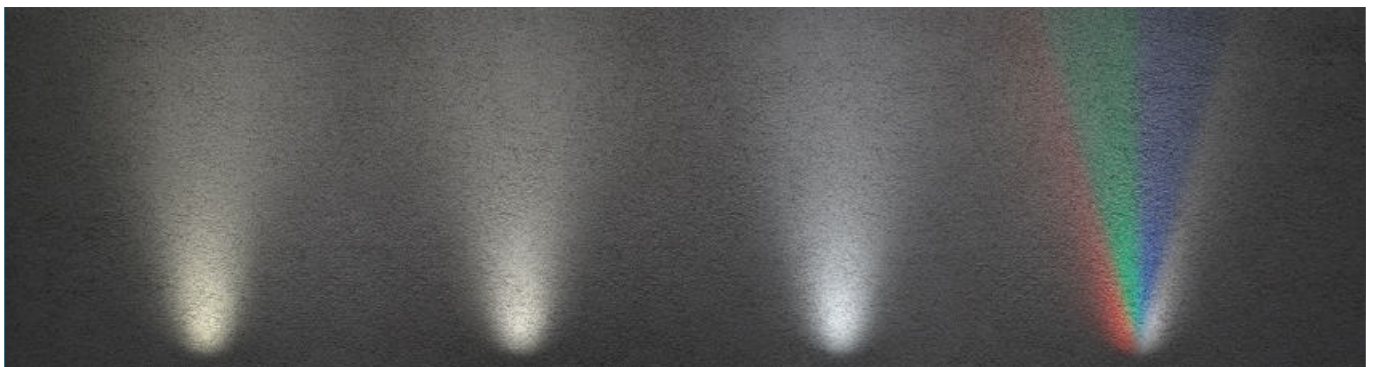

2700° K

3000° K

4000° K

RGBW


uplights and in-ground comfort



Comfort

Standard and pro optics

Linea Light Group recessed lights have an optionally deeper-positioned source than the standard version. The increased screening angle offers greater visual comfort.

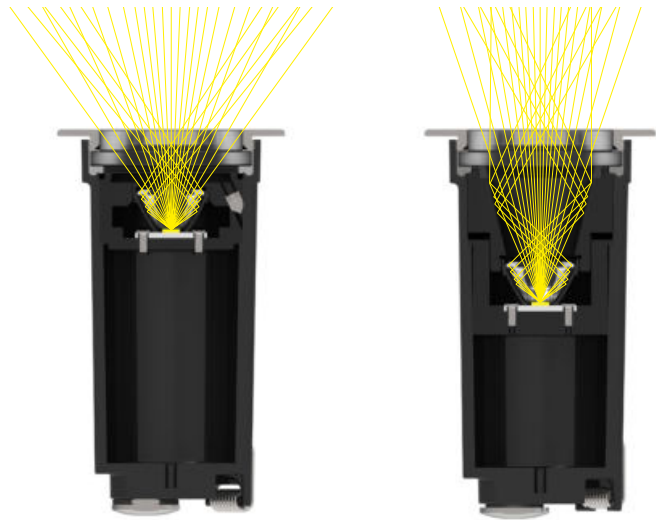


Honeycomb




The hexagonal microcells making up the mesh of the Honeycomb filter help to screen the light beam, reducing dazzle while leaving the light quality unaltered.



With Honeycomb




Without Honeycomb




Darklight




The darklight filter attenuates the light so that it shines only on a specific area of the surface. This accessory sections the beam so that only a part of it shines on the wall, and prevents dazzle even close to the source.



With Darklight




Without Darklight




uplights and in-ground optic range


Narrow optics

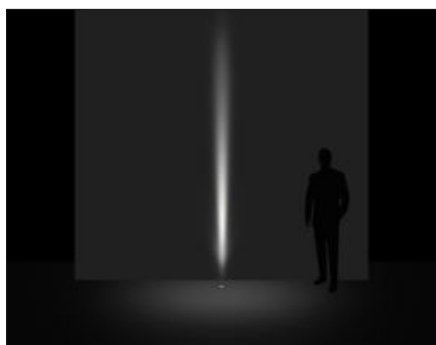

Narrow Spot

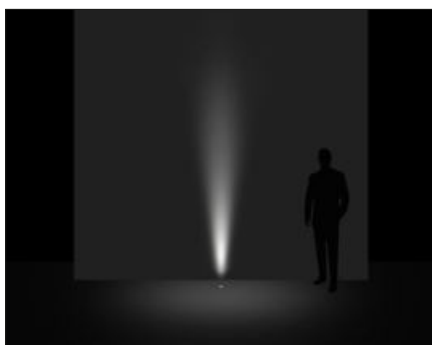


Spot

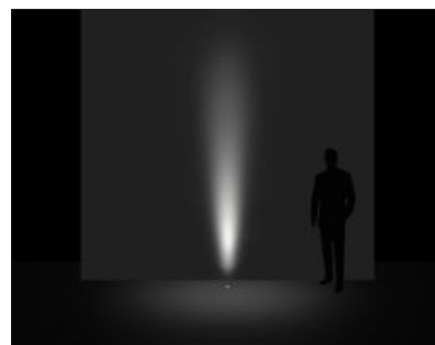


Spot

Medium optics

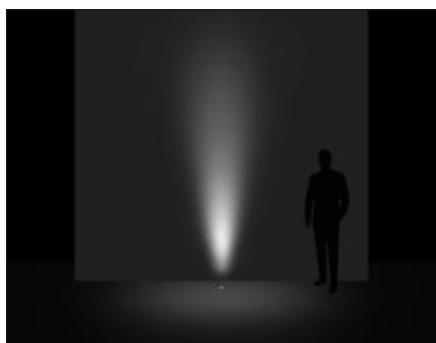

Flood

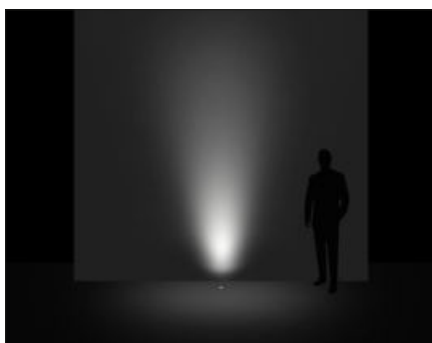


Medium Flood




Medium Flood

Diffused optics

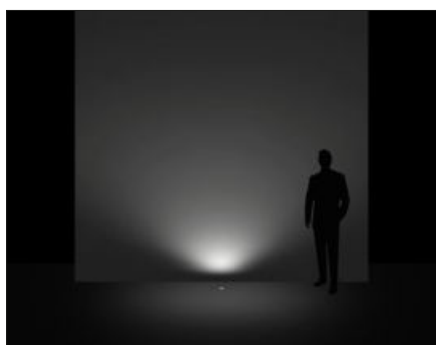


Wide Flood

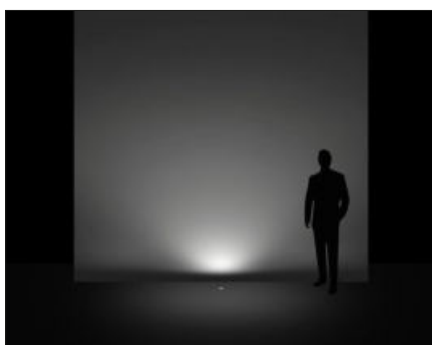


General

Ground-mounting washing optics

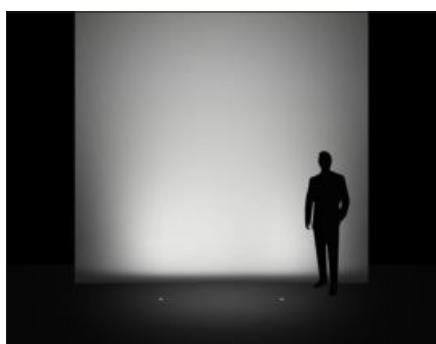

Asymmetric Wall Washer

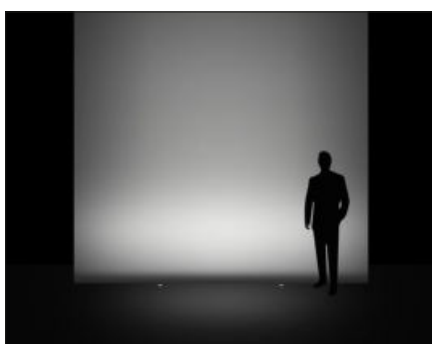

Elliptic


suelo


Materials

Aluminium body


Brass body

AISI 316L stainless steel flange

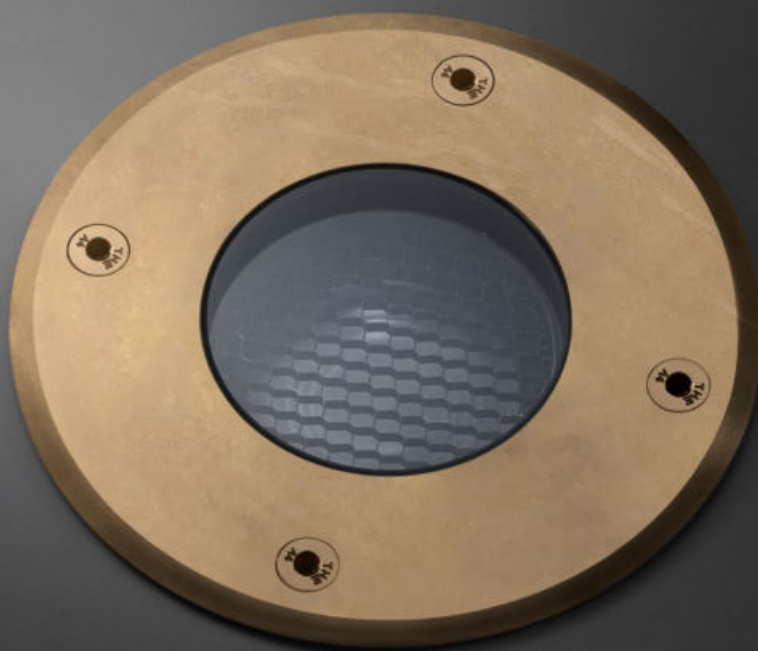

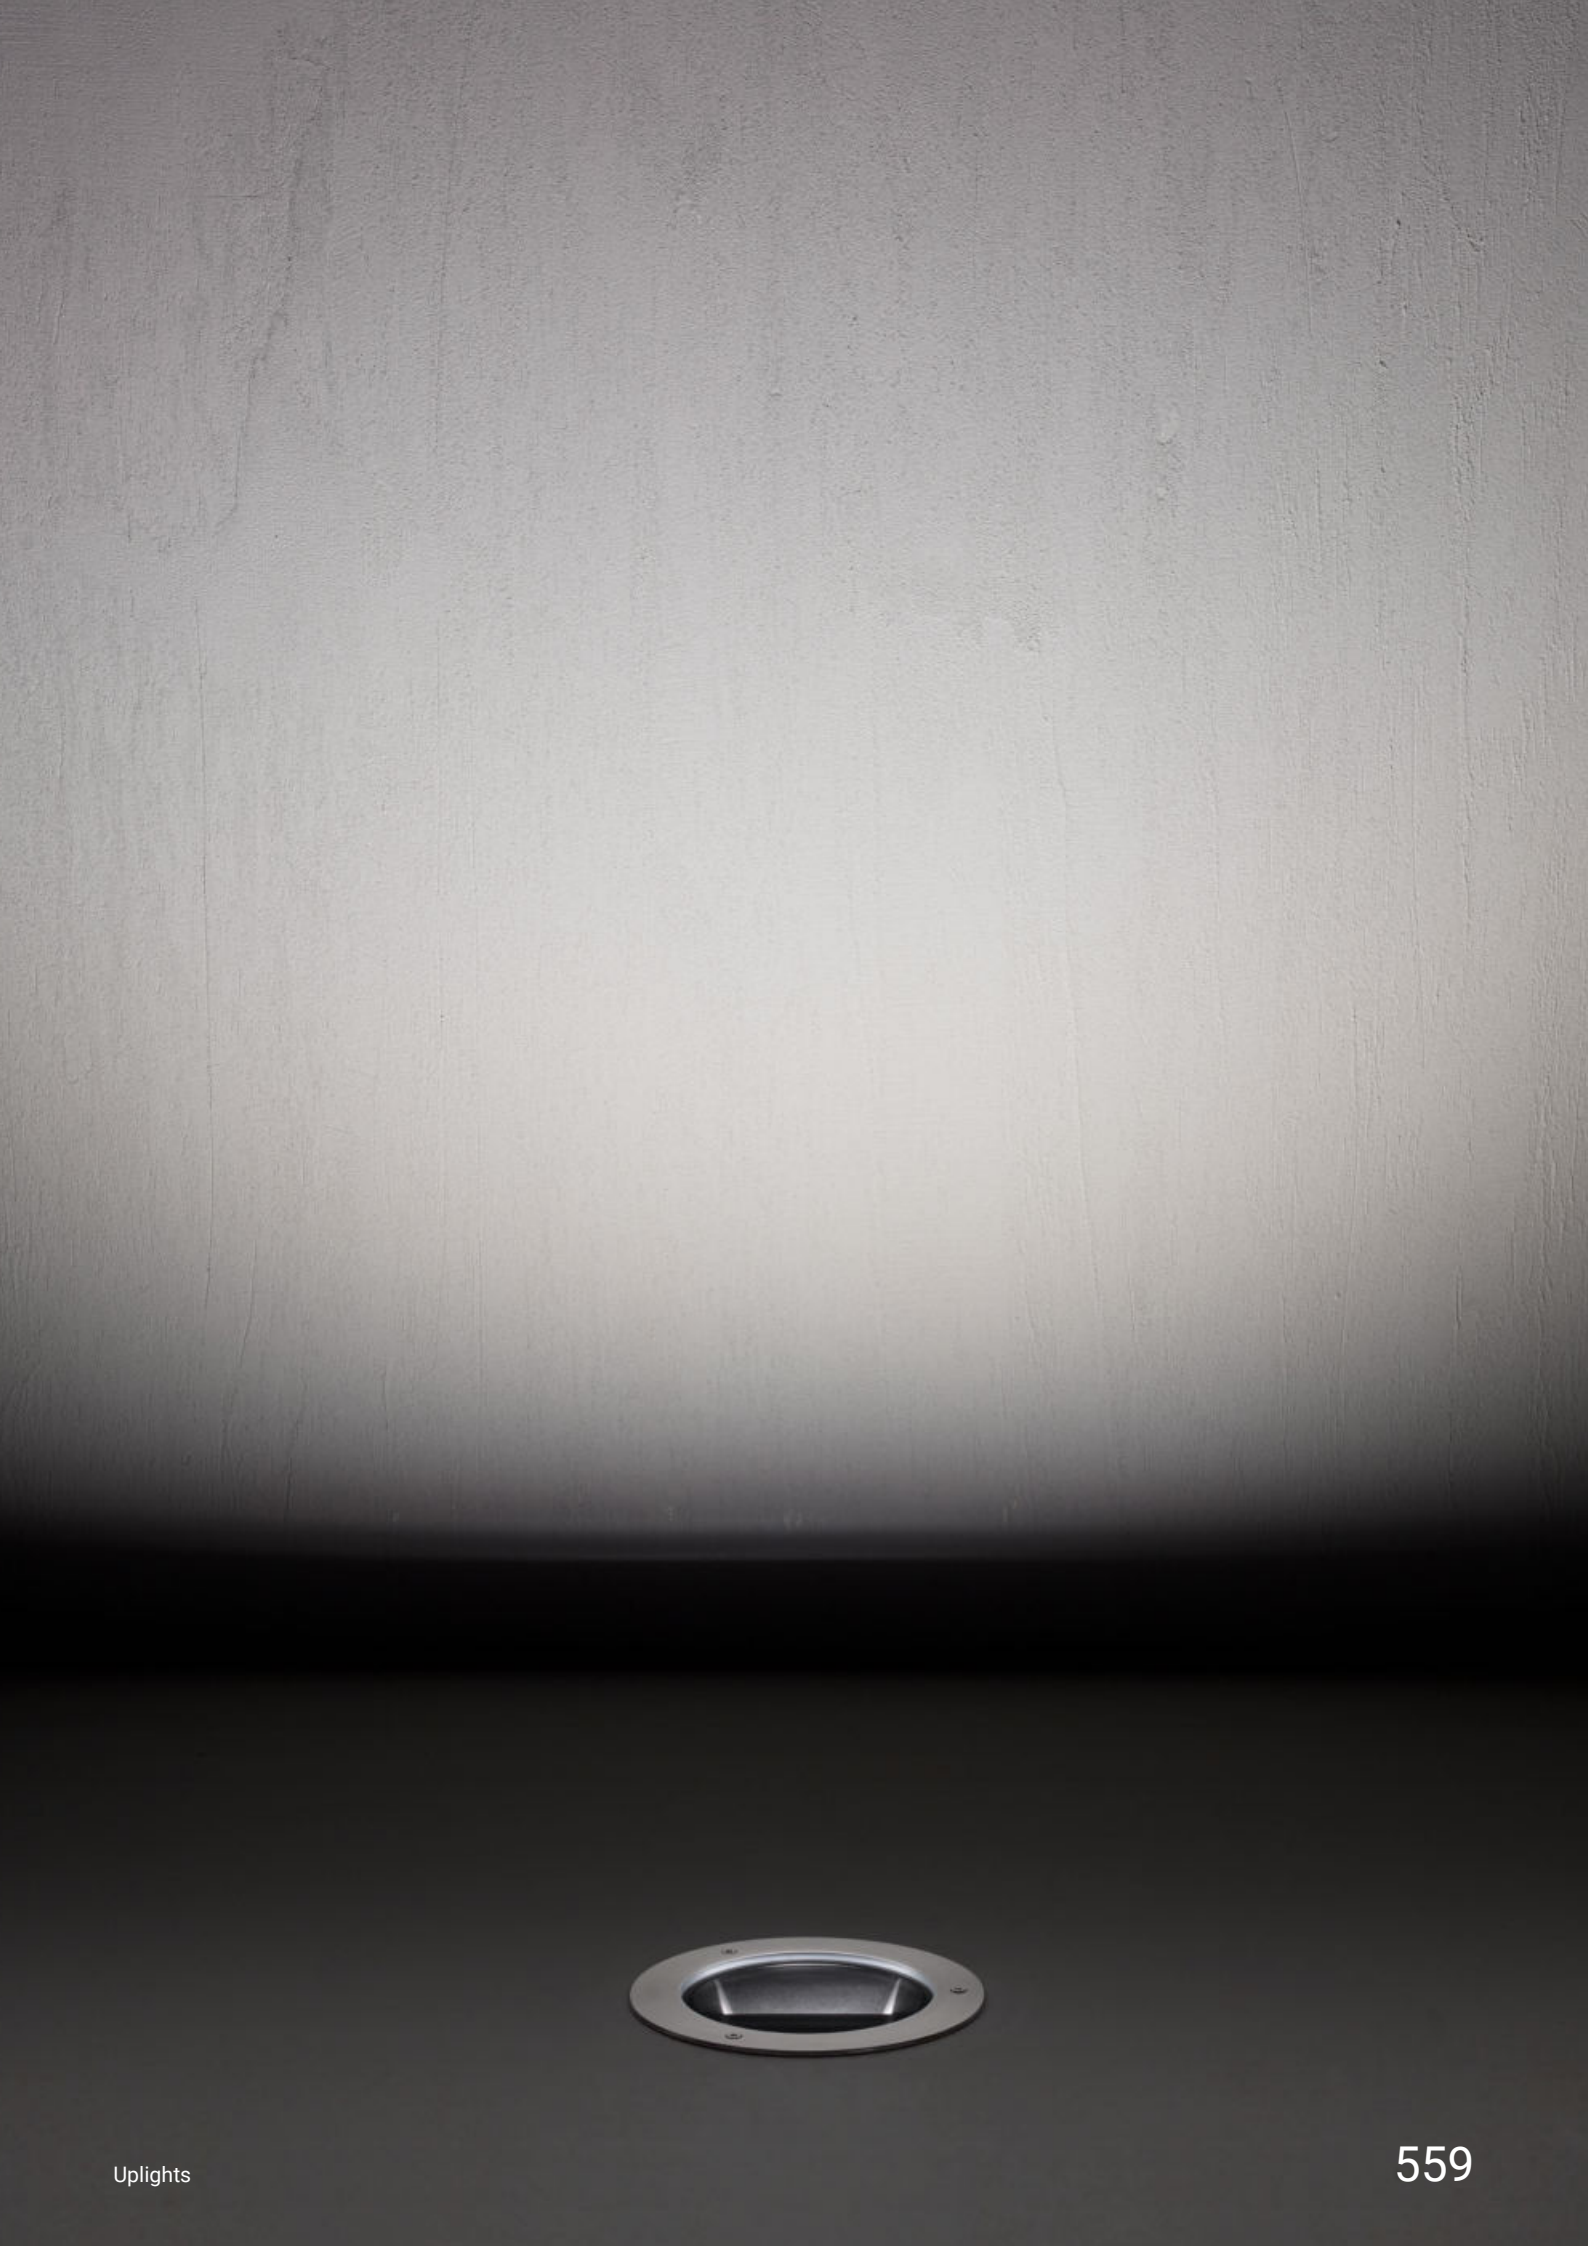

suelo range

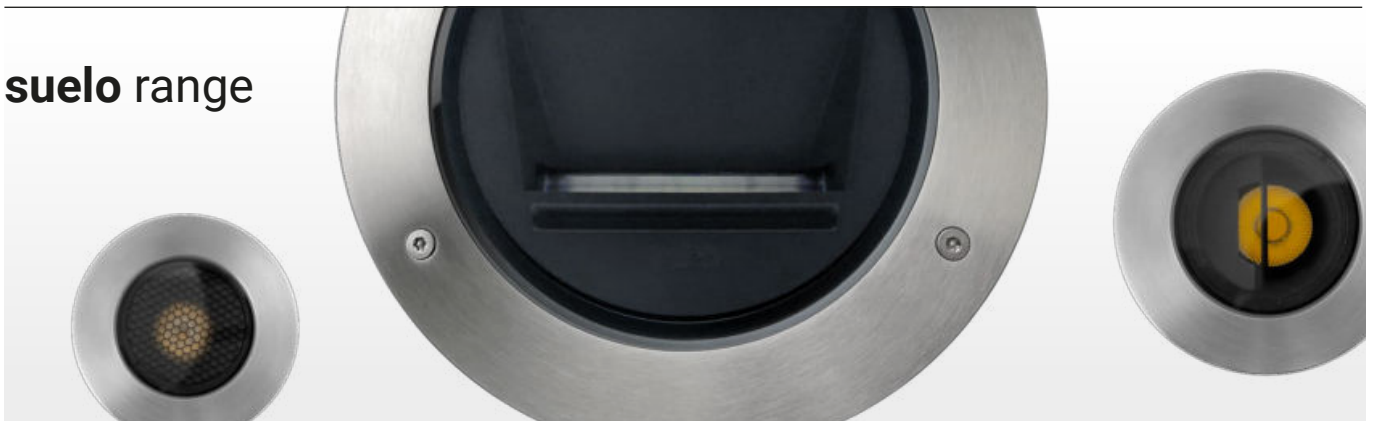

| | Suelo_R Round Suelo_RJ Round adjustable | Suelo_R PRO Round Suelo_RJ PRO Round adjustable | Suelo Focus Round Suelo_I Focus Round | Suelo_RX PRO Round adjustable with screws | Suelo Brass Round with screws | Suelo_RX Round Suelo_RXJ Round adjustable | Suelo_RDX Double optics adjustable | Suelo_RF Round Suelo_RFJ Round adjustable | Suelo Telescopic |
|--------------------|--|--|--|---|---|--|--|--|--------------------------|
| 1W - 1,5W | Ø 25 mm | Ø 25 mm | - | - | - | - | - | - | - |
| 2W - 2,5W | Ø 30 mm | Ø 35 mm | - | Ø 50 mm | - | - | - | - | - |
| 4W - 5W | Ø 64 mm (RJ) Ø 64 mm | Ø 64 mm | - | - | - | - | - | - | - |
| 8W - 9W | Ø 92 mm | Ø 92 mm (RJ PRO) Ø 92 mm | Ø 97 mm Ø 85 mm | Ø 112 mm | Ø 120 mm | Ø 112 mm (RXJ) Ø 112 mm | - | - | - |
| 12W | - | - | - | - | - | - | Ø 170 mm | - | Ø 200 mm |
| 13W | - | - | - | Ø 170 mm | - | Ø 170 mm (RXJ) Ø 170 mm | - | - | - |
| 24W - 26W | - | - | - | - | - | Ø 232 mm | Ø 232 mm | - | Ø 200 mm |
| 30W | - | - | - | - | - | Ø 232 mm (RXJ) Ø 232 mm | - | - | - |
| 37W - 44,2W | - | - | - | - | - | Ø 315 mm (RXJ) Ø 315 mm | - | Ø 308 mm (RFJ) Ø 308 mm | - |
| Finish | Steel Steel/Alu Steel/Br Brass/Alu | Steel Steel/Alu Steel/Br Brass/Alu | Steel/Alu | Steel/Alu Brass/Alu | Brass | Steel/Alu Brass/Alu | Steel/Alu | Steel/Alu | DarkBrown |
| Accessories | HC | HC DL | - | HC DL | HC | HC DL | - | HC DL | - |
| Cct | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K |
| Optics | N.Spot Spot Flood W.Flood Elliptic E.W.Flood General Asymm. | N.Spot Spot Flood W.Flood | Focus | N.Spot Spot Flood W.Flood | N.Spot Spot Flood W.Flood | N.Spot Spot Flood W.Flood Elliptic E.W.Flood General Asymm. | Spot Flood W.Flood | N.Spot Spot Flood W.Flood | Spot Flood W.Flood |
| Driver | On/Off 0/1-10V DALI - DMX | On/Off 0/1-10V DALI | - | On/Off 0/1-10V DALI | - | On/Off 0/1-10V DALI - DMX | - | - | - |
| Driver | On/Off | On/Off | On/Off | On/Off | On/Off | On/Off DALI | On/Off | On/Off DALI - DMX | On/Off |
| Current | C.C. C.V. | C.C. C.V. | - | C.C. C.V. | - | C.C. C.V. | - | - | - |

The range

The Suelo family offers a variety of solutions for every design need: fixed and swivel versions, small-flanged flush-mount uplights, and dimmer units using the DALI protocol. There are pro models with recessed optics and RGBW sources, and beam control filters. All models have exclusive AquaStop® protection systems, and there are versions with 24-volt cable converters.

Suelo can be used with a honeycomb filter, which screens secondary light and reduces dazzle, maintaining a high-quality diffuse light. A darklight filter directs the illumination onto one part of the wall by sectioning one part of the beam, and prevents dazzle even close to the source. For full beam control and a drastically reduced dazzle risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.




New Ø 31,5 cm version

The evolution of the Suelo family includes a new 315 mm diameter, 44,2 W version that improves it in terms of performance. In addition to the optics range that sets all Suelo units apart, the new version is characterised by extremely easy installation through the use of the recessed casing designed to be able adjust the inclination of the horizontal axis and, without accessing the inside of the optics chamber, the vertical axis (EAS™ pag 579). Suelo was also designed to house the power supply and control unit inside the body of the product, which guarantees a high grade of protection at IP67.




Performance and control

There are nine outputs to choose from, ranging from 1 to 44,2 watts, three colour temperatures including warm light at 2700 and 3000K, and daylight at 4000K. The uniquely wide spectrum of optics includes an elliptic, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogenous wash.

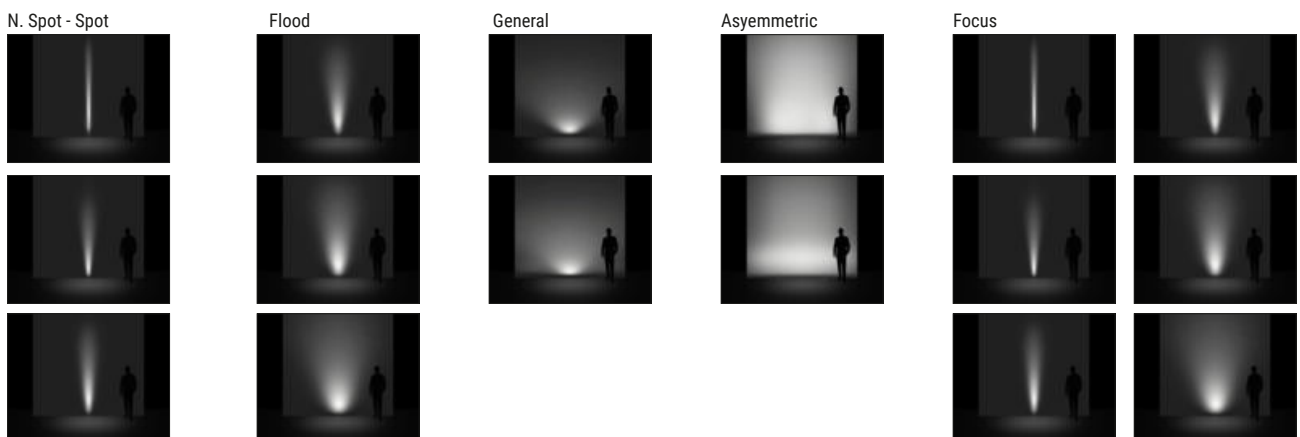

Suelo_R | Up-Light | powerLED




| C.C. 1W DC - 350mA | | Cct | lm S - D | Optic |
|--------------------|--------------|---------------|-----------|-----------------------|
| Steel | 80432 | M 2700 | 136 - 104 | 20 Flood (26°) |
| | | W 3000 | 145 - 111 | 35 Flood (36°) |
| | | N 4000 | 155 - 119 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 583

Suelo_R Pro | Up-Light | powerLED



| C.C. 1 W DC - 350mA | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-----------|-----------------------|
| Steel | 80433 | M 2700 | 136 - 96 | 20 Spot (23°) |
| Brass St | 82527 | W 3000 | 145 - 102 | 35 Flood (34°) |
| | | N 4000 | 155 - 110 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


| C.V. 1,5W DC - 24 V DC | | Cct | lm S - D | Optic |
|------------------------|--------------|---------------|-----------|-----------------------|
| Steel | 80434 | M 2700 | 136 - 96 | 20 Spot (23°) |
| Brass St | 82528 | W 3000 | 145 - 102 | 35 Flood (34°) |
| | | N 4000 | 155 - 110 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|---|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 60 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 583

Suelo_R | Up-Light | powerLED



| C.C. 2W DC - 630mA | Cct | lm S - D | Optic |
|---------------------|---------------|-----------|--------------------------|
| Chrome 93141 | M 2700 | 219 - 131 | 08 N.Spot (10°) |
| | W 3000 | 233 - 148 | 15 Spot (21°) |
| | N 4000 | 249 - 159 | 30 Flood (26°) |
| | | | 60 W.Flood (57°) |
| | | | 12 E.W.Flood(91°) |
| | | | 00 General - |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 583

RTG 93141W30

Suelo_R Pro | Up-Light | powerLED



| C.C. 2W DC - 630mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 80439 | M 2700 | 219 - 120 | 15 Spot (22°) |
| Brass Alu 82529 | W 3000 | 233 - 137 | 30 Flood (28°) |
| | N 4000 | 249 - 147 | 60 W.Flood (54°) |
| | | | 88 Elliptic - |
| | | | 00 General - |

| C.C. 2W DC - 630mA HC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|-------------------------|
| Steel Alu 80440 | M 2700 | 219 - 76 | 15 Spot (19°) |
| Brass Alu 82530 | W 3000 | 233 - 85 | 30 Flood (25°) |
| | N 4000 | 249 - 91 | 60 W.Flood (44°) |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

| C.V. 2,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 80441 | M 2700 | 219 - 120 | 15 Spot (22°) |
| Brass Alu 82531 | W 3000 | 233 - 137 | 30 Flood (28°) |
| | N 4000 | 249 - 147 | 60 W.Flood (54°) |
| | | | 88 Elliptic - |
| | | | 00 General - |


| C.V. 2,5 W DC - 24 V DC HC | Cct | lm S - D | Optic |
|----------------------------|---------------|----------|-----------------------|
| Steel Alu 80442 | M 2700 | 219 - 76 | 15 Spot (19°) |
| Brass Alu 82532 | W 3000 | 233 - 86 | 30 Flood (25°) |
| | N 4000 | 249 - 91 | 60 Flood (44°) |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|--|---|
| ON/OFF 1 - 5 art. p 80 x l 100 x h 31 | ON/OFF 1 - 9 art. p 92 x l 117 x h 38 | ON/OFF 1 - 18 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 56 art. p 150 x l 160 x h 35 | DALI 1 - 45 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 583

Suelo_R | Up-Light | powerLED



81089/81090

| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|--------------------------|
| Steel/Alu 80443 | M 2700 | 490 - 360 | 10 Spot (11°) |
| | W 3000 | 490 - 360 | 20 Spot (20°) |
| | N 4000 | 529 - 389 | 30 Flood (30°) |
| | | | 60 W.Flood (60°) |
| | | | 88 Elliptic - |
| | | | 12 E.W.Flood(86°) |
| | | | 00 General - |

| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|--------------------|
| Steel/Alu 81089 | M 2700 | 490 - 259 | 07 Asymm. - |
| | W 3000 | 490 - 259 | |
| | N 4000 | 529 - 280 | |

| C.C. 4W DC - 350mA | Cct | Im-S | Im-S | Optic |
|------------------------|---------------|-----------|------|-----------------------|
| Steel/Alu 80444 | M 2700 | 490 - 205 | | 20 Spot (15°) |
| | W 3000 | 490 - 205 | | 30 Flood (25°) |
| | N 4000 | 529 - 221 | | 60 Flood (42°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|--------------------------|
| Steel/Alu 80445 | M 2700 | 490 - 360 | 10 Spot (11°) |
| | W 3000 | 490 - 360 | 20 Spot (20°) |
| | N 4000 | 529 - 389 | 30 Flood (30°) |
| | | | 60 W.Flood (60°) |
| | | | 88 Elliptic - |
| | | | 12 E.W.Flood(86°) |
| | | | 00 General - |

| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|--------------------|
| Steel/Alu 81090 | M 2700 | 490 - 259 | 07 Asymm. - |
| | W 3000 | 490 - 259 | |
| | N 4000 | 529 - 280 | |

| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|-----------------------|
| Steel/Alu 80446 | M 2700 | 490 - 205 | 20 Spot (15°) |
| | W 3000 | 490 - 205 | 30 Flood (25°) |
| | N 4000 | 529 - 221 | 60 Flood (42°) |

Electronics


| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 9 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 583

RTG 80443W00

564

Suelo_R | Up-Light | 198-264 V AC | powerLED 4 W DC - 5 W AC




| Cct | Im S - D | Optic |
|---------------|-----------|--------------------------|
| M 2700 | 490 - 360 | 10 Spot (11°) |
| W 3000 | 490 - 360 | 20 Spot (20°) |
| N 4000 | 529 - 389 | 30 Flood (30°) |
| | | 60 W.Flood (60°) |
| | | 88 Elliptic - |
| | | 12 E.W.Flood(86°) |
| | | 00 General - |

| Cct | Im S - D | Optic |
|---------------|-----------|-----------------------|
| M 2700 | 490 - 205 | 20 Spot (15°) |
| W 3000 | 490 - 205 | 30 Flood (25°) |
| N 4000 | 529 - 221 | 60 Flood (42°) |

Recessed casing Pag. 583

Suelo_R Pro | Up-Light | powerLED



| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80449 | M 2700 | 490 - 207 | 20 Spot (16°) |
| C.C. 4W DC - 350mA | W 3000 | 490 - 207 | 30 Flood (29°) |
| Steel/Alu 80450 | N 4000 | 529 - 222 | 50 W.Flood (49°) |
| C.C. 4W DC - 350mA | | | |
| Steel/Alu 80451 | | | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80452 | M 2700 | 490 - 207 | 20 Spot (16°) |
| C.V. 5W DC - 24 V DC | W 3000 | 490 - 207 | 30 Flood (29°) |
| Steel/Alu 80453 | N 4000 | 529 - 222 | 50 W.Flood (49°) |
| C.V. 5W DC - 24 V DC | | | |
| Steel/Alu 80454 | | | |


Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 9 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 583

MAESTRO 3.0

Suelo_RJ | Up-Light | powerLED



| C.C. 4W DC - 350mA | | Cct | Im S - D | Optic |
|--------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 80455 | M 2700 | 490 - 360 | 20 Spot (20°) |
| Brass/Alu | 82533 | W 3000 | 490 - 360 | 30 Flood (30°) |
| | | N 4000 | 529 - 389 | 60 W.Flood (60°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | | Cct | Im S - D | Optic |
|----------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 80456 | M 2700 | 490 - 360 | 20 Spot (20°) |
| Brass/Alu | 82534 | W 3000 | 490 - 360 | 30 Flood (30°) |
| | | N 4000 | 529 - 389 | 60 W.Flood (60°) |


Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 583

RTG 80455W20 / 80455W30



Suelo_RJ | Up-Light | 198-264 V AC | powerLED 4 W DC - 5 W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 80457 | M 2700 | 490 - 360 | 20 Spot (20°) |
| | | W 3000 | 490 - 360 | 30 Flood (30°) |
| | | N 4000 | 529 - 389 | 60 W.Flood (60°) |

Recessed casing Pag. 583

Suelo_R | Up-Light | powerLED



| C.C. 8W DC - 630mA | Cct | Im S - D | Optic |
|------------------------|---------------|------------|---------------------------|
| Steel/Alu 80546 | M 2700 | 877 - 568 | 06 N.Spot (9°) |
| | W 3000 | 945 - 568 | 15 Spot (17°) |
| | N 4000 | 1013 - 613 | 30 Flood (26°) |
| | | | 60 W.Flood (51°) |
| | | | 88 Elliptic - |
| | | | 12 E.W.Flood(104°) |
| | | | 00 General - |
| | | | 07 Asymm. - |

| C.C. 8W DC - 630mA | Cct | Im S - D | Optic |
|------------------------|---------------|------------|-----------------------|
| Steel/Alu 80547 | M 2700 | 877 - 453 | 06 N.Spot (9°) |
| | W 3000 | 945 - 453 | 15 Spot (14°) |
| | N 4000 | 1013 - 489 | 30 Spot (24°) |
| | | | 60 Flood (42°) |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 3 art. p 53 x l 121 x h 26 |

| C.V. 9W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|------------|---------------------------|
| Steel/Alu 80550 | M 2700 | 877 - 568 | 06 N.Spot (9°) |
| | W 3000 | 945 - 568 | 15 Spot (17°) |
| | N 4000 | 1013 - 613 | 30 Flood (26°) |
| | | | 60 W.Flood (51°) |
| | | | 88 Elliptic - |
| | | | 12 E.W.Flood(104°) |
| | | | 00 General - |
| | | | 07 Asymm. - |

| C.V. 9W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|------------|-----------------------|
| Steel/Alu 80551 | M 2700 | 877 - 453 | 06 N.Spot (9°) |
| | W 3000 | 945 - 453 | 15 Spot (14°) |
| | N 4000 | 1013 - 489 | 30 Spot (24°) |
| | | | 60 Flood (42°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 160 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 160 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |


| RGBW - 8W DC - 630 mA | Cct | Optic |
|------------------------|-----------------------------|------------------|
| Steel/Alu 81717 | Q RGBW natural white | 06 N.Spot |
| | V RGBW warm white | 15 Spot |
| | | 45 Flood |

Electronics

| 99743+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Recessed casing Pag. 583

Suelo_R | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC





| Cct | Im S - D | Optic |
|---------------|------------|---------------------------|
| M 2700 | 877 - 568 | 06 N.Spot (9°) |
| W 3000 | 945 - 568 | 15 Spot (17°) |
| N 4000 | 1013 - 613 | 30 Flood (26°) |
| | | 60 W.Flood (51°) |
| | | 88 Elliptic - |
| | | 12 E.W.Flood(104°) |
| | | 00 General - |
| | | 07 Asymm. - |

| Cct | Im S - D | Optic |
|---------------|------------|-----------------------|
| M 2700 | 877 - 453 | 06 N.Spot (9°) |
| W 3000 | 945 - 453 | 15 Spot (14°) |
| N 4000 | 1013 - 489 | 30 Spot (24°) |
| | | 60 Flood (42°) |

Recessed casing Pag. 583



Suelo_R Pro | Up-Light | powerLED



| C.C. 8W DC - 630mA | Cct | Im S - D | Optic |
|------------------------------|---------------|------------|-------------------------|
| Steel/Alu 80558 | M 2700 | 877 - 510 | 06 N.Spot (6°) |
| C.C. 8W DC - 630mA HC | W 3000 | 945 - 510 | 15 Spot (15°) |
| Steel/Alu 80559 | N 4000 | 1013 - 547 | 30 Flood (25°) |
| C.C. 8W DC - 630mA DL | | | 60 W.Flood (57°) |
| Steel/Alu 80560 | | | |

Electronics

| | | |
|---|---|---|
| 99179 | 99186 | 83102 |
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 3 art. p 53 x l 121 x h 26 |

| C.V. 9W DC - 24 V DC | Cct | Im S - D | Optic |
|--------------------------------|---------------|------------|-------------------------|
| Steel/Alu 80564 | M 2700 | 877 - 510 | 06 N.Spot (6°) |
| C.V. 9W DC - 24 V DC HC | W 3000 | 945 - 510 | 15 Spot (15°) |
| Steel/Alu 80565 | N 4000 | 1013 - 547 | 30 Flood (25°) |
| C.V. 9W DC - 24 V DC DL | | | 60 W.Flood (57°) |
| Steel/Alu 80566 | | | |


Electronics

| | | | | |
|---|--|--|---|--|
| 89179 | 89359 | 99331 | 99332 | 99722 |
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 583

RTG 80566W06 / 80566W30

Suelo_R Pro | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC



| | Cct | Im S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 80570 | M 2700 | 877 - 510 | 06 N.Spot (6°) |
| Brass/Alu 82535 | W 3000 | 945 - 510 | 15 Spot (15°) |
| | N 4000 | 1013 - 547 | 30 Flood (25°) |
| | | | 60 W.Flood (57°) |
| Steel/Alu 80571 | | | |
| Brass/Alu 82536 | | | |
| | | | |
| Steel/Alu 80572 | | | |
| Brass/Alu 82537 | | | |



Recessed casing Pag. 583



Suelo_R Pro Brass

Suelo_R Pro Steel

Suelo_RJ Pro | Up-Light | powerLED



| C.C. 8W DC - 630mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 80576 | M 2700 | 760 - 558 | 20 Spot (20°) |
| | W 3000 | 760 - 558 | 30 Flood (30°) |
| | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Electronics

| 99179 | 99186 | 83102 |
|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | DALI |
| 1 art. | 2 - 3 art. | 1 - 3 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 53 x l 121 x h 26 |


| C.V. 9W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 80578 | M 2700 | 760 - 558 | 20 Spot (20°) |
| | W 3000 | 760 - 558 | 30 Flood (30°) |
| | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---------------------|----------------------|----------------------|----------------------|----------------------|
| ON/OFF | ON/OFF | ON/OFF | 0/1-10V | DALI |
| 1 - 2 art. | 1 - 5 art. | 1 - 15 art. | 1 - 15 art. | 1 - 12 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 160 x h 35 | p 150 x l 160 x h 35 | p 191 x l 163 x h 38 |

Recessed casing Pag. 583



Suelo_RJ Pro | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 80580 | M 2700 | 760 - 558 | 20 Spot (20°) |
| | W 3000 | 760 - 558 | 30 Flood (30°) |
| | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Recessed casing Pag. 583

Suelo_RX Pro | Up-Light | powerLED



| C.C. 2W DC - 630mA | | Cct | Im S - D | Optic |
|--------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 80435 | M 2700 | 219 - 120 | 15 Spot (22°) |
| Brass/Alu | 82538 | W 3000 | 233 - 137 | 30 Flood (28°) |
| | | N 4000 | 249 - 147 | 60 W.Flood (54°) |
| | | | | 00 General - |

| C.C. 2W DC - 630mA HC | | Cct | Im S - D | Optic |
|------------------------------------|--------------|---------------|----------|-----------------------|
| Steel/Alu | 80436 | M 2700 | 219 - 76 | 15 Spot (19°) |
| Brass/Alu | 82539 | W 3000 | 233 - 85 | 30 Flood (25°) |
| | | N 4000 | 249 - 91 | 60 Flood (44°) |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|---|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 174 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

| C.V. 2,5W DC - 24 V DC | | Cct | Im S - D | Optic |
|------------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 80437 | M 2700 | 219 - 120 | 15 Spot (22°) |
| Brass/Alu | 82540 | W 3000 | 233 - 137 | 30 Flood (28°) |
| | | N 4000 | 249 - 147 | 60 W.Flood (54°) |
| | | | | 00 General - |




| C.V. 2,5W DC - 24 V DC HC | | Cct | Im S - D | Optic |
|--|--------------|---------------|----------|-----------------------|
| Steel/Alu | 80438 | M 2700 | 219 - 76 | 15 Spot (19°) |
| Brass/Alu | 82541 | W 3000 | 233 - 85 | 30 Flood (25°) |
| | | N 4000 | 249 - 91 | 60 Flood (44°) |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|--|--|
| ON/OFF 1 - 7 art. p 80 x l 100 x h 31 | ON/OFF 1 - 12 art. p 92 x l 117 x h 38 | ON/OFF 1 - 24 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 75 art. p 150 x l 160 x h 35 | DALI 1 - 60 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 583

Suelo_RX | Up-Light | powerLED



| C.C. - 8W DC - 630 mA | | Cct | Im S - D | Optic |
|-----------------------|--------------|---------------|------------|---------------------------|
| Steel/Alu | 80548 | M 2700 | 877 - 568 | 06 N.Spot (9°) |
| | | W 3000 | 945 - 568 | 15 Spot (17°) |
| | | N 4000 | 1013 - 613 | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |
| | | | | 88 Elliptic - |
| | | | | 12 E.W.Flood(104°) |
| | | | | 00 General - |
| | | | | 07 Asymm. - |

| C.C. - 8W DC - 630 mA HC | | Cct | Im S - D | Optic |
|---------------------------------------|--------------|---------------|------------|-----------------------|
| Steel/Alu | 80549 | M 2700 | 877 - 453 | 06 N.Spot (9°) |
| | | W 3000 | 945 - 453 | 15 Spot (14°) |
| | | N 4000 | 1013 - 489 | 30 Flood (24°) |
| | | | | 60 Flood (42°) |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 3 art. p 53 x l 121 x h 26 |

| C.V. - 9W DC - 24 V DC | | Cct | Im S - D | Optic |
|------------------------|--------------|---------------|------------|---------------------------|
| Steel/Alu | 80552 | M 2700 | 877 - 568 | 06 N.Spot (9°) |
| | | W 3000 | 945 - 568 | 15 Spot (17°) |
| | | N 4000 | 1013 - 613 | 30 Flood (26°) |
| | | | | 60 W.Flood (51°) |
| | | | | 88 Elliptic - |
| | | | | 12 E.W.Flood(104°) |
| | | | | 00 General - |
| | | | | 07 Asymm. - |

| C.V. - 9W DC - 24 V DC HC | | Cct | Im S - D | Optic |
|--|--------------|---------------|------------|-----------------------|
| Steel/Alu | 80553 | M 2700 | 877 - 453 | 06 N.Spot (9°) |
| | | W 3000 | 945 - 453 | 15 Spot (14°) |
| | | N 4000 | 1013 - 489 | 30 Flood (24°) |
| | | | | 60 Flood (42°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 160 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |


| RGBW - 8W - 630mA | | Cct | Optic |
|-------------------|--------------|-----------------------------|------------------|
| Steel/Alu | 81718 | Q RGBW natural white | 06 N.Spot |
| | | V RGBW warm white | 15 Spot |
| | | | 45 Flood |

Electronics

| 99743+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Recessed casing Pag. 583


Suelo_RX Pro | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 80573 | M 2700 | 877 - 510 | 06 N.Spot (6°) |
| Brass/Alu 82542 | W 3000 | 945 - 510 | 15 Spot (15°) |
| | N 4000 | 1013 - 547 | 30 Flood (25°) |
| | | | 60 W.Flood (57°) |
| | | | HC |
| Steel/Alu 80574 | | | |
| Brass/Alu 82543 | | | |
| | | | DL |
| Steel/Alu 80575 | | | |
| Brass/Alu 82544 | | | |

Recessed casing Pag. 583

Suelo_RXJ | Up-Light | powerLED



| C.C. - 8W DC - 630 mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80577 | M 2700 | 760 - 558 | 20 Spot (20°) |
| | W 3000 | 760 - 558 | 30 Flood (30°) |
| | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Electronics

| 99179 | 99186 | 83102 |
|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | DALI |
| 1 art. | 2 - 3 art. | 1 - 3 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 53 x l 121 x h 26 |


| C.V. 9W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80579 | M 2700 | 760 - 558 | 20 Spot (20°) |
| | W 3000 | 760 - 558 | 30 Flood (30°) |
| | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---------------------|----------------------|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | ON/OFF | 0/1-10V | DALI |
| 1 - 2 art. | 1 - 5 art. | 1 - 15 art. | 1 - 15 art. | 1 - 12 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 191 x l 63 x h 38 |

Recessed casing Pag. 583

Suelo_RXJ | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC





| | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80581 | M 2700 | 760 - 558 | 20 Spot (20°) |
| Brass/Alu 82545 | W 3000 | 760 - 558 | 30 Flood (30°) |
| | N 4000 | 821 - 603 | 60 W.Flood (60°) |

Recessed casing Pag. 583

RTG **80581W30 / 80581W60**



Suelo_RX | Up-Light | 198-264 V AC | arrayLED 13W DC - 15W AC



| | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 80607 | M 2700 | 1843 - 1098 | 15 Spot (14°) |
| | W 3000 | 1921 - 1144 | 35 Flood (33°) |
| | N 4000 | 2028 - 1208 | 60 W.Flood (64°) |

| | Cct | Im S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel/Alu 81109 | M 2700 | 1683 - 769 | 07 Asymm. - |
| | W 3000 | 1808 - 800 | |
| | N 4000 | 1949 - 864 | |

| | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-----------------------|
| Steel/Alu 80608 | M 2700 | 1470 - 1050 | 06 N.Spot (7°) |
| | W 3000 | 1470 - 1050 | |
| | N 4000 | 1587 - 1109 | |

| | Cct | Im S - D | Optic |
|---|---------------|------------|-------------------------|
| Steel/Alu 81740 HC | M 2700 | 1843 - 668 | 15 Spot (14°) |
| | W 3000 | 1921 - 696 | 35 Flood (29°) |
| | N 4000 | 2028 - 735 | 60 W.Flood (49°) |

| | Cct | Im S - D | Optic |
|---|-----|----------|-------|
| Steel/Alu 81741 DL | | | |

| | Cct | Optic |
|------------------------|--------------------------|---------------------|
| RGBW - 13 WDC - 350 mA | | |
| Steel/Alu 81719 | V RGBW warm white | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |


Electronics

| 99741+99702 | 99333 | DMX | Driver | Switching |
|-------------------------|--------------------------|-----------------------------------|------------------------------|---------------------------------|
| Dimmer RF 1 - 4 art. | Dimmer DMX 1 - 4 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Recessed casing Pag. 583

RTG **80607W30**

Suelo_RX Pro | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC



| | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 80611 | M 2700 | 1724 - 1098 | 15 Spot (14°) |
| Brass/Alu 82546 | W 3000 | 1724 - 1144 | 35 Flood (33°) |
| | N 4000 | 1854 - 1208 | 60 W.Flood (64°) |

| | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|--------------------|
| Steel/Alu 80612 | M 2700 | 1743 - 1184 | 07 Asymm. - |
| Brass/Alu 82547 | W 3000 | 1863 - 1265 | |
| | N 4000 | 1863 - 1265 | |



| | Cct | Im S - D | Optic |
|---|---------------|------------|-------------------------|
| Steel/Alu 81744 HC | M 2700 | 1724 - 668 | 15 Spot (14°) |
| Brass/Alu 82548 | W 3000 | 1724 - 696 | 35 Flood (29°) |
| | N 4000 | 1854 - 735 | 60 W.Flood (50°) |

| | Cct | Im S - D | Optic |
|---|-----|----------|-------|
| Steel/Alu 81745 DL | | | |

| | Cct | Im S - D | Optic |
|------------------------|-----|----------|-------|
| Brass/Alu 82549 | | | |

Recessed casing Pag. 583

Suelo_RX | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC



| DALI | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-----------------------|
| Steel/Alu 80609 | M 2700 | 1470 - 1007 | 06 N.Spot (7°) |
| | W 3000 | 1470 - 1050 | |
| | N 4000 | 1587 - 1109 | |



| DALI | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 80610 | M 2700 | 1843 - 1098 | 15 Spot (14°) |
| | W 3000 | 1921 - 1144 | 35 Flood (33°) |
| | N 4000 | 2028 - 1208 | 60 W.Flood (64°) |

| DALI | Cct | Im S - D | Optic |
|------------------------|---------------|------------|--------------------|
| Steel/Alu 81110 | M 2700 | 1683 - 769 | 07 Asymm. - |
| | W 3000 | 1808 - 800 | |
| | N 4000 | 1949 - 846 | |

| DALI | HC | Cct | Im S - D | Optic |
|------------------------|----|---------------|------------|-------------------------|
| Steel/Alu 81742 | | M 2700 | 1843 - 668 | 15 Spot (14°) |
| | | W 3000 | 1921 - 701 | 35 Flood (29°) |
| | DL | N 4000 | 2028 - 735 | 60 W.Flood (50°) |
| Steel/Alu 81743 | | | | |

Recessed casing Pag. 583


Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC



| | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 80613 | M 2700 | 1724 - 978 | 15 Spot (16°) |
| Brass/Alu 82550 | W 3000 | 1724 - 1020 | 35 Flood (30°) |
| | N 4000 | 1854 - 1077 | 45 W.Flood (46°) |

Recessed casing Pag. 583




Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC



| DALI | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81111 | M 2700 | 1843 - 978 | 15 Spot (16°) |
| | W 3000 | 1921 - 1020 | 35 Flood (30°) |
| | N 4000 | 2028 - 1077 | 45 W.Flood (46°) |

Recessed casing Pag. 583

Suelo_RX | Up-Light | 198-264 V AC | arrayLED



| 30 W DC - 33,6 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 80614 | M 2700 | 4088 - 3159 | 15 Spot (18°) |
| | W 3000 | 4372 - 3293 | 35 Flood (32°) |
| | N 4000 | 4702 - 3475 | 60 W.Flood (57°) |

| 30 W DC - 33,6 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-----------------------|
| Steel/Alu 80615 | M 2700 | 3428 - 2117 | 06 N.Spot (7°) |
| | W 3000 | 3428 - 2117 | |
| | N 4000 | 3700 - 2234 | |

| 25 W DC - 27 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------|
| Steel/Alu 80616 | M 2700 | 3167 - 1408 | 07 Asymm. - |
| | W 3000 | 3401 - 1467 | |
| | N 4000 | 3667 - 1548 | |

| 25 W DC - 27 W AC | HC | Cct | lm S - D | Optic |
|------------------------|----|---------------|-------------|-----------------------|
| Steel/Alu 81746 | | M 2700 | 4088 - 1743 | 15 Spot (18°) |
| 25 W DC - 27 W AC | DL | W 3000 | 4372 - 1816 | 35 Flood (28°) |
| Steel/Alu 81747 | | N 4000 | 4702 - 1918 | 60 Flood (42°) |

| 30 W DC - 33,6 W AC | DALI | Cct | lm S - D | Optic |
|------------------------|------|---------------|-------------|-------------------------|
| Steel/Alu 81732 | | M 2700 | 4088 - 3159 | 15 Spot (18°) |
| | | W 3000 | 4372 - 3293 | 30 Flood (32°) |
| | | N 4000 | 4702 - 3475 | 60 W.Flood (57°) |

| 30 W DC - 33,6 W AC | DALI | Cct | lm S - D | Optic |
|------------------------|------|---------------|-------------|-----------------------|
| Steel/Alu 81733 | | M 2700 | 4088 - 2032 | 06 N.Spot (7°) |
| | | W 3000 | 4372 - 2117 | |
| | | N 4000 | 4702 - 2234 | |

| 25 W DC - 27 W AC | DALI | Cct | lm S - D | Optic |
|------------------------|------|---------------|-------------|--------------------|
| Steel/Alu 81734 | | M 2700 | 3167 - 1408 | 07 Asymm. - |
| | | W 3000 | 3401 - 1467 | |
| | | N 4000 | 3667 - 1548 | |

| 25 W DC - 27 W AC | HC | Cct | lm S - D | Optic |
|------------------------|----|---------------|-------------|-----------------------|
| Steel/Alu 81748 | | M 2700 | 4088 - 1743 | 15 Spot (18°) |
| 25 W DC - 27 W AC | DL | W 3000 | 4372 - 1816 | 35 Flood (28°) |
| Steel/Alu 81749 | | N 4000 | 4702 - 1918 | 60 Flood (42°) |

| RGBW - 25 WDC - 48 VDC | Cct | Optic |
|------------------------|--------------------------|---------------------|
| Steel/Alu 81737 | V RGBW warm white | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |




Electronics

| 99785 | DMX | 99385 | 98986 | 98985/99390 |
|----------------|-----------------------------------|----------------------|-----------------------------|---|
| ON/OFF 240W | DMX controllers Pag. 952 - 953 | DMX/RDM addresser | 120 Ohm DMX line closure | Connector splitter ALLinONE Start & Continuity Pag. 956 |

Recessed casing Pag. 583

Extension cables Pag. 582

Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED 30 W DC - 33,6 W AC





| Steel/Alu 80617 | Cct | lm S - D | Optic |
|------------------------|-------------|-------------------------|-------|
| M 2700 | 4088 - 2945 | 15 Spot (18°) | |
| W 3000 | 4372 - 3068 | 30 Flood (34°) | |
| N 4000 | 4702 - 3240 | 60 W.Flood (59°) | |

| DALI | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81735 | M 2700 | 4088 - 2945 | 15 Spot (18°) |
| | W 3000 | 4372 - 3068 | 30 Flood (34°) |
| | N 4000 | 4702 - 3240 | 60 W.Flood (59°) |

Recessed casing Pag. 583



Suelo_RDX | Up-Light | 198-264 V AC | powerLED 12 W DC - 13,5 W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 81619 | M 2700 | 1114 - 435 | 15 Spot (19°) |
| | W 3000 | 1176 - 457 | 30 Flood (26°) |
| | N 4000 | 1300 - 505 | 60 W.Flood (65°) |

Recessed casing Pag. 583

Suelo_RDX | Up-Light | 198-264 V AC | powerLED 24 W DC - 26 W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------|
| Steel/Alu 81620 | M 2700 | 3122 - 2090 | 15 Spot - |
| | W 3000 | 3254 - 2251 | 30 Flood - |
| | N 4000 | 3463 - 2411 | 60 Flood - |

Recessed casing Pag. 583


Receded optical compartment

Independent tilting

Optics customisable separately upOn Request



Suelo_RX | Up-Light | 198-264 V AC | arrayLED



| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 83925 | M 2700 | 6489 - 4154 | 15 Spot (19°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 4331 | 30 Flood (24°) |
| Steel/Alu 83928 | N 4000 | 7139 - 4573 | 50 W.Flood (61°) |

| 44,2 W DC - 48,2 W AC HC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 83926 | M 2700 | 6489 - 3221 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 3355 | 30 Spot (22°) |
| Steel/Alu 83929 | N 4000 | 7139 - 3535 | 50 W.Flood (47°) |

| 44,2 W DC - 48,2 W AC DL | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 83927 On req | M 2700 | 6489 - 2842 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 2964 | 30 Spot (21°) |
| Steel/Alu 83930 On req | N 4000 | 7139 - 3129 | 50 Flood (31°) |

| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 83937 | M 2700 | 4849 - 3209 | 06 N.Spot (7°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 4849 - 3209 | |
| Steel/Alu 83938 | N 4000 | 5235 - 3465 | |

| RGBW 37W DC - 41W AC | Cct | Optic |
|----------------------|-------------------|--------------|
| Steel/Alu 83941 | V RGBW warm white | 15 Spot - |
| | | 30 Flood - |
| | | 50 W.Flood - |


Electronics

| DMX | 99385 | 98986 | 98985/99390 |
|-----------------------------------|----------------------|-----------------------------|---|
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |

Recessed casing Pag. 583

Extension cables Pag. 582

Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED



| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 82713 | M 2700 | 6489 - 4154 | 15 Spot (19°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 4331 | 30 Flood (24°) |
| Steel/Alu 82716 | N 4000 | 7139 - 4573 | 50 W.Flood (61°) |

| 44,2 W DC - 48,2 W AC HC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 82714 | M 2700 | 6489 - 3221 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 3355 | 30 Spot (22°) |
| Steel/Alu 82717 | N 4000 | 7139 - 3535 | 50 W.Flood (47°) |

| 44,2 W DC - 48,2 W AC DL | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 82715 On req | M 2700 | 6489 - 2842 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 2964 | 30 Spot (21°) |
| Steel/Alu 82718 On req | N 4000 | 7139 - 3129 | 50 Flood (31°) |

| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 82719 | M 2700 | 4849 - 3209 | 06 N.Spot (7°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 4849 - 3209 | |
| Steel/Alu 82720 | N 4000 | 5235 - 3465 | |



| RGBW 37W DC - 41W AC | Cct | Optic |
|----------------------|-------------------|--------------|
| Steel/Alu 82723 | V RGBW warm white | 15 Spot - |
| | | 30 Flood - |
| | | 50 W.Flood - |

Electronics

| DMX | 99385 | 98986 | 98985/99390 |
|-----------------------------------|----------------------|-----------------------------|---|
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |

Recessed casing Pag. 583

Extension cables Pag. 582

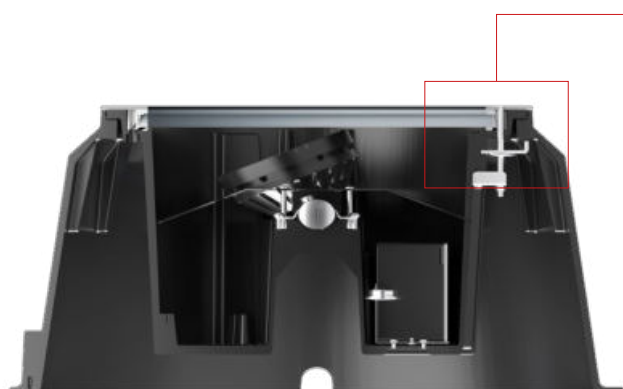


Suitable for RX / RXJ Ø 315



Suitable for RF / RFJ Ø 308

Suelo_RF | Up-Light | 198-264 V AC | arrayLED



| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 83931 | M 2700 | 6489 - 4154 | 15 Spot (19°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 4331 | 30 Flood (24°) |
| Steel/Alu 83934 | N 4000 | 7139 - 4573 | 50 W.Flood (61°) |

| 44,2 W DC - 48,2 W AC HC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 83932 | M 2700 | 6489 - 3221 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 3355 | 30 Spot (22°) |
| Steel/Alu 83935 | N 4000 | 7139 - 3535 | 50 W.Flood (47°) |

| 44,2 W DC - 48,2 W AC DL | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 83933 On req | M 2700 | 6489 - 2842 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 2964 | 30 Spot (21°) |
| Steel/Alu 83936 On req | N 4000 | 7139 - 3129 | 50 Flood (31°) |

| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 83939 | M 2700 | 4849 - 3209 | 06 N.Spot (7°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 4849 - 3209 | |
| Steel/Alu 83940 | N 4000 | 5235 - 3465 | |

| RGBW 37W DC - 41W AC | Cct | Optic |
|----------------------|-------------------|--------------|
| Steel/Alu 83942 | V RGBW warm white | 15 Spot - |
| | | 30 Flood - |
| | | 50 W.Flood - |


Electronics

| DMX | 99385 | 98986 | 98985/99390 |
|-----------------------------------|----------------------|-----------------------------|---|
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |

Recessed casing Pag. 583

Extension cables Pag. 582

Suelo_RFJ | Up-Light | 198-264 V AC | arrayLED



| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 83776 | M 2700 | 6489 - 4154 | 15 Spot (19°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 4331 | 30 Flood (24°) |
| Steel/Alu 83779 | N 4000 | 7139 - 4573 | 50 W.Flood (61°) |

| 44,2 W DC - 48,2 W AC HC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|------------------|
| Steel/Alu 83777 | M 2700 | 6489 - 3221 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 3355 | 30 Spot (22°) |
| Steel/Alu 83780 | N 4000 | 7139 - 3535 | 50 W.Flood (47°) |

| 44,2 W DC - 48,2 W AC DL | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 83778 On req | M 2700 | 6489 - 2842 | 15 Spot (17°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 6762 - 2964 | 30 Spot (21°) |
| Steel/Alu 83781 On req | N 4000 | 7139 - 3129 | 50 Flood (31°) |

| 44,2 W DC - 48,2 W AC | Cct | Im S - D | Optic |
|----------------------------|--------|-------------|----------------|
| Steel/Alu 82721 | M 2700 | 4849 - 3209 | 06 N.Spot (7°) |
| DALI 44,2 W DC - 48,2 W AC | W 3000 | 4849 - 3209 | |
| Steel/Alu 82722 | N 4000 | 5235 - 3465 | |

| RGBW 37W DC - 41W AC | Cct | Optic |
|----------------------|-------------------|--------------|
| Steel/Alu 82724 | V RGBW warm white | 15 Spot - |
| | | 30 Flood - |
| | | 50 W.Flood - |

Electronics

| DMX | 99385 | 98986 | 98985/99390 |
|-----------------------------------|----------------------|-----------------------------|---|
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |

Recessed casing Pag. 583


Extension cables Pag. 582

Easy Adjust. System


Thanks to the system realized by the i-LèD technical offices, the new Suelo recessed casing allows the light to be flush-mounted without having to open its body, using a tension-rod system that locks rotation of the product. This makes installation of the recessed casing easy and secure.

PATENT PENDING

EAS

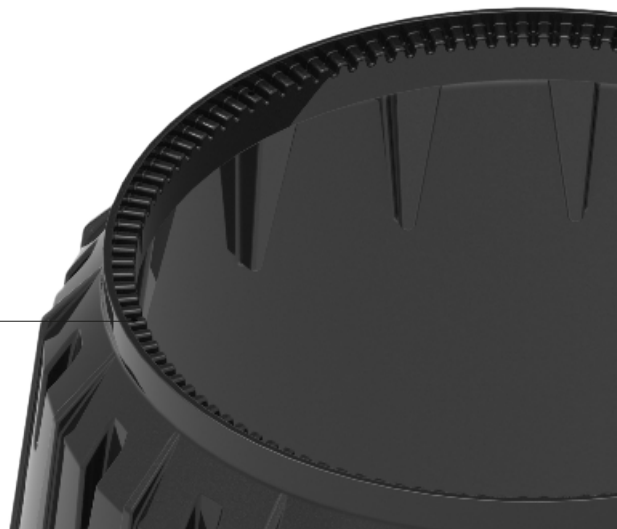



Suelo Telescopic | Up-Light | 198-264 V AC | arrayLED 12 W DC - 13,5 W AC



| | Cct | lm S - D | Optic |
|-----------------|--------|------------|------------------|
| DarkBrown 81475 | M 2700 | 1743 - 900 | 15 Spot (20°) |
| | W 3000 | 1863 - 962 | 30 Flood (40°) |
| | N 4000 | 1863 - 962 | 60 W.Flood (52°) |

Recessed casing Pag. 583

Suelo Telescopic | Up-Light | 198-250 V | arrayLED 26 W DC - 29 W AC




| | Cct | lm S - D | Optic |
|-----------------|--------|-------------|------------------|
| DarkBrown 81476 | M 2700 | 3400 - 1720 | 15 Spot (27°) |
| | W 3000 | 3673 - 1847 | 30 Flood (39°) |
| | N 4000 | 3909 - 1847 | 60 W.Flood (51°) |

Recessed casing Pag. 583




Suelo_I Focus | Up-Light | 198-264 V AC | arrayLED 8 W DC - 9,5 W AC



| | Cct | Im S - D | Optic |
|------------------------|---------------|--------------|---------------------------|
| Steel/Alu 81692 | M 2700 | 770 - On req | 85 Focus (10°-65°) |
| | W 3000 | 770 - On req | |
| | N 4000 | 831 - On req | |

Recessed casing Pag. 583

Suelo Focus | Up-Light | 198-264 V AC | arrayLED 8 W DC - 9,5 W AC



| | Cct | Im S - D | Optic |
|------------------------|---------------|--------------|---------------------------|
| Steel/Alu 81693 | M 2700 | 770 - On req | 85 Focus (10°-65°) |
| | W 3000 | 770 - On req | |
| | N 4000 | 831 - On req | |


Recessed casing Pag. 583




Narrow Spot




Spot

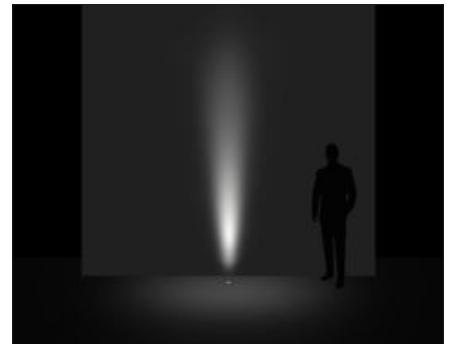


Spot

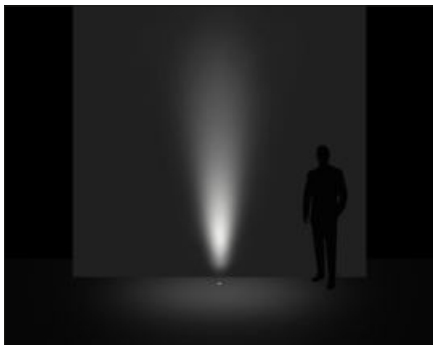

Flood

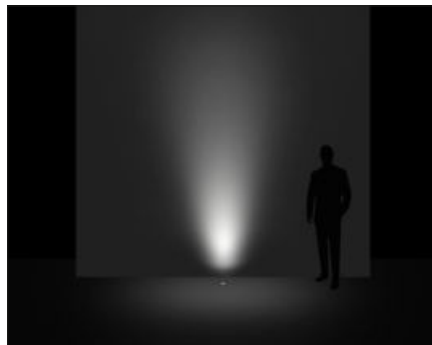




Medium Flood

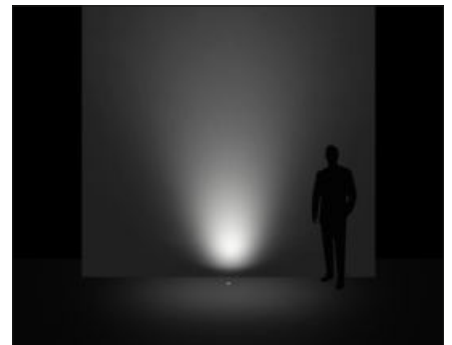

Medium Flood



Suelo_Brass | Up-Light | 190-250 V | powerLED 8 W DC - 9 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|---------------|---------------|---------------------|
| Brass | 82266 | M 2700 | 902 - On Req | 06 N.Spot - |
| | | W 3000 | 945 - On Req | - |
| | | N 4000 | 1016 - On Req | - |
| Brass | 82267 | M 2700 | 902 - On Req | 15 Spot - |
| | | W 3000 | 945 - On Req | 35 Flood - |
| | | N 4000 | 1016 - On Req | 60 W.Flood - |
| | | HC | | |
| Brass | 82268 | M 2700 | 902 - On Req | 06 N.Spot - |
| | | W 3000 | 945 - On Req | - |
| | | N 4000 | 1016 - On Req | - |
| | | HC | | |
| Brass | 82269 | M 2700 | 902 - On Req | 15 Spot - |
| | | W 3000 | 945 - On Req | 35 Flood - |
| | | N 4000 | 1016 - On Req | 60 W.Flood - |

Recessed casing Pag. 583

Extension cables



AllinOne DMX 190-250V AC

| | |
|--------------|----------------------|
| 98662 | M. / F. 6 pin (L 1m) |
| 98663 | M. / F. 6 pin (L 5m) |

suitable for: Suelo_RX - Suelo_RXJ - Suelo_RF
Suelo_RFJ



Recessed casing




| description | type |
|---------------------------------|------|
| 99676 Recessed casings | PVC |
| suitable for: Suelo_R 1W | |



| description | type |
|---------------------------------|------|
| 84918 Recessed casings | PVC |
| suitable for: Suelo_R 2W | |




| description | type |
|--|------|
| 84936 Recessed casings | PVC |
| suitable for: Suelo_R 4W - 5W (H64) Suelo_RJ 4W - 5W (H64) | |



| description | type |
|---|------|
| 99680 Recessed casings | PVC |
| suitable for: Suelo_R 8W - 9W (H112) Suelo_R Pro 8W - 9W (H112) / Suelo_RJ Pro 8W - 9W (H112) | |




| description | type |
|---|------|
| 99685 Recessed casings | PVC |
| suitable for: Suelo_RX Pro 2W - 2,5W | |




| description | type |
|---|------|
| 98122 Recessed casings | PVC |
| suitable for: Suelo_RX 8W (H152) Suelo_RXJ 8W (H154) / Suelo_RX Pro 8W (H152) | |




| description | type |
|---|------|
| 84932 Recessed casings | PVC |
| suitable for: Suelo_RX Pro 13W / Suelo_RX 13W (H204) Suelo_RXJ 13W (H204) / Suelo_RDX 12W | |



| description | type |
|---|------|
| 99747 Recessed casings | PVC |
| suitable for: Suelo Telescopic 12W Suelo Telescopic 24W | |



| description | type |
|----------------------------|------|
| 83097 Template | PVC |
| suitable for: 83096 | |



| description | type |
|----------------------------|------|
| 93099 Caseback | PVC |
| suitable for: 83096 | |



| description | type |
|-------------------------------------|------|
| 99804 Recessed casings | PVC |
| suitable for: Suelo Focus 8W | |




| description | type |
|--|------|
| 99677 Recessed casings | PVC |
| suitable for: Suelo_R Pro 1W - 1,5W | |



| description | type |
|--|------|
| 99684 Recessed casings | PVC |
| suitable for: Suelo_R Pro 2W - 2,5W | |




| description | type |
|--|------|
| 84935 Recessed casings | PVC |
| suitable for: Suelo_R 4W (H129) / Suelo_R 5W (H129) Suelo_R Pro 4W - 5W / Suelo_RJ 4W (H129) | |



| description | type |
|--|------|
| 99681 Recessed casings | PVC |
| suitable for: Suelo_R 8W (H152) / Suelo_R Pro 8W (H152) Suelo_RJ Pro 8W (H152) | |



| description | type |
|--|------|
| 98121 Recessed casings | PVC |
| suitable for: Suelo_RX 8W - 9W (H112) Suelo_RX Pro 8W - 9W (H112) / Suelo_RXJ 8W - 9W (H112) | |




| description | type |
|--|------|
| 84933 Recessed casings | PVC |
| suitable for: Suelo_RX 13W (H144) Suelo_RXJ 13W (H144) | |



| description | type |
|--|------|
| 99794 Recessed casings | PVC |
| suitable for: Suelo_RX 23W - 25W - 30W Suelo_RXJ 30W / Suelo_RDX 24W | |



| description | type |
|--|------|
| 83096 Recessed casings | PVC |
| suitable for: Suelo_RX 37W - 44,2W / Suelo_RXJ 37W - 44,2W / Suelo_RF 37W - 44,2W / Suelo_RFJ 37W - 44,2W | |



| description | type |
|----------------------------|------|
| 83098 Template | PVC |
| suitable for: 83096 | |



| description | type |
|-------------------------------------|------|
| 84900 Recessed casings | PVC |
| suitable for: Suelo_Brass 8W | |



| description | type |
|--|------|
| 99803 Recessed casings | PVC |
| suitable for: Suelo_I Focus 8W / Suelo Focus 8W | |

orma

Materials

Aluminium body


AISI 316L stainless steel flange

Extra-clear tempered glass diffuser






orma range

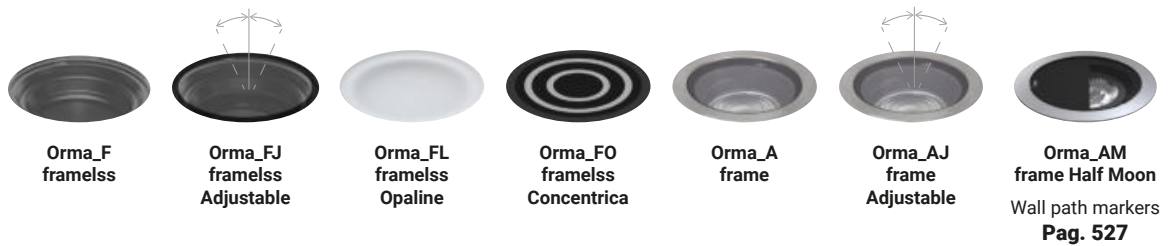

| | Orma_F framelss | Orma_FJ framelss Adjustable | Orma_FL framelss Opaline | Orma_FO framelss Concentrica | Orma_A frame | Orma_AJ frame Adjustable | Orma_AM frame Half Moon Wall path markers Pag. 527 |
|--------------------|-----------------------------|-----------------------------------|--------------------------------|------------------------------------|--|--------------------------------|---|
| Ø22,5 | 1W CC 1,5W CV | - | 1W CC 1,5W CV | - | - | - | - |
| Ø42 | - | - | - | 1,5W CV | - | - | - |
| Ø54 - Ø56 | 4W CC 5W CV | 4W CC 5W CV | 1W CC 1,5W CV | 1W CC 1,5W CV | 4W CC 5W CV | 4W CC 5W CV | 4W CC 5W CV |
| Ø64 | - | - | - | - | - | - | - |
| Ø85 - Ø87 | 8W CC 9W CV | 8W CC 9W CV | 2W CC 2,5W CV | 2W CC 2,5W CV | 8W CC - 9W CV 8W RGBW | 8W CC 9W CV | 8W CC 9W CV |
| Ø97 | - | - | - | - | - | - | - |
| Ø125 - Ø127 | 12W CC 13W CV | 12W CC 13W CV | 4W CC 5W CV | 4W CC 5W CV | 12W CC 13W CV | 12W CC 13W CV | 12W CC 13W CV |
| Ø138 | - | - | - | - | - | - | - |
| Accessories | HC DL | HC | - | - | HC DL | HC | - |
| Finish | Glass Alu | Glass Alu | Glass Alu | Black White Grey | Steel Alu | Steel Alu | Steel Alu |
| CRI 80 | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | 2700K 3000K 4000K |
| Optic | Spot Flood Wide Flood | Spot Flood Wide Flood | General | General | Spot Flood Wide Flood General Elliptic | Spot Flood Wide Flood | Asymm. |

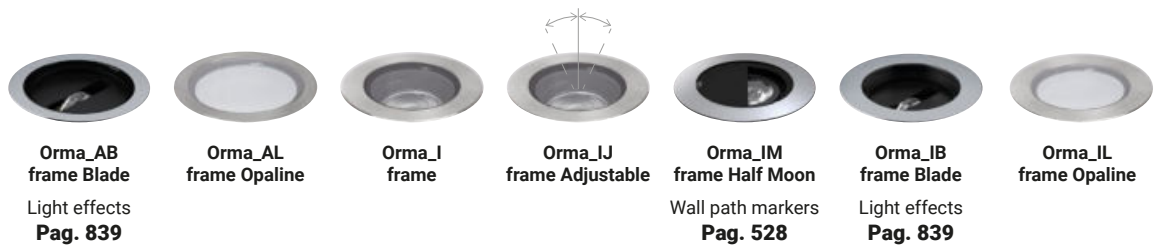

| | | | | | | | |
|--------------------|-------------------------|-------------------------|--|-----------------------------|-------------------------|-------------------------|-------------------------|
| Ø22,5 | - | - | - | - | - | - | - |
| Ø42 | - | - | - | - | - | - | - |
| Ø54 - Ø56 | - | 1W CC 1,5W CV | - | - | - | - | - |
| Ø64 | - | - | 4W CC 5W CV | 4W CC 5W CV | 4W CC 5W CV | - | 1W CC 1,5W CV |
| Ø85 - Ø87 | 8W CC 9W CV | 2W CC 2,5W CV | - | - | - | - | - |
| Ø97 | - | - | 8W CC - 9W CV 8W RGBW | 8W CC 9W CV | 8W CC 9W CV | 8W CC 9W CV | 2W CC 2,5W CV |
| Ø125 - Ø127 | - | 4W CC 4,5W CV | - | - | - | - | - |
| Ø138 | - | - | 12W CC 13W CV | 12W CC 13W CV | 12W CC 13W CV | - | 4W CC 5W CV |
| Accessories | - | - | HC DL | HC | - | - | - |
| Finish | Steel Alu | Steel Alu | Steel Alu | Steel Alu Brass Alu | Steel Alu | Steel Alu | Steel Alu |
| CRI 80 | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K |
| Optic | E.W.Flood | General | Spot Flood Wide Flood General Elliptic | Spot Flood Wide Flood | Asymm. | E.W.Flood | General |

Vast range

Orma is a complete recess-mounted family with compact sizes, and sturdy, reliable materials with high grades of protection: temporary IK10 and IP68, ideal for tight installation spaces.

In addition to the embossed steel flange, the range is enriched by the new Brass finish. The recess-mounted steel flange is completed by the brand new version with an all-glass front flush with the floor and a path-marker with concentric optics.

The swinging versions can also be easily and quickly directed using a flat screwdriver on the specific screw, without having to open the lamp body and consequently taking the risk of compromising the waterproof seal. Orma was conceived with a unique application versatility which provides the designer with a vast range of possible shapes, finish and optics combinations. Flush, all-glass or in metal, Orma can adapt to any setting, even the most unusual one, thanks to the possibility of choosing from no less than 8 diameters and an innovative square-shaped flange. On a technical lighting level, new optics packages are introduced: Spot, Flood, Wide Flood, Extra Wide Flood, General, Elliptic, asymmetrical swing with Half Moon optics.






Blade Optics

The Blade optics let you light windows, arches and architraves, emphasising the architecture and its details. The entirely recess-mounted structure lets the window open and close without interference.


The light beam is very narrow laterally and then opens up to almost 180° at the front, enhancing the inner face of the openings without glare or light pollution.

Pag. 839

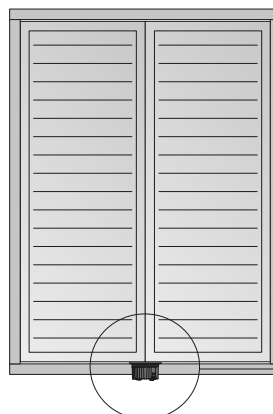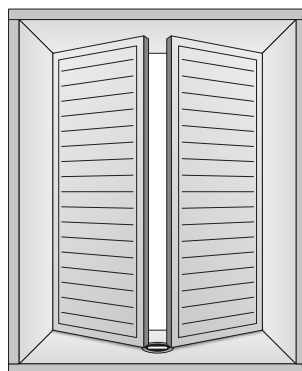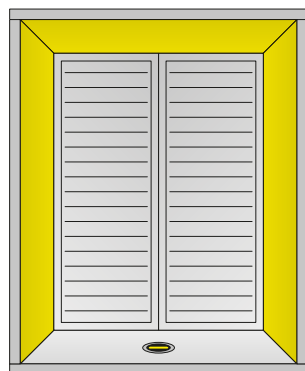

Concentric Optics


An exclusive design, recess-mounted path marker, flush with the pavement, it is capable of creating beautiful effects and giving the paths correct directionality with a sturdy structure capable of withstanding traffic weighing up to 2000 kg. The family includes four diameters: 42 mm, 56 mm, 87 mm, 127mm and 5 power versions: 1 W, 1,5 W, 2 W, 2,5 W, 4 W, 5 W. A diverse and vast range available to professionals and their creativity.

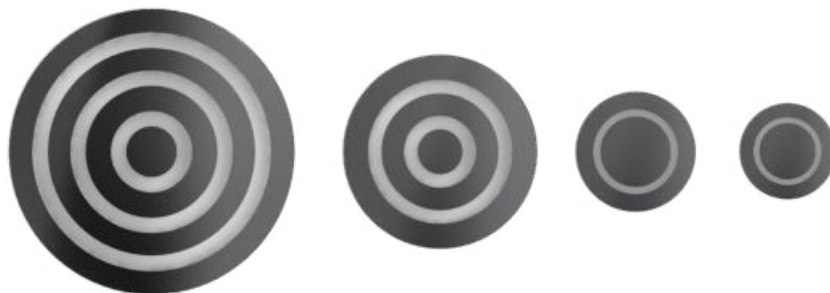


Half Moon Optics

Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Moon optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.



Pag. 527

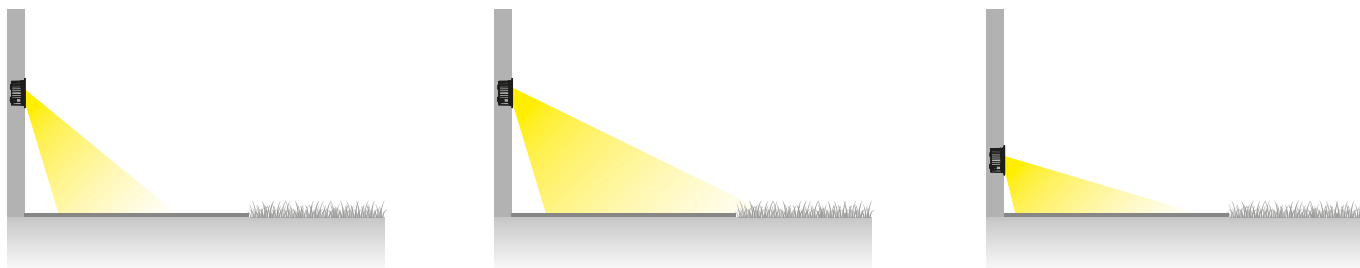

Thanks to the tilting system built into the optics compartment, Orma Half Moon is able to adapt to different installation heights, defining the diffusion of the light up the 3 metres away from the source.

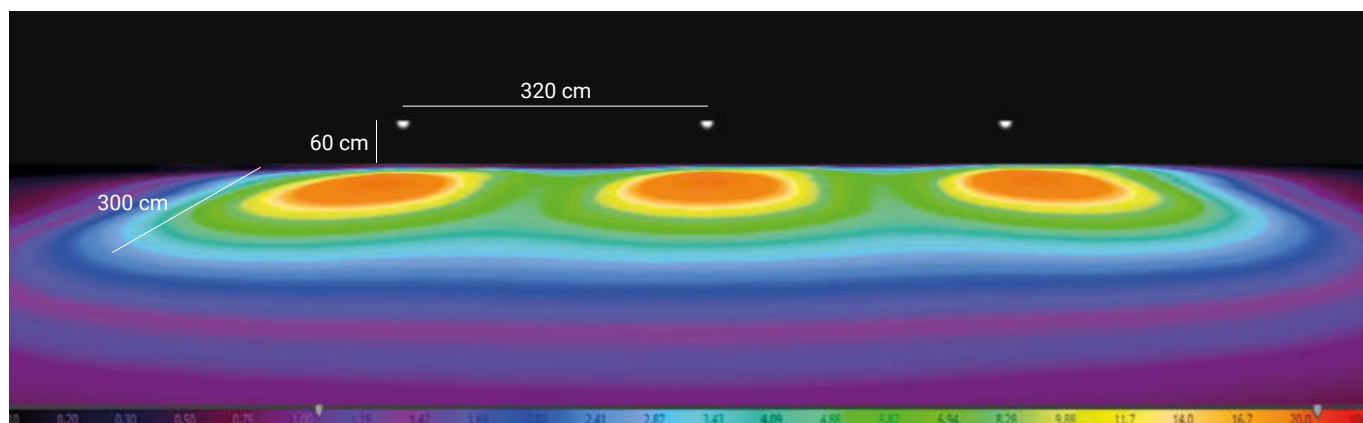

Orma_F | Up-Light | powerLED




| C.C. 1W DC - 350mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|-------------------------|
| Glass Alu 82697 | M 2700 | 136 - 71 | 20 Flood (26°) |
| | W 3000 | 145 - 75 | 35 W.Flood (45°) |
| | N 4000 | 155 - 81 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 610/611

Orma_F | Up-Light | powerLED




| C.V. 1,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|-------------------------|
| Glass Alu 82698 | M 2700 | 136 - 71 | 20 Flood (26°) |
| | W 3000 | 145 - 75 | 35 W.Flood (45°) |
| | N 4000 | 155 - 81 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|--|---|--|--|---|
| ON/OFF 1 - 9 art. p 80 x 1100 x h 31 | ON/OFF 1 - 15 art. p 92 x 1117 x h 38 | ON/OFF 1 - 30 art. p 115 x 1140 x h 50 | 0/1-10V 1 - 98 art. p 150 x 160 x h 35 | DALI 1 - 78 art. p 191 x 163 x h 38 |

Recessed casing Pag. 610/611

Orma_F | Up-Light | powerLED



| C.C. 4W DC - 350mA | Cct | lm S - D | Optic |
|------------------------------|---------------|-----------|-------------------------|
| Glass Alu 82657 | M 2700 | 490 - 287 | 15 Spot (16°) |
| C.C. 4W DC - 350mA HC | W 3000 | 490 - 287 | 30 Flood (30°) |
| Glass Alu 82658 | N 4000 | 529 - 309 | 60 W.Flood (55°) |
| C.C. 4W DC - 350mA DL | | | |
| Glass Alu 82659 | | | |

Electronics

| 89421 | 99183 | 83100 |
|---------------------------------------|--|--|
| ON/OFF 1 art. p 65 x 174 x h 27 | ON/OFF 2 - 3 art. p 80 x 1100 x h 31 | DALI 1 - 4 art. p 54 x 1121 x h 26 |


| C.V. 5W DC - 24 V DC | Cct | lm S - D | Optic |
|--------------------------------|---------------|-----------|-------------------------|
| Glass Alu 82660 | M 2700 | 490 - 287 | 15 Spot (16°) |
| C.V. 5W DC - 24 V DC HC | W 3000 | 490 - 287 | 30 Flood (30°) |
| Glass Alu 82661 | N 4000 | 529 - 309 | 60 W.Flood (55°) |
| C.V. 5W DC - 24 V DC DL | | | |
| Glass Alu 82662 | | | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|--|--|---|--|---|
| ON/OFF 1 - 2 art. p 80 x 1100 x h 31 | ON/OFF 1 - 4 art. p 92 x 1117 x h 38 | ON/OFF 1 - 9 art. p 115 x 1140 x h 50 | 0/1-10V 1 - 29 art. p 150 x 160 x h 35 | DALI 1 - 23 art. p 191 x 163 x h 38 |

Recessed casing Pag. 610/611

Orma_F | Up-Light | ArrayLED



| C.C. 8W DC - 220mA | Cct | Im S - D | Optic |
|------------------------------|---------------|------------|-------------------------|
| Glass Alu 82669 | M 2700 | 1088 - 689 | 15 Spot (17°) |
| C.C. 8W DC - 220mA HC | W 3000 | 1088 - 718 | 30 Flood (30°) |
| Glass Alu 82670 | N 4000 | 1173 - 758 | 60 W.Flood (60°) |
| C.C. 8W DC - 220mA DL | | | |
| Glass Alu 82671 | | | |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 9W DC - 24 V DC | Cct | Im S - D | Optic |
|--------------------------------|---------------|------------|-------------------------|
| Glass Alu 82672 | M 2700 | 1209 - 689 | 15 Spot (17°) |
| C.V. 9W DC - 24 V DC HC | W 3000 | 1209 - 718 | 30 Flood (30°) |
| Glass Alu 82673 | N 4000 | 1303 - 758 | 60 W.Flood (60°) |
| C.V. 9W DC - 24 V DC DL | | | |
| Glass Alu 82674 | | | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_F | Up-Light | ArrayLED



| C.C. 12W - 350mA | Cct | Im S - D | Optic |
|----------------------------|---------------|-------------|-------------------------|
| Glass Alu 82683 | M 2700 | 1724 - 1365 | 15 Spot (12°) |
| C.C. 12W - 350mA HC | W 3000 | 1724 - 1365 | 30 Flood (31°) |
| Glass Alu 82684 | N 4000 | 1854 - 1466 | 60 W.Flood (57°) |
| C.C. 12W - 350mA DL | | | |
| Glass Alu 82685 | | | |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |



| C.V. 13W DC - 24 V DC | Cct | Im S - D | Optic |
|---------------------------------|---------------|-------------|-------------------------|
| Glass Alu 82686 | M 2700 | 1724 - 1365 | 15 Spot (12°) |
| C.V. 13W DC - 24 V DC HC | W 3000 | 1724 - 1365 | 30 Flood (31°) |
| Glass Alu 82687 | N 4000 | 1854 - 1466 | 60 W.Flood (57°) |
| C.V. 13W DC - 24 V DC DL | | | |
| Glass Alu 82688 | | | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FJ | Up-Light | powerLED



| C.C. 4W DC - 350mA | Cct | lm S - D | Optic |
|-------------------------|---------------|-----------|-------------------------|
| Glass /Alu 82663 | M 2700 | 490 - 287 | 15 Spot (16°) |
| | W 3000 | 490 - 287 | 30 Flood (30°) |
| | N 4000 | 529 - 309 | 60 W.Flood (55°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |


| C.V. 5W DC - 24 V DC | Cct | lm S - D | Optic |
|-------------------------|---------------|-----------|-------------------------|
| Glass /Alu 82664 | M 2700 | 490 - 287 | 15 Spot (16°) |
| | W 3000 | 490 - 287 | 30 Flood (30°) |
| | N 4000 | 529 - 309 | 60 W.Flood (55°) |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FJ | Up-Light | ArrayLED



| C.C. 8W DC - 220mA | Cct | lm S - D | Optic |
|------------------------------|---------------|------------|-------------------------|
| Glass /Alu 82675 | M 2700 | 1088 - 689 | 15 Spot (17°) |
| C.C. 8W DC - 220mA HC | W 3000 | 1088 - 718 | 30 Flood (30°) |
| Glass /Alu 82676 | N 4000 | 1173 - 758 | 60 W.Flood (60°) |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 9W DC - 24 V DC | Cct | lm S - D | Optic |
|--------------------------------|---------------|------------|-------------------------|
| Glass /Alu 82677 | M 2700 | 1209 - 689 | 15 Spot (17°) |
| C.V. 9W DC - 24 V DC HC | W 3000 | 1209 - 718 | 30 Flood (30°) |
| Glass /Alu 82678 | N 4000 | 1303 - 758 | 60 W.Flood (60°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FJ | Up-Light | ArrayLED



| C.C. 12W DC - 350mA | Cct | Im S - D | Optic |
|-------------------------------|---------------|-------------|-------------------------|
| Glass /Alu 82689 | M 2700 | 1724 - 1202 | 15 Spot (22°) |
| C.C. 12W DC - 350mA HC | W 3000 | 1724 - 1202 | 30 Flood (30°) |
| Glass /Alu 82690 | N 4000 | 1854 - 1292 | 60 W.Flood (58°) |

Electronics

| | |
|---|---------------------------------------|
| 99183 | 83100 |
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 13W DC - 24 V DC | Cct | Im S - D | Optic |
|---------------------------------|---------------|-------------|-------------------------|
| Glass /Alu 82691 | M 2700 | 1724 - 1202 | 15 Spot (22°) |
| C.V. 13W DC - 24 V DC HC | W 3000 | 1724 - 1202 | 30 Flood (30°) |
| Glass /Alu 82692 | N 4000 | 1854 - 1292 | 60 W.Flood (58°) |

Electronics

| | | | | |
|---|--|--|---|---|
| 89179 | 89359 | 99331 | 99332 | 99722 |
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FL | Up-Light | powerLED




| C.C. 1W DC - 350mA | Cct | Im S - D | Optic |
|--------------------------|---------------|----------|---------------------|
| Glass / Alu 82699 | M 2700 | 136 - 12 | 00 General - |
| | W 3000 | 145 - 13 | |
| | N 4000 | 155 - 14 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 610/611

Orma_FL | Up-Light | powerLED




| C.V. 1,5W DC - 24 V DC | Cct | Im S - D | Optic |
|--------------------------|---------------|----------|---------------------|
| Glass / Alu 82700 | M 2700 | 136 - 12 | 00 General - |
| | W 3000 | 145 - 13 | |
| | N 4000 | 155 - 14 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|---|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 60 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FL | Path-Marker | powerLED



| C.C. 1W DC - 350mA | Cct | Im S - D | Optic |
|--------------------------|---------------|----------|---------------------|
| Glass / Alu 82667 | M 2700 | 136 - 8 | 00 General - |
| | W 3000 | 145 - 8 | |
| | N 4000 | 155 - 8 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


| C.V. 1,5W DC - 24 V DC | Cct | Im S - D | Optic |
|--------------------------|---------------|----------|---------------------|
| Glass / Alu 82668 | M 2700 | 136 - 8 | 00 General - |
| | W 3000 | 145 - 8 | |
| | N 4000 | 155 - 8 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|---|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 60 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FL | Path-Marker | powerLED



| C.C. 2W DC- 630mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Glass Alu 82681 | M 2700 | 249 - 14 | 00 General - |
| | W 3000 | 266 - 15 | |
| | N 4000 | 284 - 15 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|---|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 174 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


| C.V. 2,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Glass Alu 82682 | M 2700 | 249 - 14 | 00 General - |
| | W 3000 | 266 - 15 | |
| | N 4000 | 284 - 15 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|--|---|
| ON/OFF 1 - 5 art. p 80 x l 100 x h 31 | ON/OFF 1 - 9 art. p 92 x l 117 x h 38 | ON/OFF 1 - 18 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 56 art. p 150 x l 160 x h 35 | DALI 1 - 45 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611

Orma_FL | Path-Marker | powerLED



| C.C. 4W DC - 350mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Glass Alu 82695 | M 2700 | 490 - 50 | 00 General - |
| | W 3000 | 490 - 50 | |
| | N 4000 | 529 - 54 | |

Electronics

| 89421 | 99183 | 83100 |
|---|---|---|
| ON/OFF 1 art. p 65 x l 174 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |



| C.V. 5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Glass Alu 82696 | M 2700 | 490 - 50 | 00 General - |
| | W 3000 | 490 - 50 | |
| | N 4000 | 529 - 54 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 160 x h 35 | DALI 1 - 23 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611

Orma_FO | Drive-over spotlights | 24 V DC | topLED 1,5 W DC



| | Cct | Im S - D | Optic |
|-------------|--------|-------------|--------------|
| White 95474 | M 2700 | 54 - On req | 00 General - |
| Black 95475 | W 3000 | 60 - On req | |
| Grey 95476 | N 4000 | 63 - On req | |



Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|--|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 160 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

RTG 95474W00 / 95475W00

Recessed casing Pag. 610/611

Orma_FO | Up-Light | powerLED



| C.C. 2W DC - 630mA | Cct | Im S - D | Optic |
|--------------------|--------|----------|--------------|
| Black 82679 | M 2700 | 249 - 12 | 00 General - |
| | W 3000 | 266 - 13 | |
| | N 4000 | 284 - 13 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

| C.V. 2,5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|--------|----------|--------------|
| Black 82680 | M 2700 | 249 - 12 | 00 General - |
| | W 3000 | 266 - 13 | |
| | N 4000 | 284 - 13 | |



Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|--|--|
| ON/OFF 1 - 5 art. p 80 x l 100 x h 31 | ON/OFF 1 - 9 art. p 92 x l 117 x h 38 | ON/OFF 1 - 18 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 56 art. p 150 x l 160 x h 35 | DALI 1 - 45 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

596

Orma_FO | Up-Light | powerLED



| C.C. 1W DC - 350mA | Cct | Im S - D | Optic |
|--------------------|--------|----------|--------------|
| Black 82665 | M 2700 | 136 - 6 | 00 General - |
| | W 3000 | 145 - 6 | |
| | N 4000 | 155 - 7 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |



| C.V. 1,5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|--------|----------|--------------|
| Black 82666 | M 2700 | 136 - 6 | 00 General - |
| | W 3000 | 145 - 6 | |
| | N 4000 | 155 - 7 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|--|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 160 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_FO | Up-Light | powerLED



| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|--------------------|--------|----------|--------------|
| Black 82693 | M 2700 | 490 - 34 | 00 General - |
| | W 3000 | 490 - 34 | |
| | N 4000 | 529 - 37 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |



| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|----------------------|--------|----------|--------------|
| Black 82694 | M 2700 | 490 - 34 | 00 General - |
| | W 3000 | 490 - 34 | |
| | N 4000 | 529 - 37 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 160 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611





| C.C. 4W DC - 350mA | | Cct | lm S - D | Optic |
|--------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81181 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (49°) |
| | | | | 25 Elliptic - |

| | | HC | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|-----------------------|-------|
| Steel/Alu | 81182 | M 2700 | 490 - 186 | 15 Spot (20°) | |
| | | W 3000 | 490 - 186 | 30 Flood (25°) | |
| | | N 4000 | 529 - 201 | 60 Flood (37°) | |

| | | DL | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|-------------------------|-------|
| Steel/Alu | 81183 | M 2700 | 490 - 193 | 15 Spot (22°) | |
| | | W 3000 | 490 - 193 | 30 Flood (30°) | |
| | | N 4000 | 529 - 208 | 60 W.Flood (55°) | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | | Cct | lm S - D | Optic |
|----------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81184 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (49°) |
| | | | | 25 Elliptic - |

| | | HC | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|-----------------------|-------|
| Steel/Alu | 81185 | M 2700 | 490 - 186 | 15 Spot (20°) | |
| | | W 3000 | 490 - 186 | 30 Flood (25°) | |
| | | N 4000 | 529 - 201 | 60 Flood (37°) | |



| | | DL | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|-------------------------|-------|
| Steel/Alu | 81186 | M 2700 | 490 - 193 | 15 Spot (22°) | |
| | | W 3000 | 490 - 193 | 30 Flood (30°) | |
| | | N 4000 | 529 - 208 | 60 W.Flood (55°) | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

RTG 81181W15 / 81181W30



| C.C. - 8W DC - 220 mA | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|------------|-------------------------|
| Steel/Alu | 81187 | M 2700 | 1088 - 858 | 15 Spot (15°) |
| | | W 3000 | 1088 - 894 | 30 Flood (31°) |
| | | N 4000 | 1173 - 944 | 60 W.Flood (61°) |

| | | HC | Cct | lm S - D | Optic |
|-----------|--------------|---------------|------------|-------------------------|-------|
| Steel/Alu | 81188 | M 2700 | 1088 - 619 | 15 Spot (15°) | |
| | | W 3000 | 1088 - 645 | 30 Flood (27°) | |
| | | N 4000 | 1173 - 681 | 60 W.Flood (49°) | |

| | | DL | Cct | lm S - D | Optic |
|-----------|--------------|---------------|------------|-------------------------|-------|
| Steel/Alu | 81189 | M 2700 | 1088 - 575 | 15 Spot (16°) | |
| | | W 3000 | 1088 - 599 | 30 Flood (29°) | |
| | | N 4000 | 1173 - 633 | 60 W.Flood (53°) | |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

| C.V. 9W DC - 24 V DC | | Cct | lm S - D | Optic |
|----------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 81190 | M 2700 | 1209 - 954 | 15 Spot (15°) |
| | | W 3000 | 1209 - 996 | 30 Flood (31°) |
| | | N 4000 | 1303 - 1052 | 60 W.Flood (61°) |

| | | HC | Cct | lm S - D | Optic |
|-----------|--------------|---------------|------------|-------------------------|-------|
| Steel/Alu | 81191 | M 2700 | 1209 - 687 | 15 Spot (15°) | |
| | | W 3000 | 1209 - 716 | 30 Flood (27°) | |
| | | N 4000 | 1303 - 756 | 60 W.Flood (49°) | |

| | | DL | Cct | lm S - D | Optic |
|-----------|--------------|---------------|------------|-------------------------|-------|
| Steel/Alu | 81192 | M 2700 | 1209 - 639 | 15 Spot (16°) | |
| | | W 3000 | 1209 - 666 | 30 Flood (29°) | |
| | | N 4000 | 1303 - 703 | 60 W.Flood (53°) | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

| RGBW - 8W DC - 630 mA | | Cct | Optic |
|-----------------------|--------------|-----------------------------|---------------------|
| Steel/Alu | 81322 | Q RGBW natural white | 06 N.Spot - |
| | | V RGBW warm white | 15 Spot - |
| | | | 45 W.Flood - |
| | | | 00 General - |



Electronics

| 99743+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Recessed casing Pag. 610/611

RTG 81187W30

Orma_A | Up-Light | arrayLED



C.C. 12W DC - 350mA

| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81193 | M 2700 | 1724 - 1379 | 15 Spot (14°) |
| | W 3000 | 1724 - 1379 | 30 Flood (31°) |
| | N 4000 | 1854 - 1485 | 60 W.Flood (61°) |

HC

| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81194 | M 2700 | 1724 - 981 | 15 Spot (14°) |
| | W 3000 | 1724 - 981 | 30 Flood (28°) |
| | N 4000 | 1854 - 1055 | 60 W.Flood (49°) |

DL

| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81195 | M 2700 | 1724 - 1094 | 15 Spot (14°) |
| | W 3000 | 1724 - 1094 | 30 Flood (30°) |
| | N 4000 | 1854 - 1178 | 60 W.Flood (52°) |

Electronics

99183 83100

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

C.V. 13W DC - 24 V DC

| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81196 | M 2700 | 1724 - 1379 | 15 Spot (14°) |
| | W 3000 | 1724 - 1379 | 30 Flood (31°) |
| | N 4000 | 1854 - 1485 | 60 W.Flood (60°) |

HC

| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81197 | M 2700 | 1724 - 981 | 15 Spot (14°) |
| | W 3000 | 1724 - 981 | 30 Flood (28°) |
| | N 4000 | 1854 - 1055 | 60 W.Flood (49°) |

DL

| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81198 | M 2700 | 1724 - 1094 | 15 Spot (14°) |
| | W 3000 | 1724 - 1094 | 30 Flood (30°) |
| | N 4000 | 1854 - 1178 | 60 W.Flood (52°) |


Electronics

89179 89359 99331 99332 99722

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1 - 3 art. 1 - 10 art. 1 - 10 art. 1 - 8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 60 x h 35 p 150 x l 60 x h 35 p 191 x l 63 x h 38

Recessed casing Pag. 610/611

Orma_AJ | Up-Light | powerLED



| C.C. 4W DC - 350mA | | Cct | Im S - D | Optic |
|--------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81205 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (49°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |


| C.V. 5W DC - 24 V DC | | Cct | Im S - D | Optic |
|----------------------|--------------|---------------|-----------|-------------------------|
| Steel/Alu | 81206 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | | W 3000 | 490 - 270 | 30 Flood (29°) |
| | | N 4000 | 529 - 292 | 60 W.Flood (49°) |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_AJ | Up-Light | arrayLED



| C.C. - 8W DC - 220 mA | | Cct | Im S - D | Optic |
|-----------------------|--------------|---------------|------------|-------------------------|
| Steel/Alu | 81207 | M 2700 | 1088 - 858 | 15 Spot (15°) |
| | | W 3000 | 1088 - 894 | 30 Flood (32°) |
| | | N 4000 | 1173 - 944 | 60 W.Flood (61°) |

| C.C. - 8W DC - 220 mA HC | | Cct | Im S - D | Optic |
|--------------------------|--------------|---------------|------------|-------------------------|
| Steel/Alu | 82460 | M 2700 | 1088 - 619 | 15 Spot (15°) |
| | | W 3000 | 1088 - 645 | 30 Flood (27°) |
| | | N 4000 | 1173 - 681 | 60 W.Flood (49°) |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

| C.V. 9W DC - 24 V DC | | Cct | Im S - D | Optic |
|----------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 81208 | M 2700 | 1209 - 954 | 15 Spot (15°) |
| | | W 3000 | 1209 - 996 | 30 Flood (32°) |
| | | N 4000 | 1303 - 1052 | 60 W.Flood (61°) |


| C.V. 9W DC - 24 V DC HC | | Cct | Im S - D | Optic |
|-------------------------|--------------|---------------|------------|-------------------------|
| Steel/Alu | 82461 | M 2700 | 1209 - 687 | 15 Spot (15°) |
| | | W 3000 | 1209 - 716 | 30 Flood (32°) |
| | | N 4000 | 1303 - 756 | 60 W.Flood (61°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_AJ | Up-Light | arrayLED



| C.C. - 12W DC - 350 mA | | Cct | Im S - D | Optic |
|------------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 81209 | M 2700 | 1724 - 1317 | 15 Spot (22°) |
| | | W 3000 | 1724 - 1317 | 30 Flood (34°) |
| | | N 4000 | 1854 - 1417 | 60 W.Flood (61°) |

| C.C. - 12W DC - 350 mA ^{HC} | | Cct | Im S - D | Optic |
|--------------------------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 82462 | M 2700 | 1724 - 935 | 15 Spot (20°) |
| | | W 3000 | 1724 - 935 | 30 Flood (27°) |
| | | N 4000 | 1854 - 1005 | 60 W.Flood (48°) |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

| C.V. 13W DC - 24 V DC | | Cct | Im S - D | Optic |
|-----------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 81210 | M 2700 | 1724 - 1317 | 15 Spot (22°) |
| | | W 3000 | 1724 - 1317 | 30 Flood (34°) |
| | | N 4000 | 1854 - 1417 | 60 W.Flood (61°) |



| C.V. 13W DC - 24 V DC ^{HC} | | Cct | Im S - D | Optic |
|-------------------------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 82463 | M 2700 | 1724 - 935 | 15 Spot (20°) |
| | | W 3000 | 1724 - 935 | 30 Flood (27°) |
| | | N 4000 | 1854 - 1005 | 60 W.Flood (48°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_AL | Path-Marker | powerLED



| C.C. 1W DC - 350mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81217 | M 2700 | 136 - 16 | 00 General - |
| | W 3000 | 145 - 18 | |
| | N 4000 | 155 - 19 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


| C.V. 1,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81218 | M 2700 | 136 - 16 | 00 General - |
| | W 3000 | 145 - 18 | |
| | N 4000 | 155 - 19 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|---|--|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 60 x h 35 | DALI 1 - 78 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_AL | Path-Marker | powerLED



| C.C. 2W DC - 630 mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81219 | M 2700 | 249 - 24 | 00 General - |
| | W 3000 | 266 - 26 | |
| | N 4000 | 284 - 28 | |

Electronics


| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

| C.V. 2,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81220 | M 2700 | 249 - 24 | 00 General - |
| | W 3000 | 266 - 26 | |
| | N 4000 | 284 - 28 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|---|--|
| ON/OFF 1 - 5 art. p 80 x l 100 x h 31 | ON/OFF 1 - 9 art. p 92 x l 117 x h 38 | ON/OFF 1 - 18 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 56 art. p 150 x l 60 x h 35 | DALI 1 - 45 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611



| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81221 | M 2700 | 490 - 89 | 00 General - |
| | W 3000 | 490 - 89 | |
| | N 4000 | 529 - 96 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |




| C.V. 4,5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81222 | M 2700 | 490 - 89 | 00 General - |
| | W 3000 | 490 - 89 | |
| | N 4000 | 529 - 96 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 160 x h 35 | DALI 1 - 23 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611

Orma_I | Up-Light | powerLED



| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80582 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | W 3000 | 490 - 270 | 30 Flood (29°) |
| | N 4000 | 529 - 292 | 60 W.Flood (49°) |
| | | | 25 Elliptic - |

| C.C. 4W DC - 350mA ^{HC} | Cct | Im S - D | Optic |
|----------------------------------|---------------|-----------|-----------------------|
| Steel/Alu 80583 | M 2700 | 490 - 186 | 15 Spot (20°) |
| | W 3000 | 490 - 186 | 30 Flood (25°) |
| | N 4000 | 529 - 201 | 60 Flood (37°) |

| C.C. 4W DC - 350mA ^{DL} | Cct | Im S - D | Optic |
|----------------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80584 | M 2700 | 490 - 193 | 15 Spot (22°) |
| | W 3000 | 490 - 193 | 30 Flood (30°) |
| | N 4000 | 529 - 208 | 60 W.Flood (55°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80585 | M 2700 | 490 - 270 | 15 Spot (22°) |
| | W 3000 | 490 - 270 | 30 Flood (29°) |
| | N 4000 | 529 - 292 | 60 W.Flood (49°) |
| | | | 25 Elliptic - |

| C.V. 5W DC - 24 V DC ^{HC} | Cct | Im S - D | Optic |
|------------------------------------|---------------|-----------|-----------------------|
| Steel/Alu 80586 | M 2700 | 490 - 186 | 15 Spot (20°) |
| | W 3000 | 490 - 186 | 30 Flood (25°) |
| | N 4000 | 529 - 201 | 60 Flood (37°) |

| C.V. 5W DC - 24 V DC ^{DL} | Cct | Im S - D | Optic |
|------------------------------------|---------------|-----------|-------------------------|
| Steel/Alu 80587 | M 2700 | 490 - 193 | 15 Spot (22°) |
| | W 3000 | 490 - 193 | 30 Flood (30°) |
| | N 4000 | 529 - 208 | 60 W.Flood (55°) |



Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 160 x h 35 | DALI 1 - 23 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611

RTG 80582W30

Orma_I | Up-Light | arrayLED



| C.C. - 8W DC - 220 mA | Cct | Im S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 80588 | M 2700 | 1088 - 858 | 15 Spot (15°) |
| | W 3000 | 1088 - 894 | 30 Flood (32°) |
| | N 4000 | 1173 - 944 | 60 W.Flood (61°) |

| C.C. - 8W DC - 220 mA ^{HC} | Cct | Im S - D | Optic |
|-------------------------------------|---------------|------------|-------------------------|
| Steel/Alu 80589 | M 2700 | 1088 - 619 | 15 Spot (15°) |
| | W 3000 | 1088 - 645 | 30 Flood (27°) |
| | N 4000 | 1173 - 681 | 60 W.Flood (49°) |

| C.C. - 8W DC - 220 mA ^{DL} | Cct | Im S - D | Optic |
|-------------------------------------|---------------|------------|-------------------------|
| Steel/Alu 80590 | M 2700 | 1088 - 575 | 15 Spot (16°) |
| | W 3000 | 1088 - 599 | 30 Flood (29°) |
| | N 4000 | 1173 - 633 | 60 W.Flood (53°) |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

| C.V. 9W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81172 | M 2700 | 1209 - 954 | 15 Spot (15°) |
| | W 3000 | 1209 - 996 | 30 Flood (32°) |
| | N 4000 | 1303 - 1052 | 60 W.Flood (61°) |

| C.V. 9W DC - 24 V DC ^{HC} | Cct | Im S - D | Optic |
|------------------------------------|---------------|------------|-------------------------|
| Steel/Alu 81173 | M 2700 | 1209 - 687 | 15 Spot (15°) |
| | W 3000 | 1209 - 716 | 30 Flood (27°) |
| | N 4000 | 1303 - 756 | 60 W.Flood (49°) |

| C.V. 9W DC - 24 V DC ^{DL} | Cct | Im S - D | Optic |
|------------------------------------|---------------|------------|-------------------------|
| Steel/Alu 81174 | M 2700 | 1209 - 639 | 15 Spot (16°) |
| | W 3000 | 1209 - 666 | 30 Flood (29°) |
| | N 4000 | 1303 - 703 | 60 W.Flood (53°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 160 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 160 x h 35 | DALI 1 - 12 art. p 191 x l 163 x h 38 |

| RGBW - 8W DC - 630 mA | Cct | Optic |
|------------------------|-----------------------------|---------------------|
| Steel/Alu 81321 | Q RGBW natural white | 06 N.Spot - |
| | V RGBW warm white | 15 Spot - |
| | | 45 W.Flood - |
| | | 00 General - |


Electronics

| 99743+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Recessed casing Pag. 610/611

RTG 80588W30 / 81321V45

Orma_I | Up-Light | arrayLED



| C.C. 12W DC - 350mA | | Cct | lm S - D | Optic | |
|---------------------|--------------|---------------|-------------|-------------------|-------|
| Steel/Alu | 81175 | M 2700 | 1724 - 1379 | 15 Spot | (14°) |
| | | W 3000 | 1724 - 1379 | 30 Flood | (31°) |
| | | N 4000 | 1854 - 1485 | 60 W.Flood | (60°) |

| C.C. 12W DC - 350mA HC | | Cct | lm S - D | Optic | |
|-------------------------------|--------------|---------------|-------------|-------------------|-------|
| Steel/Alu | 81176 | M 2700 | 1724 - 981 | 15 Spot | (14°) |
| | | W 3000 | 1724 - 981 | 30 Flood | (28°) |
| | | N 4000 | 1854 - 1055 | 60 W.Flood | (49°) |

| C.C. 12W DC - 350mA DL | | Cct | lm S - D | Optic | |
|-------------------------------|--------------|---------------|-------------|-------------------|-------|
| Steel/Alu | 81177 | M 2700 | 1724 - 1094 | 15 Spot | (14°) |
| | | W 3000 | 1724 - 1094 | 30 Flood | (30°) |
| | | N 4000 | 1854 - 1178 | 60 W.Flood | (52°) |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

| C.V. 13W DC - 24 V DC | | Cct | lm S - D | Optic | |
|-----------------------|--------------|---------------|-------------|-------------------|-------|
| Steel/Alu | 81178 | M 2700 | 1724 - 1379 | 15 Spot | (14°) |
| | | W 3000 | 1724 - 1379 | 30 Flood | (31°) |
| | | N 4000 | 1854 - 1485 | 60 W.Flood | (60°) |

| C.V. 13W DC - 24 V DC HC | | Cct | lm S - D | Optic | |
|---------------------------------|--------------|---------------|-------------|-------------------|-------|
| Steel/Alu | 81179 | M 2700 | 1724 - 981 | 15 Spot | (14°) |
| | | W 3000 | 1724 - 981 | 30 Flood | (28°) |
| | | N 4000 | 1854 - 1055 | 60 W.Flood | (49°) |


| C.V. 13W DC - 24 V DC DL | | Cct | lm S - D | Optic | |
|---------------------------------|--------------|---------------|-------------|-------------------|-------|
| Steel/Alu | 81180 | M 2700 | 1724 - 1094 | 15 Spot | (14°) |
| | | W 3000 | 1724 - 1094 | 30 Flood | (30°) |
| | | N 4000 | 1854 - 1178 | 60 W.Flood | (52°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_IJ | Up-Light | powerLED



| C.C. 4W DC - 350mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 81199 | M 2700 | 490 - 270 | 15 Spot (22°) |
| Brass Alu 82521 | W 3000 | 490 - 270 | 30 Flood (29°) |
| | N 4000 | 529 - 292 | 60 W.Flood (49°) |

Electronics


| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel Alu 81200 | M 2700 | 490 - 270 | 15 Spot (22°) |
| Brass Alu 82522 | W 3000 | 490 - 270 | 30 Flood (29°) |
| | N 4000 | 529 - 292 | 60 W.Flood (49°) |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|--|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 160 x h 35 | DALI 1 - 23 art. p 191 x l 163 x h 38 |


Recessed casing Pag. 610/611

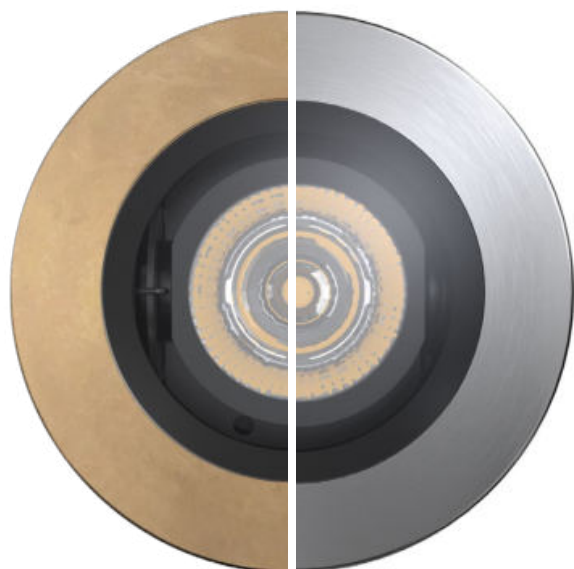

Orma_IJ Brass

Orma_IJ Steel

Orma_IJ | Up-Light | arrayLED



| C.C. - 8W DC - 220mA | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel Alu 81201 | M 2700 | 1088 - 858 | 15 Spot (15°) |
| Brass Alu 82523 | W 3000 | 1088 - 894 | 30 Flood (32°) |
| | N 4000 | 1173 - 944 | 60 W.Flood (61°) |

| C.C. - 8W DC - 220mA HC | Cct | lm S - D | Optic |
|-------------------------|---------------|------------|-------------------------|
| Steel Alu 82456 | M 2700 | 1088 - 619 | 15 Spot (15°) |
| Brass Alu 82934 | W 3000 | 1088 - 645 | 30 Flood (27°) |
| | N 4000 | 1173 - 681 | 60 W.Flood (49°) |

Electronics

| 99342 | 83154 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |


| C.V. 9W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel Alu 81202 | M 2700 | 1209 - 954 | 15 Spot (15°) |
| Brass Alu 82524 | W 3000 | 1209 - 996 | 30 Flood (32°) |
| | N 4000 | 1303 - 1052 | 60 W.Flood (61°) |

| C.V. 9W DC - 24 V DC HC | Cct | lm S - D | Optic |
|-------------------------|---------------|------------|-------------------------|
| Steel Alu 82457 | M 2700 | 1209 - 687 | 15 Spot (15°) |
| Brass Alu 82935 | W 3000 | 1209 - 716 | 30 Flood (32°) |
| | N 4000 | 1303 - 756 | 60 W.Flood (61°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 5 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 160 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 160 x h 35 | DALI 1 - 12 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611



| C.C. - 12W DC - 350mA | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 81203 | M 2700 | 1724 - 1317 | 15 Spot (22°) |
| Brass/Alu | 82525 | W 3000 | 1724 - 1317 | 30 Flood (34°) |
| | | N 4000 | 1854 - 1417 | 60 W.Flood (61°) |

| C.C. - 12W DC - 350mA ^{HC} | | Cct | lm S - D | Optic |
|-------------------------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 82458 | M 2700 | 1724 - 935 | 15 Spot (20°) |
| | | W 3000 | 1724 - 935 | 30 Flood (27°) |
| | | N 4000 | 1854 - 1005 | 60 W.Flood (48°) |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

| C.V. 13W DC - 24 V DC | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 81204 | M 2700 | 1724 - 1317 | 15 Spot (22°) |
| Brass/Alu | 82526 | W 3000 | 1724 - 1317 | 30 Flood (34°) |
| | | N 4000 | 1854 - 1417 | 60 W.Flood (61°) |



| C.V. 13W DC - 24 V DC ^{HC} | | Cct | lm S - D | Optic |
|-------------------------------------|--------------|---------------|-------------|-------------------------|
| Steel/Alu | 82459 | M 2700 | 1724 - 935 | 15 Spot (20°) |
| | | W 3000 | 1724 - 935 | 30 Flood (27°) |
| | | N 4000 | 1854 - 1005 | 60 W.Flood (48°) |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 10 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 10 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Orma_IL | Path-Marker | powerLED



| C.C. 1W DC - 350mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81211 | M 2700 | 136 - 16 | 00 General - |
| | W 3000 | 145 - 18 | |
| | N 4000 | 155 - 19 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|--|
| ON/OFF 1 - 2 art. p 65 x l 174 x h 27 | ON/OFF 3 - 6 art. p 65 x l 174 x h 27 | ON/OFF 6 - 12 art. p 80 x l 1100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


| C.V. 1,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81212 | M 2700 | 136 - 16 | 00 General - |
| | W 3000 | 145 - 18 | |
| | N 4000 | 155 - 19 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 160 x h 35 | DALI 1 - 78 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611

Orma_IL | Path-Marker | powerLED



| C.C. 2W DC - 630mA | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81213 | M 2700 | 249 - 24 | 00 General - |
| | W 3000 | 266 - 26 | |
| | N 4000 | 284 - 28 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|---|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 174 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


| C.V. 2,5W DC - 24 V DC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81214 | M 2700 | 249 - 24 | 00 General - |
| | W 3000 | 266 - 26 | |
| | N 4000 | 284 - 28 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|--|---|
| ON/OFF 1 - 5 art. p 80 x l 100 x h 31 | ON/OFF 1 - 9 art. p 92 x l 117 x h 38 | ON/OFF 1 - 18 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 56 art. p 150 x l 160 x h 35 | DALI 1 - 45 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 610/611

Orma_IL | Path-Marker | powerLED



| C.C. 4W DC - 350mA | Cct | Im S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81215 | M 2700 | 490 - 89 | 00 General - |
| | W 3000 | 490 - 89 | |
| | N 4000 | 529 - 96 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

| C.V. 5W DC - 24 V DC | Cct | Im S - D | Optic |
|------------------------|---------------|----------|---------------------|
| Steel/Alu 81216 | M 2700 | 490 - 89 | 00 General - |
| | W 3000 | 490 - 89 | |
| | N 4000 | 529 - 96 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|--|---|--|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 9 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 29 art. p 150 x l 60 x h 35 | DALI 1 - 23 art. p 191 x l 63 x h 38 |

Recessed casing Pag. 610/611

Recessed casing

Orma A / AJ / AL / I / IJ / IL



| | description | type |
|--------------|------------------|------|
| 99650 | Recessed casings | PVC |

suitable for: Orma_A 4W - 5W / Orma_AJ 4W - 5W
Orma_AL 1W - 1,5W / Orma_I 4W - 5W
Orma_IJ 4W - 5W / Orma_IL 1W - 1,5W



| | description | type |
|--------------|------------------|------|
| 99651 | Recessed casings | PVC |

suitable for: Orma_A 8W - 9W / Orma_AJ 8W - 9W
Orma_AL 2W - 2,5W / Orma_I 8W - 9W / Orma_IJ 8W - 9W
Orma_IL 2W - 2,5W



| | description | type |
|--------------|------------------|------|
| 99652 | Recessed casings | PVC |

suitable for: Orma_A 12W - 13W / Orma_AJ 12W - 13W
Orma_AL 4W - 4,5W / Orma_I 12W - 13W
Orma_IJ 12W - 13W / Orma_IL 4W - 5W

Orma A / AJ / AL



| | description | type |
|--------------|------------------|------|
| 99560 | Recessed casings | PVC |

suitable for: Orma_A 4W - 5W / Orma_AJ 4W - 5W
Orma_AL 1W - 1,5W



| | description | type |
|--------------|------------------|------|
| 99563 | Recessed casings | PVC |

suitable for: Orma_A 8W - 9W / Orma_AJ 8W - 9W
Orma_AL 2W - 2,5W



| | description | type |
|--------------|------------------|------|
| 99564 | Recessed casings | PVC |

suitable for: Orma_A 12W - 13W / Orma_AJ 12W - 13W
Orma_AL 4W - 4,5W



| | description | type |
|--------------|------------------|------|
| 99855 | Recessed casings | PVC |

suitable for: Orma_A 4W - 5W / Orma_AJ 4W - 5W
Orma_AL 1W - 1,5W



| | description | type |
|--------------|------------------|------|
| 99856 | Recessed casings | PVC |


suitable for: Orma_A 8W - 9W / Orma_AJ 8W - 9W
Orma_AL 2W - 2,5W



| | description | type |
|--------------|------------------|------|
| 99857 | Recessed casings | PVC |

suitable for: Orma_A 12W - 13W / Orma_AJ 12W - 13W
Orma_AL 4W - 4,5W

Orma F / FJ / FL / FO



| | description | type |
|--------------|------------------|------|
| 99925 | Recessed casings | PVC |

suitable for: Orma_F 1W / Orma_FL 1,5W



| | description | type |
|--------------|------------------|------|
| 99922 | Recessed casings | PVC |

suitable for: Orma_F 4W - 5W / Orma_FJ 4W - 5W
Orma_FL 1W - 1,5W / Orma_FO 1W - 1,5W (Ø 56)




| | description | type |
|--------------|------------------|------|
| 99923 | Recessed casings | PVC |

suitable for: Orma_F 8W - 9W / Orma_FJ 8W - 9W
Orma_FL 2W - 2,5W - Orma_FO 2W - 2,5W



| | description | type |
|--------------|------------------|------|
| 99924 | Recessed casings | PVC |

suitable for: Orma_F 12W - 13W / Orma_FJ 12W - 13W
Orma_FL 4W - 5W / Orma_FO 4W - 5W



| | description | type |
|--------------|-----------------|------|
| 98292 | Recessed casing | PVC |


suitable for: Orma_FO 1,5W (Ø 42)




| | description | type |
|--------------|-----------------|------|
| 98291 | Recessed casing | |

suitable for: Orma_FO 1,5W (Ø 42)


Orma F / FJ / FL / FO



| | description | type |
|---|------------------|------|
| 83036 | Recessed casings | PVC |
| suitable for: Orma_F 1W / Orma_FL 1W | | |



| | description | type |
|---|------------------|------|
| 83037 | Recessed casings | PVC |
| suitable for: Orma_F 1,5W / Orma_FL 1,5W | | |



| | description | type |
|--|------------------|------|
| 83038 | Recessed casings | PVC |
| suitable for: Orma_F 4W - 5W / Orma_FJ 4W - 5W / Orma_FL 1W - 1,5W / Orma_FO 1W - 1,5W (Ø 56) | | |



| | description | type |
|--|------------------|------|
| 83039 | Recessed casings | PVC |
| suitable for: Orma_F 8W - 9W / Orma_FJ 8W - 9W / Orma_F 2W - 2,5W - Orma_FO 2W - 2,5W | | |




| | description | type |
|---|------------------|------|
| 83040 | Recessed casings | PVC |
| suitable for: Orma_F 12W - 13W / Orma_FJ 12W - 13W / Orma_FL 4W - 5W / Orma_FO 4W - 5W | | |



| | description | type |
|-----------------------------------|-------------|------|
| 83235 | Suction cup | PVC |
| suitable for: for all Orma | | |


INSTALLATION

Installation in a few quick steps (**Recessed casing 99563 + Orma AJ 81207W15**)

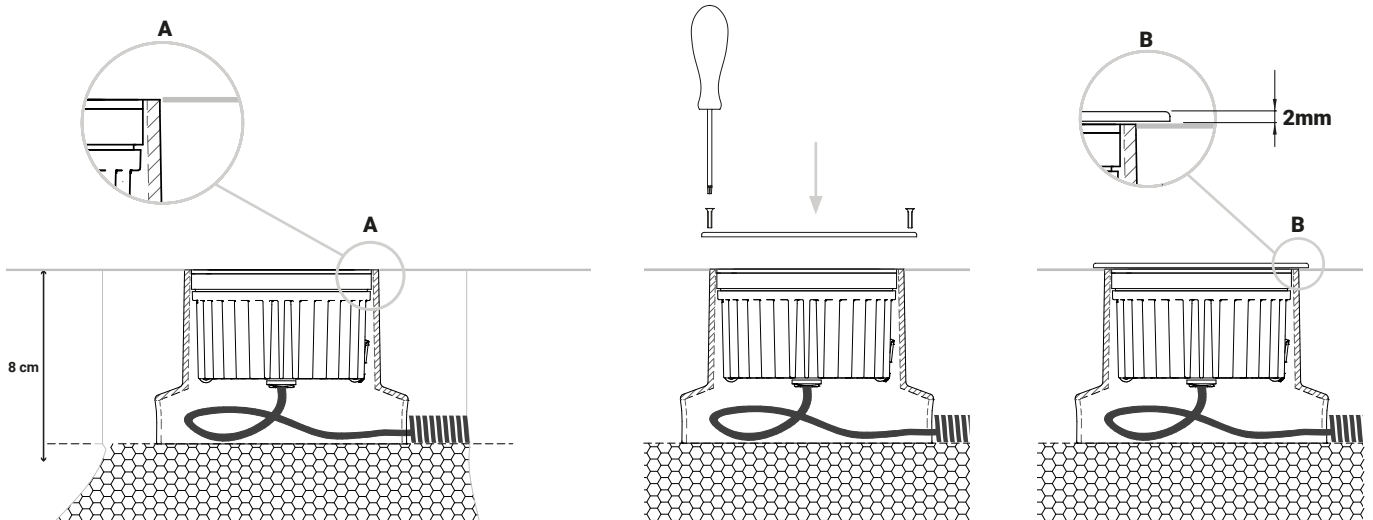

LOCKING SYSTEM

Technologically advanced outer casings that offer maximum pointing stability when using the orientable version of the equipment thanks to the special grooves that stabilise the screw and prevent rotation thereof over time.

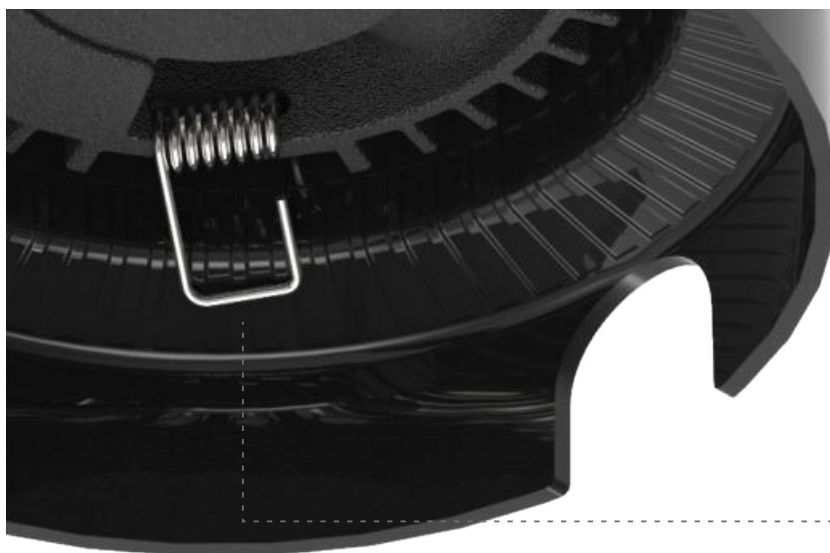


Maximum pointing stability when using the tilting version (Orma_J)



beret


Materials

Brass or aluminium body
Brass or steel flange

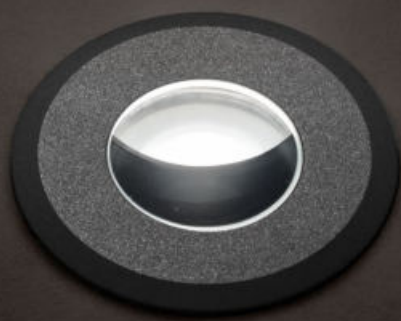



Beret_R | Walk-over spotlight | powerLED 1W DC 350 mA



29



| | | Cct | Im S - D | Optic |
|--------|--------------|---------------|----------|-------------------------|
| White | 92065 | M 2700 | 136 - 82 | 15 Spot (21°) |
| Grey | 92061 | W 3000 | 145 - 92 | 30 Flood (26°) |
| Chrome | 92066 | N 4000 | 155 - 99 | 60 W.Flood (57°) |
| Nickel | 92067 | | | 00 General - |
| Steel | 92068 | | | |
| Brass | 81469 | | | |



Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 615

RTG 92065W15 / 92065W30 / 92065W00 / 92066W30 / 92067W00
92067W15 / 92067W30 / 92067W60 / 92068W15 / 92068W30
92068W60 / 92068W00 / 92068N30 / 92068N00

Beret_2R | Walk-over spotlight | powerLED 2W DC 630 mA



| | | Cct | Im S - D | Optic |
|--------|--------------|---------------|-----------|--------------------------|
| Chrome | 93126 | M 2700 | 219 - 131 | 08 N.Spot (10°) |
| Nickel | 93127 | W 3000 | 233 - 148 | 15 Spot (21°) |
| Steel | 93128 | N 4000 | 249 - 159 | 30 Flood (26°) |
| Brass | 81470 | | | 60 W.Flood (56°) |
| | | | | 12 E.W.Flood(89°) |
| | | | | 00 General - |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|---|--|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 80 x 1100 x h 31 | ON/OFF 6 - 12 art. p 92 x 1117 x h 38 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 615

RTG 93126W08 / 93126W30 / 93127W00 / 93127W08 / 93127W15
93127W30 / 93127W60 / 93127N30 / 93128W08 / 93128W15
93128W30 / 93128W60 / 93128W00 / 93128N30

Beret_X Anti-glaring | Walk-over spotlight | powerLED 1W DC 350 mA



29




| | | Cct | Im S - D | Optic |
|--------|--------------|---------------|----------|-------------------------|
| White | 97800 | M 2700 | 136 - 32 | 15 Spot (22°) |
| Grey | 97801 | W 3000 | 145 - 34 | 30 Flood (26°) |
| Chrome | 97797 | N 4000 | 155 - 36 | 60 W.Flood (54°) |
| Nickel | 97798 | | | |
| Steel | 97799 | | | |
| Brass | 81471 | | | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|---|---|---|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 65 x 174 x h 27 | ON/OFF 6 - 12 art. p 80 x 1100 x h 31 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Recessed casing Pag. 615



RTG 97800W30 / 97799W30 / 97799W60

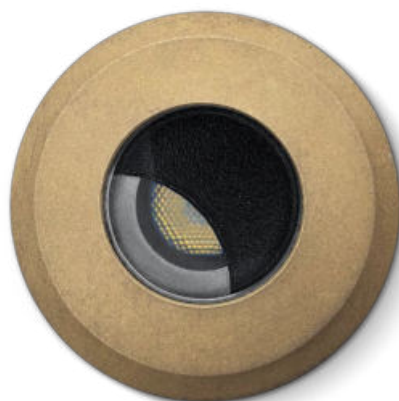


Beret_X Anti-glaring



Beret_Q | Walk-over spotlight | powerLED 1W DC 350 mA



29



| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|-------------------------|
| White | 92088 | M 2700 | 136 - 82 | 15 Spot (21°) |
| Grey | 92092 | W 3000 | 145 - 92 | 30 Flood (26°) |
| Chrome | 92069 | N 4000 | 155 - 99 | 60 W.Flood (56°) |
| Nickel | 92076 | | | 00 General - |
| Steel | 92077 | | | |


Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 615

RTG 92077W00

Beret_2Q | Walk-over spotlight | powerLED 2W DC 630 mA



| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|---------------------------|
| Chrome | 93138 | M 2700 | 219 - 131 | 08 N.Spot (10°) |
| Nickel | 93139 | W 3000 | 233 - 148 | 15 Spot (21°) |
| Steel | 93140 | N 4000 | 249 - 159 | 30 Flood (26°) |
| | | | | 60 W.Flood (57°) |
| | | | | 12 E.W.Flood (91°) |
| | | | | 00 General - |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |


Recessed casing Pag. 615

RTG 93140W30

Beret_2Q | Walk-over spotlight | powerLED 2W DC 630 mA



29



| | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-----------------|---------------------------|
| Chrome | 93132 | M 2700 | 219 - 131 | 08 N.Spot (10°) |
| Nickel | 93133 | W 3000 | 233 - 148 | 15 Spot (21°) |
| Steel | 93134 | N 4000 | 249 - 159 | 30 Flood (26°) |
| | | | | 60 W.Flood (57°) |
| | | | | 12 E.W.Flood (91°) |
| | | | | 00 General - |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 615

RTG 93134W30

Recessed casing




| | description | type |
|--------------|--------------------|-------------|
| 84336 | Recessed casing | PVC |

suitable for: Beret_R / Beret_X / Beret_Q



| | description | type |
|--------------|--------------------|-------------|
| 84915 | Recessed casing | PVC |

suitable for: Beret_R / Beret_X / Beret_Q



| | description | type |
|--------------|--------------------|-------------|
| 84918 | Recessed casing | PVC |

suitable for: Beret_2R / Beret_2Q



zalex

Materials

AISI 316L stainless steel body



Zalex | Drive-over spotlight | powerLED 6W DC 630 mA






| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------|-------------------------|
| Steel | 94137 | M 2700 | 657 - 549 | 15 Flood (29°) |
| | | W 3000 | 699 - 584 | 30 Flood (33°) |
| | | N 4000 | 747 - 625 | 60 W.Flood (44°) |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 617

Zalex | Drive-over spotlight | powerLED 18W DC 630 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-------------|-------------------------|
| Steel | 94138 | M 2700 | 1971 - 1721 | 15 Flood (29°) |
| | | W 3000 | 2097 - 1827 | 30 Flood (34°) |
| | | N 4000 | 2241 - 1954 | 60 W.Flood (50°) |

Electronics

| 99186 | 83102 |
|---|---------------------------------------|
| ON/OFF 1 art. p 92 x l 117 x h 38 | DALI 1 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 617

Private Villa | Athens, Greece



Recessed casing



| description | |
|------------------------|----------------------------|
| 98134 | Recessed casing PVC |
| suitable for: Zalex 6W | |



| description | |
|-------------------------|----------------------------|
| 98133 | Recessed casing PVC |
| suitable for: Zalex 18W | |

Uplight

fasim



Materials

Anodised aluminium body

AISI 316L stainless steel flange



Fasim | Walk-over spotlight | 198-264V AC | arrayLED 8W DC - 10W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 82222 | M 2700 | 1088 - 727 | 15 Spot (14°) |
| | W 3000 | 1088 - 758 | 30 Flood (33°) |
| | N 4000 | 1173 - 799 | 60 W.Flood (52°) |



| | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------|
| Steel/Alu 82223 | M 2700 | 1239 - 676 | 07 Asymm - |
| | W 3000 | 1291 - 705 | |
| | N 4000 | 1363 - 743 | |

| | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-----------------------|
| Steel/Alu 82224 | M 2700 | 760 - 530 | 06 N.Spot (6°) |
| | W 3000 | 760 - 530 | |
| | N 4000 | 821 - 572 | |

Code 82224 powerLED

Recessed casing Pag. 621


Fasim_J | Walk-over spotlight | 198-264V AC | powerLED 7,2W DC - 8W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Steel/Alu 82464 | M 2700 | 760 - 524 | 20 Spot (23°) |
| | W 3000 | 760 - 524 | 30 Flood (31°) |
| | N 4000 | 821 - 566 | 60 W.Flood (62°) |

Recessed casing Pag. 621



Fasim | Walk-over spotlight | 198-264V AC | arrayLED 13W DC - 14,5W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Steel/Alu 81943 | M 2700 | 1724 - 963 | 15 Spot (13°) |
| | W 3000 | 1724 - 1003 | 30 Flood (30°) |
| | N 4000 | 1854 - 1059 | 60 W.Flood (50°) |

Recessed casing Pag. 621


Fasim | Walk-over spotlight | 198-264V AC | arrayLED 13W DC - 14,5W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------|
| Steel/Alu 94415 | M 2700 | 1743 - 1553 | 07 Asymm. - |
| | W 3000 | 1863 - 1660 | |
| | N 4000 | 1863 - 1786 | |

Recessed casing Pag. 621


Fasim | Walk-over spotlight | 198-264 V AC | powerLEDs 13 W DC - 14,5 W AC



| | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|------------------------|
| Steel/Alu 94659 | M 2700 | 1683 - 1503 | 03 N.Spot (11°) |
| | W 3000 | 1791 - 1602 | |
| | N 4000 | 1917 - 1710 | |

Recessed casing Pag. 621


Fasim_J | Walk-over spotlight | 198-264 V AC | arrayLED 13 W DC - 14,5 W AC




| | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Steel/Alu 81944 | M 2700 | 1724 - 877 | 15 Spot (14°) |
| | W 3000 | 1724 - 914 | 30 Flood (29°) |
| | N 4000 | 1854 - 965 | 60 W.Flood (51°) |

Recessed casing Pag. 621

Recessed casing



| description | | |
|--|-----------------|-----|
| 84928 | Recessed casing | PVC |
| suitable for: Fasim 8W / Fasim_J 7,2W | | |



| description | | |
|--|-----------------|-----|
| 84906 | Recessed casing | PVC |
| suitable for: Fasim 13W / Fasim_J 13W | | |

Marionette Theatre | Düsseldorf, Germany




concentrica



Materials

Aluminium body

Single or double opalescent polycarbonate diffuser

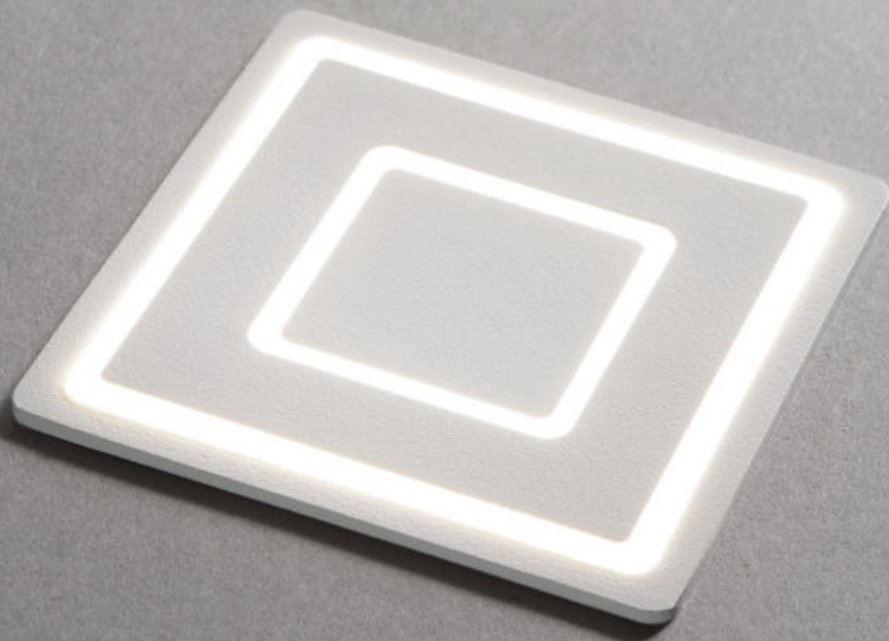

Concentrica_Q | Drive-over spotlights | 24 V DC | topLED 1.4 W DC






| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|-------------------|
| White | 96659 | M 2700 | 54 - On req. | 00 General (180°) |
| Black | 96660 | W 3000 | 60 - On req. | |
| Grey | 96661 | N 4000 | 63 - On req. | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 160 x h 35 | DALI 1 - 78 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 623

Concentrica_Q | Drive-over spotlights | 24 V DC | topLED 2.6 W DC




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|-------------------|
| White | 94059 | M 2700 | 216 - On req. | 00 General (142°) |
| Black | 94060 | W 3000 | 240 - On req. | |
| Grey | 94061 | N 4000 | 252 - On req. | |

Electronics


| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|---|---|--|---|
| ON/OFF 1 - 5 art. p 80 x l 100 x h 31 | ON/OFF 1 - 9 art. p 92 x l 117 x h 38 | ON/OFF 1 - 18 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 56 art. p 150 x l 160 x h 35 | DALI 1 - 45 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 623

Recessed casing



| description | |
|----------------------------------|-----------------|
| 98402 | Recessed casing |
| suitable for: Concentrica_Q 1,4W | |



| description | |
|----------------------------------|-----------------|
| 98877 | Recessed casing |
| suitable for: Concentrica_Q 2,6W | |



alcor

Materials

AISI 316L stainless steel body


Brass body

Tempered prismatic glass diffuser

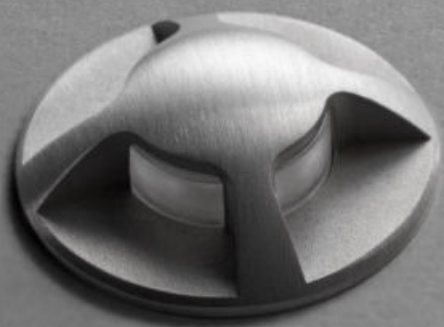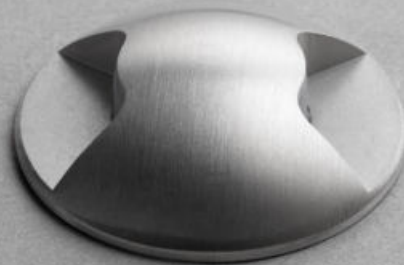



Alcor_R1 | Drive-over spotlights | powerLED



| 6.4 W DC 500 mA | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|--------------|--------------|
| Steel | 87603 | W 3000 | 566 - On req | 18 General - |
| | | N 4000 | 626 - On req | |

Electronics

| 99181 | 99185 | 83101 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |





| 4.2 W DC 5 W AC | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|--------------|--------------|
| Steel | 87600 | W 3000 | 432 - On req | 18 General - |
| | | N 4000 | 477 - On req | |

Recessed casing Pag. 629

RTG 87600W18


Alcor_R4 | Drive-over spotlights | powerLED



| 6.4 W DC 500 mA | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|--------------|--------------|
| Steel | 87605 | W 3000 | 566 - On req | 18 General - |
| | | N 4000 | 626 - On req | |

Electronics


| 99181 | 99185 | 83101 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |



| 4.2 W DC 5 W AC | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|--------------|--------------|
| Steel | 87602 | W 3000 | 432 - On req | 18 General - |
| | | N 4000 | 477 - On req | |

Recessed casing Pag. 629


Alcor_R2 | Drive-over spotlights | powerLED



| 6.4 W DC 500 mA | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|--------------|--------------|
| Steel | 87604 | W 3000 | 566 - On req | 18 General - |
| | | N 4000 | 626 - On req | |

Electronics


| 99181 | 99185 | 83101 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |



| 4.2 W DC 5 W AC | | Cct | lm S - D | Optic |
|-----------------|--------------|--------|--------------|--------------|
| Steel | 87601 | W 3000 | 432 - On req | 18 General - |
| | | N 4000 | 477 - On req | |

Recessed casing Pag. 629

Alcor_R | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|---------------------|
| Steel | 97353 | W 3000 | 199 - On req | 18 General - |
| Brass | 83606 | N 4000 | 213 - On req | |





Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629

RTG 97353W18 / 97353N18

Alcor_R2 | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|---------------------|
| Steel | 97355 | W 3000 | 199 - On req | 18 General - |
| Brass | 83608 | N 4000 | 213 - On req | |




Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629

RTG 97355W18

Alcor_R1 | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|---------------------|
| Steel | 97354 | W 3000 | 199 - On req | 18 General - |
| Brass | 83607 | N 4000 | 213 - On req | |





Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629

RTG 97354W18 / 97354N18

Alcor_R4 | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|---------------------|
| Steel | 97356 | W 3000 | 199 - On req | 18 General - |
| Brass | 83609 | N 4000 | 213 - On req | |




Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629

RTG 97356W18

Alcor_Q1 | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Steel | 81736 | W 3000 | 199 - On req | 18 General - |
| Brass | 83610 | N 4000 | 213 - On req | |





Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629

Alcor_Q2 | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Steel | 81750 | W 3000 | 199 - On req | 18 General - |
| Brass | 83611 | N 4000 | 213 - On req | |




Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629

Alcor_Q4 | Drive-over spotlights | powerLED 1,5 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Steel | 81751 | W 3000 | 199 - On req | 18 General - |
| Brass | 83612 | N 4000 | 213 - On req | |




Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 629



Alcor_R1 Blade | Drive-over spotlights | 190-250V | powerLED 2 W DC 2,5 W AC



| | Cct | lm S - D | Optic |
|-------------------|---------------|----------|-----------------------|
| Grey 83523 | M 2700 | 219 - 50 | 05 N.Spot - |
| | W 3000 | 233 - 53 | 12 E.W.Flood - |
| | N 4000 | 249 - 57 | |

Recessed casing Pag. 629



Alcor_R1 Blade | Drive-over spotlights | 190-250V | powerLED 4 W DC 4,5 W AC



| | Cct | lm S - D | Optic |
|-------------------|---------------|-----------|-----------------------|
| Grey 82639 | M 2700 | 490 - 94 | 05 N.Spot - |
| | W 3000 | 490 - 94 | 12 E.W.Flood - |
| | N 4000 | 529 - 101 | |

Recessed casing Pag. 629



Alcor_R2 Blade | Drive-over spotlights | 190-250V | powerLED 4 W DC 4,5 W AC



| | Cct | lm S - D | Optic |
|-------------------|---------------|-----------|-----------------------|
| Grey 83521 | M 2700 | 438 - 101 | 05 N.Spot - |
| | W 3000 | 466 - 107 | 12 E.W.Flood - |
| | N 4000 | 498 - 114 | |

Recessed casing Pag. 629

Alcor_R2 Blade | Drive-over spotlights | 190-250V | powerLED 8 W DC 9 W AC



| | Cct | lm S - D | Optic |
|-------------------|---------------|------------|----------------------|
| Grey 82640 | M 2700 | 980 - 188 | 05 N.Spot - |
| | W 3000 | 980 - 188 | 12 E.W.Flood- |
| | N 4000 | 1058 - 203 | |

Recessed casing Pag. 629

Recessed casing



| description | |
|--|----------------------------|
| 84341 | Recessed casing PVC |
| suitable for: Alcor_R1 4,2 - 6,4W / Alcor_R2 4,2 - 6,4W / Alcor_R4 4,2 - 6,4W | |




| description | |
|--|----------------------------|
| 84900 | Recessed casing PVC |
| suitable for: Alcor_R1 Blade 2W - 4W / Alcor_R2 Blade 4W - 8W | |



| description | |
|--|----------------------------|
| 84918 | Recessed casing PVC |
| suitable for: Alcor_R 1,5W / Alcor_R1 1,5W / Alcor_R2 1,5W / Alcor_R4 1,5W / Alcor_Q1 / Alcor_Q2 / Alcor_Q4 | |

Alcor_AI_1 | Drive-over spotlights | powerLED 2 W DC 630 mA



| | | Cct | lm S - D | Optic |
|------|--------------|---------------|-----------------|--------------------------|
| Grey | 86096 | W 3000 | 233 - 21 | 18 General (180°) |
| | | N 4000 | 249 - 22 | |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 633

RTG 86096W18

Alcor_AI_4 | Drive-over spotlights | powerLED 2 W DC 630 mA



| | | Cct | lm S - D | Optic |
|------|--------------|---------------|-----------------|--------------------------|
| Grey | 86104 | W 3000 | 235 - 43 | 18 General (180°) |
| | | N 4000 | 249 - 45 | |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 633

RTG 86104W18

Alcor_AI_2 | Drive-over spotlights | powerLED 2 W DC 630 mA





| | | Cct | lm S - D | Optic |
|------|--------------|---------------|-----------------|--------------------------|
| Grey | 86100 | W 3000 | 233 - 30 | 18 General (180°) |
| | | N 4000 | 249 - 32 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 633

Alcor_AI_1 | Drive-over spotlights | 198-264 V AC | powerLED 2 W DC 2,5 W AC




| | Cct | lm S - D | Optic |
|-------------------|--------|----------|-------------------|
| Grey 86097 | W 3000 | 233 - 21 | 18 General (180°) |
| | N 4000 | 249 - 22 | |

Recessed casing Pag. 633

RTG 86097W18


Alcor_AI_2 | Drive-over spotlights | 198-264 V AC | powerLED 2 W DC 2,5 W AC



| | Cct | lm S - D | Optic |
|-------------------|--------|----------|-------------------|
| Grey 86101 | W 3000 | 233 - 30 | 18 General (180°) |
| | N 4000 | 249 - 32 | |

Recessed casing Pag. 633


Alcor_AI_4 | Drive-over spotlights | 198-264 V AC | powerLED 2 W DC 2,5 W AC



| | Cct | lm S - D | Optic |
|-------------------|--------|----------|-------------------|
| Grey 86105 | W 3000 | 243 - 43 | 18 General (180°) |
| | N 4000 | 249 - 45 | |

Recessed casing Pag. 633

Alcor_AI_1 | Drive-over spotlights | arrayLED 6 W DC



| | Cct | lm S - D | Optic |
|-------------------|---------------|----------|--------------------------|
| Grey 91422 | W 3000 | 685 - 65 | 18 General (180°) |
| | N 4000 | 739 - 70 | |



Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 633

RTG 91422W18

Alcor_AI_2 | Drive-over spotlights | arrayLED 6 W DC




| | Cct | lm S - D | Optic |
|-------------------|---------------|-----------|--------------------------|
| Grey 91423 | W 3000 | 685 - 135 | 18 General (180°) |
| | N 4000 | 739 - 145 | |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 633

Alcor_AI_4 | Drive-over spotlights | arrayLED 6 W DC




| | Cct | lm S - D | Optic |
|-------------------|---------------|-----------|--------------------------|
| Grey 91424 | W 3000 | 685 - 135 | 18 General (180°) |
| | N 4000 | 739 - 146 | |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 633

Alcor_AI_1 | Drive-over spotlights | 198-264 V AC | arrayLED 6 W DC 8 W AC





| | Cct | lm S - D | Optic |
|-------------------|--------|----------|-------------------|
| Grey 91425 | W 3000 | 685 - 65 | 18 General (180°) |
| | N 4000 | 739 - 70 | |

Recessed casing Pag. 633

RTG 91425W18



Alcor_AI_2 | Drive-over spotlights | 198-264 V AC | arrayLED 6 W DC 8 W AC



| | Cct | lm S - D | Optic |
|-------------------|--------|-----------|-------------------|
| Grey 91426 | W 3000 | 685 - 135 | 18 General (180°) |
| | N 4000 | 739 - 145 | |

Recessed casing Pag. 633

Alcor_AI_4 | Drive-over spotlights | 198-264 V AC | arrayLED 6 W DC 8 W AC



| | Cct | lm S - D | Optic |
|-------------------|--------|-----------|-------------------|
| Grey 91427 | W 3000 | 685 - 135 | 18 General (180°) |
| | N 4000 | 739 - 146 | |

Recessed casing Pag. 633

Recessed casing




| description | | |
|---|-----------------|-----|
| 84936 | Recessed casing | PVC |
| suitable for: Alcor_AI_1 2W (86096) | | |
| Alcor_AI_2 2W (86100) / Alcor_AI_4 2W (86104) | | |



| description | | |
|---|-----------------|-----|
| 84935 | Recessed casing | PVC |
| suitable for: Alcor_AI_1 2W (86097) | | |
| Alcor_AI_2 2W (86101) / Alcor_AI_4 2W (86105) | | |



| description | | |
|---|-----------------|-----|
| 98121 | Recessed casing | PVC |
| suitable for: Alcor_AI_1 6W (91422) | | |
| Alcor_AI_2 6W (91423) / Alcor_AI_4 6W (91424) | | |



| description | | |
|---|-----------------|-----|
| 98122 | Recessed casing | PVC |
| suitable for: Alcor_AI_1 6W (91425) | | |
| Alcor_AI_2 6W (91426) / Alcor_AI_4 6W (91427) | | |


astropek

Materials


Aluminium body

Prismatic tempered glass diffuser



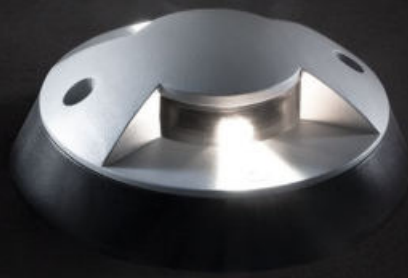

Astropek_1 | Drive-over spotlights | powerLED 2 W DC 630 mA




| | Cct | lm S - D | Optic |
|-------------------|---------------|--------------|--------------------------|
| Grey 86788 | W 3000 | 233 - On req | 18 General (180°) |
| | N 4000 | 249 - On req | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

RTG 86788W18

Astropek_2 | Drive-over spotlights | powerLED 2 W DC 630 mA




| | Cct | lm S - D | Optic |
|-------------------|---------------|--------------|--------------------------|
| Grey 86789 | W 3000 | 233 - On req | 18 General (180°) |
| | N 4000 | 249 - On req | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Astropek_4 | Drive-over spotlights | powerLED 2 W DC 630 mA





| | Cct | lm S - D | Optic |
|-------------------|---------------|--------------|--------------------------|
| Grey 86787 | W 3000 | 233 - On req | 18 General (180°) |
| | N 4000 | 249 - On req | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Astropek_1 Blade | Up-Light | powerLED 2 W DC 630 mA




| | Cct | lm S - D | Optic |
|-------------------|---------------|----------|----------------------|
| Grey 83524 | M 2700 | 219 - 50 | 05 N.Spot - |
| | W 3000 | 233 - 53 | 12 E.W.Flood- |
| | N 4000 | 249 - 57 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1-2 art. p 65 x l 74 x h 27 | ON/OFF 3-6 art. p 80 x l 100 x h 31 | ON/OFF 6-12 art. p 92 x l 117 x h 38 | DALI 1-14 art. p 54 x l 121 x h 26 |

Astropek_1 Blade | Up-Light | powerLED 4 W DC 350 mA





| | Cct | lm S - D | Optic |
|-------------------|---------------|-----------|----------------------|
| Grey 82637 | M 2700 | 490 - 94 | 05 N.Spot - |
| | W 3000 | 490 - 94 | 12 E.W.Flood- |
| | N 4000 | 529 - 101 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2-3 art. p 80 x l 100 x h 31 | DALI 1-4 art. p 54 x l 121 x h 26 |

Astropek_2 Blade | Up-Light | powerLED 4 W DC 630mA




| | Cct | lm S - D | Optic |
|-------------------|---------------|-----------|----------------------|
| Grey 83522 | M 2700 | 438 - 101 | 05 N.Spot - |
| | W 3000 | 438 - 107 | 12 E.W.Flood- |
| | N 4000 | 498 - 114 | |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1-2 art. p 65 x l 74 x h 27 | ON/OFF 3-6 art. p 80 x l 100 x h 31 | ON/OFF 6-12 art. p 92 x l 117 x h 38 | DALI 1-14 art. p 54 x l 121 x h 26 |

Astropek_2 Blade | Up-Light | powerLED 8 W DC 350mA



| | Cct | lm S - D | Optic |
|-------------------|---------------|------------|----------------------|
| Grey 82638 | M 2700 | 980 - 188 | 05 N.Spot - |
| | W 3000 | 980 - 188 | 12 E.W.Flood- |
| | N 4000 | 1058 - 203 | |

Electronics

| 99183 | 83100 |
|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1-2 art. p 54 x l 121 x h 26 |

footpad



Materials

AISI 316L stainless steel body

Diffuser in polycarbonate



Footpad Flat | Drive-over spotlights | powerLED 4 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------|---------------------|
| Steel | 96916 | W 3000 | 428 - 130 | 00 General - |
| | | N 4000 | 456 - 139 | |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

RTG 96916W00

Footpad Flat_Q | Drive-over spotlights | powerLED 4 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------|---------------------|
| Steel | 81691 | W 3000 | 428 - 130 | 00 General - |
| | | N 4000 | 456 - 139 | |


Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |



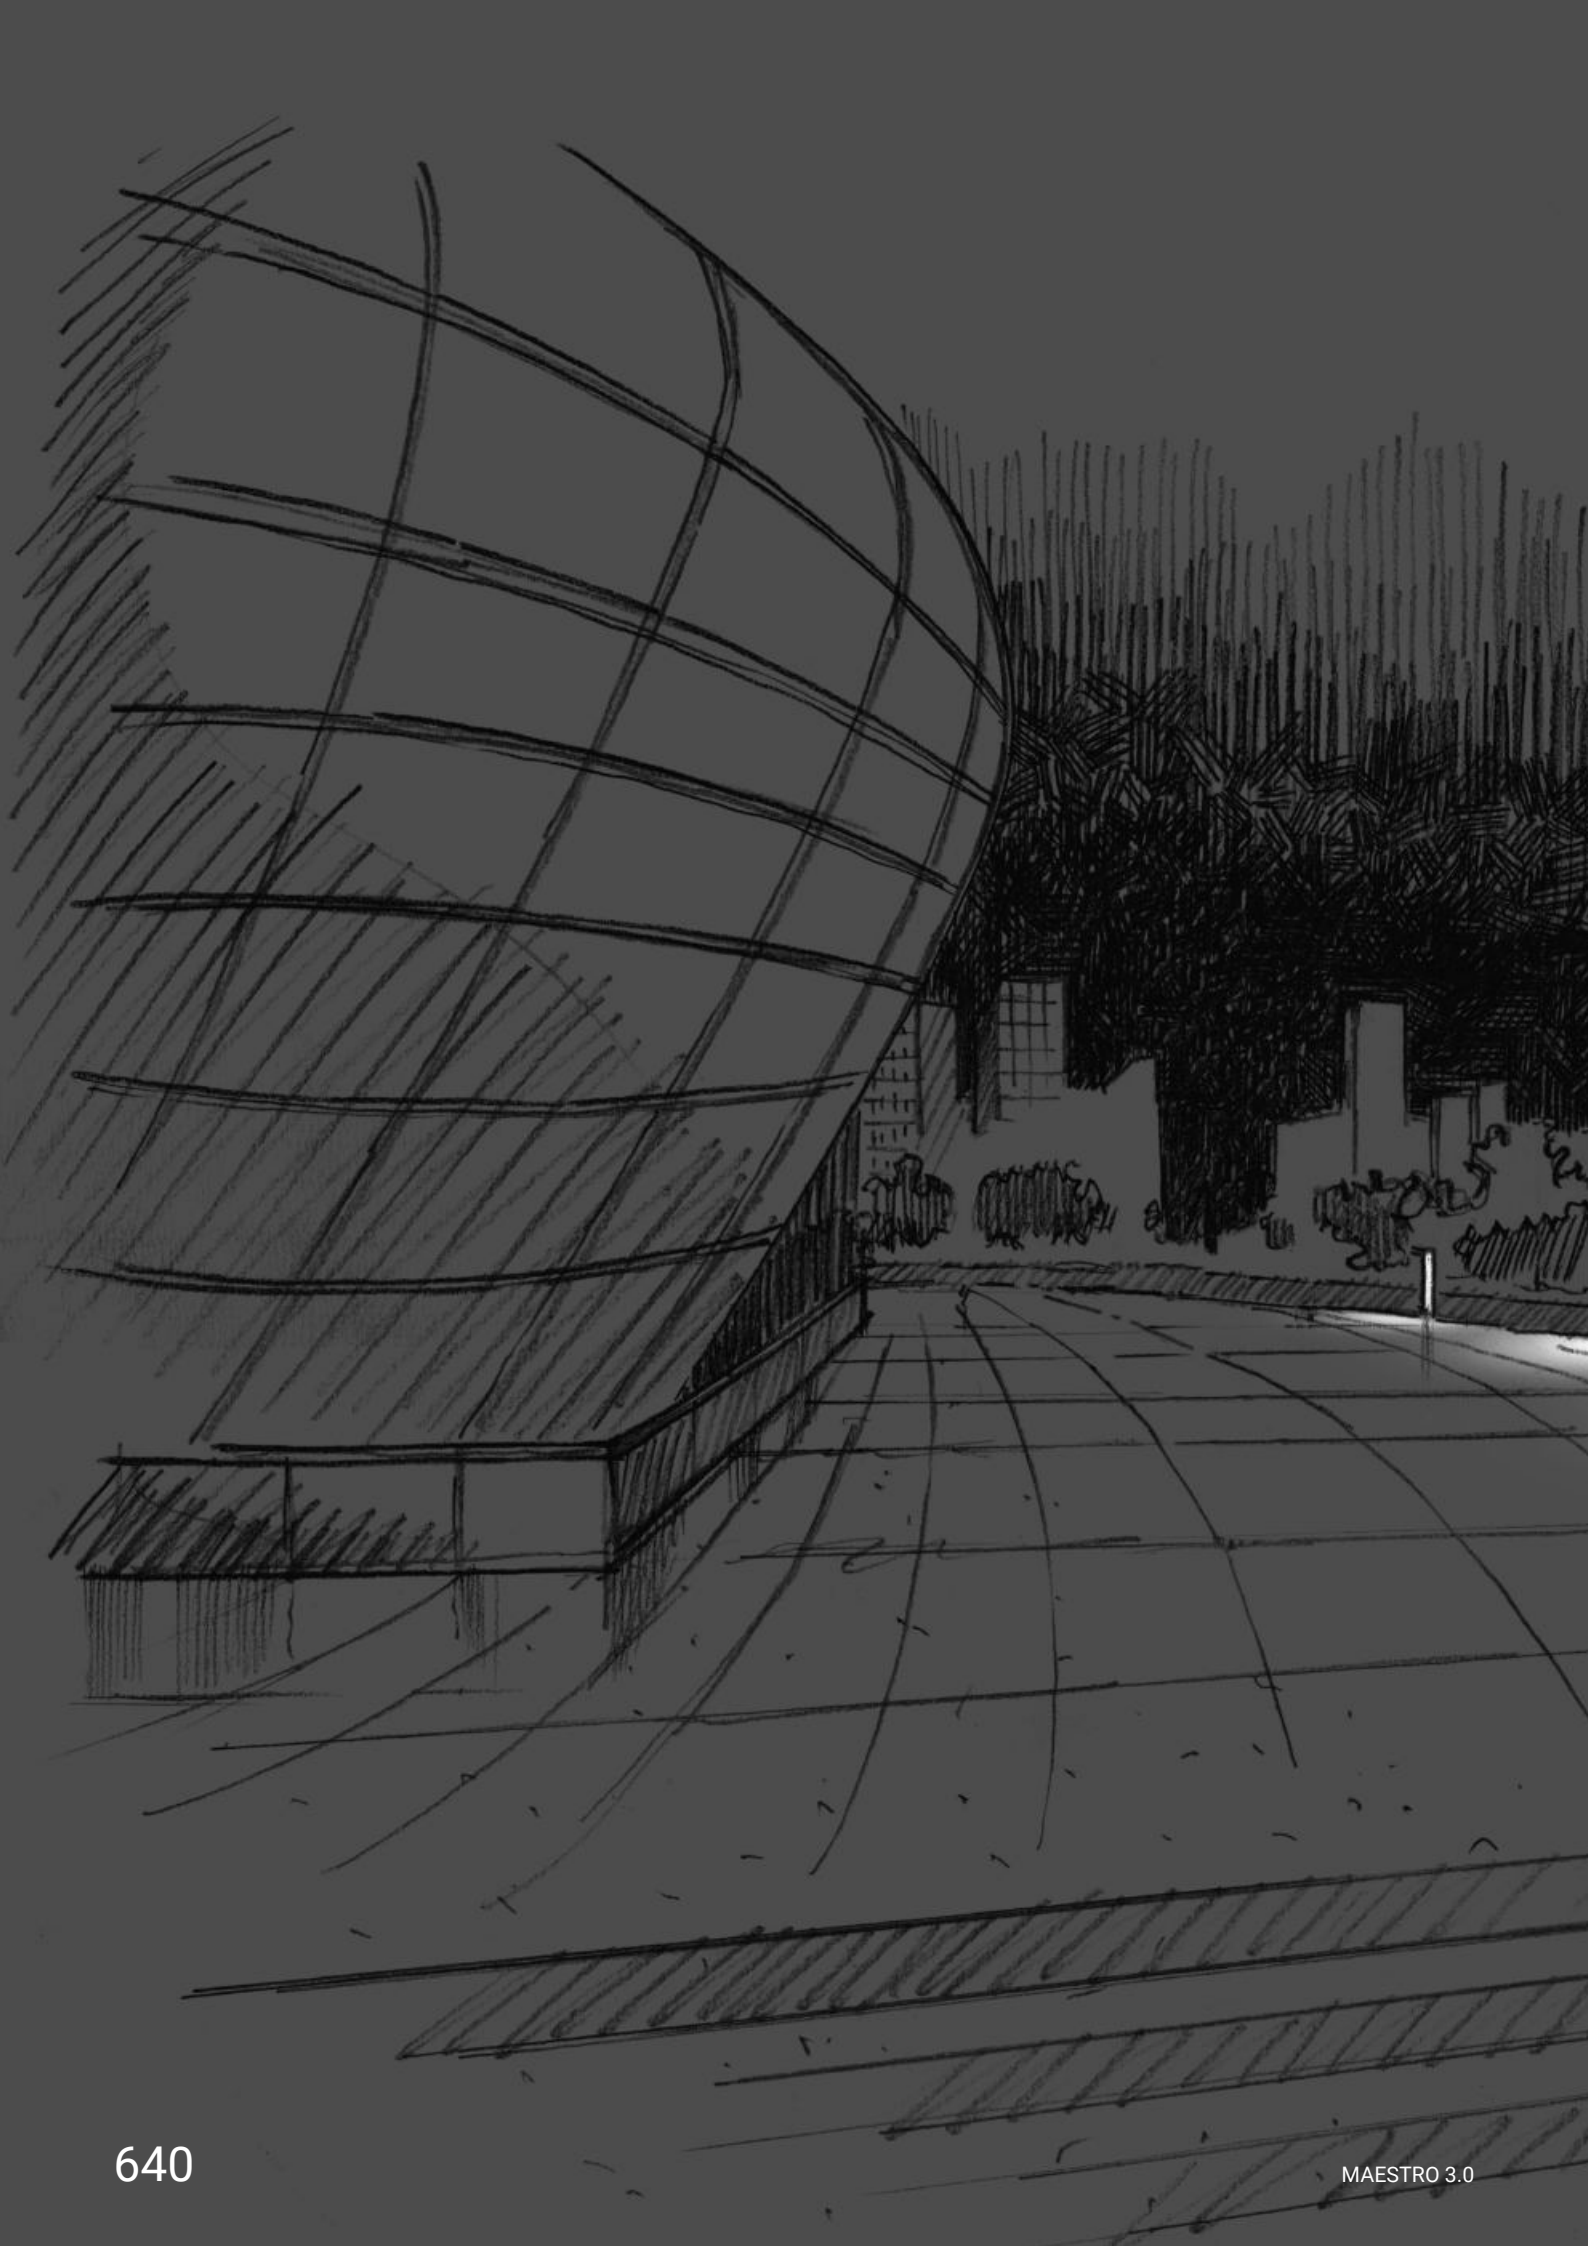

Bollards & Poles

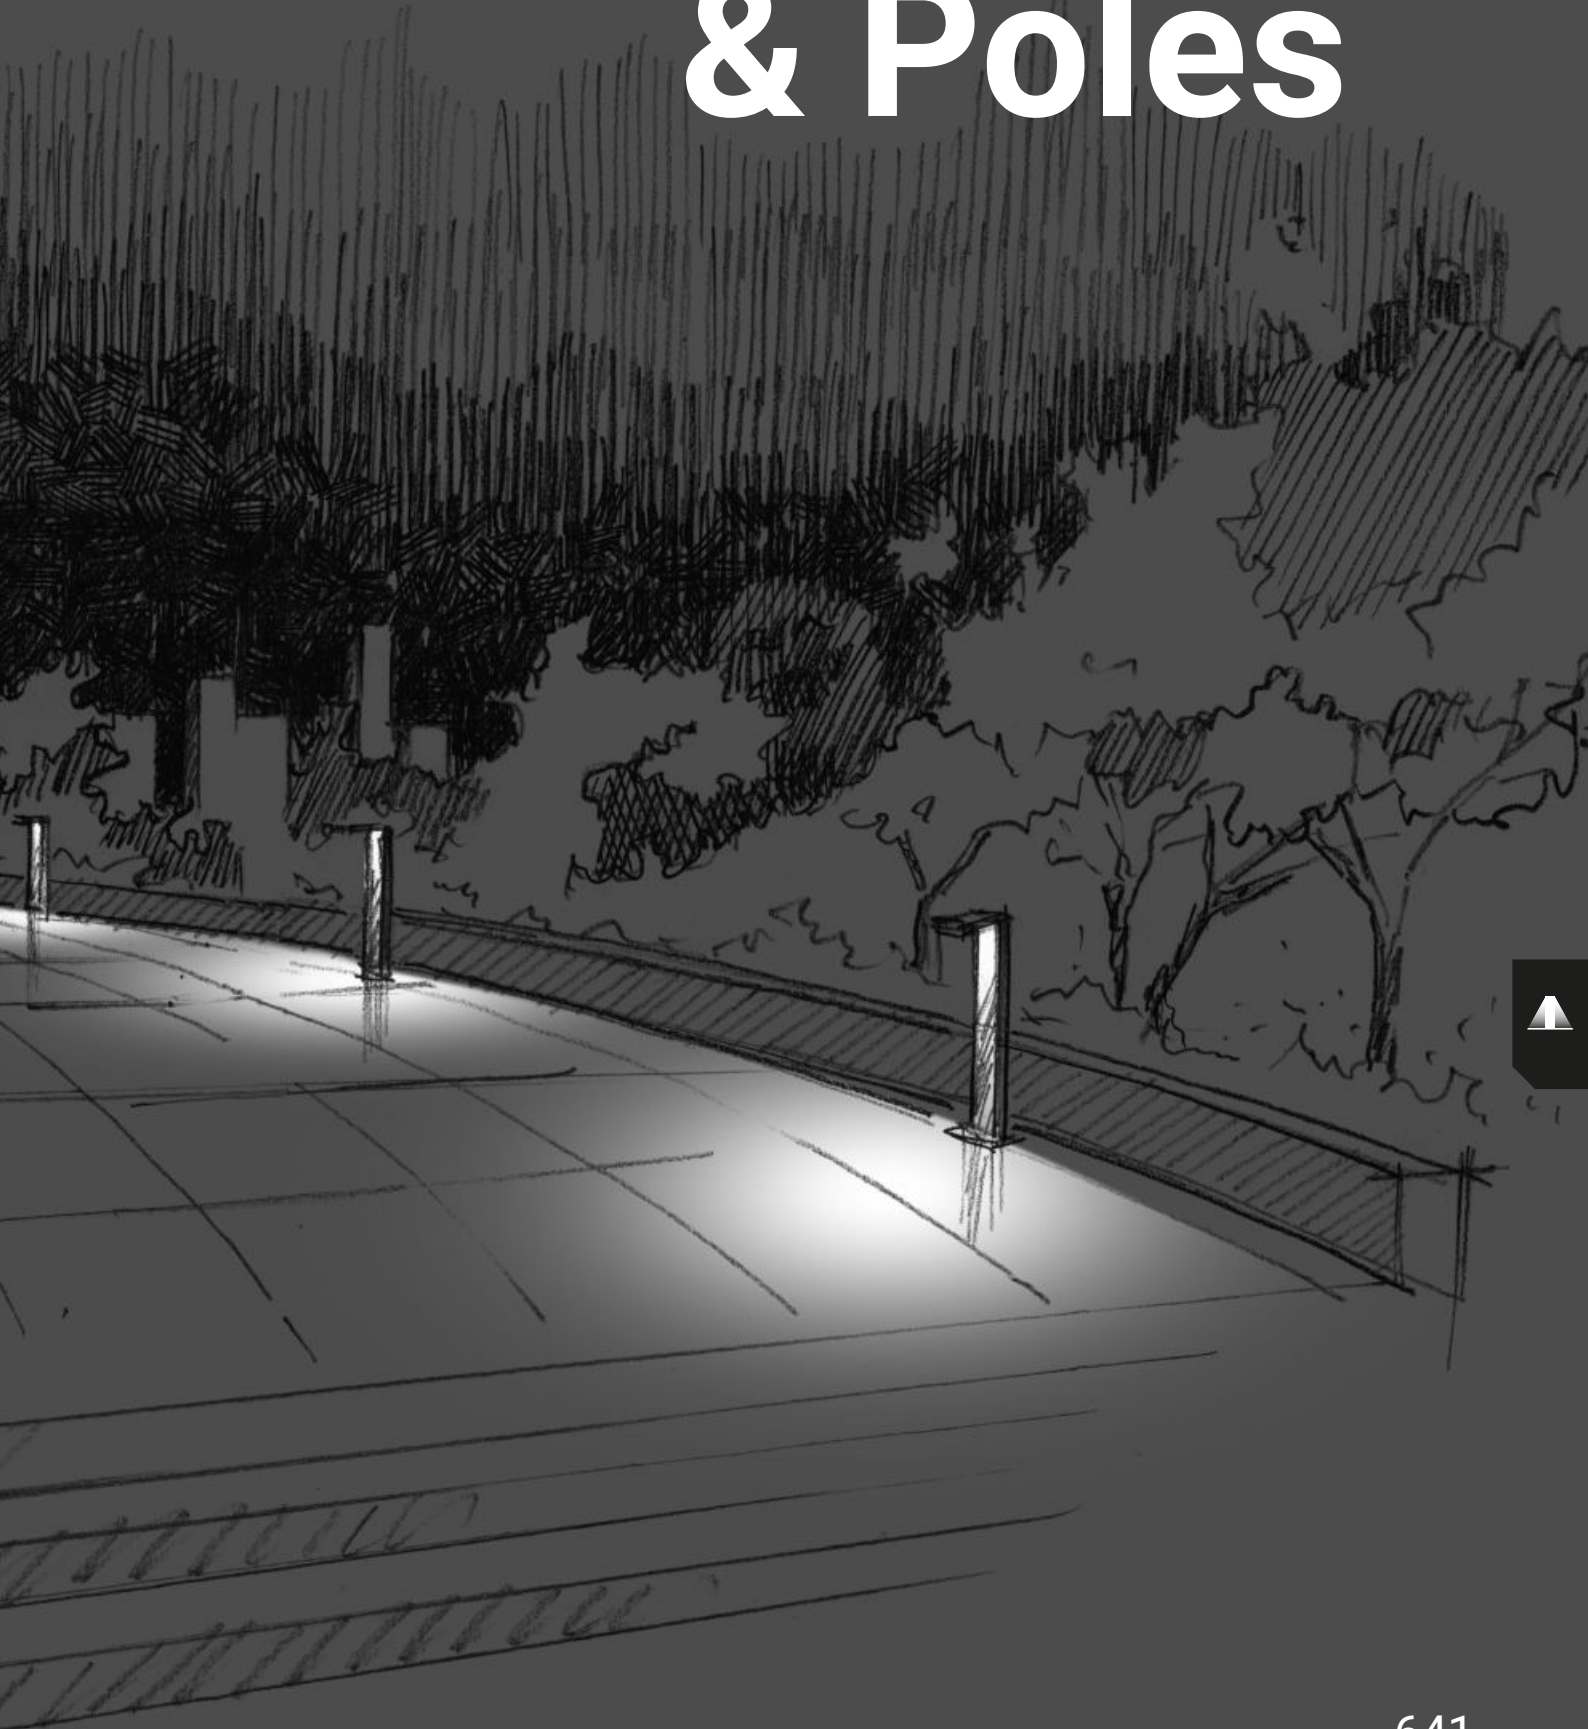


bollards & poles range index

Ryo



Joe



Bond-pro



Puro




Opti-Pole




Peak



Nail



Apache



Blum



Pilos



Stalk



Lino







ryo


Materials

Polyester powder-coated aluminium body
and protective surface treatment
Transparent polycarbonate diffuser





ryo range

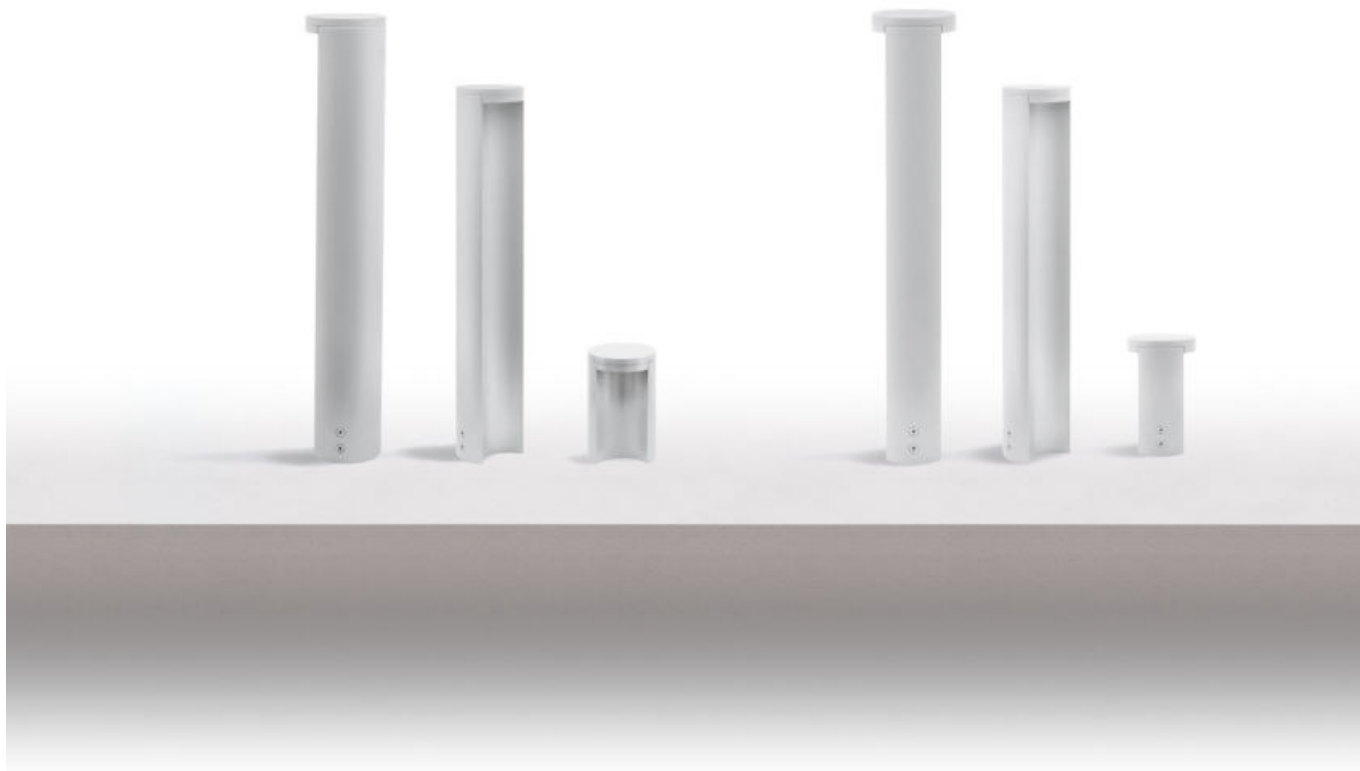

Ryo



4,2 W

250 x Ø150 mm

8,4 W

250 x Ø150 mm

9 W

820 x Ø150 mm
1120 x Ø150 mm

18 W

820 x Ø150 mm
1120 x Ø150 mm

Finish

Grey BK Grey DarkBrown

arrayLED

3000 - 4000

Optics

General

Driver




On/Off

ryo lighting concept

Concept



The Ryo name indicates its peculiar character: during the night the stem's concave profile comes alive and flooded by decorative and functional light. The vertical plan lighting provides a reference point during the night, using coating surface fixture's luminance to reduce consumptions. Light distribution on path results smooth and deep, perfect for public and residential projects.

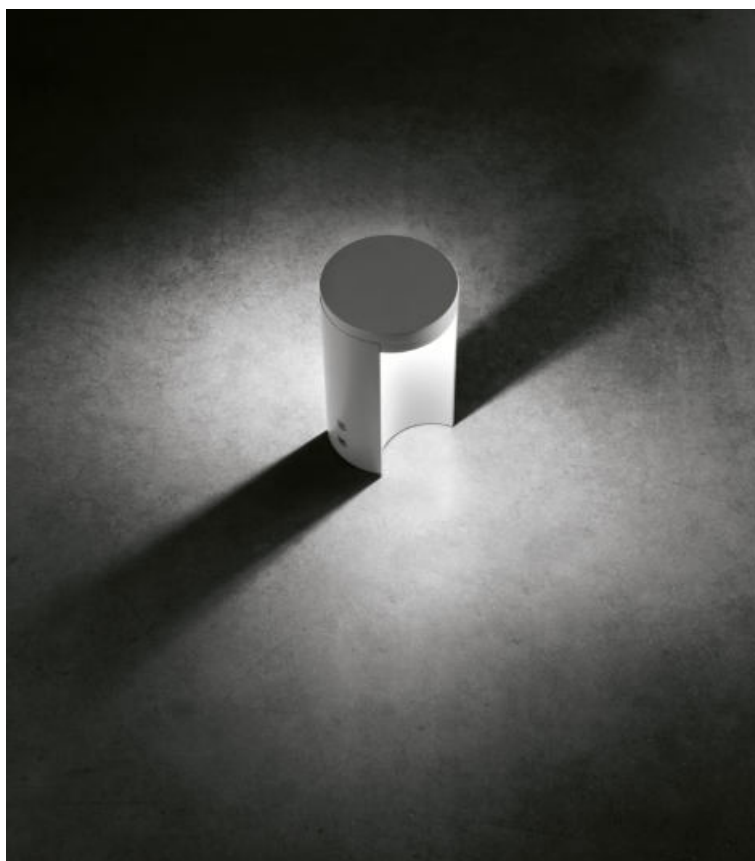

Unidirectional emission

Ideal for pathway lighting, this solution provides a great visual orientation and creates a certain rhythm inside the pathways, also outlining the walking areas through light and shade.



64736N00

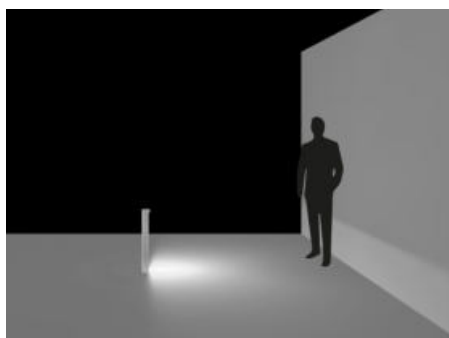


Bidirectional emission

This type of emission is particularly functional to light up large areas or gardens, since they require a diffusive light coming from both sides of the bollard.

64735W00

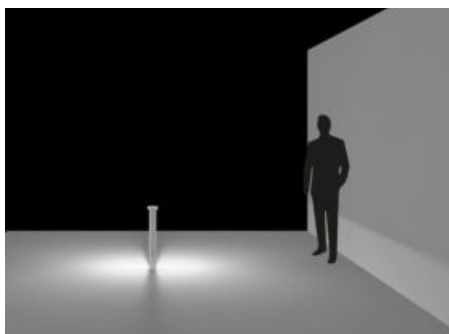

Ryo | Bollards | 198-264 V AC | arrayLED 4,2 W DC - 5,2 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------|
| Grey | 64761 | W 3000 | 728 - 517 | 00 General - |
| BK Grey | 64759 | N 4000 | 778 - 535 | |
| DarkBrown | 64760 | | | |

Accessories Pag. 651

RTG 64761W00 / 64760W00

Ryo | Bollards | 100-240 V AC | arrayLED 9 W DC - 10 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|--------------|
| Grey | 64734 | W 3000 | 1208 - 1019 | 00 General - |
| BK Grey | 64721 | N 4000 | 1294 - 1054 | |
| DarkBrown | 64726 | | | |

Accessories Pag. 651

RTG 64734W00 / 64726W00


Ryo | Bollards | 100-240 V AC | arrayLED 9 W DC - 10 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|--------------|
| Grey | 64736 | W 3000 | 1208 - 1019 | 00 General - |
| BK Grey | 64723 | N 4000 | 1294 - 1054 | |
| DarkBrown | 64728 | | | |

Accessories Pag. 651




Ryo | Bollards | 100-240 V AC | arrayLED 8,4 W DC - 10 W AC



| | Cct | Im S - D | Optic |
|------------------------|--------|-------------|--------------|
| Grey 64764 | W 3000 | 1456 - 1034 | 00 General - |
| BK Grey 64762 | N 4000 | 1556 - 1070 | |
| DarkBrown 64763 | | | |

Accessories Pag. 651


Ryo | Bollards | 176-240 V AC | arrayLED 18 W DC - 20 W AC



| | Cct | Im S - D | Optic |
|------------------------|--------|-------------|--------------|
| Grey 64735 | W 3000 | 2416 - 2038 | 00 General - |
| BK Grey 64722 | N 4000 | 2588 - 2108 | |
| DarkBrown 64727 | | | |

Accessories Pag. 651


Ryo | Bollards | 176-240 V AC | arrayLED 18 W DC - 20 W AC



| | Cct | Im S - D | Optic |
|------------------------|--------|-------------|--------------|
| Grey 64737 | W 3000 | 2416 - 2038 | 00 General - |
| BK Grey 64724 | N 4000 | 2588 - 2108 | |
| DarkBrown 64729 | | | |

Accessories Pag. 651

Accessories



| description | type |
|-----------------------|------|
| 64758 Tie rods | |

suitable for: Ryo

joe

Materials

Polyester powder-coated aluminium
body and protective surface treatment
Transparent polycarbonate diffuser






joe lighting concept

Optics design

The peculiar Joe emission derives by integrated optical group accurate studies. The high performance LED source combined with a sputtering metallized transparent polycarbonate special semi-circular reflector. The light chamber lower part is wrapped with a microcell pad in semi-glossy black polycarbonate, for the direct luminance perfect control.

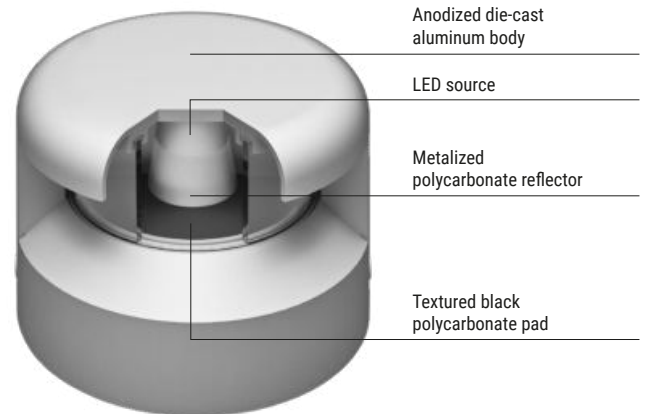

Robust design

The special spherical cap shape of Joe profile makes this product particularly robust and resistant, ideal for both public and private outdoor applications. The total absence of raw edges makes it particularly safe for users.





reddot award 2015
winner


Grazing light

The distribution of the light on the walking area creates an interesting shade effect, which is perfectly parallel to the walking direction. This effect can be used to outline night paths and highlight green areas with accent lighting.

59165W00

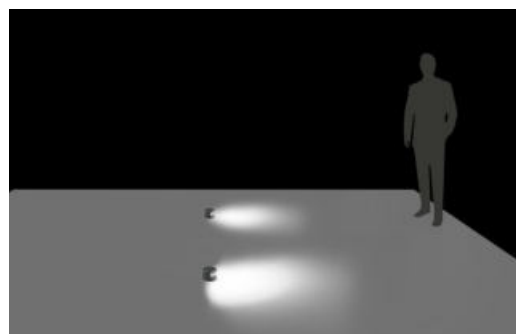

Joe | Bollards | 100-240 V AC | arrayLED 9 W DC - 11 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| Grey | 59165 | W 3000 | 1208 - 380 | 00 General - |
| DarkBrown | 59166 | N 4000 | 1294 - 380 | |

Accessories Pag. 655

RTG 59165W00 / 59166W00


Joe | Bollards | 176-276 V AC | topLED 9 W DC - 11 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| Grey | 64635 | W 3000 | 1060 - 514 | 00 General - |
| DarkBrown | 64636 | N 4000 | 1124 - 545 | |

Accessories Pag. 655

Accessories



| description | type |
|-------------------|------|
| 14931 Peg | |
| suitable for: Joe | |





bond PRO

Materials

Polyester powder-coated aluminium body and protective surface treatment or stainless steel body
Opalescent white polyethylene diffuser





bond PRO lighting concept




Ergonomic design


The light source in the top of the bollard is screened by the circular flange to create a total cutoff, so that the light is never invasive and fits perfectly with its environment. The light emitted illuminates the portion of the area below. The Bond PRO range offers three different sizes that allow the product to be declined in a variety of application contexts.





81099W00

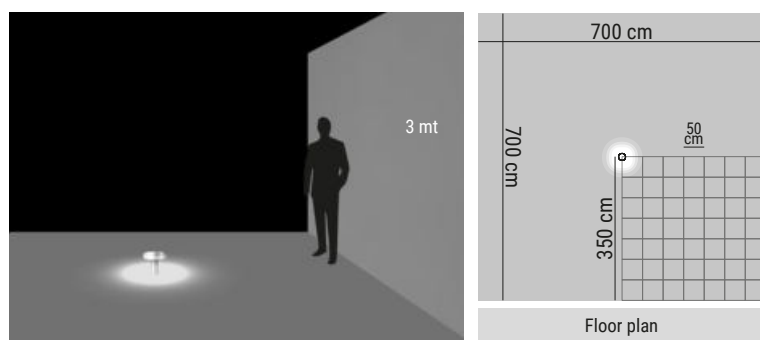

81107W00

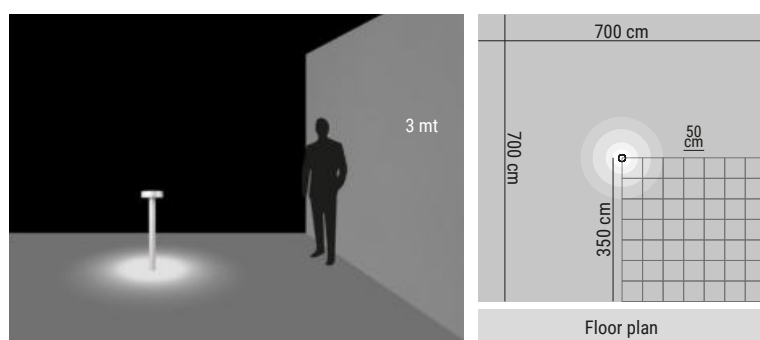


Bond_PRO | Bollards | 220-240 V AC | topLED 10,8 W DC - 12 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| Black | 81098 | W 3000 | 1350 - 580 | 00 General - |
| DarkBrown | 81099 | N 4000 | 1460 - 627 | |
| Steel | 81100 | | | |
| Grey | 81097 | | | |

Accessories Pag. 661


Bond_PRO | Bollards | 220-240 V AC | topLED 10,8 W DC - 12 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| Black | 81102 | W 3000 | 1350 - 580 | 00 General - |
| DarkBrown | 81103 | N 4000 | 1460 - 627 | |
| Steel | 81104 | | | |
| Grey | 81101 | | | |

Accessories Pag. 661


Bond_PRO | Bollards | 220-240 V AC | topLED 10,8 W DC - 12 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| Black | 81106 | W 3000 | 1350 - 580 | 00 General - |
| DarkBrown | 81107 | N 4000 | 1460 - 627 | |
| Steel | 81108 | | | |
| Grey | 81105 | | | |

Accessories Pag. 661

Accessories



| description | type |
|------------------|------|
| 14931 Peg | |

suitable for: Bond_PRO


puro

Materials

Polyester powder-coated aluminium body
with protective surface treatment
Extra-clear glass diffuser





Puro | Bollards | 198-264 V AC | topLED 13 W DC - 14 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-------------------|
| Grey | 64715 | W 3000 | 1941 - 1363 | 00 General (360°) |
| BK Grey | 64716 | N 4000 | 2060 - 1445 | |
| DarkBrown | 64610 | | | |

Puro | Bollards | 220-240 V AC | topLED 21 W DC - 23 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-------------------|
| Grey | 64700 | W 3000 | 2673 - 1679 | 00 General (360°) |
| BK Grey | 64701 | N 4000 | 2832 - 1779 | |
| DarkBrown | 64611 | | | |

Puro | Bollards | 198-264 V AC | topLED 12 W DC - 14 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------------|
| Grey | 64719 | W 3000 | 1058 - 356 | 18 General (180°) |
| BK Grey | 64720 | N 4000 | 1123 - 378 | |
| DarkBrown | 64612 | | | |

Puro 180° | Bollards | 198-264 V AC | topLED 14 W DC - 15,5 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------------|
| Grey | 64717 | W 3000 | 1458 - 490 | 18 General (180°) |
| BK Grey | 64718 | N 4000 | 1544 - 520 | |
| DarkBrown | 64613 | | | |

opti-pole

Materials

Polyester powder-coated aluminium
body and protective surface treatment
Transparent PMMA diffuser





opti-pole lighting concept

Simple design

Opti-Pole's extremely compact form is designed for minimum visual impact. The head is barely 15 mm thick. Its range of finishes, in classic grey, anthracite, and dark brown, makes it even more elegant.



OptiLight™



IK08



IP65



Visual comfort


Opti-Pole uses OptiLight technology to achieve unique visual comfort by reducing glare to zero. The source is positioned laterally inside the optics, and the laser microincisions in the PMMA diffuser channel the beam evenly. Opti-Pole covers the ground to the front and sides of the bollard, and also part of the back.

65395W07

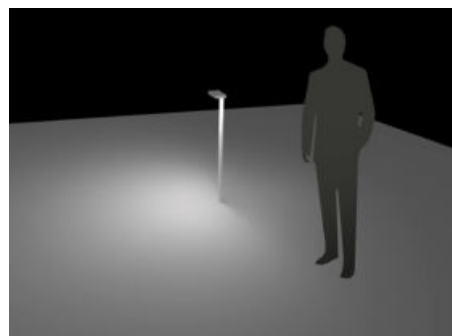

Floor plan


Opti-pole | Bollards | 100-240 V AC | topLED 8 W DC - 9,5 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------------|
| Grey | 65392 | M 2700 | 744 - 216 | 07 Asymm. - |
| BK Grey | 65394 | W 3000 | 780 - 225 | |
| DarkBrown | 65393 | N 4000 | 816 - 235 | |

Accessories Pag. 667

Opti-pole | Bollards | 100-240 V AC | topLED 8 W DC - 9,5 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|--------------------|
| Grey | 65395 | M 2700 | 744 - 216 | 07 Asymm. - |
| BK Grey | 65397 | W 3000 | 780 - 225 | |
| DarkBrown | 65396 | N 4000 | 816 - 235 | |

Accessories Pag. 667

Metalco | Treviso, Italy



Accessories



| description | type |
|-----------------------|------|
| 64200 Tie rods | |

suitable for: Opti-pole

peak

Materials

Polyester powder-coated aluminium body
with protective surface treatment
Extra-clear glass diffuser






peak range



| | Peak | Peak | Peak-Maxi | Peak-Maxi_L | Peak-Maxi_DL | Peak-Maxi_W |
|--------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 6,5 W | 350 x 90 mm | - | - | - | - | - |
| 9,5 W | 750 x 90 mm | 750 x 90 mm | - | - | - | - |
| 12 W | - | - | - | - | - | - |
| 24 W | - | - | - | - | - | - |
| 36 W | - | - | 3008 x 180 mm | - | - | 330 x 180 mm |
| 45 W | - | - | - | - | - | - |
| 53 W | - | - | - | 4500 x 180 mm | - | - |
| 106 W | - | - | - | - | 4500 x 180 mm | - |
| Finish | Grey BK Grey DarkBrown | Grey BK Grey DarkBrown | Grey BK Grey DarkBrown | Grey BK Grey DarkBrown | Grey BK Grey DarkBrown | Grey BK Grey DarkBrown |
| topLED | 3000 4000 | 3000 4000 | 3000 4000 | 3000 4000 | 3000 4000 | 3000 4000 |
| Optics | Asymmetric | Asymmetric | Asymmetric | Asymmetric | Asymmetric | Asymmetric |
| Driver | On/Off | On/Off - DALI | On/Off - DALI | On/Off - DALI | On/Off - DALI | On/Off - DALI |

Optics design

The peculiar optical group conformation provides a lighting emission only on bollard front, eliminating every secondary light dispersion on the back. The light emission is deep, clear and defined.

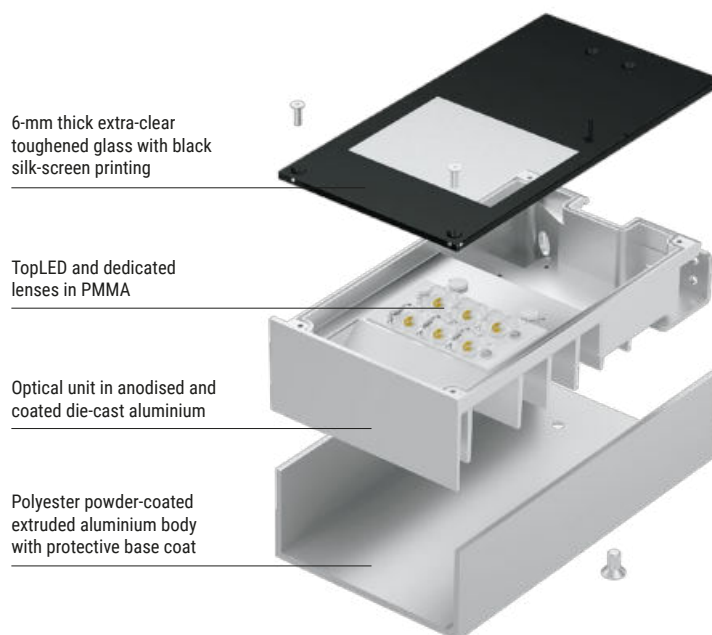

Control and performance

Luminous unit equipped with dedicated lens managing light distribution with maximum control. Asymmetric effects able to light up secondary roads, squares, parks and gardens.





Every needs answer

Wall mounted version, different dimensions and power bollards, single or double architectural poles and the arc peculiar version, ensures a solution for every installation needs. Peak provides easier installation also in the urban context, its great flexibility ensures a professional lighting and architecture project approach.



Peak | Bollards | 198-264 V AC | arrayLED 6,5 W DC - 9 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------|
| Grey | 64794 | W 3000 | 988 - 575 | 07 Asymm. - |
| BK Grey | 64795 | N 4000 | 1058 - 595 | |
| DarkBrown | 64796 | | | |

Accessories Pag. 673

RTG 64796W07 / 64794W07


Peak | Bollards | 100-240 V AC | arrayLED 9,5 W DC - 11 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------|
| Grey | 64791 | W 3000 | 1208 - 775 | 07 Asymm. - |
| BK Grey | 64792 | N 4000 | 1294 - 800 | |
| DarkBrown | 64793 | | | |

Accessories Pag. 673

Peak | Bollards | 100-240 V AC | arrayLED 9,5 W DC - 11 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------|
| Grey | 64788 | W 3000 | 1208 - 537 | 07 Asymm. - |
| BK Grey | 64789 | N 4000 | 1294 - 555 | |
| DarkBrown | 64790 | | | |

| DALI | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|-------------|
| Grey | 65403 | W 3000 | 1208 - 537 | 07 Asymm. - |
| BK Grey | 65404 | N 4000 | 1294 - 555 | |
| DarkBrown | 65405 | | | |

Accessories Pag. 673

RTG 64790W07 / 64788W07 / 64789W07

Peak-Maxi | Poles | 198-264 V AC | powerLED 36 W DC - 39 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| Grey | 65073 | W 3000 | 3414 - 2764 | 07 Asymm. - |
| BK Grey | 65074 | N 4000 | 3684 - 3437 | |
| DarkBrown | 65072 | | | |

| DALI | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| Grey | 65406 | W 3000 | 3414 - 2764 | 07 Asymm. - |
| BK Grey | 65407 | N 4000 | 3684 - 3437 | |
| DarkBrown | 65408 | | | |

Accessories Pag. 673

Peak-Maxi_L | Poles | 198-264 V AC | powerLED 53 W DC - 59 W AC




| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| Grey | 65064 | W 3000 | 5121 - 4146 | 07 Asymm. - |
| BK Grey | 65065 | N 4000 | 5526 - 5156 | |
| DarkBrown | 65063 | | | |

| DALI | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| Grey | 65400 | W 3000 | 5121 - 4146 | 07 Asymm. - |
| BK Grey | 65401 | N 4000 | 5526 - 5156 | |
| DarkBrown | 65402 | | | |

Accessories Pag. 673


Peak-Maxi_W | Wall Lights | 198-264 V AC | powerLED 36 W DC - 39 W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| Grey | 65084 | W 3000 | 3414 - 2764 | 07 Asymm. - |
| BK Grey | 65085 | N 4000 | 3684 - 3437 | |
| DarkBrown | 65083 | | | |

| DALI | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-------------|-------------|
| Grey | 65409 | W 3000 | 3414 - 2764 | 07 Asymm. - |
| BK Grey | 65410 | N 4000 | 3684 - 3437 | |
| DarkBrown | 65411 | | | |

Peak-Maxi_DL | Poles | 198-264 V AC | powerLED 106 W DC - 118 W AC




| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|----------------|-------------|
| Grey | 64300 | W 3000 | 10242 - On req | 07 Asymm. - |
| BK Grey | 64301 | N 4000 | 11052 - On req | |
| DarkBrown | 64302 | | | |


| DALI | | Cct | Im S - D | Optic |
|-----------|--------------|--------|----------------|-------------|
| Grey | 65197 | W 3000 | 10242 - On req | 07 Asymm. - |
| BK Grey | 65198 | N 4000 | 11052 - On req | |
| DarkBrown | 65199 | | | |

Accessories Pag. 673


Accessories



| description | type |
|--|------|
| 65082 Tie rods | |
| suitable for: Peak 6,5W / Peak 9,5W | |



| description | type |
|---|------|
| 65078 Fixing base | |
| suitable for: Peak Maxi / Peak Maxi L / Peak Maxi DL | |



| description | type |
|---|-----------|
| 65076 Fixing base | Grey |
| 65077 Fixing base | BK Grey |
| 65075 Fixing base | DarkBrown |
| suitable for: Peak Maxi / Peak Maxi L / Peak Maxi DL | |





nail


Materials

Aluminium body

Diffuser in polycarbonate




Nail | Bollards | 100-240 V AC | powerLED 6W DC - 7W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|------------|-----------------|--------------|
| BK Grey | 84189 | M 2700 | 532 - On req | 00 General - |
| DarkBrown | 84190 | W 3000 | 569 - On req | |
| Grey | 84191 | N 4000 | 614 - On req | |
| Sand | 84192 | | | |

Accessories




| | description | type |
|--------------|--------------------|-------------|
| 83158 | Tie rods | |

suitable for: Nail



Nail Bollards

The most important feature of the Nail Bollard is that it can vary the height of the stem at will thanks to the telescopic system that makes it unique. The light source remains in a fixed position and by increasing the height of the fixture, the surface area and intensity of illumination on the ground also vary.

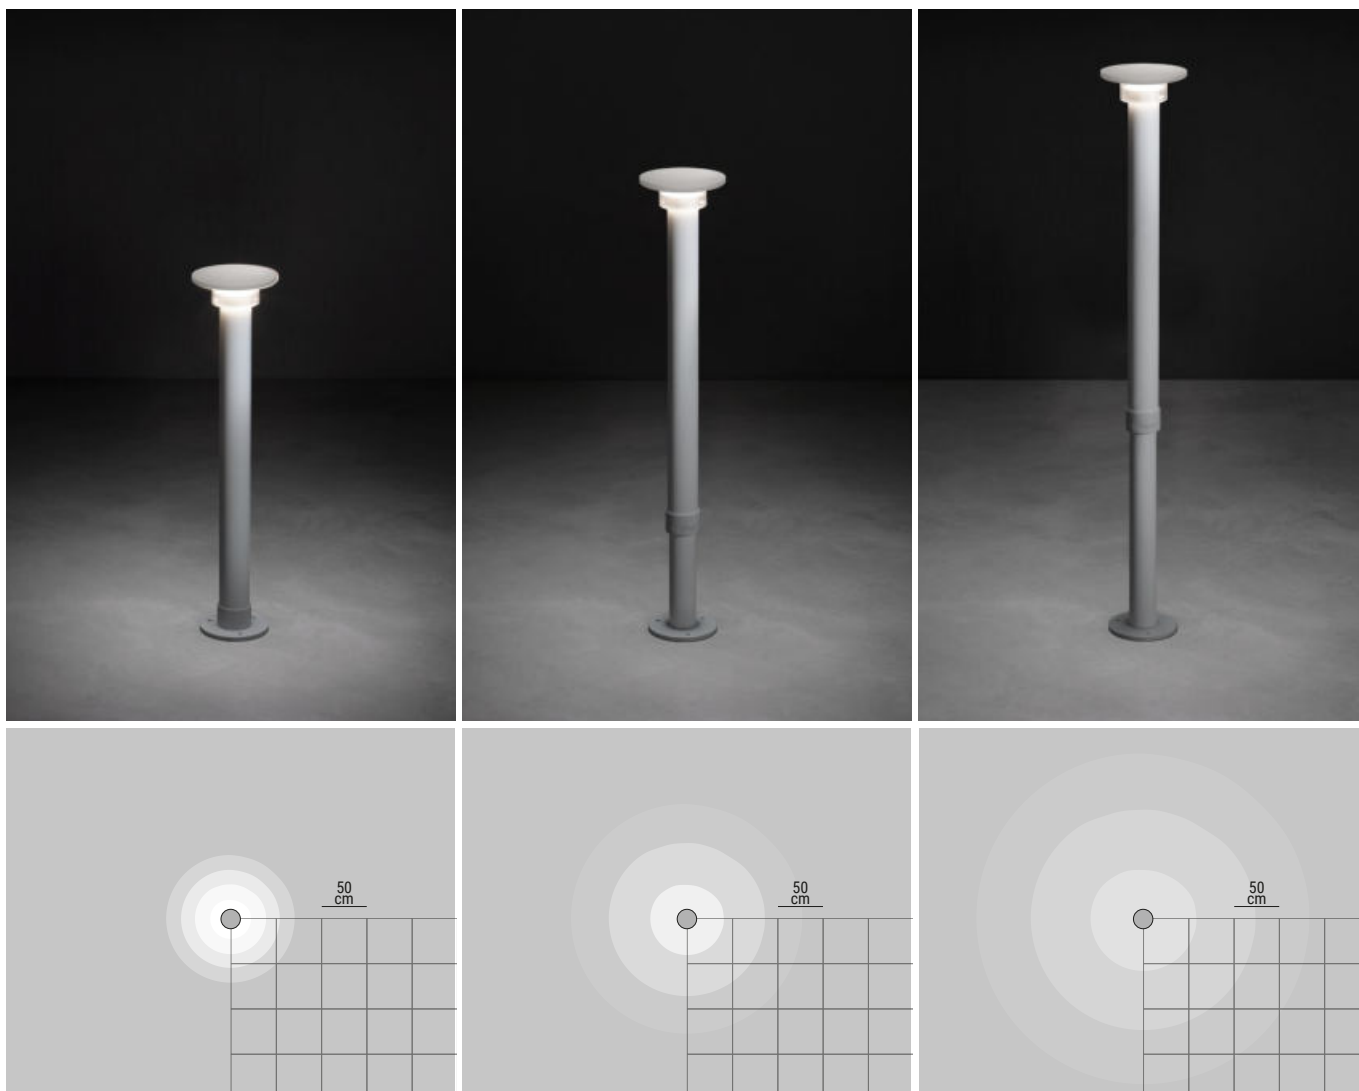

apache

Materials

Aluminium body with polyester powder coating
and protective surface pre-treatment
Transparent polycarbonate diffuser





apache


design Rigo Architeti

180° Lens

Thanks to the topLED source sloped toward the inside and the hollow conformation of the front part, the luminous curve reaches the portion of the surface behind the base to then open up to 180° and proceed uniformly in front of the post. An emission conceived for installations close to a wall: the light illuminates the walkway area exactly starting from the base of the wall, no matter despite Apache being installed a few centimetres in front of it.

Uniform emission

The emission of Apache is free of shady cones, clean and high-performance. On the ground, within 1.5 metres from the base of the lamp, the minimum illumination never drops below 10 lux, for light that is always uniform and functional.

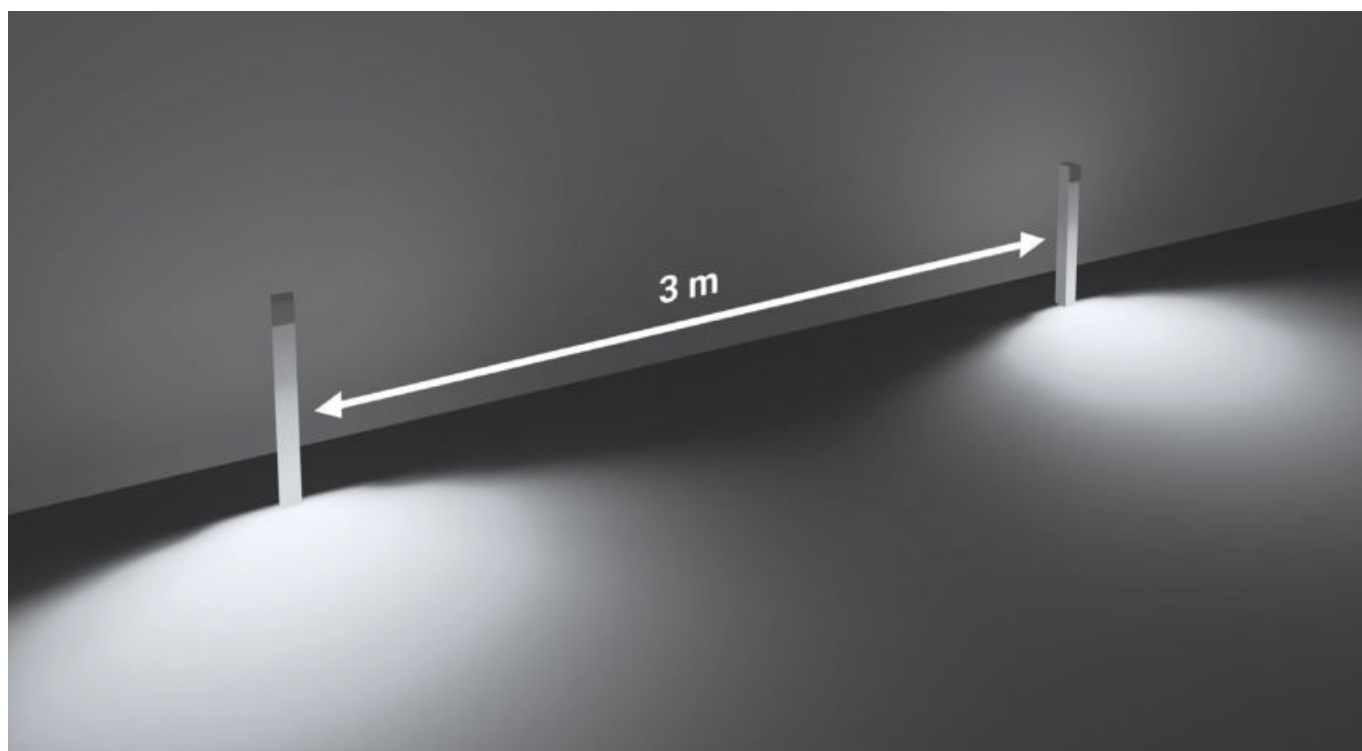


Cut-off recessed source

The source located on the top of the post is completely hidden from view. Apache is a cut-off light fixture with extremely high visual comfort: the light “slides” along the hollow body and radiates once on the ground, without ever glaring the view of passers-by even if they were to look directly at the post.




Apache | Bollards | 198-264 V AC | topLED 7 W DC - 8 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| BK Grey | 64252 | M 2700 | 992 - 447 | 00 General - |
| Gr BK | 64253 | W 3000 | 1034 - 466 | |
| DarkBrown | 64254 | N 4000 | 1087 - 489 | |
| Sand | 64255 | | | |

Accessories Pag. 681


Apache | Bollards | 198-264 V AC | topLED 9 W DC - 10 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| BK Grey | 64256 | M 2700 | 1198 - 539 | 00 General - |
| Gr BK | 64257 | W 3000 | 1249 - 561 | |
| DarkBrown | 64258 | N 4000 | 1313 - 589 | |
| Sand | 64259 | | | |

Accessories Pag. 681


Apache | Bollards | 198-264 V AC | topLED 7 W DC - 9 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| BK Grey | 64262 | M 2700 | 992 - 351 | 00 General - |
| Gr BK | 64263 | W 3000 | 1034 - 365 | |
| DarkBrown | 64264 | N 4000 | 1087 - 384 | |
| Sand | 64265 | | | |

Accessories Pag. 681


Apache | Bollards | 198-264 V AC | topLED 9 W DC - 10 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|------------|--------------|
| BK Grey | 64266 | M 2700 | 1198 - 423 | 00 General - |
| Gr BK | 64267 | W 3000 | 1249 - 440 | |
| DarkBrown | 64268 | N 4000 | 1313 - 463 | |
| Sand | 64269 | | | |

Accessories Pag. 681

Accessories



| description | type |
|-----------------------|------|
| 64210 Tie rods | |
| suitable for: Apache | |

blum


Materials

PVC/Aluminium body
PMMA diffuser






Blum | Bollards | 100-240 V AC | 1 x powerLEDs 1,5 W DC - 1,8 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83875 | M 2700 | 199 - On req | 20 Spot - |
| | | W 3000 | 213 - On req | 00 General - |
| | | N 4000 | 227 - On req | |

Accessories Pag. 685


Blum | Bollards | 100-240 V AC | 3 x powerLEDs 4,5 W DC - 5,4 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83879 | M 2700 | 597 - On req | 20 Spot - |
| | | W 3000 | 639 - On req | 00 General - |
| | | N 4000 | 681 - On req | |

Accessories Pag. 685



Blum | Bollards | 100-240 V AC | 1 x powerLEDs 1,5 W DC - 1,8 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83876 | M 2700 | 199 - On req | 00 General - |
| | | W 3000 | 213 - On req | |
| | | N 4000 | 227 - On req | |

Accessories Pag. 685

Blum | Bollards | 100-240 V AC | 3 x powerLEDs 4,5 W DC - 5,4 W AC




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83880 | M 2700 | 597 - On req | 00 General - |
| | | W 3000 | 639 - On req | |
| | | N 4000 | 681 - On req | |


Accessories Pag. 685




Spot



General




Closed flower



Open flower


Blum Flower | Bollards | 100-240 V AC | 1 x powerLEDs 1,5 W DC - 1,8 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83877 | M 2700 | 199 - On req | 00 General - |
| | | W 3000 | 213 - On req | |
| | | N 4000 | 227 - On req | |

Accessories Pag. 685


Blum Flower | Bollards | 100-240 V AC | 3 x powerLEDs 4,5 W DC - 5,4 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83881 | M 2700 | 597 - On req | 00 General - |
| | | W 3000 | 639 - On req | |
| | | N 4000 | 681 - On req | |

Accessories Pag. 685


Blum Flower | Bollards | 100-240 V AC | 1 x powerLEDs 1,5 W DC - 1,8 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83878 | M 2700 | 199 - On req | 00 General - |
| | | W 3000 | 213 - On req | |
| | | N 4000 | 227 - On req | |

Accessories Pag. 685


Blum Flower | Bollards | 100-240 V AC | 3 x powerLEDs 4,5 W DC - 5,4 W AC



| | | Cct | Im S - D | Optic |
|-------|--------------|--------|--------------|--------------|
| Brown | 83882 | M 2700 | 597 - On req | 00 General - |
| | | W 3000 | 639 - On req | |
| | | N 4000 | 681 - On req | |

Accessories Pag. 685

Accessories



| | description | type |
|---|-------------|------|
| 14931 | Peg | |
| suitable for: Blum / Blum Flower | | |



| | description | type |
|----------------------------------|---------------|------|
| 83883 | Closed flower | |
| suitable for: Blum Flower | | |



| | description | type |
|----------------------------------|-------------|------|
| 83884 | Open flower | |
| suitable for: Blum Flower | | |


pilos

Materials

Polyester powder-coated aluminium body
with protective surface treatment
Satinised polycarbonate diffuser





Pilos | Bollards | 198-264 V AC | topLED 6 W DC - 7 W AC



| | | Cct | lm S - D | Optic |
|------|--------------|--------|-----------|--------------|
| Grey | 61125 | W 3000 | 728 - 344 | 00 General - |
| | | N 4000 | 755 - 371 | |

Accessories Pag. 687


Pilos | Bollards | 198-264 V AC | topLED 6 W DC - 7 W AC



| | | Cct | lm S - D | Optic |
|------|--------------|--------|-----------|--------------|
| Grey | 61115 | W 3000 | 728 - 344 | 00 General - |
| | | N 4000 | 755 - 371 | |

Accessories Pag. 687

Pilos | Bollards | 220-240 V AC | topLED 12 W DC - 13 W AC




| | | Cct | lm S - D | Optic |
|------|--------------|--------|------------|--------------|
| Grey | 61145 | W 3000 | 1456 - 716 | 00 General - |
| | | N 4000 | 1510 - 772 | |

Accessories Pag. 687


Accessories



| description | type |
|---|------|
| 59950 Tie rods | |
| suitable for: Pilos 6W / Pilos 12W | |



| description | type |
|-------------------------------|------|
| 58675 Reflector | |
| suitable for: Pilos 6W | |



| description | type |
|--------------------------------|------|
| 58685 Reflector | |
| suitable for: Pilos 12W | |


stalk

Materials

Polyester powder-coated aluminium body
with protective surface treatment
Opalescent white polyethylene diffuser




Stalk | Bollards | 100-240 V AC | topLED 4 W DC - 5 W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|----------|-------------------|
| Grey | 63455 | W 3000 | 414 - 78 | 00 General (120°) |
| DarkBrown | 63456 | N 4000 | 440 - 98 | |

Accessories Pag. 689


Stalk | Bollards | 100-240 V AC | topLED 4 W DC - 5 W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-----------|--------------|
| Grey | 63495 | W 3000 | 414 - 157 | 00 General - |
| DarkBrown | 63496 | N 4000 | 440 - 196 | |

Accessories Pag. 689



Stalk | Bollards | 180-264 V AC | topLED 20 W DC - 21 W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|------------|-------------------|
| Grey | 63445 | W 3000 | 1656 - 791 | 00 General (115°) |
| DarkBrown | 63446 | N 4000 | 1757 - 840 | |

Accessories Pag. 689




Stalk | Bollards | 180-264 V AC | topLED 9 W DC - 10 W AC



| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-----------|-------------------|
| Grey | 63465 | W 3000 | 828 - 157 | 00 General (120°) |
| DarkBrown | 63466 | N 4000 | 879 - 196 | |

Accessories Pag. 689


Stalk | Bollards | 180-264 V AC | topLED 9 W DC - 10 W AC




| | | Cct | Im S - D | Optic |
|-----------|--------------|--------|-----------|--------------|
| Grey | 63505 | W 3000 | 828 - 313 | 00 General - |
| DarkBrown | 63506 | N 4000 | 879 - 392 | |

Accessories Pag. 689

Accessories



| description | type |
|--|------|
| 56990 Fixing base | |
| suitable for: Stalk 365 mm / Stalk 700 mm Stalk 706 mm | |



| description | type |
|----------------------------|------|
| 53890 Tie rods | |
| suitable for: Stalk | |




lino

Materials

Stainless steel body

Extra-clear glass diffuser

Lino | Bollards | 24V DC | powerLED 1 W DC



| | | Cct | Im S - D | Optic |
|-------|--------------|---------------|----------|---------------------|
| Steel | 83763 | M 2700 | 98 - 66 | 00 General - |
| | | W 3000 | 106 - 71 | |
| | | N 4000 | 112 - 75 | |


Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|-----------------------|-----------------------|-----------------------|-------------------------|----------------------|
| ON/OFF 1 - 14 art. | ON/OFF 1 - 24 art. | ON/OFF 1 - 48 art. | 0/1-10V 1 - 150 art. | DALI 1 - 120 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 160 x h 35 | p 191 x l 163 x h 38 |


lino

design IN-VISIBLE lab



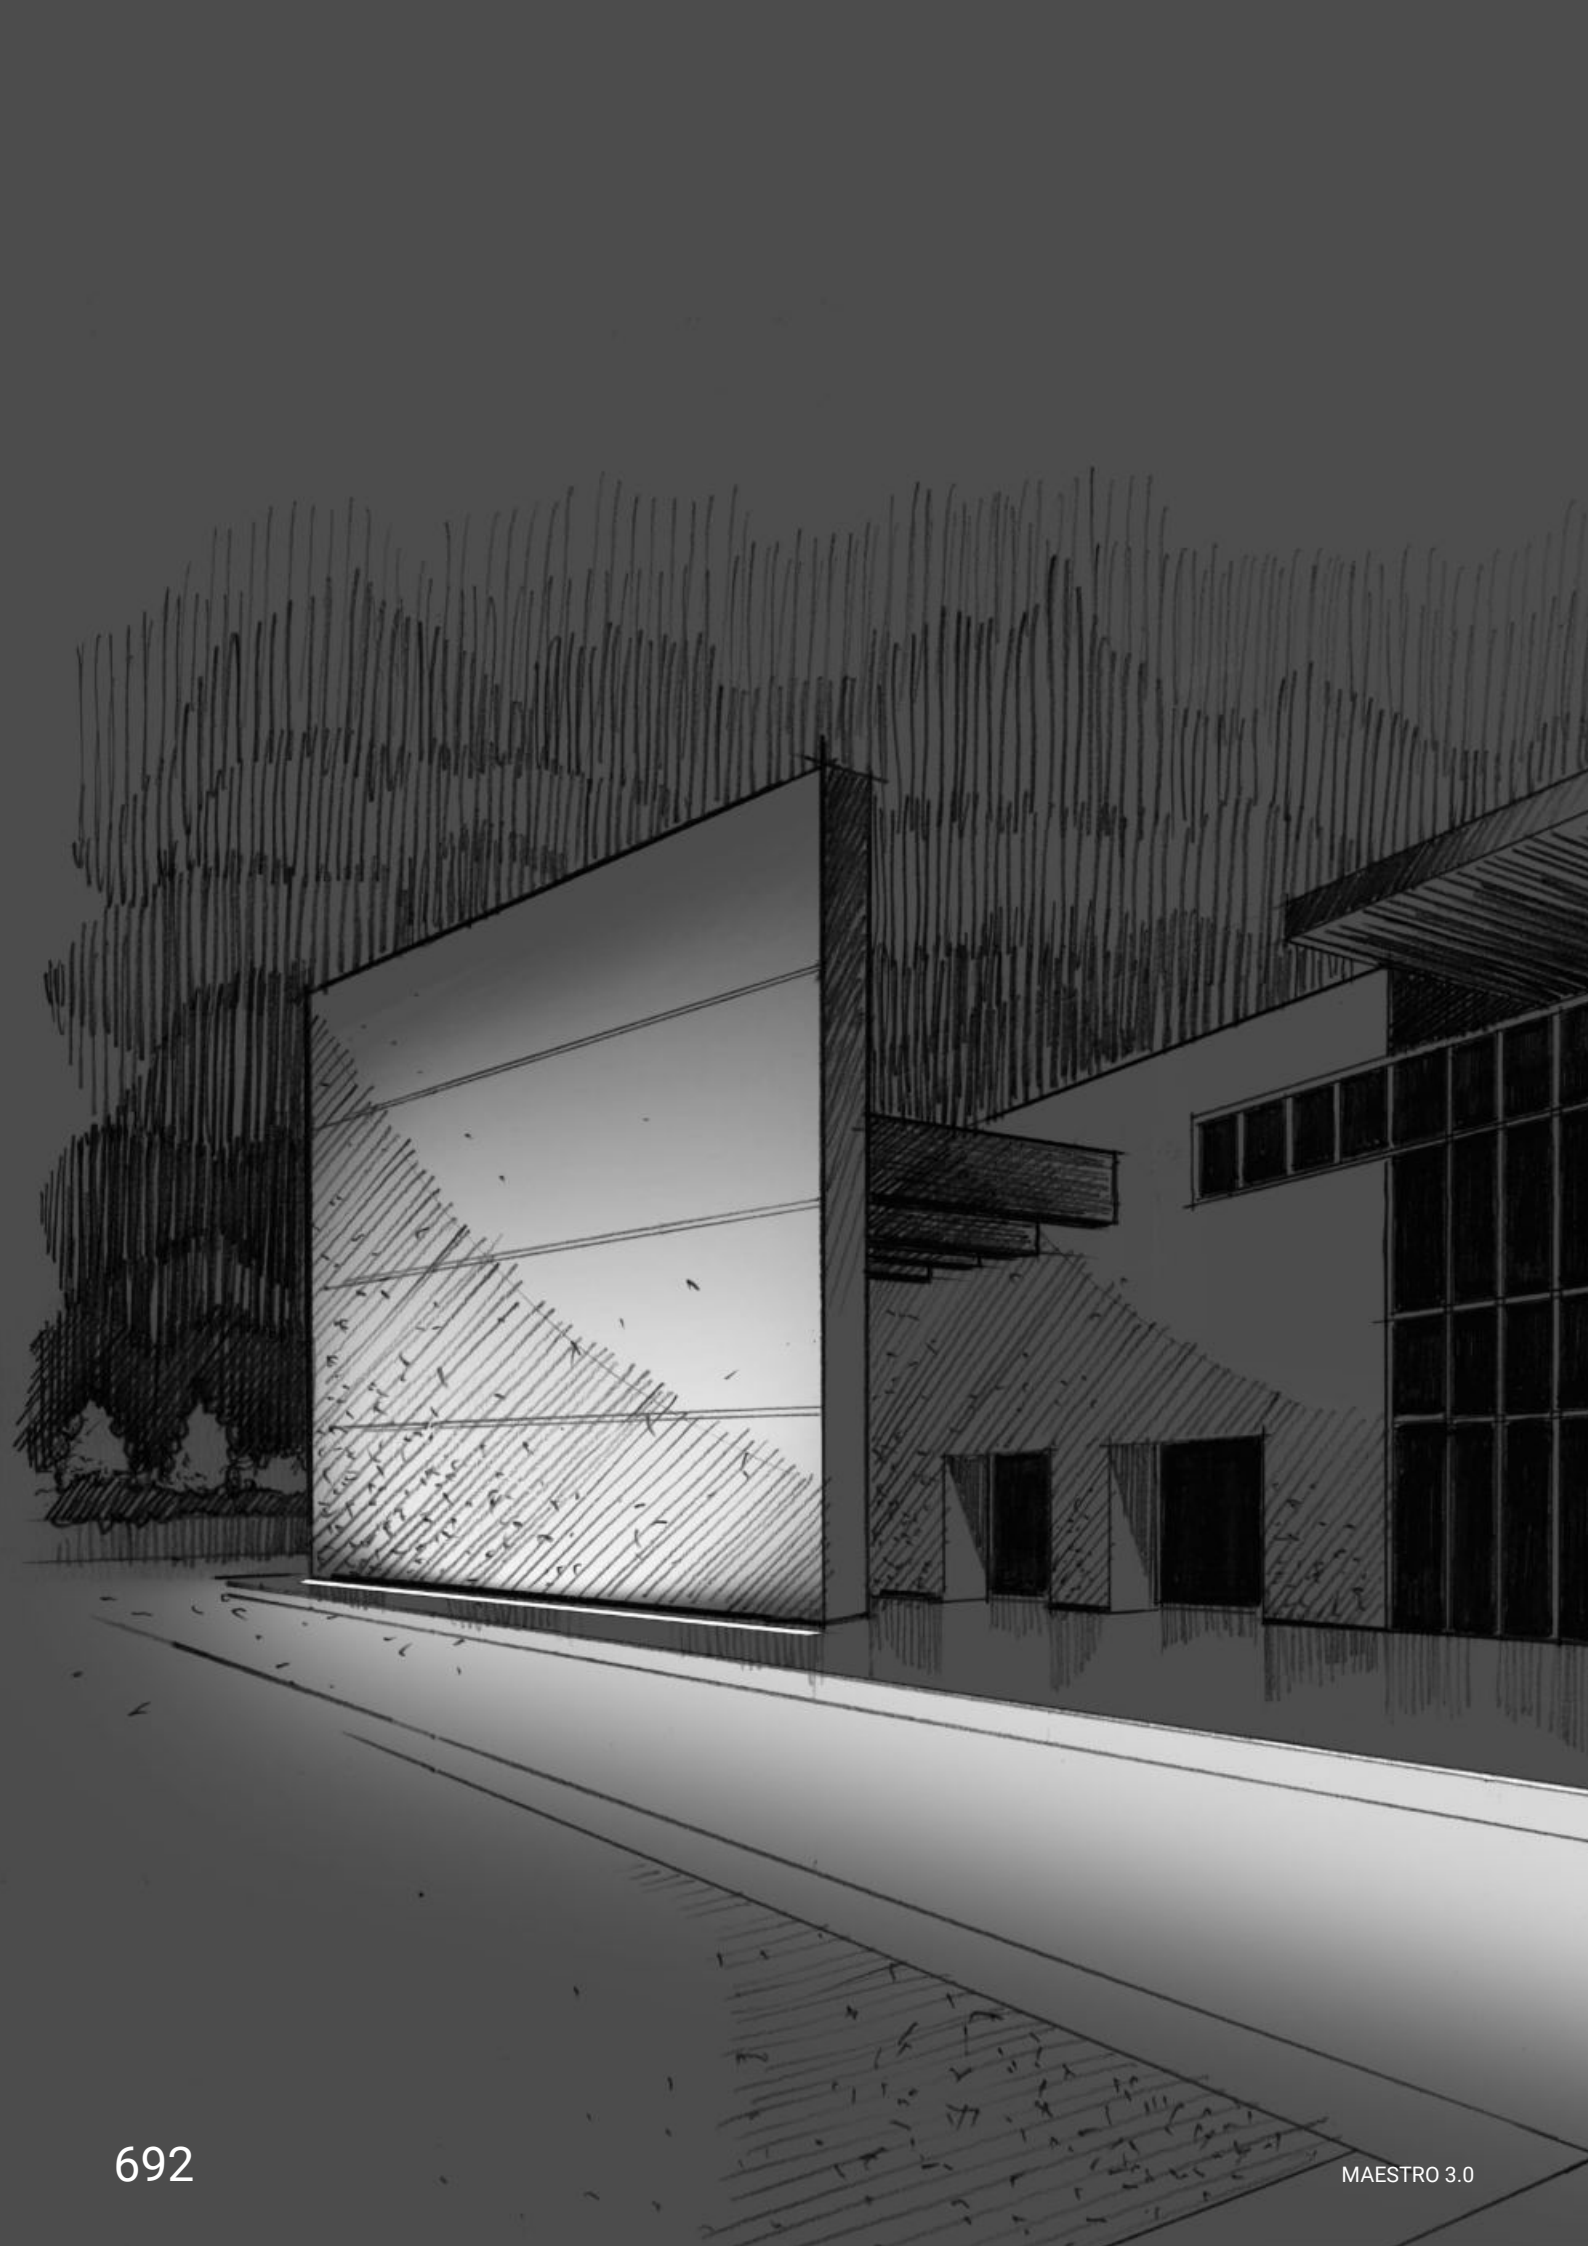

Linear lights

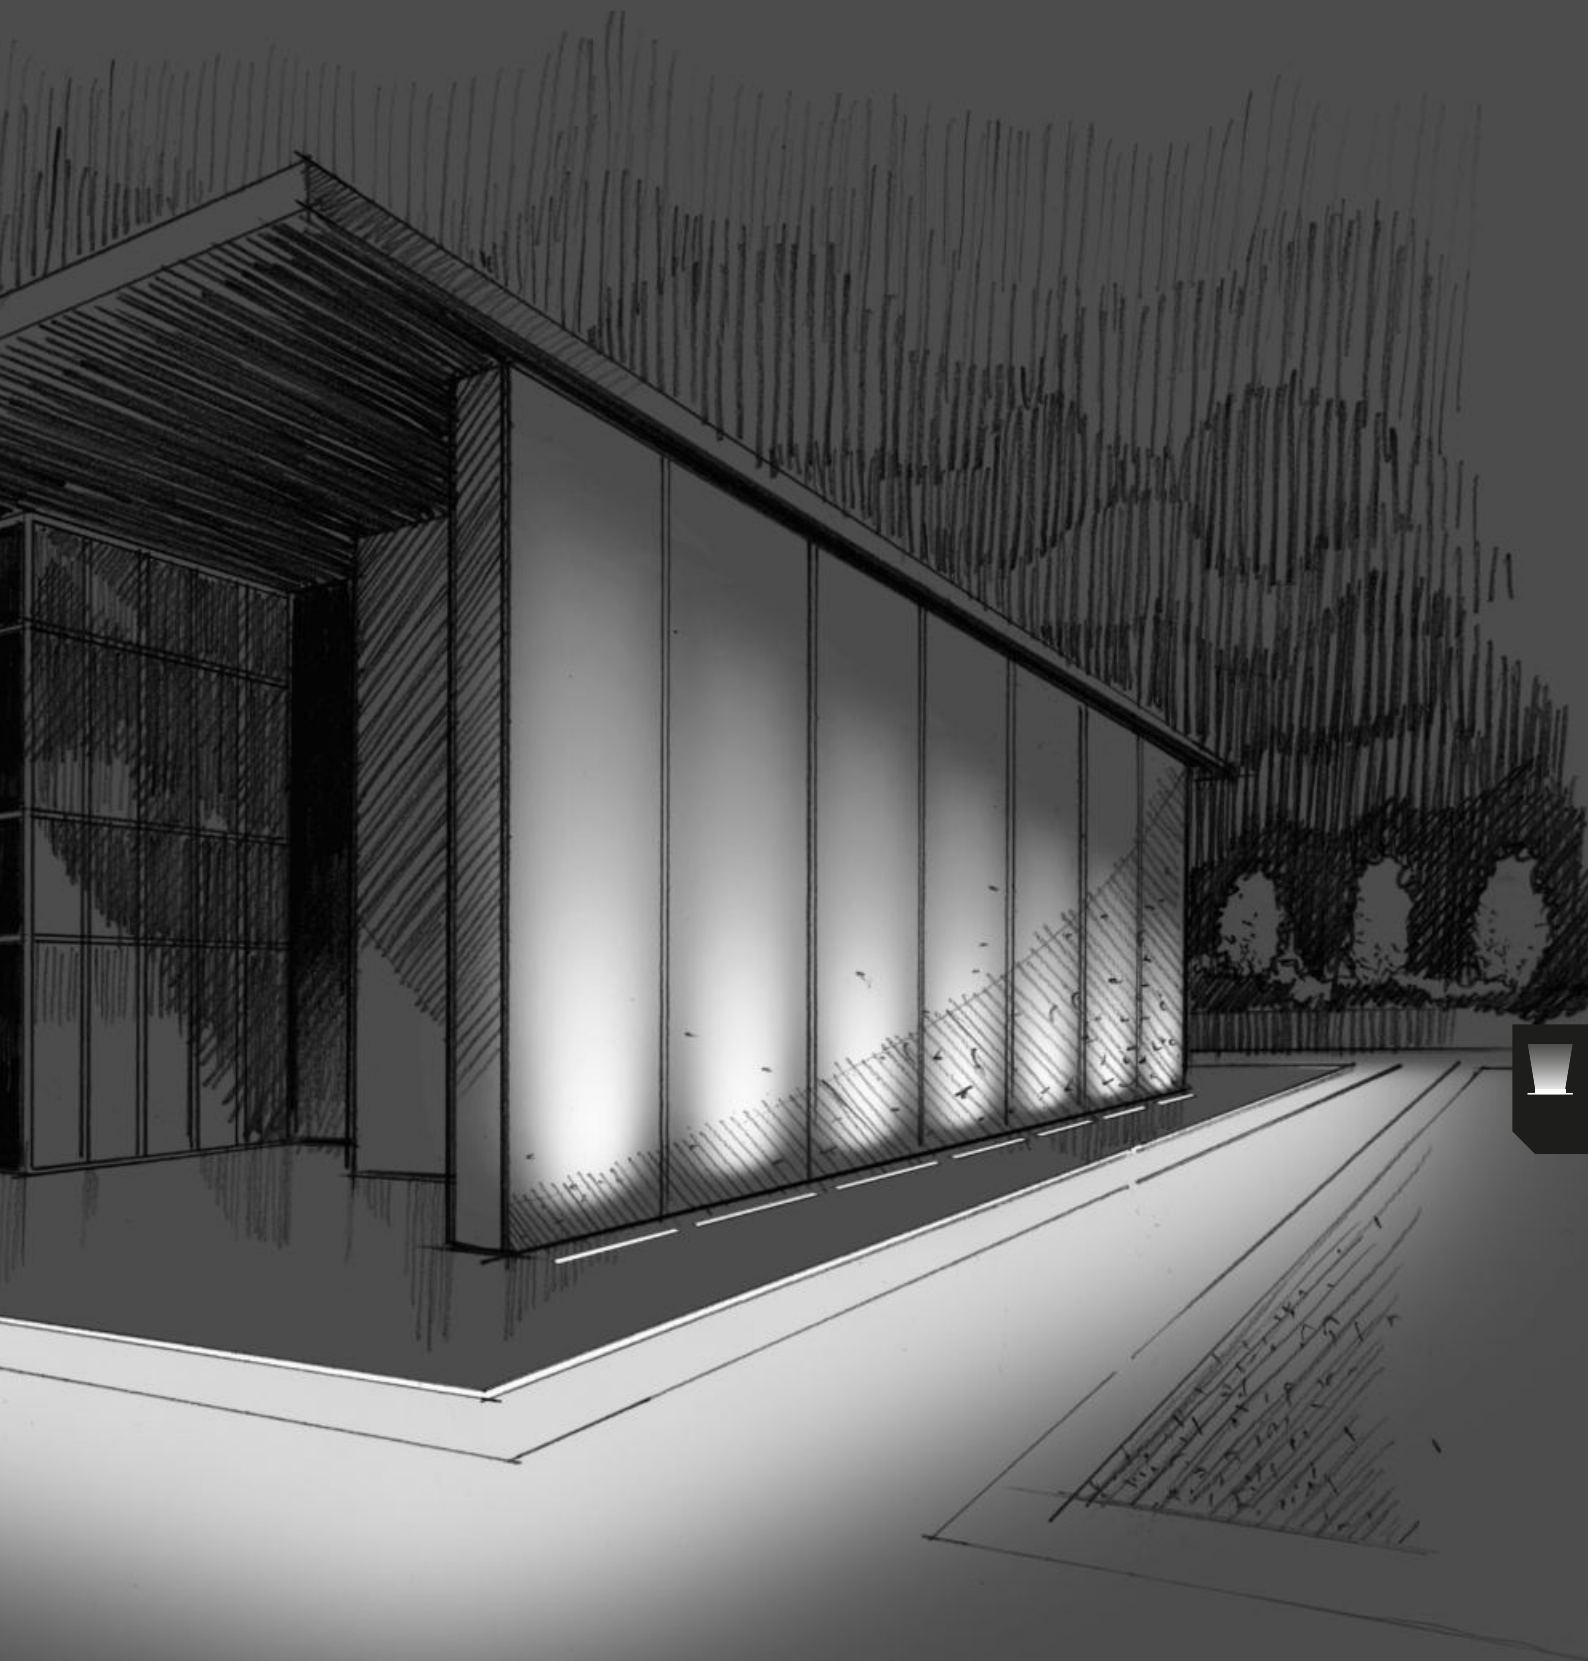


linear lights range index

Archiline




Xenia

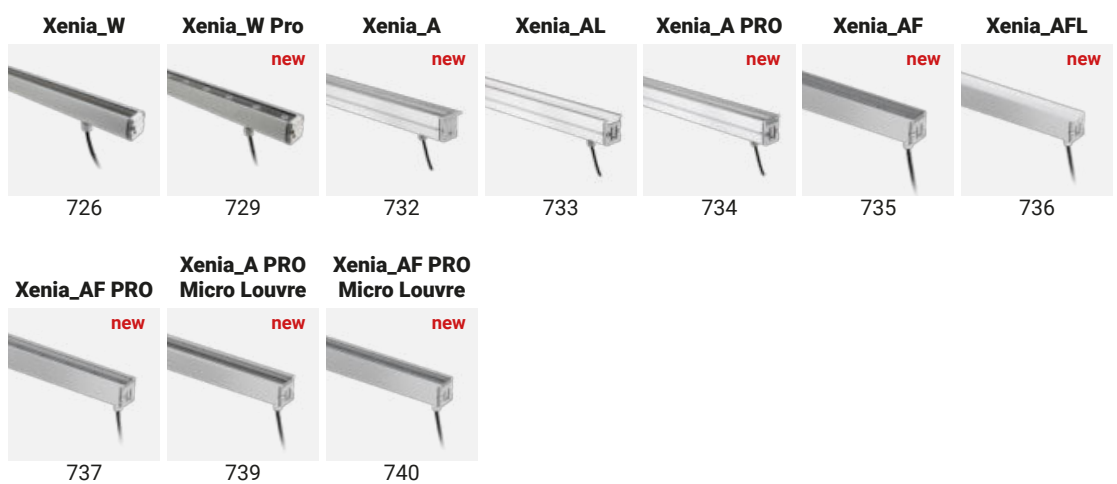


Paseo



Thin66



Ice-Cut66



Skin

Skin_FL



768

Skin_S



768

Skin_F



768

Skin_Y



768

Dirigo

Dirigo



774

Fylo+

Fylo+ Out Recessed



782





linear lighting features

High-quality construction

The new linear light ranges feature:

- Very high-quality materials, including EN AW-6060 aluminium alloy, 316L stainless steel, tempered glass, and special silicone resins;

- Proven resistance to vibration, stress and impact, tolerating temperatures of -20C to +60C and other extremes of climate, overvoltage, electric discharge and moisture protection, and AquaStop® conductor waterproofing.



Less than 0,5 MacAdam steps

We choose the best manufacturers to ensure that LEDs maintain consistency of colour over time and within lighting projects. Our standard of quality is less than 0,5 MacAdam steps, meaning that differences between LEDs are not visible to the naked eye, and the LEDs are regarded as being of excellent quality.



MacAdam < 0,5





Chromatic inhomogeneity

Colour range

LEDs give you access to a wide range of colour temperatures, from warm white (2700 K) to daylight tones (4000 K), for total design versatility. As well as white light, the RGB range offers static or dynamic coloured effects, and the introduction of RGBW, in which white is separate from red, green and blue in the diode, lets you obtain the right mix for your project alongside a very pure white.


Perfect mixing

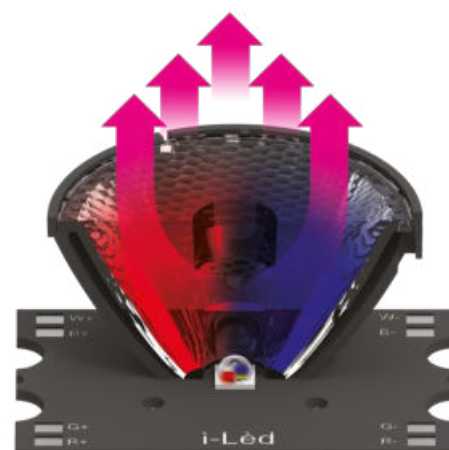

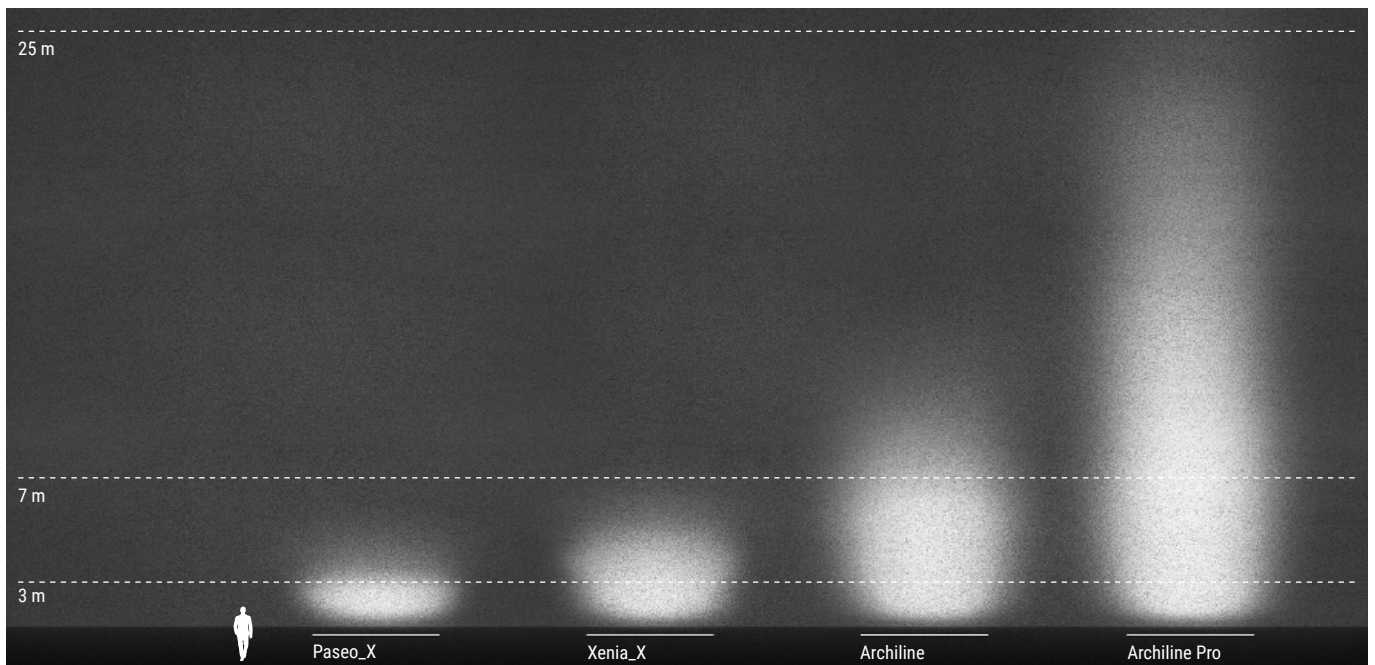

Performance for every need

Each family of lights includes different outputs to meet the largest possible range of requirements. Paseo, Xenia, Archiline and Archiline PRO offer a particularly wide selection. It's worth remembering that all linear lights can be dimmed using 1-10V, DALI, DMX and RDM protocols, using bidirectional communication to achieve total control of DMX parameters.

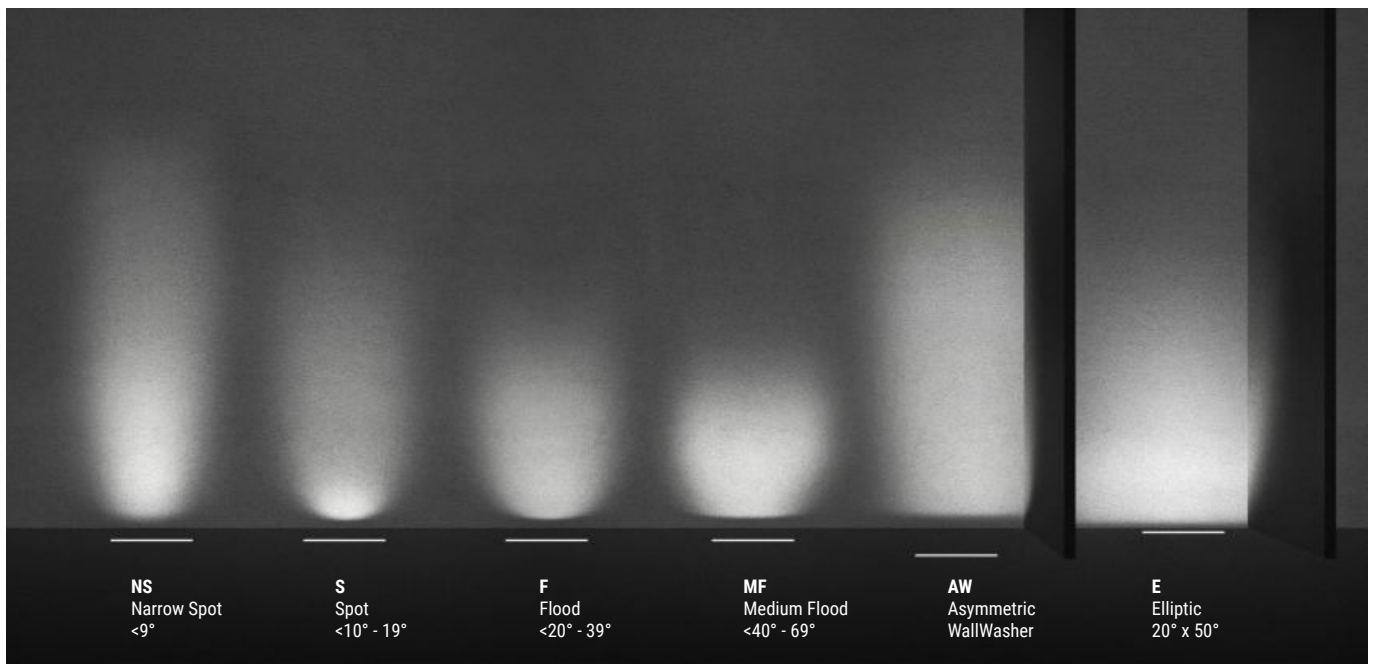

Optical range

The Linear Lights series offers specific products for every context, and lighting solutions that vary depending on the optics you choose. There are spots, narrow spots for small or very small angles, various floods, and diffuse and wall washer lights. The Elliptical $20^\circ \times 50^\circ$ gives an oval grazing wash for tall narrow walls, and Asymmetric provides a directional beam that washes the wall evenly.

archiline

Recessed model materials

Anodised 6060 aluminium alloy or AISI 316L stainless steel flange. Extra-clear tempered glass or white ceramic varnished tempered glass diffuser

Wall/ceiling model materials

Anodised 6060 aluminium alloy or AISI 316L stainless steel body. Extra-clear tempered glass diffuser







archiline range

Archiline Twin




Pag. 823

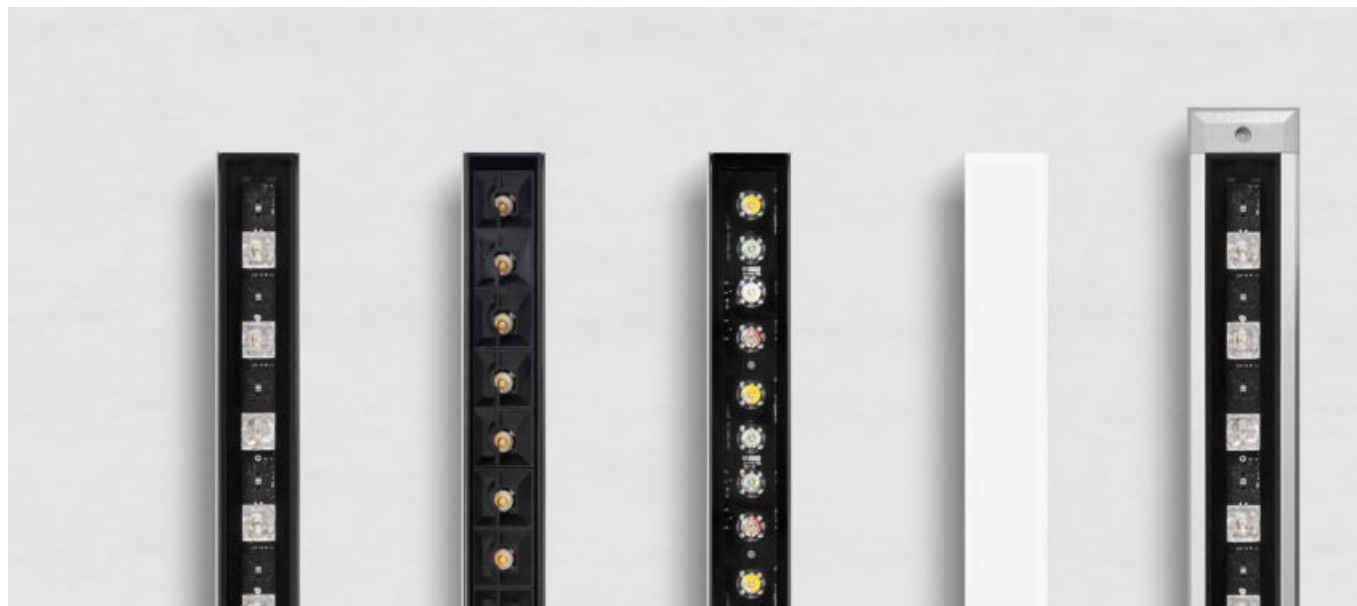

| | _F / _FJ frameless | _F frameless Anti-glaring | _F frameless RGBW DMX | _FL frameless Opaline | _A frame |
|---|---|---|---|-----------------------------|---|
| 3,6 W | - | - | - | 321 x 45 mm | - |
| 6 W | - | - | - | 511 x 45 mm | - |
| 8,4 W | - | - | - | 321 x 45 mm | - |
| 11,2 W 13,6 W | 321 x 45 mm | 321 x 45 mm | 321 x 45 mm | 1001 x 45 mm 511 x 45 mm | 371 x 62 mm |
| 18,3 W 19,8 W | 511 x 45 mm 501 x 45 mm | 511 x 45 mm | - | - | 561 x 62 mm |
| 22 W | - | - | 511 x 45 mm | - | - |
| 24 W | - | - | - | 1001 x 45 mm | - |
| 36,5 W 39,6 W | 1001 x 45 mm | 1001 x 45 mm | - | - | 1051 x 62 mm |
| 44W | - | - | 1001 x 45 mm | - | - |
| 55 W 59 W | - | - | - | - | 1541 x 62 mm |
| Finish | Anod. Bk. | Anod. Bk. | Anod. Bk. | Anod. Bk. | Anod. Al. |
| powerLED | 2700K - 3000K 4000K | 2700K - 3000K 4000K | RGBW | 3000K - 4000K RGBW | 2700K - 3000K 4000K |
| Optics | Spot Flood Wide Flood Elliptic Asymmetric | Spot Flood Wide Flood Elliptic | Spot Flood Wide Flood Elliptic Asymmetric | General | Spot Flood Wide Flood Elliptic Asymmetric |
| Driver  | On/Off DALI | On/Off DALI | DMX | On/Off DMX | On/Off DALI |



| | _A Frame Anti-glaring | _A Frame RGBW DMX | _I / _IJ Frame Inox | _I Frame Anti-glaring | _I Frame RGBW DMX | PRO_I PRO_I RGBW DMX |
|--|---|---|---|---|---|--|
| 11,2 W 13,6 W | 371 x 62 mm | 371 x 62 mm | 375 x 66 mm | 375 x 66 mm | 375 x 66 mm | - |
| 18,3 W 19,8 W | 561 x 62 mm | - | 565 x 66 mm | 565 x 66 mm | - | - |
| 22 W | - | 561 x 62 mm | - | - | 565 x 66 mm | - |
| 36,5 W 39,6 W | 1051 x 62 mm | - | 1055 x 66 mm | 1055 x 66 mm | - | - |
| PRO 37 W | | | | | | 585 x 150 mm |
| 44 W | - | 1051 x 62 mm | - | - | 1055 x 66 mm | - |
| PRO 46 W | | | | | | 585 x 150 mm |
| PRO 74 W | | | | | | 1090 x 150 mm |
| PRO 80,5 W | | | | | | 1090 x 150 mm |
| Finish | Anod. Al. | Anod. Al. | Steel | Steel | Steel | Steel |
| powerLED | 2700K - 3000K 4000K | RGBW | 2700K - 3000K 4000K | 2700K - 3000K 4000K | RGBW | 2700K - 3000K - 4000K RGBW |
| Optics | Spot Flood Wide Flood Elliptic | Spot Flood Wide Flood Elliptic Asymmetric | Spot Flood Wide Flood Elliptic Asymmetric | Spot Flood Wide Flood Elliptic | Spot Flood Wide Flood Elliptic Asymmetric | Narrow Spot Spot Flood Elliptic |
| Driver  | On/Off DALI | DMX | On/Off DALI | On/Off DALI | DMX | On/Off DMX |

High-quality construction



Archiline bodies are made from extruded 6060 aluminium alloy anodised to 10 microns.

These two processes provide superior passive heat dissipation and, most importantly, higher corrosion resistance.

The caps are diecast.

New tilting version


The Archiline family expands with the new tilting version which rounds out a vast range of solutions and versions. Archiline_IJ and Archiline_FJ use a tilting system that allows adjustment of the optics assembly using a specific ring with 5°/10°/15° steps.

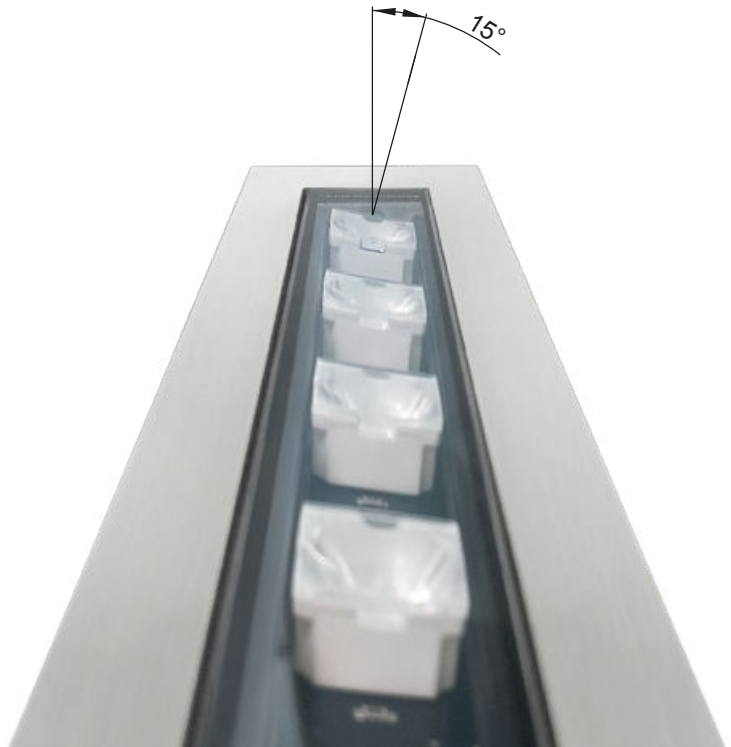

Safety systems

We have developed a variety of corrosion protection technology to maximise the lifespan of our lights.

They also have overtension and electrical discharge protection, TCS® to shield their circuits from moisture, and AquaStop® water protection.

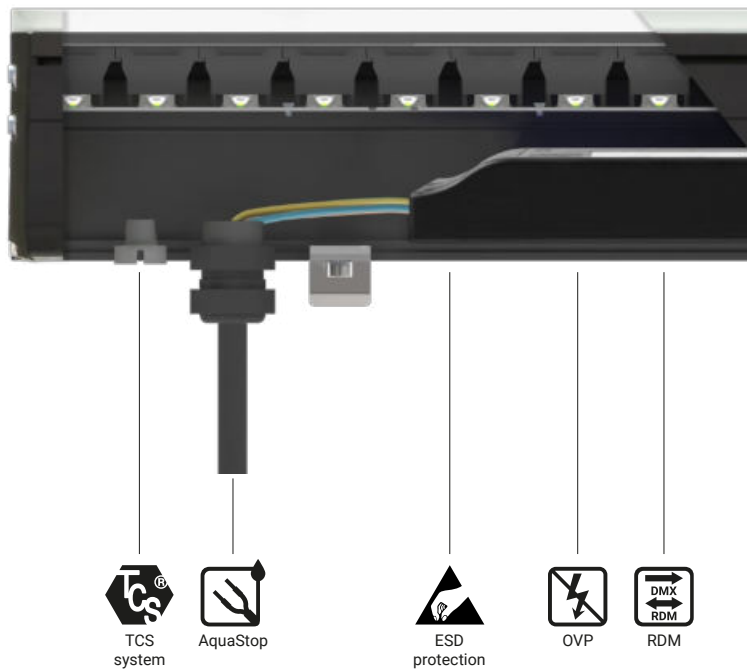

The range

The Archiline range comprises four subranges of recessed mountings.

- ARCHILINE_F: trimless with extra-clear 12-mm tempered glass and black-screenprinted optical compartment, with or without darklight or in RGBW. Designed for wall lighting, and can be placed in continuous lines.



- ARCHILINE_FL: trimless with extra-clear 12-mm tempered glass and white ceramic varnish, monochrome or RGBW versions. Designed for path marking in parks, squares, drives, and public spaces. Can be placed in continuous lines.



- ARCHILINE_A: 6060 aluminium alloy flange with extra-clear 12-mm tempered glass and black-screenprinted optical compartment, with or without darklight or in darklight+RGBW. Designed for wall lighting.



- ARCHILINE_I: AISI 316L stainless steel flange with extra-clear 12-mm tempered glass and black-screenprinted optical compartment, with or without darklight or in darklight+RGBW. Designed for wall lighting.



Optics

The Archiline range has optics for every type of design need.

- SPOT and NARROW SPOT for accent lighting
- FLOOD and MEDIUM FLOOD for soft lighting of parts of walls
- ELLIPTIC 20°x50°, which projects an oval beam, ideal for grazing illumination of high and narrow walls
- ASYMMETRIC for a wallwasher effect.

Other features:

- Darklight versions, which section the beam by eliminating the direct component to the exterior and lighting only the wall
- Ability to create continuous lines without affecting the evenness of the light near the ends of each module. In the Archiline_F no-darklight versions, the diodes are arranged so as to maintain the same distance between each one, and between the last ones at each end.




Archiline_F | Linear profiles | 198-264V AC | powerLED




| 13,2 W DC - 14,5 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|-------------------------|
| Anod. Bk. 92127 | M 2700 | 1692 - 916 | 08 Spot (18°) |
| DALI 12,2 W DC - 13,5 W AC | W 3000 | 1812 - 974 | 15 Spot (23°) |
| Anod. Bk. 81591 | N 4000 | 1932 - 1037 | 30 Flood (29°) |
| | | | 60 W.Flood (53°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

6 LEDs




| 19,8 W DC - 22 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|-------------------------|
| Anod. Bk. 92128 | M 2700 | 2538 - 1481 | 08 Spot (16°) |
| DALI 18,3 W DC - 20,5 W AC | W 3000 | 2718 - 1557 | 15 Spot (18°) |
| Anod. Bk. 81592 | N 4000 | 2898 - 1658 | 30 Flood (25°) |
| | | | 60 W.Flood (57°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

9 LEDs



| 39,6 W DC - 44 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|-------------------------|
| Anod. Bk. 92129 | M 2700 | 5076 - 2884 | 08 Spot (16°) |
| DALI 36,5 W DC - 41 W AC | W 3000 | 5436 - 3067 | 15 Spot (21°) |
| Anod. Bk. 81593 | N 4000 | 5796 - 3265 | 30 Flood (28°) |
| | | | 60 W.Flood (56°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |


18 LEDs



Cables Pag. 721


Recessed casing Pag. 715

Archiline_F Anti-glare | Linear profiles | 198-264V AC | powerLED




| 12,1 W DC - 13,5 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|------------|----------------------|
| Anod. Bk. 92049 | M 2700 | 1716 - 645 | 15 Spot - |
| DALI 11,2 W DC - 14 W AC | W 3000 | 1837 - 687 | 30 Flood - |
| Anod. Bk. 81594 | N 4000 | 1958 - 730 | 60 W.Flood - |
| | | | 25 Elliptic - |

11 LEDs




| 19,8 W DC - 22 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|----------------------|
| Anod. Bk. 92050 | M 2700 | 2808 - 1118 | 15 Spot - |
| DALI 18,3 W DC - 20,5 W AC | W 3000 | 3006 - 1191 | 30 Flood - |
| Anod. Bk. 81595 | N 4000 | 3204 - 1264 | 60 W.Flood - |
| | | | 25 Elliptic - |

18 LEDs



| 39,6 W DC - 43,5 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|----------------------|
| Anod. Bk. 92051 | M 2700 | 5616 - 2326 | 15 Spot - |
| DALI 36,5 W DC - 41 W AC | W 3000 | 6012 - 2476 | 30 Flood - |
| Anod. Bk. 81596 | N 4000 | 6408 - 2628 | 60 W.Flood - |
| | | | 25 Elliptic - |


36 LEDs




Cables Pag. 721

Recessed casing Pag. 715


Archiline_FJ | Linear profiles | 198-264V AC | powerLED




| 13,2 W DC - 14,5 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|------------------------------|
| Anod. Bk. 82302 | M 2700 | 1692 - 916 | 08 Spot (13°) |
| DALI 12,2 W DC - 13,5 W AC | W 3000 | 1812 - 974 | 15 Spot (18°) |
| Anod. Bk. 82303 | N 4000 | 1932 - 1037 | 30 Flood (29°) |
| | | | 60 W.Flood (53°) |
| | | | 25 Elliptic (29°x44°) |
| | | | 27 Asymm. - |



| 19,8 W DC - 22 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|------------------------------|
| Anod. Bk. 82304 | M 2700 | 2538 - 1482 | 08 Spot (16°) |
| DALI 18,3 W DC - 20,5 W AC | W 3000 | 2718 - 1557 | 15 Spot (18°) |
| Anod. Bk. 82305 | N 4000 | 2898 - 1658 | 30 Flood (25°) |
| | | | 60 W.Flood (57°) |
| | | | 25 Elliptic (22°x46°) |
| | | | 27 Asymm. - |



| 39,6 W DC - 44 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|------------------------------|
| Anod. Bk. 82306 | M 2700 | 5076 - 2884 | 08 Spot (16°) |
| DALI 36,5 W DC - 41 W AC | W 3000 | 5436 - 3067 | 15 Spot (21°) |
| Anod. Bk. 82307 | N 4000 | 5796 - 3265 | 30 Flood (28°) |
| | | | 60 W.Flood (56°) |
| | | | 25 Elliptic (23°x61°) |
| | | | 27 Asymm. - |




Cables Pag. 721
Recessed casing Pag. 715


Archiline_F RGBW DMX | Linear profiles | 198-264V AC | powerLED




| 13,2 W DC - 14,5 W AC | | Optic |
|------------------------|-----------------------------|----------------------|
| Anod. Bk. 92083 | Q RGBW natural white | 15 Spot - |
| | V RGBW warm white | 30 Flood - |
| | | 60 W.Flood - |
| | | 25 Elliptic - |
| | | 27 Asymm. - |



| 22 W DC - 24,5 W AC | | Optic |
|------------------------|-----------------------------|----------------------|
| Anod. Bk. 92084 | Q RGBW natural white | 15 Spot - |
| | V RGBW warm white | 30 Flood - |
| | | 60 W.Flood - |
| | | 25 Elliptic - |
| | | 27 Asymm. - |




| 44 W DC - 49 W AC | | Optic |
|------------------------|-----------------------------|----------------------|
| Anod. Bk. 92093 | Q RGBW natural white | 15 Spot - |
| | V RGBW warm white | 30 Flood - |
| | | 60 W.Flood - |
| | | 25 Elliptic - |
| | | 27 Asymm. - |



DMX 99385 DMX/RDM addresser
98986 DMX LINE Clouser 120 Ohm
98985/99390 Splitter ALLinONE Start & Continuity Pag. 956

Cables Pag. 721
Recessed casing Pag. 715


DW Dynamic White on request

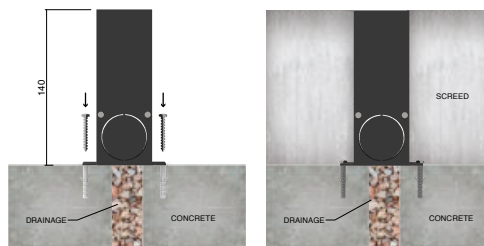


Archiline_FL | Linear profiles | 190-250V AC | topLED




| 3,6 W DC - 5 W AC | Cct | lm S - D | Optic |
|------------------------|------------------|-----------------------|-------------------|
| Anod. Bk. 92138 | W 3000 N 4000 | 483 - 95 504 - 103 | 00 General (103°) |



| 6 W DC - 8,6 W AC | Cct | lm S - D | Optic |
|------------------------|------------------|------------------------|-------------------|
| Anod. Bk. 92139 | W 3000 N 4000 | 828 - 145 864 - 158 | 00 General (124°) |



| 12 W DC - 14,3 W AC | Cct | lm S - D | Optic |
|------------------------|------------------|--------------------------|-------------------|
| Anod. Bk. 92142 | W 3000 N 4000 | 1656 - 290 1728 - 315 | 00 General (124°) |




Cables Pag. 721
Recessed casing Pag. 715


Archiline_FL RGBW DMX | Linear profiles | 190-250V AC | topLED




| 8,4 W DC - 10 W AC | | Optic |
|------------------------|---|--------------|
| Anod. Bk. 92143 | Q RGBW natural white V RGBW warm white | 00 General - |



| 13,6 W DC - 16 W AC | | Optic |
|------------------------|---|--------------|
| Anod. Bk. 92144 | Q RGBW natural white V RGBW warm white | 00 General - |



| 24 W DC - 25 W AC | | Optic |
|------------------------|---|--------------|
| Anod. Bk. 92145 | Q RGBW natural white V RGBW warm white | 00 General - |



| DMX | 99385 | 98986 | 98985/99390 |
|-----------------------------------|----------------------|-----------------------------|---|
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |


Cables Pag. 721
Recessed casing Pag. 715






| 13,2 W DC - 14,5 W AC | Cct | lm S - D | Optic |
|-----------------------------------|---------------|-------------|-------------------------|
| Anod. AL. 92132 | M 2700 | 1692 - 916 | 08 Spot (13°) |
| DALI 12,2 W DC - 13,5 W AC | W 3000 | 1812 - 974 | 15 Spot (18°) |
| Anod. AL. 81603 | N 4000 | 1932 - 1037 | 30 Flood (29°) |
| | | | 60 W.Flood (53°) |
| | | | 25 Elliptic. - |
| | | | 27 Asymm. - |

6 LEDs




| 19,8 W DC - 22 W AC | Cct | lm S - D | Optic |
|-----------------------------------|---------------|-------------|-------------------------|
| Anod. AL. 92134 | M 2700 | 2538 - 1481 | 08 Spot (16°) |
| DALI 18,3 W DC - 20,5 W AC | W 3000 | 2718 - 1557 | 15 Spot (18°) |
| Anod. AL. 81604 | N 4000 | 2898 - 1658 | 30 Flood (25°) |
| | | | 60 W.Flood (57°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

9 LEDs




| 39,6 W DC - 44 W AC | Cct | lm S - D | Optic |
|---------------------------------|---------------|-------------|-------------------------|
| Anod. AL. 92136 | M 2700 | 5076 - 2884 | 08 Spot (16°) |
| DALI 36,5 W AC - 41 W AC | W 3000 | 5436 - 3067 | 15 Spot (21°) |
| Anod. AL. 81605 | N 4000 | 5796 - 3265 | 30 Flood (28°) |
| | | | 60 W.Flood (56°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

18 LEDs



| 59 W DC - 65 W AC | Cct | lm S - D | Optic |
|---------------------------------|---------------|-------------|-----------------------|
| Anod. AL. 81590 | M 2700 | 7182 - 4095 | 08 Spot (16°) |
| DALI 55 W DC - 61,4 W AC | W 3000 | 7668 - 4355 | 15 Spot (21°) |
| Anod. AL. 81606 | N 4000 | 8181 - 4660 | 30 Flood (28°) |
| | | | 60 W.Flood - |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

27 LEDs




Cables Pag. 721
Recessed casing Pag. 715




| 12,1 W DC - 13,5 W AC | Cct | lm S - D | Optic |
|-----------------------------------|---------------|------------|----------------------|
| Anod. AL. 92052 | M 2700 | 1716 - 645 | 15 Spot - |
| DALI 11,2 W DC - 12,5 W AC | W 3000 | 1837 - 687 | 30 Flood - |
| Anod. AL. 81607 | N 4000 | 1958 - 730 | 60 W.Flood - |
| | | | 25 Elliptic - |

11 LEDs




| 19,8 W DC - 22 W AC | Cct | lm S - D | Optic |
|-----------------------------------|---------------|-------------|----------------------|
| Anod. AL. 92054 | M 2700 | 2808 - 1118 | 15 Spot - |
| DALI 18,3 W DC - 20,5 W AC | W 3000 | 3006 - 1191 | 30 Flood - |
| Anod. AL. 81608 | N 4000 | 3204 - 1264 | 60 W.Flood - |
| | | | 25 Elliptic - |

18 LEDs



| 39,6 W DC - 43,5 W AC | Cct | lm S - D | Optic |
|---------------------------------|---------------|-------------|----------------------|
| Anod. AL. 92056 | M 2700 | 5616 - 2326 | 15 Spot - |
| DALI 36,5 W AC - 41 W AC | W 3000 | 6012 - 2476 | 30 Flood - |
| Anod. AL. 81609 | N 4000 | 6408 - 2628 | 60 W.Flood - |
| | | | 25 Elliptic - |

36 LEDs



Cables Pag. 721
Recessed casing Pag. 715



13,2 W DC - 14,5 W AC



Anod. Al. **92100**

Q RGBW natural white
V RGBW warm white

Optic

| | |
|--------------------|---|
| 15 Spot | - |
| 30 Flood | - |
| 60 W.Flood | - |
| 25 Elliptic | - |
| 27 Asymm. | - |

3 x 4 LEDs



22 W DC - 24,5 W AC



Anod. Al. **92104**

Q RGBW natural white
V RGBW warm white

Optic

| | |
|--------------------|---|
| 15 Spot | - |
| 30 Flood | - |
| 60 W.Flood | - |
| 25 Elliptic | - |
| 27 Asymm. | - |

5 x 4 LEDs



44 W DC - 49 W AC



Anod. Al. **92108**

Q RGBW natural white
V RGBW warm white

Optic

| | |
|--------------------|---|
| 15 Spot | - |
| 30 Flood | - |
| 60 W.Flood | - |
| 25 Elliptic | - |
| 27 Asymm. | - |

10 x 4 LEDs



DMX

DMX controllers
Pag. 952 - 953

99385

DMX/RDM
addresser

98986

DMX LINE
Clouser 120 Ohm

98985/99390

Splitter ALLinONE
Start & Continuity
Pag. 956

Cables Pag. 721


Recessed casing Pag. 715

DW Dynamic White on request




| 13,2 W DC - 14,5 W AC | | Cct | lm S - D | Optic |
|-----------------------------------|--------------|--------|-------------|-------------------------|
| Steel | 92124 | M 2700 | 1692 - 916 | 08 Spot (13°) |
| DALI 12,2 W DC - 13,5 W AC | | W 3000 | 1812 - 974 | 15 Spot (18°) |
| Steel | 81597 | N 4000 | 1932 - 1037 | 30 Flood (29°) |
| | | | | 60 W.Flood (53°) |
| | | | | 25 Elliptic - |
| | | | | 27 Asymm. - |

6 LEDs




| 19,8 W DC - 22 W AC | | Cct | lm S - D | Optic |
|-----------------------------------|--------------|--------|-------------|-------------------------|
| Steel | 92125 | M 2700 | 2538 - 1481 | 08 Spot (16°) |
| DALI 18,3 W DC - 20,5 W AC | | W 3000 | 2718 - 1557 | 15 Spot (18°) |
| Steel | 81598 | N 4000 | 2898 - 1658 | 30 Flood (25°) |
| | | | | 60 W.Flood (57°) |
| | | | | 25 Elliptic - |
| | | | | 27 Asymm. - |

9 LEDs




| 39,6 W DC - 44 W AC | | Cct | lm S - D | Optic |
|---------------------------------|--------------|--------|-------------|-------------------------|
| Steel | 92126 | M 2700 | 5076 - 2884 | 08 Spot (16°) |
| DALI 36,5 W DC - 41 W AC | | W 3000 | 5436 - 3067 | 15 Spot (21°) |
| Steel | 81599 | N 4000 | 5796 - 3265 | 30 Flood (28°) |
| | | | | 60 W.Flood (56°) |
| | | | | 25 Elliptic - |
| | | | | 27 Asymm. - |

18 LEDs




Cables Pag. 721

Recessed casing Pag. 715




| 12,1 W DC - 13,5 W AC | | Cct | lm S - D | Optic |
|-----------------------------------|--------------|--------|------------|----------------------|
| Steel | 92046 | M 2700 | 1716 - 645 | 15 Spot - |
| DALI 11,2 W DC - 12,5 W AC | | W 3000 | 1837 - 687 | 30 Flood - |
| Steel | 81600 | N 4000 | 1958 - 730 | 60 W.Flood - |
| | | | | 25 Elliptic - |

11 LEDs




| 19,8 W DC - 22 W AC | | Cct | lm S - D | Optic |
|-----------------------------------|--------------|--------|-------------|----------------------|
| Steel | 92047 | M 2700 | 2808 - 1118 | 15 Spot - |
| DALI 18,3 W DC - 20,5 W AC | | W 3000 | 3006 - 1191 | 30 Flood - |
| Steel | 81601 | N 4000 | 3204 - 1264 | 60 W.Flood - |
| | | | | 25 Elliptic - |

18 LEDs



| 39,6 W DC - 43,5 W AC | | Cct | lm S - D | Optic |
|---------------------------------|--------------|--------|-------------|----------------------|
| Steel | 92048 | M 2700 | 5616 - 2326 | 15 Spot - |
| DALI 36,5 W DC - 41 W AC | | W 3000 | 6012 - 2476 | 30 Flood - |
| Steel | 81602 | N 4000 | 6408 - 2628 | 60 W.Flood - |
| | | | | 25 Elliptic - |

36 LEDs




Cables Pag. 721


Recessed casing Pag. 715




| 13,2 W DC - 14,5 W AC | | Cct | lm S - D | Optic |
|-----------------------------------|--------------|--------|-------------|------------------------------|
| Steel | 82308 | M 2700 | 1692 - 916 | 08 Spot (13°) |
| DALI 12,2 W DC - 13,5 W AC | | W 3000 | 1812 - 974 | 15 Spot (18°) |
| Steel | 82309 | N 4000 | 1932 - 1037 | 30 Flood (29°) |
| | | | | 60 W.Flood (53°) |
| | | | | 25 Elliptic (29°x44°) |
| | | | | 27 Asymm. - |



| 19,8 W DC - 22 W AC | | Cct | lm S - D | Optic |
|-----------------------------------|--------------|--------|-------------|------------------------------|
| Steel | 82310 | M 2700 | 2538 - 1482 | 08 Spot (16°) |
| DALI 18,3 W DC - 20,5 W AC | | W 3000 | 2718 - 1557 | 15 Spot (18°) |
| Steel | 82311 | N 4000 | 2898 - 1658 | 30 Flood (25°) |
| | | | | 60 W.Flood (57°) |
| | | | | 25 Elliptic (22°x46°) |
| | | | | 27 Asymm. - |



| 39,6 W DC - 44 W AC | | Cct | lm S - D | Optic |
|---------------------------------|--------------|--------|-------------|------------------------------|
| Steel | 82312 | M 2700 | 5076 - 2884 | 08 Spot (16°) |
| DALI 36,5 W DC - 41 W AC | | W 3000 | 5436 - 3067 | 15 Spot (21°) |
| Steel | 82313 | N 4000 | 5796 - 3265 | 30 Flood (28°) |
| | | | | 60 W.Flood (56°) |
| | | | | 25 Elliptic (23°x61°) |
| | | | | 27 Asymm. - |




Cables Pag. 721


Recessed casing Pag. 715




| 13,2 W DC - 14,5 W AC | | Optic |
|-----------------------|--------------|-----------------------------|
| Steel | 92080 | Q RGBW natural white |
| | | V RGBW warm white |
| | | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |
| | | 25 Elliptic - |
| | | 27 Asymm. - |



| 22 W DC - 24,5 W AC | | Optic |
|---------------------|--------------|-----------------------------|
| Steel | 92081 | Q RGBW natural white |
| | | V RGBW warm white |
| | | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |
| | | 25 Elliptic - |
| | | 27 Asymm. - |



| 44 W DC - 49 W AC | | Optic |
|-------------------|--------------|-----------------------------|
| Steel | 92082 | Q RGBW natural white |
| | | V RGBW warm white |
| | | 15 Spot - |
| | | 30 Flood - |
| | | 60 W.Flood - |
| | | 25 Elliptic - |
| | | 27 Asymm. - |



DMX 99385 98986 98985/99390

DMX controllers
Pag. 952 - 953

DMX/RDM
addresser

DMX LINE
Clouser 120 Ohm

Splitter ALLinONE
Start & Continuity
Pag. 956

Cables Pag. 721

Recessed casing Pag. 715

DW Dynamic White on request


Archiline PRO_I | Linear profiles | 190-250 V AC | powerLED



| 46 W DC - 51 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-----------------------|
| Steel | 81673 | M 2700 | 5243 - 3637 | 15 Spot (23°) |
| | | W 3000 | 5243 - 3637 | 30 Flood (28°) |
| | | N 4000 | 5660 - 3926 | 25 Elliptic - |

| 46 W DC - 51 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|--------------------|
| Steel | 81677 | M 2700 | 5243 - 3948 | 06 N.Spot - |
| | | W 3000 | 5243 - 3948 | |
| | | N 4000 | 5660 - 4261 | |


9 LEDs

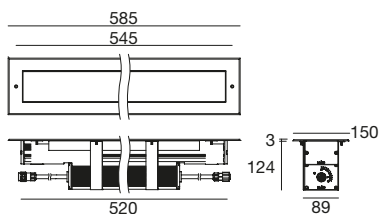

| 80,5 W DC - 89 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|--------------|-------------------------|
| Steel | 81674 | M 2700 | 10487 - 7174 | 15 Flood (44°) |
| | | W 3000 | 10487 - 7174 | 30 W.Flood (45°) |
| | | N 4000 | 11320 - 7743 | 25 Elliptic - |

| 80,5 W DC - 89 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|--------------|--------------------|
| Steel | 81678 | M 2700 | 10487 - 6993 | 06 N.Spot - |
| | | W 3000 | 10487 - 6993 | |
| | | N 4000 | 11321 - 7560 | |

18 LEDs

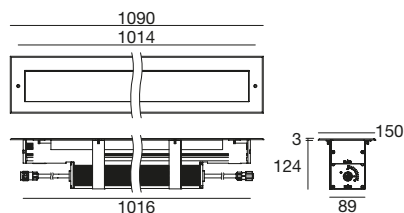

Cables Pag. 721

Recessed casing Pag. 715


Archiline PRO_I RGBW DMX | Linear profiles | 190-250V AC | powerLED



| 37 W DC - 44 W AC | | | Optic |
|-------------------|--------------|-----------------------------|----------------------|
| Steel | 81675 | Q RGBW natural white | 15 Spot - |
| | | V RGBW warm white | 30 Flood - |
| | | | 45 Flood - |
| | | | 25 Elliptic - |

| 37 W DC - 44 W AC | | | Optic |
|-------------------|--------------|-----------------------------|--------------------|
| Steel | 81679 | Q RGBW natural white | 06 N.Spot - |
| | | V RGBW warm white | |


9 LEDs

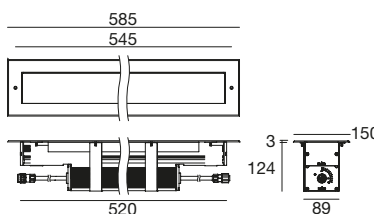

| 74 W DC - 86 W AC | | | Optic |
|-------------------|--------------|-----------------------------|----------------------|
| Steel | 81676 | Q RGBW natural white | 15 Spot - |
| | | V RGBW warm white | 30 Flood - |
| | | | 45 Flood - |
| | | | 25 Elliptic - |

| 74 W DC - 86 W AC | | | Optic |
|-------------------|--------------|-----------------------------|--------------------|
| Steel | 81680 | Q RGBW natural white | 06 N.Spot - |
| | | V RGBW warm white | |

18 LEDs

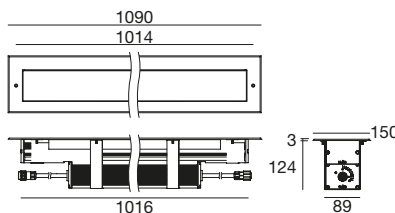

DMX 99385 98986 98985/99390

DMX controllers
Pag. 952 - 953

DMX/RDM
addresser

DMX LINE
Clouser 120 Ohm



Splitter ALLinONE
Start & Continuity
Pag. 956

Cables Pag. 721

Recessed casing Pag. 715

DW Dynamic White on request

Archiline_F_FJ_FL | Outer casing for floor-mounted recessed installation

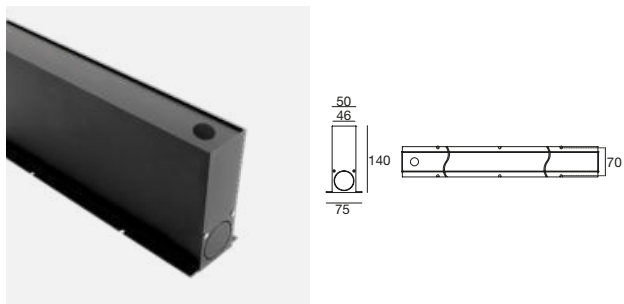

These outer casings allow to create a continuous row of light


| | | |
|----------|--------------|-----------------------------------|
| Anod.Bk. | 98724 | 322 mm x Archiline_F / _FJ / _FL |
| Anod.Bk. | 98725 | 513 mm x Archiline_F / _FJ / _FL |
| Anod.Bk. | 98726 | 1003 mm x Archiline_F / _FJ / _FL |

Anodisation

Anodisation is carried out in electrochemically controlled conditions, and creates a layer of oxide on the surface of the aluminium. This has excellent levels of adherence, compactness, hardness, and corrosion resistance.


Drive-over capability

The housings of the Archiline_F, FJ and FL versions have tempered glass, 12-mm ceramic powder coating, and will support a weight of up to five tonnes.

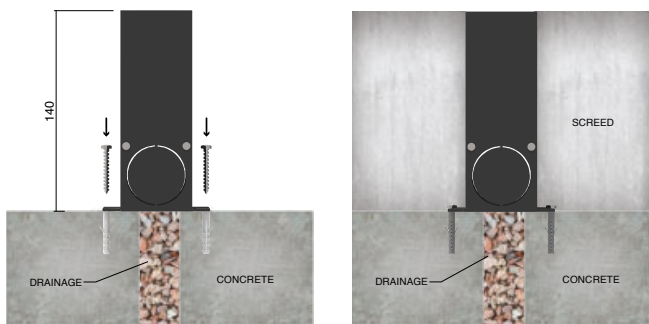

| description | |
|--------------|-------------|
| 98957 | accessories |


Archiline_A / _I



| description | |
|--------------|----------------------|
| 83049 | Wall fixing brackets |


Linear lights

Archiline_A_I_IJ | Outer casing for floor-mounted recessed installation

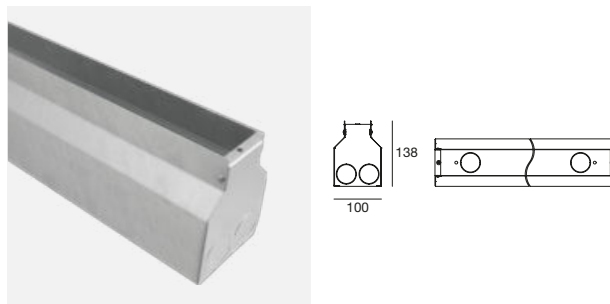

| | |
|--------------|----------------------------------|
| 98671 | 356 mm x Archiline_A / _I / _IJ |
| 98672 | 546 mm x Archiline_A / _I / _IJ |
| 98673 | 1036 mm x Archiline_A / _I / _IJ |
| 99760 | 1526 mm x Archiline_A |


Archiline_PRO_I | Outer casing for floor-mounted recessed installation

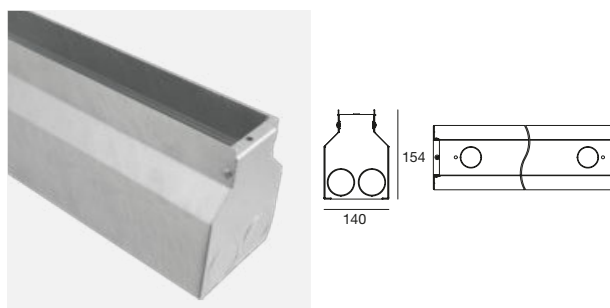

| | |
|--------------|--|
| 99771 | 563 mm x Archiline_PRO_I (on request) |
| 99830 | 1068 mm x Archiline_PRO_I (on request) |

Galvanisation

The housings of the Archiline_A, I, IJ and PRO_I versions are galvanised for improved corrosion resistance and durability.

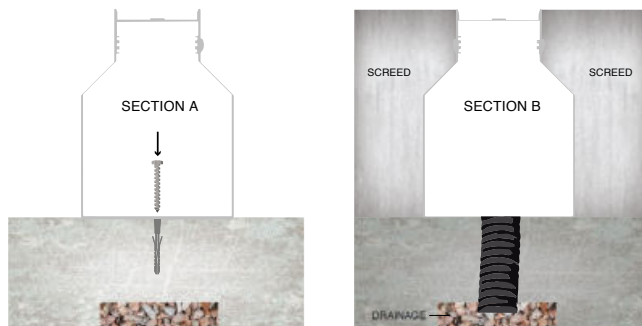

archiline_W range

Archiline Twin



Pag. 823




| | _W Wall | _W Anti-glare Wall | _W RGBW DMX Wall | PRO_W Anti-glare | PRO_W RGBW DMX Anti-glare |
|----------|--|---|---|--|--|
| 320 mm | 12,2 W - 13,2 W | 11,2 W - 12,1 W | 13,2 W | - | - |
| 356 mm | - | - | - | 32 W | 24,6 W |
| 515 mm | - | - | - | 46 W | 37 W |
| 620 mm | 22,3 W - 24,3 W | 22,4 W - 24,3 W | 26,4 W | - | - |
| 920 mm | 34,5 W - 37,5 W | 33,6 W - 36,4 W | 39,6 W | - | - |
| 1016 mm | - | - | - | 80,5 W | 74 W |
| 1220 mm | 44,7 W - 48,5 W | 44,8 W - 48,5 W | 52,8 W | - | - |
| 1520 mm | 55 W - 59 W | - | - | - | - |
| Finish | Anod. AL. | Anod. AL. | Anod. AL. | Anod. AL. | Anod. AL. |
| powerLED | 2700K - 3000K 4000K | 2700K - 3000K 4000K | RGBW | 2700K - 3000K 4000K | RGBW |
| Optics | Narrow Spot Spot Flood Wide Flood Elliptic Asymmetric | Spot Flood Wide Flood Elliptic | Spot Flood Wide Flood Elliptic Asymmetric | Narrow Spot Spot Flood Wide Flood Elliptic | Narrow Spot Spot Flood Wide Flood Elliptic |
| Driver | On/Off DALI | On/Off DALI | DMX | On/Off | DMX |

A wide range of applications

Archiline_W is a linear element for installation on the wall itself. It combines the functions of a spot with the shape and size of an outdoor bar.

The body is made from 10-micron- anodised 6060 extruded aluminium alloy.

Archiline_W has an adjustable graduated stainless steel bracket that fixes to a wall or ceiling, and the distance from the wall is also adjustable.

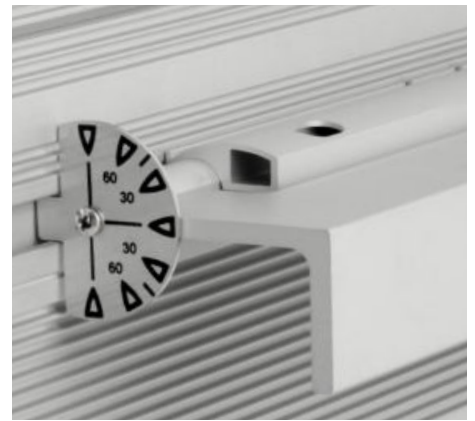


RGBW

The perfect mix

Combined-optic RGBW technology makes colour mixing better and more uniform. This takes place within the optics, using treated lenses optimised for maximum efficiency and high-performance RGBW LEDs. One diode combines pure warm or natural white and red, green and blue, mixing the colours better than traditional systems and creating an infinite variety of shades, as well as obtaining pure white without the influence of the RGB. The optical compartment is screenprinted in black, with dark-light screening giving perfect control over glare, sectioning the beam to eliminate the direct outward component and lighting only the wall.

Perfect mixing

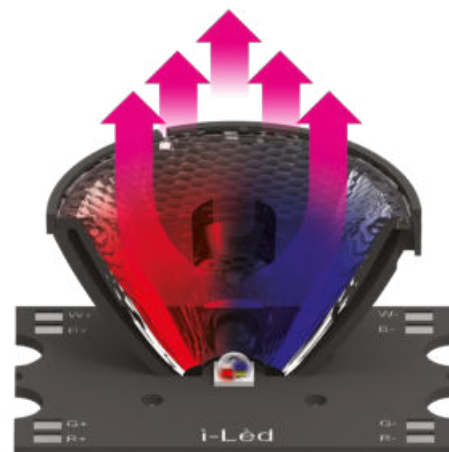


State-of-the-art engineering: Archiline_W PRO

The PRO version is the star of the Archiline range, made entirely from dedicated components, including the powerLED diode sources and extremely high-performance integrated drivers. Archiline_W PRO has an efficiency of 100 lm/W, developing a luminous flux of over 11,000 lumens per metre! It is therefore strongly recommended for very high walls, thanks partly to its optics covered with 5-mm extra-clear glass, black screenprinted edges and high-efficiency elliptical, narrow or flood beam. The 6-degree-optic version will project a beam to a height of 50 metres! Available in an ON/OFF or RGBW version with DMX dimmer protocol. In this model, the main tension and DMX signal both pass through the connector.







| 13,2 W DC - 14,5 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|------------------|
| Anod. Al. 92112 | M 2700 | 1692 - 916 | 06 N.Spot - |
| DALI 12,2 W DC - 13,5 W AC | W 3000 | 1812 - 974 | 15 Spot (18°) |
| Anod. Al. 81610 | N 4000 | 1932 - 1037 | 30 Flood (29°) |
| | | | 60 W.Flood (53°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |




| 24,3 W DC - 27 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|------------------|
| Anod. Al. 92114 | M 2700 | 3102 - 2196 | 06 N.Spot - |
| DALI 22,3 W DC - 25 W AC | W 3000 | 3322 - 2336 | 15 Spot (18°) |
| Anod. Al. 81611 | N 4000 | 3542 - 2487 | 30 Flood (25°) |
| | | | 60 W.Flood (57°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |




| 37,5 W DC - 41 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|------------------|
| Anod. Al. 92118 | M 2700 | 4794 - 3094 | 06 N.Spot - |
| DALI 34,5 W DC - 38,7 W AC | W 3000 | 5134 - 3290 | 15 Spot (22°) |
| Anod. Al. 81612 | N 4000 | 5474 - 3502 | 30 Flood (27°) |
| | | | 60 W.Flood (56°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

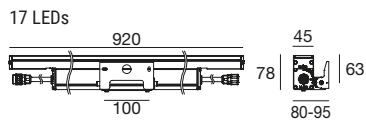

| 48,5 W DC - 53,5 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|------------------|
| Anod. Al. 92120 | M 2700 | 6204 - 4004 | 06 N.Spot - |
| DALI 44,7 W DC - 50 W AC | W 3000 | 6644 - 4258 | 15 Spot (22°) |
| Anod. Al. 81613 | N 4000 | 7084 - 4532 | 30 Flood (27°) |
| | | | 60 W.Flood (56°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |

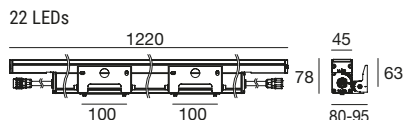


| 59 W DC - 65 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|------------------|
| Anod. Al. 81513 | M 2700 | 7448 - 4803 | 06 N.Spot - |
| DALI 55 W DC - 61,5 W AC | W 3000 | 7952 - 5468 | 15 Spot (22°) |
| Anod. Al. 81614 | N 4000 | 8484 - 5109 | 30 Flood (27°) |
| | | | 60 W.Flood (56°) |
| | | | 25 Elliptic - |
| | | | 27 Asymm. - |




Accessories and cables Pag. 721




| 12,1 W DC - 13,5 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|------------|---------------|
| Anod. Al. 92038 | M 2700 | 1716 - 645 | 15 Spot - |
| DALI 11,2 W DC - 12,5 W AC | W 3000 | 1837 - 687 | 30 Flood - |
| Anod. Al. 81615 | N 4000 | 1958 - 730 | 60 W.Flood - |
| | | | 25 Elliptic - |




| 24,3 W DC - 26 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|---------------|
| Anod. Al. 92040 | M 2700 | 3432 - 1616 | 15 Spot - |
| DALI 22,4 W DC - 25 W AC | W 3000 | 3674 - 1721 | 30 Flood - |
| Anod. Al. 81616 | N 4000 | 3916 - 1826 | 60 W.Flood - |
| | | | 25 Elliptic - |




| 36,4 W DC - 40 W AC | Cct | lm S - D | Optic |
|-----------------------------------|--------|-------------|---------------|
| Anod. Al. 92042 | M 2700 | 5148 - 2134 | 15 Spot - |
| DALI 33,6 W DC - 37,5 W AC | W 3000 | 5511 - 2270 | 30 Flood - |
| Anod. Al. 81617 | N 4000 | 5874 - 2409 | 60 W.Flood - |
| | | | 25 Elliptic - |

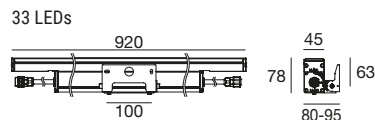

| 48,5 W DC - 53,5 W AC | Cct | lm S - D | Optic |
|---------------------------------|--------|-------------|---------------|
| Anod. Al. 92044 | M 2700 | 6864 - 2845 | 15 Spot - |
| DALI 44,8 W DC - 50 W AC | W 3000 | 7348 - 3026 | 30 Flood - |
| Anod. Al. 81618 | N 4000 | 7832 - 3212 | 60 W.Flood - |
| | | | 25 Elliptic - |



Accessories and cables Pag. 721



13,2 W DC - 14,5 W AC


Anod. AL. **92070**

Q RGBW natural white
V RGBW warm white

Optic

15 Spot -
30 Flood -
60 W.Flood -
25 Elliptic -
27 Asymm. -

3 x 4 LEDs



26,4 W DC - 29 W AC


Anod. AL. **92072**

Q RGBW natural white
V RGBW warm white

Optic

15 Spot -
30 Flood -
45 W.Flood -
25 Elliptic -
27 Asymm. -

4 x 6 LEDs



39,6 W DC - 43,5 W AC


Anod. AL. **92074**

Q RGBW natural white
V RGBW warm white

Optic

15 Spot -
30 Flood -
45 W.Flood -
25 Elliptic -
27 Asymm. -

4 x 9 LEDs



52,8 W DC - 58 W AC


Anod. AL. **92078**

Q RGBW natural white
V RGBW warm white

Optic

15 Spot -
30 Flood -
45 W.Flood -
25 Elliptic -
27 Asymm. -

4 x 12 LEDs



DMX 99385 98986 98985/99390

DMX controllers
Pag. 952 - 953


DMX/RDM
addresser

DMX LINE
Clouser 120 Ohm

Splitter ALLinONE
Start & Continuity
Pag. 956

Accessories and cables Pag. 721


DW Dynamic White on request



| 32 W DC - 35 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-----------------------|
| Anod. AL. 90458 | M 2700 | 3629 - 2337 | 15 Spot (16°) |
| | W 3000 | 3629 - 2337 | 30 Flood (27°) |
| | N 4000 | 3917 - 2522 | 25 Elliptic - |

| 32 W DC - 35 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------|
| Anod. AL. 81447 | M 2700 | 3629 - 2736 | 06 N.Spot - |
| | W 3000 | 3629 - 2736 | |
| | N 4000 | 3917 - 2952 | |


6 LEDs



| 46 W DC - 51 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Anod. AL. 90460 | M 2700 | 5234 - 3637 | 15 Flood (23°) |
| | W 3000 | 5243 - 3637 | 30 Flood (28°) |
| | N 4000 | 5660 - 3926 | 25 W.Flood (47°) |

| 46 W DC - 51 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------|
| Anod. AL. 81448 | M 2700 | 5234 - 3948 | 06 N.Spot - |
| | W 3000 | 5243 - 3948 | |
| | N 4000 | 5660 - 4261 | |



9 LEDs



| 80,5 W DC - 89 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|----------------------|
| Anod. AL. 90461 | M 2700 | 10486 - 7174 | 15 W.Flood - |
| | W 3000 | 10486 - 7174 | 30 W.Flood - |
| | N 4000 | 11320 - 7743 | 25 Elliptic - |

| 80,5 W DC - 89 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|--------------------|
| Anod. AL. 81449 | M 2700 | 10486 - 6993 | 06 N.Spot - |
| | W 3000 | 10486 - 6993 | |
| | N 4000 | 11320 - 7560 | |


18 LEDs

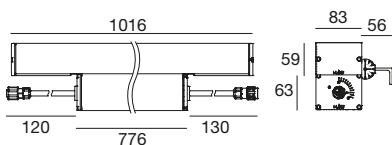

| 24,6 W DC - 30 W AC | | Optic |
|------------------------|-----------------------------|----------------------|
| Anod. AL. 90459 | Q RGBW natural white | 15 Spot - |
| | V RGBW warm white | 30 Flood - |
| | | 45 W.Flood - |
| | | 25 Elliptic - |

| 24,6 W DC - 30 W AC | | Optic |
|------------------------|-----------------------------|--------------------|
| Anod. AL. 81450 | Q RGBW natural white | 06 N.Spot - |
| | V RGBW warm white | |


3 x 2 LEDs



| 37 W DC - 44 W AC | | Optic |
|------------------------|-----------------------------|----------------------|
| Anod. AL. 90462 | Q RGBW natural white | 15 Spot - |
| | V RGBW warm white | 30 Flood - |
| | | 45 W.Flood - |
| | | 25 Elliptic - |

| 37 W DC - 44 W AC | | Optic |
|------------------------|-----------------------------|--------------------|
| Anod. AL. 81451 | Q RGBW natural white | 06 N.Spot - |
| | V RGBW warm white | |


3 x 3 LEDs



| 74 W DC - 86 W AC | | Optic |
|------------------------|-----------------------------|----------------------|
| Anod. AL. 90463 | Q RGBW natural white | 15 Spot - |
| | V RGBW warm white | 30 Flood - |
| | | 45 W.Flood - |
| | | 25 Elliptic - |

| 74 W DC - 86 W AC | | Optic |
|------------------------|-----------------------------|--------------------|
| Anod. AL. 81452 | Q RGBW natural white | 06 N.Spot - |
| | V RGBW warm white | |

3 x 6 LEDs

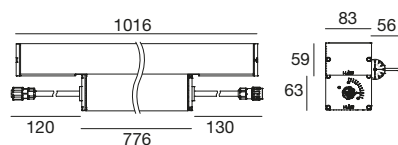

| DMX | 99385 | 98986 | 98985/99390 |
|-----------------------------------|----------------------|-----------------------------|---|
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |



Flap

The flap fixture is made up of two directional flaps and it has been designed to shape light when the luminaire is used as a spotlight. Please note that light emission is not reduced, but shaped only. This accessory is made of black anodised aluminium.





type
Anod.Bk. **98675** suitable for Archiline_W 620 mm

type
Anod.Bk. **98676** suitable for Archiline_W 920 mm

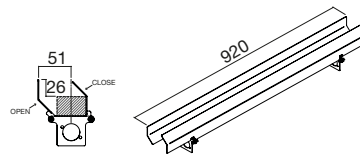

type
Anod.Bk. **98677** suitable for Archiline_W 1220 mm

type
Anod.Bk. **99748** suitable for Archiline_W 1520 mm

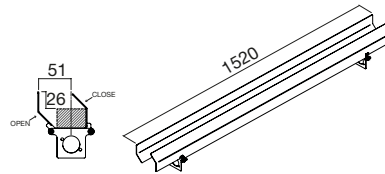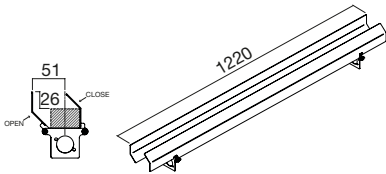

Cables



On/Off 190-250V AC
99057 Conn. F.3 pin (L 2m)
suitable for: Archiline




DALI 190-250V AC
99826 Conn. F. 5 pin (L 1m)
99822 Conn. F. 5 pin (L 5m)
suitable for: Archiline



AllinOne DMX 190-250V AC
98660 F. 6 pin (L 1m)
98661 F. 6 pin (L 5m)
suitable for: Archiline

Extension cables



On/Off 190-250V AC
98147 Conn. M. / F. 3 pin (L 5m)
98146 Conn. M. / F. 3 pin (L 10m)
suitable for: Archiline



DALI 190-250V AC
99823 Conn. M. / F. 5 pin (L 1m)
99824 Conn. M. / F. 5 pin (L 5m)
99825 Conn. M. / F. 5 pin (L 10m)
suitable for: Archiline




AllinOne DMX 190-250V AC
98662 M. / F. 6 pin (L 1m)
98663 M. / F. 6 pin (L 5m)
suitable for: Archiline

xenia


Materials

Anodised 6060 aluminium alloy body

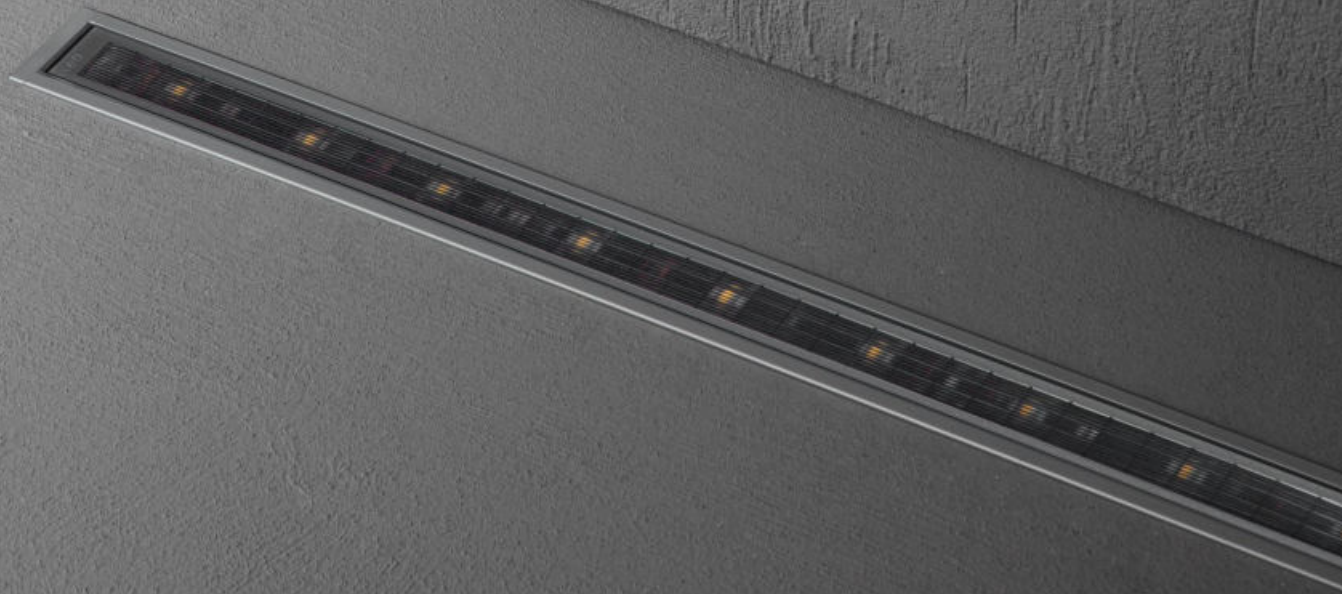



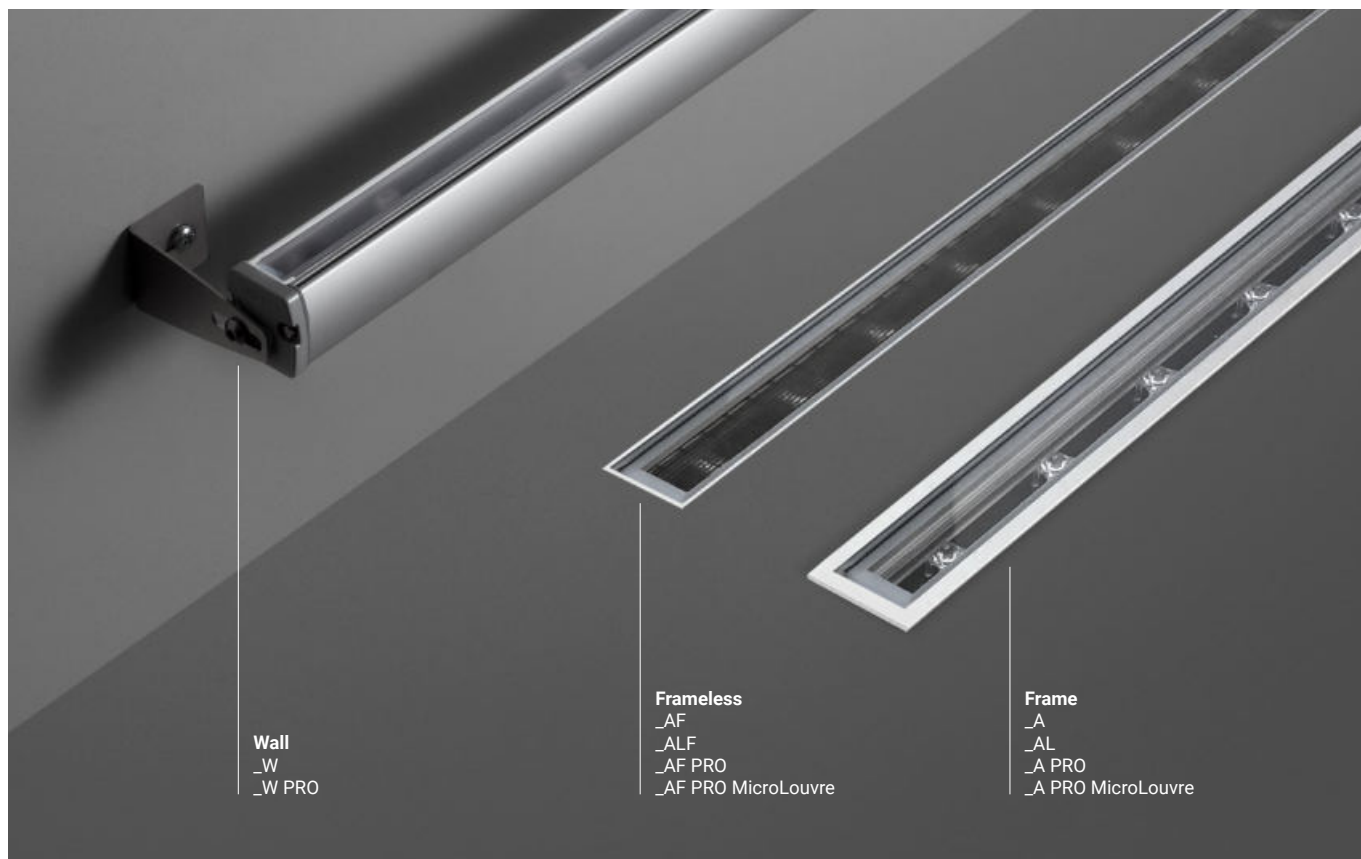

xenia lighting concept



Wall
_W
_W PRO

Frameless
_AF
_ALF
_AF PRO
_AF PRO MicroLouvre

Frame
_A
_AL
_A PRO
_A PRO MicroLouvre


| | _W wall | _W PRO wall | _A frame | _AL frame | _A PRO frame | _AF frameless | _ALF frameless | _AF PRO frameless | _A PRO MicroLouvre frame | _AF PRO MicroLouvre frameless |
|--|---|---|---|-------------------------|---|---|-------------------------|---|---|---|
| Length | 366 -->1530 | 366 -->1530 | 359-->1519 | 359-->1519 | 160-->1519 | 359-->1519 | 359-->1519 | 160-->1519 | 359-->1519 | 359-->1519 |
| topLED | 2700K 3000K 4000K RGBW | - | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | - | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | - | - | - |
| powerLED | - | 2700K 3000K 4000K RGBW | - | - | 2700K 3000K 4000K RGBW | - | - | 2700K 3000K 4000K RGBW | 2700K 3000K 4000K | 2700K 3000K 4000K |
| Optics | Sym. Flood Spot Flood W.Flood E.W.Flood Elliptic Asymm. | Sym. Flood Flood W.Flood E.W.Flood Elliptic Asymm. | Spot Flood W.Flood E.W.Flood Asymm. | General | Sym. Flood Spot Flood W.Flood E.W.Flood Elliptic Asymm. | Flood W.Flood E.W.Flood Asymm. | General | Sym. Flood Flood W.Flood E.W.Flood Elliptic Asymm. | Sym. Flood Flood W.Flood E.W.Flood Elliptic Asymm. | Sym. Flood Flood W.Flood E.W.Flood Elliptic Asymm. |
| Finish | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. | Anod. Al. |
| Driver  | On/Off 0/1-10V DALI | - | On/Off 0/1-10V DALI | - | On/Off DALI | On/Off 0/1-10V DALI | - | On/Off DALI | - | - |
| Driver  | On/Off DMX | On/Off DALI DMX | On/Off DMX | On/Off | On/Off DALI DMX | On/Off DMX | On/Off | On/Off DALI DMX | On/Off DALI | On/Off DALI |

High-quality construction

Xenia is made from very high-quality materials and components. Because of the ways in which they are used, these lights must be durable and able to maintain their performance in temperatures ranging from a glacial -20°C to a sultry +60°C. They are also highly corrosion resistant, thanks to their use of 6060 aluminium alloy and 10-micron anodisation.


Safety systems

We have developed a variety of corrosion protection technology to maximise the lifespan of our lights. They also have overtension and electrical discharge protection, TCS® to protect their circuits from moisture.

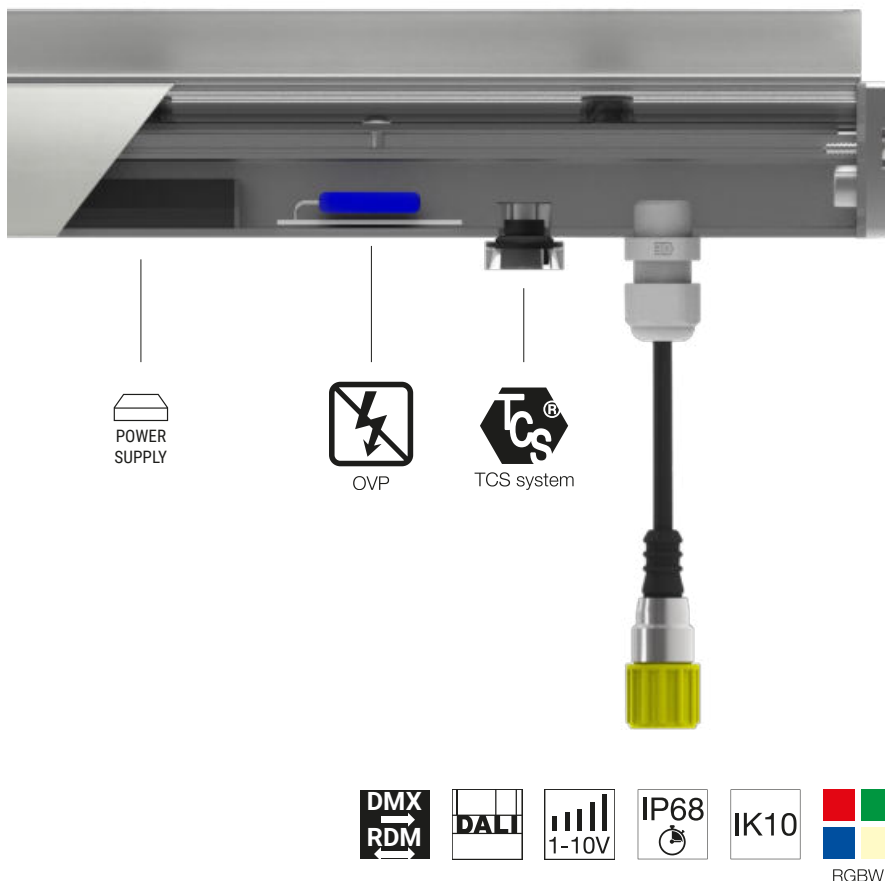

MicroLouvre

Xenia_MicroLouvre takes advantage of the main characteristics of the Xenia family, but is able to guarantee even more visual comfort for the customer, applying an anti-glare screen to the product that sections the beam into microcells. The screen, extremely thin, does not affect the quality and uniformity of the light emitted, but allows part of the glaring to be shielded.

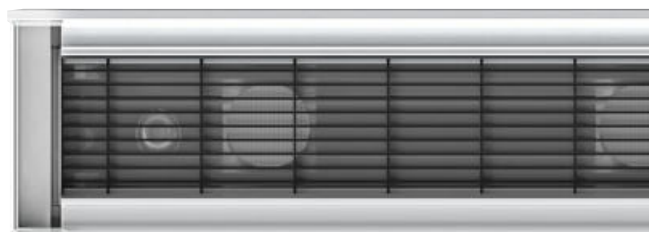

Recessed versions

- Extra-thin housing: frame only 3 mm thick
- Light and housing have no fixing caps, so multiple lights can be positioned in series to create continuous lines. The cap can then be placed at the end of the line and adapted to the housing so that the whole of the body is enclosed.
- Anti-glare shade (darklight)
- 6 sizes, from 16 to 150 cm
- Optics: Symmetric flood, Flood, Medium flood, Wide flood, Extra wide flood, Asymmetric, General, Narrow spot, Spot, Elliptic.





| 6,5 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|--------------------------|
| Anod. AL. 93786 | M 2700 | 764 - 454 | 20 Flood (26°) |
| | W 3000 | 801 - 474 | 50 Flood (39°) |
| | N 4000 | 838 - 482 | 90 E.W.Flood(66°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |




| 13 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|--------------------------|
| Anod. AL. 93825 | M 2700 | 1528 - 909 | 20 Flood (26°) |
| | W 3000 | 1602 - 949 | 50 Flood (39°) |
| | N 4000 | 1676 - 964 | 90 E.W.Flood(66°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |




| 19,5 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------------|
| Anod. AL. 93828 | M 2700 | 2292 - 1382 | 20 Flood (27°) |
| | W 3000 | 2403 - 1441 | 50 Flood (43°) |
| | N 4000 | 2514 - 1463 | 90 E.W.Flood(68°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |



| 26 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------------|
| Anod. AL. 93829 | M 2700 | 3056 - 1834 | 20 Flood (27°) |
| | W 3000 | 3204 - 1922 | 50 Flood (43°) |
| | N 4000 | 3352 - 1950 | 90 E.W.Flood(68°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |




| 32,5 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------------|
| Anod. AL. 81696 | M 2700 | 3820 - 2293 | 20 Flood (27°) |
| | W 3000 | 4005 - 2401 | 50 Flood (43°) |
| | N 4000 | 4190 - 2513 | 90 E.W.Flood(68°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |




| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |


Fixing brackets and accessories Pag. 741/742




| 6,5 W DC - 8,2 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|--------------------------|
| Anod. AL. 93688 | M 2700 | 764 - 454 | 20 Flood (26°) |
| | W 3000 | 801 - 474 | 50 Flood (39°) |
| | N 4000 | 838 - 482 | 90 E.W.Flood(66°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |

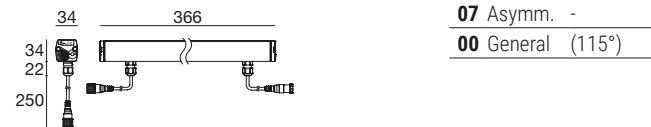


| 13 W DC - 14,2 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|--------------------------|
| Anod. AL. 93689 | M 2700 | 1528 - 909 | 20 Flood (26°) |
| | W 3000 | 1602 - 949 | 50 Flood (39°) |
| | N 4000 | 1676 - 964 | 90 E.W.Flood(66°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |




| 19,5 W DC - 21,4 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------------|
| Anod. AL. 94020 | M 2700 | 2292 - 1381 | 20 Flood (27°) |
| | W 3000 | 2403 - 1441 | 50 Flood (43°) |
| | N 4000 | 2514 - 1463 | 90 E.W.Flood(68°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |



| 25 W DC - 27,8 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------------|
| Anod. AL. 94023 | M 2700 | 3056 - 1834 | 20 Flood (27°) |
| | W 3000 | 3204 - 1922 | 50 Flood (43°) |
| | N 4000 | 3352 - 1950 | 90 E.W.Flood(68°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |

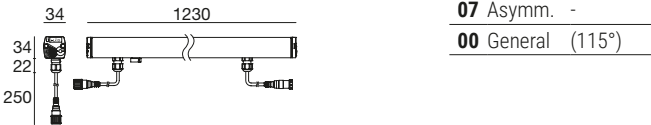

| 32,5 W DC - 37 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|--------------------------|
| Anod. AL. 81695 | M 2700 | 3820 - 2293 | 20 Flood (27°) |
| | W 3000 | 4005 - 2401 | 50 Flood (43°) |
| | N 4000 | 4190 - 2513 | 90 E.W.Flood(68°) |
| | | | 07 Asymm. - |
| | | | 00 General (115°) |

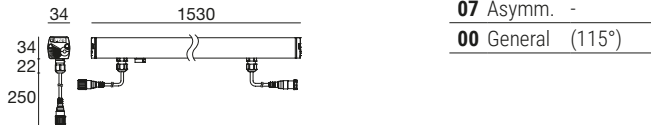

Fixing brackets, accessories and cables Pag. 741/742

Xenia_W RGBW DMX | Linear profiles | 190-250V AC | topLED




12 W DC - 13 W AC

Anod. AL. **84047**

Q RGBW natural white
V RGBW warm white

Optic

20 Spot -
50 W.Flood -
90 E.W.Flood-
07 Asymm. -




22 W DC - 24 W AC

Anod. AL. **84048**

Q RGBW natural white
V RGBW warm white

Optic

20 Spot -
50 W.Flood -
90 E.W.Flood-
07 Asymm. -



DMX 99385

DMX Controllers
Pag. 952 - 953

89365

DMX/RDM
120 Ohm DMX line
closure

Fixing brackets, accessories and cables Pag. 741/742




Xenia_W + Anti-glaring



| 6,1 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|----------------------------|
| Anod. AL. 93690 | M 2700 | 699 - 445 | 08 Sym. Flood (26°) |
| | W 3000 | 747 - 476 | 20 Flood (28°) |
| | N 4000 | 798 - 507 | 50 Flood (44°) |
| | | | 90 W.Flood (77°) |
| | | | 25 Elliptic. - |
| | | | 07 Asymm. - |


3 LEDs



| | | |
|---|---|---|
| 99179 | 99186 | 83102 |
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 2 art. p 54 x l 121 x h 26 |

| 12,1 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 93691 | M 2700 | 1398 - 915 | 08 Sym. Flood(25°) |
| | W 3000 | 1494 - 980 | 20 Flood (28°) |
| | N 4000 | 1596 - 1045 | 50 W.Flood (55°) |
| | | | 90 W.Flood (75°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |


6 LEDs



| | | |
|---|---|---|
| 99179 | 99186 | 83102 |
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | DALI 1 - 2 art. p 54 x l 121 x h 26 |

| 17,9 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 93755 | M 2700 | 2097 - 1365 | 08 Sym. Flood(24°) |
| | W 3000 | 2241 - 1455 | 20 Flood (28°) |
| | N 4000 | 2394 - 1551 | 50 W.Flood (45°) |
| | | | 90 W.Flood (73°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |


9 LEDs



| | |
|---|---------------------------------------|
| 99186 | 83102 |
| ON/OFF 1 art. p 92 x l 117 x h 38 | DALI 1 art. p 54 x l 121 x h 26 |


| 24,3 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 93785 | M 2700 | 2796 - 1859 | 08 Sym. Flood(24°) |
| | W 3000 | 2988 - 1989 | 20 Flood (30°) |
| | N 4000 | 3192 - 2119 | 50 W.Flood (46°) |
| | | | 90 W.Flood (73°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |

12 LEDs




| | |
|---|---------------------------------------|
| 99186 | 83102 |
| ON/OFF 1 art. p 92 x l 117 x h 38 | DALI x art. p 54 x l 121 x h 26 |

Fixing brackets and accessories Pag. 741/742




| 6,1 W DC - 7,8 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Anod. AL. 93594 | M 2700 | 699 - 445 | 08 Sym. Flood(25°) |
| | W 3000 | 747 - 476 | 20 Flood (28°) |
| | N 4000 | 798 - 507 | 50 Flood (44°) |
| | | | 90 W.Flood (77°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |

3 LEDs




| 12,1 W DC - 14,2 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 93595 | M 2700 | 1398 - 915 | 08 Sym. Flood(25°) |
| | W 3000 | 1494 - 980 | 20 Flood (28°) |
| | N 4000 | 1596 - 1045 | 50 W.Flood (55°) |
| | | | 90 W.Flood (75°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |

6 LEDs




| 17,9 W DC - 20,4 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 93596 | M 2700 | 2097 - 1365 | 08 Sym. Flood(24°) |
| | W 3000 | 2241 - 1455 | 20 Flood (28°) |
| | N 4000 | 2394 - 1551 | 50 W.Flood (45°) |
| | | | 90 W.Flood (73°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |

9 LEDs



| 24,3 W DC - 27,2 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 93605 | M 2700 | 2796 - 1859 | 08 Sym. Flood(24°) |
| | W 3000 | 2988 - 1989 | 20 Flood (30°) |
| | N 4000 | 3192 - 2119 | 50 W.Flood (46°) |
| | | | 90 W.Flood (73°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |

12 LEDs




Fixing brackets, accessories and cables Pag. 741/742


RTG 93596W25




| 8 W DC - 9 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|---------------------------|
| Anod. AL. 81702 | M 2700 | 1086 - 681 | 08 Sym. Flood(23°) |
| | W 3000 | 1164 - 729 | 20 Flood (28°) |
| | N 4000 | 1242 - 831 | 50 W.Flood (55°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




| 15,1 W DC - 17,1 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81703 | M 2700 | 2172 - 1306 | 08 Sym. Flood(23°) |
| | W 3000 | 2328 - 1398 | 20 Flood (28°) |
| | N 4000 | 2484 - 1594 | 50 W.Flood (55°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




| 23,1 W DC - 26,2 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81704 | M 2700 | 3078 - 1959 | 08 Sym. Flood(25°) |
| | W 3000 | 3294 - 2097 | 20 Flood (28°) |
| | N 4000 | 3510 - 2391 | 50 W.Flood (55°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




| 31,8 W DC - 35,4 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81705 | M 2700 | 4104 - 2385 | 08 Sym. Flood(25°) |
| | W 3000 | 4392 - 2554 | 20 Flood (28°) |
| | N 4000 | 4680 - 2911 | 50 Flood (43°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




| 37,4 W DC - 44 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81706 | M 2700 | 5130 - 2984 | 08 Sym. Flood(25°) |
| | W 3000 | 5490 - 3195 | 20 Flood (28°) |
| | N 4000 | 5850 - 3639 | 50 Flood (43°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




Fixing brackets, accessories and cables Pag. 741/742




| DALI 8,4 W DC - 10,1 W AC | Cct | lm S - D | Optic |
|---------------------------|---------------|------------|---------------------------|
| Anod. AL. 81713 | M 2700 | 1272 - 797 | 08 Sym. Flood(23°) |
| | W 3000 | 1368 - 854 | 20 Flood (28°) |
| | N 4000 | 1452 - 974 | 50 W.Flood (55°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




| DALI 12,8 W DC - 14,4 W AC | Cct | lm S - D | Optic |
|----------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81714 | M 2700 | 1908 - 1196 | 08 Sym. Flood(25°) |
| | W 3000 | 2052 - 1281 | 20 Flood (28°) |
| | N 4000 | 2178 - 1460 | 50 W.Flood (55°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |



| DALI 17,1 W DC - 19,1 W AC | Cct | lm S - D | Optic |
|----------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81715 | M 2700 | 2544 - 1458 | 08 Sym. Flood(25°) |
| | W 3000 | 2736 - 1559 | 20 Flood (28°) |
| | N 4000 | 2904 - 1777 | 50 Flood (43°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |



| DALI 21,4 W DC - 24 W AC | Cct | lm S - D | Optic |
|--------------------------|---------------|-------------|---------------------------|
| Anod. AL. 81716 | M 2700 | 3180 - 1821 | 08 Sym. Flood(25°) |
| | W 3000 | 3420 - 1550 | 20 Flood (28°) |
| | N 4000 | 3630 - 2221 | 50 W.Flood (43°) |
| | | | 90 E.W.Flood(88°) |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |



Fixing brackets, accessories and cables Pag. 741/742



7,3 W DC - 8,5 W AC


Anod. AL **84049**

Q RGBW natural white
V RGBW warm white

Optic

25 Elliptic -

3 x 4 LEDs



19,3 W DC - 22,6 W AC


Anod. AL **84050**

Q RGBW natural white
V RGBW warm white

Optic

25 Elliptic -

8 x 4 LEDs



| | | |
|-----------------------------------|--------------|-----------------------------|
| DMX | 99385 | 89365 |
| DMX Controllers Pag. 952 - 953 | DMX/RDM | 120 Ohm DMX line closure |

Fixing brackets, accessories and cables Pag. 741/742

DW Dynamic White on request



Xenia_A | Linear profiles | 24V DC | topLED



| 6,5 W DC | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------|--------------------------|
| Anod. AL. | 81453 | M 2700 | 764 - 597 | 20 Flood (27°) |
| | | W 3000 | 801 - 627 | 50 Flood (40°) |
| | | N 4000 | 838 - 656 | 90 E.W.Flood(80°) |
| | | | | 07 Asymm. - |

| 13 W DC | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81454 | M 2700 | 1528 - 944 | 20 Flood (27°) |
| | | W 3000 | 1602 - 988 | 50 W.Flood (56°) |
| | | N 4000 | 1676 - 1035 | 90 W.Flood (77°) |
| | | | | 07 Asymm. - |

| 19,5 W DC | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81455 | M 2700 | 2292 - 1401 | 20 Flood (27°) |
| | | W 3000 | 2403 - 1468 | 50 W.Flood (55°) |
| | | N 4000 | 2514 - 1536 | 90 W.Flood (76°) |
| | | | | 07 Asymm. - |

| 26 W DC | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81456 | M 2700 | 3056 - 1864 | 20 Flood (27°) |
| | | W 3000 | 3204 - 1956 | 50 W.Flood (55°) |
| | | N 4000 | 3352 - 2044 | 90 W.Flood (76°) |
| | | | | 07 Asymm. - |

| 32,5 W DC | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81621 | M 2700 | 3820 - 2215 | 20 Flood (31°) |
| | | W 3000 | 4005 - 2322 | 50 W.Flood (40°) |
| | | N 4000 | 4190 - 2429 | 90 W.Flood (70°) |
| | | | | 07 Asymm. - |

| | | | | |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

Recessed casing, accessories and cables Pag. 741/742

Xenia_A | Linear profiles | 190-250V AC | topLED



| 6,5 W DC - 7,15 W AC | | Cct | lm S - D | Optic |
|----------------------|--------------|---------------|-----------|-------------------------|
| Anod. AL. | 81457 | M 2700 | 764 - 597 | 20 Flood (27°) |
| | | W 3000 | 801 - 627 | 50 W.Flood (40°) |
| | | N 4000 | 838 - 656 | 90 W.Flood (79°) |
| | | | | 07 Asymm. - |

| 13 W DC - 14,3 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81458 | M 2700 | 1528 - 944 | 20 Flood (27°) |
| | | W 3000 | 1602 - 988 | 50 W.Flood (56°) |
| | | N 4000 | 1676 - 1035 | 90 W.Flood (77°) |
| | | | | 07 Asymm. - |

| 19,5 W DC - 21,5 W AC | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81459 | M 2700 | 2292 - 1401 | 20 Flood (27°) |
| | | W 3000 | 2403 - 1468 | 50 W.Flood (55°) |
| | | N 4000 | 2514 - 1536 | 90 W.Flood (76°) |
| | | | | 07 Asymm. - |

| 26 W DC - 28,6 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81460 | M 2700 | 3056 - 1864 | 20 Flood (27°) |
| | | W 3000 | 3204 - 1955 | 50 W.Flood (55°) |
| | | N 4000 | 3352 - 2044 | 90 W.Flood (76°) |
| | | | | 07 Asymm. - |


| 32,5 W DC - 35,8 W AC | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|-------------------------|
| Anod. AL. | 81622 | M 2700 | 3820 - 2215 | 20 Flood (31°) |
| | | W 3000 | 4005 - 2322 | 50 Flood (40°) |
| | | N 4000 | 4190 - 2429 | 90 W.Flood (70°) |
| | | | | 07 Asymm. - |

Recessed casing, accessories and cables Pag. 741/742


Xenia_AL | Linear profiles | 190-250V AC | topLED




| 2 W DC - 3 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|----------|--------------------------|
| Anod. AL. 81461 | M 2700 | 336 - 78 | 00 General (108°) |
| | W 3000 | 348 - 80 | |
| | N 4000 | 367 - 85 | |




| 3,6 W DC - 5 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|--------------------------|
| Anod. AL. 81462 | M 2700 | 605 - 161 | 00 General (105°) |
| | W 3000 | 626 - 167 | |
| | N 4000 | 661 - 176 | |




| 5,4 W DC - 7 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|--------------------------|
| Anod. AL. 81463 | M 2700 | 907 - 241 | 00 General (105°) |
| | W 3000 | 939 - 249 | |
| | N 4000 | 992 - 263 | |



| 7,2 W DC - 9,4 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Anod. AL. 81464 | M 2700 | 1210 - 320 | 00 General (94°) |
| | W 3000 | 1252 - 332 | |
| | N 4000 | 1322 - 350 | |



| 9 W DC - 11,3 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|------------|-------------------------|
| Anod. AL. 81623 | M 2700 | 1513 - 401 | 00 General (94°) |
| | W 3000 | 1565 - 415 | |
| | N 4000 | 1653 - 438 | |




Recessed casing, accessories and cables Pag. 741/742


Xenia_A RGBW DMX | Linear profiles | 100-240V AC | topLED



| 12 W DC - 13 W AC | Q | V | Optic |
|------------------------|--------------------|-----------------|----------------------|
| Anod. AL. 84051 | RGBW natural white | RGBW warm white | 20 Spot - |
| | | | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 07 Asymm. - |



| 22 W DC - 24 W AC | Q | V | Optic |
|------------------------|--------------------|-----------------|----------------------|
| Anod. AL. 84052 | RGBW natural white | RGBW warm white | 20 Spot - |
| | | | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 07 Asymm. - |




DMX 99385 89365
DMX Controllers Pag. 952 - 953 DMX/RDM 120 Ohm DMX line closure

Xenia_A PRO | Linear profiles | powerLED 4,5 W DC 500 mA



| 4,5 W DC | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|-----------------------|
| Anod. AL. 82711 | M 2700 | 561 - On req | 08 Sym. Flood- |
| | W 3000 | 597 - On req | 20 Spot - |
| | N 4000 | 639 - On req | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |



99181 99185 83101
ON/OFF 1 - 2 art. p 78 x l 100 x h 31 ON/OFF 2 - 4 art. p 92 x l 117 x h 38 DALI 1 - 4 art. p 53 x l 121 x h 26

Recessed casing, accessories and cables Pag. 741/742



| 7,4 W DC - 8,3 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|------------|---------------------------|
| Anod. AL. | 81465 | M 2700 | 1086 - 503 | 08 Sym. Flood(24°) |
| | | W 3000 | 1164 - 539 | 20 Flood (29°) |
| | | N 4000 | 1242 - 614 | 50 Flood (44°) |
| 6 LEDs | | | | |
| | 40 | | 359 | |
| 64 | | | | |
| | 32 | | 200 | 200 |

| 14,8 W DC - 16,5 W AC | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81466 | M 2700 | 2172 - 1026 | 08 Sym. Flood(22°) |
| | | W 3000 | 2328 - 1098 | 20 Flood (31°) |
| | | N 4000 | 2484 - 1251 | 50 Flood (44°) |
| 12 LEDs | | | | |
| | 40 | | 619 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

| 22,2 W DC - 24,8 W AC | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81467 | M 2700 | 3078 - 1672 | 08 Sym. Flood(22°) |
| | | W 3000 | 3294 - 1787 | 20 Flood (29°) |
| | | N 4000 | 3510 - 2041 | 50 W.Flood (45°) |
| 18 LEDs | | | | |
| | 40 | | 919 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

| 29,6 W DC - 33,2 W AC | | Cct | lm S - D | Optic |
|-----------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81468 | M 2700 | 4104 - 2229 | 08 Sym. Flood(22°) |
| | | W 3000 | 4392 - 2380 | 20 Flood (29°) |
| | | N 4000 | 4680 - 2720 | 50 W.Flood (45°) |
| 24 LEDs | | | | |
| | 40 | | 1219 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

| 37 W DC - 44,3 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81624 | M 2700 | 5130 - 2563 | 08 Sym. Flood(23°) |
| | | W 3000 | 5490 - 2741 | 20 Flood (30°) |
| | | N 4000 | 5850 - 3125 | 50 Flood (43°) |
| 30 LEDs | | | | |
| | 40 | | 1519 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

Recessed casing, accessories and cables Pag. 741/742



| DALI 8,4 W DC - 10,1 W AC | | Cct | lm S - D | Optic |
|---------------------------|--------------|---------------|------------|---------------------------|
| Anod. AL. | 81687 | M 2700 | 1272 - 627 | 08 Sym. Flood(22°) |
| | | W 3000 | 1368 - 671 | 20 Flood (31°) |
| | | N 4000 | 1452 - 765 | 50 Flood (44°) |
| 12 LEDs | | | | |
| | 40 | | 619 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

| DALI 12,8 W DC - 14,4 W AC | | Cct | lm S - D | Optic |
|----------------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81688 | M 2700 | 1908 - 1021 | 08 Sym. Flood(22°) |
| | | W 3000 | 2052 - 1093 | 20 Flood (29°) |
| | | N 4000 | 2178 - 1246 | 50 W.Flood (45°) |
| 18 LEDs | | | | |
| | 40 | | 919 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

| DALI 17,1 W DC - 19,1 W AC | | Cct | lm S - D | Optic |
|----------------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81689 | M 2700 | 2544 - 1361 | 08 Sym. Flood(22°) |
| | | W 3000 | 2736 - 1457 | 20 Flood (29°) |
| | | N 4000 | 2904 - 1660 | 50 W.Flood (45°) |
| 24 LEDs | | | | |
| | 40 | | 1219 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

| DALI 21,4 W DC - 24 W AC | | Cct | lm S - D | Optic |
|--------------------------|--------------|---------------|-------------|---------------------------|
| Anod. AL. | 81690 | M 2700 | 3180 - 1566 | 08 Sym. Flood(23°) |
| | | W 3000 | 3420 - 1674 | 20 Flood (30°) |
| | | N 4000 | 3630 - 1909 | 50 Flood (43°) |
| 30 LEDs | | | | |
| | 40 | | 1519 | |
| 61 | | | | |
| | 32 | | 200 | 200 |

Recessed casing, accessories and cables Pag. 741/742


Xenia_A PRO RGBW DMX | Linear profiles | 100-240V AC | powerLED



7,3 W DC - 8,5 W AC

| | | | | |
|-----------|--------------|---|--------------------|---|
| Anod. AL. | 84053 | Q RGBW natural white V RGBW warm white | 25 Elliptic | - |
|-----------|--------------|---|--------------------|---|


3 x 4 LEDs



19,3 W DC - 22,6 W AC

| | | | | |
|-----------|--------------|---|--------------------|---|
| Anod. AL. | 84054 | Q RGBW natural white V RGBW warm white | 25 Elliptic | - |
|-----------|--------------|---|--------------------|---|

8 x 4 LEDs



| | | |
|-----------------------------------|--------------|-----------------------------|
| DMX | 99385 | 89365 |
| DMX Controllers Pag. 952 - 953 | DMX/RDM | 120 Ohm DMX line closure |

Recessed casing, accessories and cables Pag. 741/742

DW Dynamic White on request


Xenia_AF | Linear profiles | 24V DC | topLED



6,5 W DC

| | | | | | |
|-----------|--------------|---|------------|-------------------------------------|---|
| Anod. AL. | 82491 | M 2700 W 3000 N 4000 | Cct | lm S - D | Optic |
| | | | | 764 - 606 801 - 635 838 - 664 | 20 Flood (27°) 50 Flood (39°) 90 W.Flood (66°) |


12 LEDs



13 W DC

| | | | | | |
|-----------|--------------|---|------------|--|---|
| Anod. AL. | 82492 | M 2700 W 3000 N 4000 | Cct | lm S - D | Optic |
| | | | | 1528 - 970 1602 - 1017 1676 - 1063 | 20 Flood (27°) 50 Flood (39°) 90 W.Flood (66°) |


12 LEDs



19,5 W DC

| | | | | | |
|-----------|--------------|---|------------|---|---|
| Anod. AL. | 82493 | M 2700 W 3000 N 4000 | Cct | lm S - D | Optic |
| | | | | 2292 - 1455 2403 - 1525 2514 - 1595 | 20 Flood (27°) 50 Flood (39°) 90 W.Flood (66°) |


12 LEDs



26 W DC

| | | | | | |
|-----------|--------------|---|------------|---|---|
| Anod. AL. | 82494 | M 2700 W 3000 N 4000 | Cct | lm S - D | Optic |
| | | | | 3056 - 1940 3204 - 2034 3352 - 2127 | 20 Flood (27°) 50 Flood (39°) 90 W.Flood (66°) |


12 LEDs



32,5 W DC

| | | | | | |
|-----------|--------------|---|------------|---|---|
| Anod. AL. | 82495 | M 2700 W 3000 N 4000 | Cct | lm S - D | Optic |
| | | | | 3820 - 2425 4005 - 2542 4190 - 2659 | 20 Flood (27°) 50 Flood (39°) 90 W.Flood (66°) |

12 LEDs



| | | | | |
|---------------------|---------------------|---------------------|---------------------|---------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W | ON/OFF 150 W | 0/1-10V 150 W | DALI PUSH 150 W | DALI 240 W |
| p 210 x l 48 x h 25 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 280 x l 43 x h 30 | p 244 x l 71 x h 38 |


Recessed casing, accessories and cables Pag. 741/742

Xenia_AF | Linear profiles | 190-250V AC | topLED




| 6,5 W DC - 7,2 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|-------------------------|
| Anod. AL. 82486 | M 2700 | 764 - 606 | 20 Flood (27°) |
| | W 3000 | 801 - 635 | 50 Flood (39°) |
| | N 4000 | 838 - 664 | 90 W.Flood (66°) |
| | | | 07 Asymm. - |


12 LEDs




| 13 W DC - 14,3 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Anod. AL. 82487 | M 2700 | 1528 - 970 | 20 Flood (27°) |
| | W 3000 | 1602 - 1017 | 50 Flood (39°) |
| | N 4000 | 1676 - 1063 | 90 W.Flood (66°) |
| | | | 07 Asymm. - |




| 19,5 W DC - 21,5 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Anod. AL. 82488 | M 2700 | 2292 - 1455 | 20 Flood (27°) |
| | W 3000 | 2403 - 1525 | 50 Flood (39°) |
| | N 4000 | 2514 - 1595 | 90 W.Flood (66°) |
| | | | 07 Asymm. - |



| 26 W DC - 28,6 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Anod. AL. 82489 | M 2700 | 3056 - 1940 | 20 Flood (27°) |
| | W 3000 | 3204 - 2034 | 50 Flood (39°) |
| | N 4000 | 3352 - 2127 | 90 W.Flood (66°) |
| | | | 07 Asymm. - |



| 32,5 W DC - 35,8 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|-------------|-------------------------|
| Anod. AL. 82490 | M 2700 | 3820 - 2425 | 20 Flood (27°) |
| | W 3000 | 4005 - 2542 | 50 Flood (39°) |
| | N 4000 | 4190 - 2659 | 90 W.Flood (66°) |
| | | | 07 Asymm. - |




Fixing brackets, recessed casing, accessories and cables Pag. 741/742


Xenia_ALF | Linear profiles | 190-250V AC | topLED




| 2 W DC - 3 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|---------------------|
| Anod. AL. 82481 | M 2700 | 336 - 0n req | 00 General - |
| | W 3000 | 348 - 0n req | |
| | N 4000 | 367 - 0n req | |




| 3,6 W DC - 5 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|---------------------|
| Anod. AL. 82482 | M 2700 | 605 - 0n req | 00 General - |
| | W 3000 | 626 - 0n req | |
| | N 4000 | 661 - 0n req | |




| 5,4 W DC - 7 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|--------------|---------------------|
| Anod. AL. 82483 | M 2700 | 907 - 0n req | 00 General - |
| | W 3000 | 939 - 0n req | |
| | N 4000 | 992 - 0n req | |



| 7,2 W DC - 9,4 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|---------------|---------------------|
| Anod. AL. 82484 | M 2700 | 1210 - 0n req | 00 General - |
| | W 3000 | 1252 - 0n req | |
| | N 4000 | 1322 - 0n req | |



| 9 W DC - 11,3 W AC | Cct | lm S - D | Optic |
|------------------------|---------------|---------------|---------------------|
| Anod. AL. 82485 | M 2700 | 1513 - 0n req | 00 General - |
| | W 3000 | 1565 - 0n req | |
| | N 4000 | 1653 - 0n req | |




Fixing brackets, recessed casing, accessories and cables Pag. 741/742

Xenia_AF RGBW DMX | Linear profiles | 100-240V AC | topLED



12 W DC - 13 W AC

| | | |
|-----------|--------------|-----------------------------|
| Anod. AL. | 83589 | Q RGBW natural white |
| | | V RGBW warm white |




Optic

| | |
|----------------------|---|
| 20 Spot | - |
| 50 W.Flood | - |
| 90 E.W.Flood- | - |
| 07 Asymm. | - |

22 W DC - 24 W AC

| | | |
|-----------|--------------|-----------------------------|
| Anod. AL. | 83590 | Q RGBW natural white |
| | | V RGBW warm white |



Optic

| | |
|----------------------|---|
| 20 Spot | - |
| 50 W.Flood | - |
| 90 E.W.Flood- | - |
| 07 Asymm. | - |

DMX 99385 89365
 DMX Controllers Pag. 952 - 953 DMX/RDM 120 Ohm DMX line closure


Fixing brackets, recessed casing, accessories and cables Pag. 741/742

Xenia_AF PRO | Linear profiles | powerLED 4,5 W DC 500 mA



4,5 W DC

| | | | | |
|-----------|--------------|---------------|---------------------------|---------------------------|
| Anod. AL. | 82712 | M 2700 | Im S - D 561 - 336 | 08 Sym. Flood(28°) |
| | | W 3000 | 597 - 360 | 20 Flood (30°) |
| | | N 4000 | 639 - 384 | 50 W.Flood (51°) |
| | | | | 90 W.Flood (66°) |
| | | | | 25 Elliptic - |
| | | | | 07 Asymm. - |



99181 99185 83101
 ON/OFF 1-2 art. p 78 x l 100 x h 31 ON/OFF 2-4 art. p 92 x l 117 x h 38 DALI 1-4 art. p 53 x l 121 x h 26


Fixing brackets, recessed casing, accessories and cables Pag. 741/742

Xenia_AF PRO | Linear profiles | 190-250V AC | powerLED




7,4 W DC - 8,3 W AC

| | | | | |
|-----------|--------------|---------------|----------------------------|---------------------------|
| Anod. AL. | 82496 | M 2700 | Im S - D 1086 - 577 | 08 Sym. Flood(28°) |
| | | W 3000 | 1164 - 619 | 20 Flood (30°) |
| | | N 4000 | 1242 - 660 | 50 W.Flood (51°) |
| | | | | 90 W.Flood (66°) |
| | | | | 25 Elliptic - |
| | | | | 07 Asymm. - |




14,8 W DC - 16,5 W AC

| | | | | |
|-----------|--------------|---------------|-----------------------------|---------------------------|
| Anod. AL. | 82497 | M 2700 | Im S - D 2172 - 1155 | 08 Sym. Flood(28°) |
| | | W 3000 | 2328 - 1238 | 20 Flood (30°) |
| | | N 4000 | 2484 - 1321 | 50 W.Flood (51°) |
| | | | | 90 W.Flood (66°) |
| | | | | 25 Elliptic - |
| | | | | 07 Asymm. - |




22,2 W DC - 24,8 W AC

| | | | | |
|-----------|--------------|---------------|-----------------------------|---------------------------|
| Anod. AL. | 82498 | M 2700 | Im S - D 3078 - 1635 | 08 Sym. Flood(28°) |
| | | W 3000 | 3294 - 1752 | 20 Flood (30°) |
| | | N 4000 | 3510 - 1870 | 50 W.Flood (51°) |
| | | | | 90 W.Flood (66°) |
| | | | | 25 Elliptic - |
| | | | | 07 Asymm. - |




29,6 W DC - 33,2 W AC

| | | | | |
|-----------|--------------|---------------|-----------------------------|---------------------------|
| Anod. AL. | 82499 | M 2700 | Im S - D 4104 - 2171 | 08 Sym. Flood(28°) |
| | | W 3000 | 4392 - 2334 | 20 Flood (30°) |
| | | N 4000 | 4680 - 2491 | 50 W.Flood (51°) |
| | | | | 90 W.Flood (66°) |
| | | | | 25 Elliptic - |
| | | | | 07 Asymm. - |



37 W DC - 41,3 W AC

| | | | | |
|-----------|--------------|---------------|-----------------------------|---------------------------|
| Anod. AL. | 82500 | M 2700 | Im S - D 5130 - 2727 | 08 Sym. Flood(28°) |
| | | W 3000 | 5490 - 2923 | 20 Flood (30°) |
| | | N 4000 | 5850 - 3119 | 50 W.Flood (51°) |
| | | | | 90 W.Flood (66°) |
| | | | | 25 Elliptic - |
| | | | | 07 Asymm. - |




Fixing brackets, recessed casing, accessories and cables Pag. 741/742

Xenia_AF PRO | Linear profiles | 190-250V AC | powerLED




8,4 W DC - 10,1 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|---------------------------|
| Anod. AL. 82505 | M 2700 | 1272 - 677 | 08 Sym. Flood(28°) |
| | W 3000 | 1368 - 728 | 20 Flood (30°) |
| | N 4000 | 1452 - 777 | 50 W.Flood (51°) |




12,8 W DC - 14,4 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 82506 | M 2700 | 1908 - 1018 | 08 Sym. Flood(28°) |
| | W 3000 | 2052 - 1091 | 20 Flood (30°) |
| | N 4000 | 2178 - 1165 | 50 W.Flood (51°) |




17,1 W DC - 19,1 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 82507 | M 2700 | 2544 - 1357 | 08 Sym. Flood(28°) |
| | W 3000 | 2736 - 1454 | 20 Flood (30°) |
| | N 4000 | 2904 - 1552 | 50 W.Flood (51°) |



21,4 W DC - 24 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|---------------------------|
| Anod. AL. 82508 | M 2700 | 3180 - 1699 | 08 Sym. Flood(28°) |
| | W 3000 | 3420 - 1821 | 20 Flood (30°) |
| | N 4000 | 3630 - 1943 | 50 W.Flood (51°) |




Fixing brackets, recessed casing, accessories and cables Pag. 741/742

Xenia_AF PRO RGBW DMX | Linear profiles | 100-240V AC | powerLED




7,3 W DC - 8,5 W AC **Optic**

| | | |
|------------------------|-----------------------------|----------------------|
| Anod. AL. 84046 | Q RGBW natural white | 25 Elliptic - |
| | V RGBW warm white | |



19,3 W DC - 22,6 W AC **Optic**

| | | |
|------------------------|-----------------------------|----------------------|
| Anod. AL. 84045 | Q RGBW natural white | 25 Elliptic - |
| | V RGBW warm white | |



DMX 99385 89365
 DMX Controllers DMX/RDM 120 Ohm DMX line closure
 Pag. 952 - 953


Fixing brackets, recessed casing, accessories and cables Pag. 741/742

DW Dynamic White on request




7,4 W DC - 8,3 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82330 | M 2700 | 1086 - 268 | 08 Sym. Flood- |
| | W 3000 | 1164 - 288 | 20 Flood - |
| | N 4000 | 1242 - 307 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




14,8 W DC - 16,5 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82331 | M 2700 | 2172 - 537 | 08 Sym. Flood- |
| | W 3000 | 2328 - 576 | 20 Flood - |
| | N 4000 | 2484 - 614 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




22,2 W DC - 24,8 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82332 | M 2700 | 3078 - 760 | 08 Sym. Flood- |
| | W 3000 | 3294 - 815 | 20 Flood - |
| | N 4000 | 3510 - 869 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




29,6 W DC - 33,2 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|-----------------------|
| Anod. AL. 82333 | M 2700 | 4104 - 1015 | 08 Sym. Flood- |
| | W 3000 | 4392 - 1088 | 20 Flood - |
| | N 4000 | 4680 - 1161 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




37 W DC - 41,3 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|-----------------------|
| Anod. AL. 82334 | M 2700 | 5130 - 1270 | 08 Sym. Flood- |
| | W 3000 | 5490 - 1362 | 20 Flood - |
| | N 4000 | 5850 - 1453 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




Recessed casing, accessories and cables Pag. 741/742




DALI 8,4 W DC - 10,1 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82326 | M 2700 | 1272 - 316 | 08 Sym. Flood- |
| | W 3000 | 1368 - 338 | 20 Flood - |
| | N 4000 | 1452 - 361 | 50 Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




DALI 12,8 W DC - 14,4 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82327 | M 2700 | 1908 - 473 | 08 Sym. Flood- |
| | W 3000 | 2052 - 507 | 20 Flood - |
| | N 4000 | 2178 - 541 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




DALI 17,1 W DC - 19,1 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82328 | M 2700 | 2544 - 632 | 08 Sym. Flood- |
| | W 3000 | 2736 - 678 | 20 Flood - |
| | N 4000 | 2904 - 723 | 50 W.Flood - |
| | | | 90 E.W.Flood- |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |



DALI 21,4 W DC - 24 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82329 | M 2700 | 3180 - 791 | 08 Sym. Flood- |
| | W 3000 | 3420 - 848 | 20 Flood - |
| | N 4000 | 3630 - 905 | 50 Flood - |
| | | | 90 W.Flood - |
| | | | 25 Elliptic - |
| | | | 07 Asymm. - |




Recessed casing, accessories and cables Pag. 741/742




7,4 W DC - 8,3 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82553 | M 2700 | 1086 - 273 | 08 Sym. Flood- |
| | W 3000 | 1164 - 293 | 20 Flood - |
| | N 4000 | 1242 - 312 | 50 W.Flood - |




14,8 W DC - 16,5 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82554 | M 2700 | 2172 - 547 | 08 Sym. Flood- |
| | W 3000 | 2328 - 586 | 20 Flood - |
| | N 4000 | 2484 - 625 | 50 W.Flood - |




22,2 W DC - 24,8 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82555 | M 2700 | 3078 - 771 | 08 Sym. Flood- |
| | W 3000 | 3294 - 829 | 20 Flood - |
| | N 4000 | 3510 - 885 | 50 W.Flood - |




29,6 W DC - 33,2 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|-----------------------|
| Anod. AL. 82556 | M 2700 | 4104 - 1031 | 08 Sym. Flood- |
| | W 3000 | 4392 - 1105 | 20 Flood - |
| | N 4000 | 4680 - 1179 | 50 W.Flood - |



37W DC - 41,3 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|-------------|-----------------------|
| Anod. AL. 82557 | M 2700 | 5130 - 1291 | 08 Sym. Flood- |
| | W 3000 | 5490 - 1383 | 20 Flood - |
| | N 4000 | 5850 - 1476 | 50 W.Flood - |




Fixing brackets, recessed casing, accessories and cables Pag. 741/742




8,4 W DC - 10,1 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82562 | M 2700 | 1272 - 321 | 08 Sym. Flood- |
| | W 3000 | 1368 - 344 | 20 Flood - |
| | N 4000 | 1452 - 367 | 50 W.Flood - |




12,8 W DC - 14,4 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82563 | M 2700 | 1908 - 482 | 08 Sym. Flood- |
| | W 3000 | 2052 - 516 | 20 Flood - |
| | N 4000 | 2178 - 551 | 50 W.Flood - |




17,1 W DC - 19,1 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82564 | M 2700 | 2544 - 640 | 08 Sym. Flood- |
| | W 3000 | 2736 - 688 | 20 Flood - |
| | N 4000 | 2904 - 734 | 50 W.Flood - |



21,4 W DC - 24 W AC **Cct** **lm S - D** **Optic**

| | | | |
|------------------------|---------------|------------|-----------------------|
| Anod. AL. 82565 | M 2700 | 3180 - 804 | 08 Sym. Flood- |
| | W 3000 | 3420 - 862 | 20 Flood - |
| | N 4000 | 3630 - 918 | 50 W.Flood - |



Fixing brackets, recessed casing, accessories and cables Pag. 741/742

Fixing brackets



| 2 x | description | |
|--|--------------------------|--|
| 98949 | Fixing brackets 46-67 mm | |
| suitable for: Xenia_W / Xenia_W PRO | | |

Xenia_AF / Xenia_ALF / Xenia_AF PRO
Xenia_AF RGBW DMX / Xenia_AF PRO RGBW DMX
Xenia_AF PRO Micro Louvre



| 2 x | description | |
|--|-----------------------|--|
| 89045 | Fixing brackets 90 mm | |
| suitable for: Xenia_W / Xenia_W PRO | | |



| 2 x | description | |
|--|------------------------|--|
| 89046 | Fixing brackets 150 mm | |
| suitable for: Xenia_W / Xenia_W PRO | | |



| 2 x | description | |
|--|------------------------|--|
| 89047 | Fixing brackets 300 mm | |
| suitable for: Xenia_W / Xenia_W PRO | | |

Recessed casing



| description | |
|---|---------|
| 99972 | 160 mm |
| 99761 | 360 mm |
| 99762 | 620 mm |
| 99763 | 920 mm |
| 99764 | 1220 mm |
| 99765 | 1520 mm |
| suitable for: Xenia_A / Xenia_AL / Xenia_A PRO | |

| RGBW | |
|--------------|---------|
| 99820 | 530 mm |
| 99821 | 1170 mm |

suitable for: Xenia_A RGBW DMX
Xenia_A PRO RGBW DMX



| description | |
|--------------|---------|
| 99926 | 160 mm |
| 99912 | 359 mm |
| 99913 | 619 mm |
| 99914 | 919 mm |
| 99915 | 1219 mm |
| 99916 | 1519 mm |

suitable for: Xenia_AF / Xenia_ALF / Xenia_AF PRO
Xenia_AF PRO Micro Louvre / Xenia_A PRO Micro Louvre

| RGBW | |
|--------------|---------|
| 99918 | 529 mm |
| 99919 | 1169 mm |

suitable for: Xenia_AF RGBW / Xenia_AF Pro RGBW DMX

Accessories



| 2 x | description | |
|--|-------------------|--|
| 99766 | Line sealing caps | |
| suitable for: Xenia_A / Xenia_AL / Xenia_A RGBW DMX Xenia_A PRO (not for L 160 mm) Xenia_A PRO RGBW DMX | | |



| 2 x | description | |
|--|-------------------|--|
| 83188 | Line sealing caps | |
| suitable for: Xenia_A PRO (L 160 mm) Xenia_A PRO MicroLouvre | | |



| description | |
|---|----------------------------|
| 99818 | Springs for false ceilings |
| suitable for: Xenia_A / Xenia_AL / Xenia_A PRO Xenia_A PRO MicroLouvre / Xenia_A RGBW DMX Xenia_A PRO RGBW DMX | |



| 2 x | description | |
|---|-------------------|--|
| 99917 | Line sealing caps | |
| suitable for: Xenia_AF / Xenia_ALF / Xenia_AF PRO Xenia_AF RGBW DMX / Xenia_AF PRO RGBW DMX Xenia_AF PRO MicroLouvre | | |

Accessories



| description | |
|--|---------------------|
| 98782 | Anti-glaring 366 mm |
| suitable for: Xenia_W / Xenia_W PRO | |



| description | |
|--|---------------------|
| 98783 | Anti-glaring 630 mm |
| suitable for: Xenia_W / Xenia_W PRO | |



| description | |
|--|---------------------|
| 98784 | Anti-glaring 930 mm |
| suitable for: Xenia_W / Xenia_W PRO | |



| description | |
|--|----------------------|
| 98785 | Anti-glaring 1230 mm |
| suitable for: Xenia_W / Xenia_W PRO | |



| description | |
|--|----------------------|
| 99778 | Anti-glaring 1530 mm |
| suitable for: Xenia_W / Xenia_W PRO | |



| description | |
|---|---------------------|
| 98951 | Anti-glaring 500 mm |
| suitable for: Xenia_W PRO RGBW DMX | |



| description | |
|---------------------------------------|---------------------|
| 98953 | Anti-glaring 535 mm |
| suitable for: Xenia_W RGBW DMX | |




| description | |
|---|----------------------|
| 98952 | Anti-glaring 1182 mm |
| suitable for: Xenia_W RGBW DMX Xenia_W PRO RGBW DMX | |


Cables




| 24V DC 190-250V AC | |
|----------------------------|----------------------------|
| 99216 | Conn. F.4 pin M12 (L 1,5m) |
| 89190 | Conn. F.4 pin M12 (L 5m) |
| suitable for: Xenia | |




| DMX | |
|----------------------------|--------------------------|
| 89189 | Conn. M.5 pin M12 (L 5m) |
| suitable for: Xenia | |



| DMX | |
|----------------------------|--|
| 89186 | Conn. M.5 pin M12 + M.3 pin XLR (L 5m) |
| suitable for: Xenia | |



| DMX | |
|----------------------------|--|
| 98494 | Conn. M.5 pin M12 + F.3 pin XLR (L 5m) |
| suitable for: Xenia | |



| DMX | |
|----------------------------|--|
| 98493 | Conn. M.5 pin M12 + M.5 pin XLR (L 5m) |
| suitable for: Xenia | |




| 1-10V & DALI | |
|----------------------------|--------------------------|
| 99879 | Conn M. 5 pin M12 (L 5m) |
| suitable for: Xenia | |

Extension cables



| 24V DC 190-250V AC | |
|----------------------------|--------------------------------|
| 98437 | Conn M. + F. 4 pin M12 (L 1m) |
| 98149 | Conn M. + F. 4 pin M12 (L 5m) |
| 89188 | Conn M. + F. 4 pin M12 (L 10m) |
| suitable for: Xenia | |



| DMX | |
|----------------------------|---------------------------------|
| 98994 | Conn. M. / F. 5 pin M12 (L 1m) |
| 98993 | Conn. M. / F. 5 pin M12 (L 5m) |
| 89187 | Conn. M. / F. 5 pin M12 (L 10m) |
| suitable for: Xenia | |



| 1-10V & DALI | |
|----------------------------|--------------------------------|
| 89361 | Conn M. + F. 5 pin M12 (L 10m) |
| suitable for: Xenia | |




paseo

Materials

Transparent or opalescent polycarbonate body



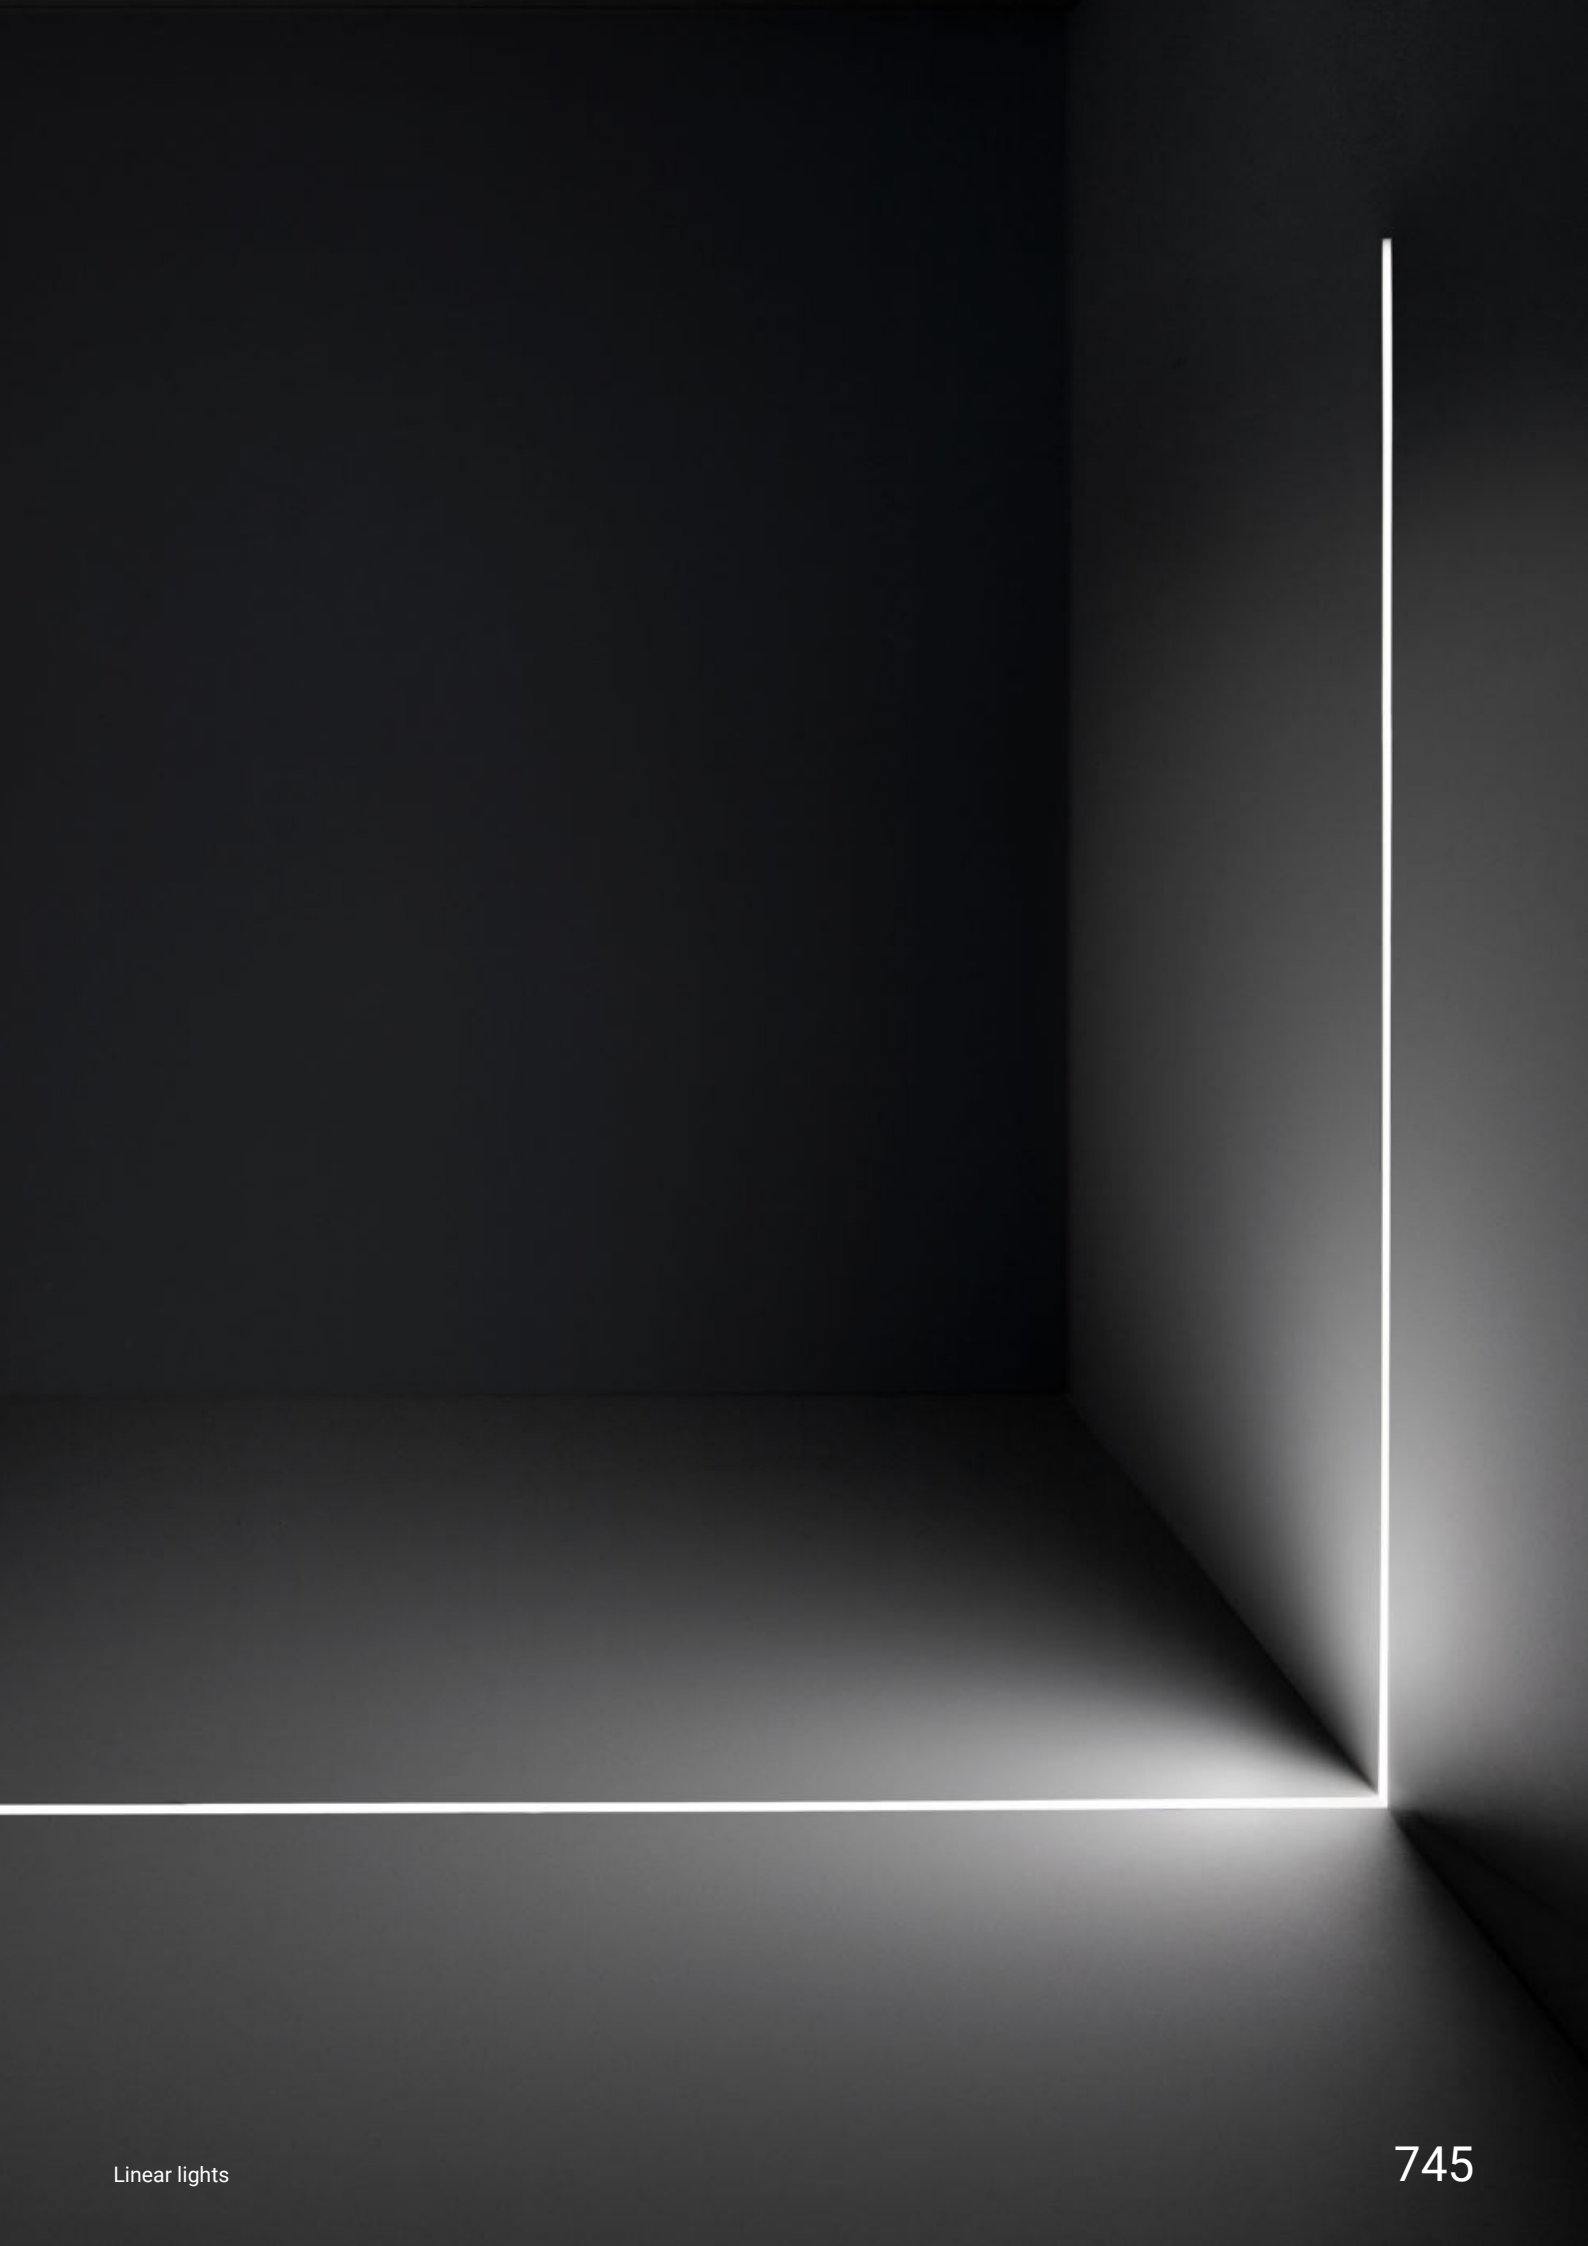

paseo range



| | _L / _L Anti-glare | Dark | _X |
|-------------------|-------------------------------------|--------------------------|-----------------------------------|
| 6,2 W 6,6 W | 512 x 24 mm | 594 x 26 mm | - |
| 7 W 8 W | - | - | 576 x 24 mm 576 x 24 mm (RGBW) |
| 12 W | 512 x 24 mm (RGBW) | 1176 x 26 mm | - |
| 13,1 W 13,6 W | 1152 x 24 mm | - | - |
| 15 W | - | 1467 x 26 mm | - |
| 17 W 17,3 W | - | - | 1152 x 24 mm |
| 19,5 W | 1452 x 24 mm | - | - |
| 24 W | 1152 x 24 mm (RGBW) | - | - |
| 31 W | 1452 x 24 mm (RGBW) | - | - |
| Finish | Transp. Opaline | Black | Transp. |
| topLED | 2700K - 3000K - 4000K - RGBW | 2700K - 3000K - 4000K | - |
| powerLED | - | - | 2700K - 3000K - 4000K - RGBW |
| Optics | Spot - Flood - Asymmetric - General | General | Spot - Flood - W.Flood - Elliptic |
| Driver | On/Off - 0/1-10V - DALI | On/Off - DALI/PUSH - DMX | - |
| Driver | On/Off - DMX | - | On/Off - 1/10 V - DALI - DMX |

Minimal size

The new Paseo models are even thinner and more versatile, with width of 24 to 26 millimetres that adapt easily to any design need. Their very small size is combined with simple, minimalist aesthetics.


24 mm



Real sizes



The Paseo range comes with a wide choice of optics, lengths, colour temperatures, and controls. These include DALI and 1-10V, and RGBW DMX and RGB pixel (**Pag. 851**) for dynamic lighting management and spectacular architectural illumination. The housings and numerous accessories mean Paseo can be recessed or fitted to a wall, ceiling or floor.

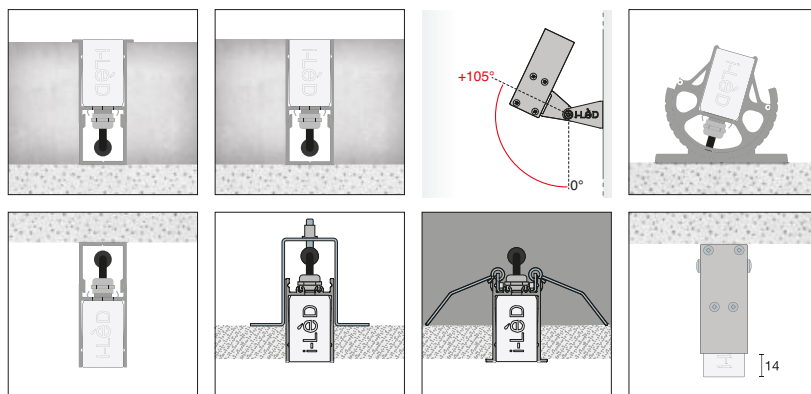

Maximum protection

An electrostatic discharge occurs when, between two bodies that are close or at contact, there occurs a transfer of charges which could at times damage electronics and LED modules. Paseos with incorporated drivers come with an up to 4KV electrostatic discharge (ESD) protection.




Ultrasonic-welded caps offer perfect mechanical resistance and light continuity

Thermoplastic PUR cables with IP67 quick coupling connectors made of M12 with 4 or 5 poles

Steel spring for safe coupling of the Paseo profile to the outer casing

Apparatus equipped TCS® valve, to avoid the formation of humidity in the profile

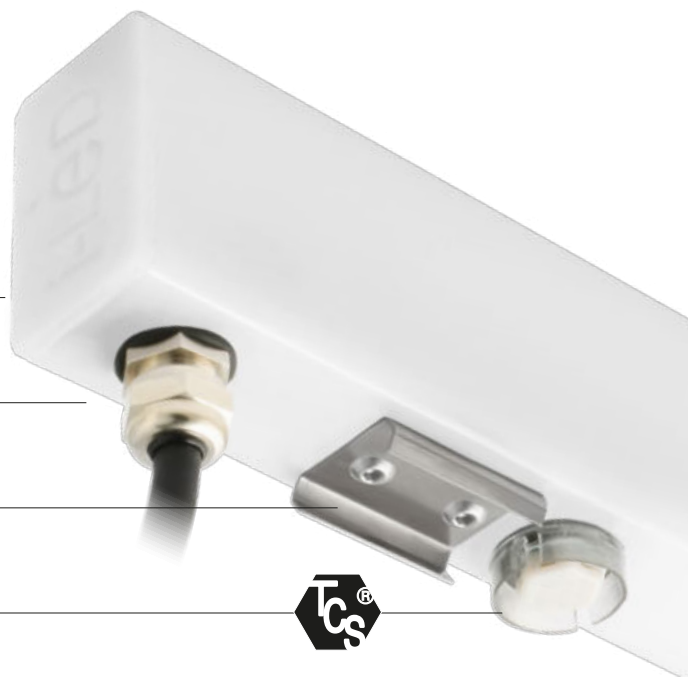


Paseo_L | Linear profiles | 24V DC | topLED



| 6,6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|-----------------------|
| Transp. 97673 | M 2700 | 662 - 507 | 20 Flood (37°) |
| | W 3000 | 720 - 552 | 07 Asymm. - |
| | N 4000 | 749 - 574 | |


| 6,6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|-------------------|
| Opaline 81328 | M 2700 | 662 - 330 | 00 General |
| | W 3000 | 720 - 359 | |
| | N 4000 | 749 - 374 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|----------------------|----------------------|-----------------------|------------------------|---------------------|
| ON/OFF 1 - 3 art. | ON/OFF 1 - 7 art. | ON/OFF 1 - 21 art. | 0/1-10V 1 - 21 art. | DALI 1 - 18 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 191 x l 63 x h 38 |

| 13,6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|-----------------------|
| Transp. 97674 | M 2700 | 1208 - 931 | 20 Flood (34°) |
| | W 3000 | 1313 - 1013 | 07 Asymm. - |
| | N 4000 | 1365 - 1053 | |


| 13,6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|------------|-------------------|
| Opaline 81329 | M 2700 | 1208 - 624 | 00 General |
| | W 3000 | 1313 - 679 | |
| | N 4000 | 1365 - 706 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---------------------|----------------------|-----------------------|------------------------|---------------------|
| ON/OFF 1 art. | ON/OFF 1 - 3 art. | ON/OFF 1 - 11 art. | 0/1-10V 1 - 11 art. | DALI 1 - 8 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 191 x l 63 x h 38 |

| 19,5 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|-----------------------|
| Transp. 97675 | M 2700 | 1913 - 1474 | 20 Flood (34°) |
| | W 3000 | 2079 - 1604 | 07 Asymm. - |
| | N 4000 | 2162 - 1667 | |


| 19,5 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|-------------------|
| Opaline 81330 | M 2700 | 1913 - 988 | 00 General |
| | W 3000 | 2079 - 1075 | |
| | N 4000 | 2162 - 1117 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---------------------|----------------------|----------------------|-----------------------|---------------------|
| ON/OFF 1 art. | ON/OFF 1 - 2 art. | ON/OFF 1 - 7 art. | 0/1-10V 1 - 7 art. | DALI 1 - 6 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 191 x l 63 x h 38 |


Cables, recessed casing and accessories Pag. 754-757

Paseo_L | Linear profiles | 190-250 V AC | topLED




| 6,6 W DC - 7,4 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|-----------------------|
| Transp. 96150 | M 2700 | 662 - 507 | 20 Flood (37°) |
| | W 3000 | 720 - 552 | 07 Asymm. - |
| | N 4000 | 749 - 574 | |

| 6,6 W DC - 7,4 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|-------------------|
| Opaline 81331 | M 2700 | 662 - 330 | 00 General |
| | W 3000 | 720 - 359 | |
| | N 4000 | 749 - 374 | |




| 13,6 W DC - 15,2 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|-----------------------|
| Transp. 96151 | M 2700 | 1208 - 931 | 20 Flood (34°) |
| | W 3000 | 1313 - 1013 | 07 Asymm. - |
| | N 4000 | 1365 - 1053 | |

| 13,6 W DC - 15,2 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|------------|-------------------|
| Opaline 81332 | M 2700 | 1208 - 624 | 00 General |
| | W 3000 | 1313 - 679 | |
| | N 4000 | 1365 - 706 | |



| 19,5 W DC - 21,8 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|-----------------------|
| Transp. 96152 | M 2700 | 1913 - 1474 | 20 Flood (34°) |
| | W 3000 | 2079 - 1604 | 07 Asymm. - |
| | N 4000 | 2162 - 1667 | |


| 19,5 W DC - 21,8 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|-------------|-------------------|
| Opaline 81333 | M 2700 | 1913 - 988 | 00 General |
| | W 3000 | 2079 - 1075 | |
| | N 4000 | 2162 - 1117 | |




Cables, recessed casing and accessories Pag. 754-757

RTG 81332W00

Paseo_L Anti-glare | Linear profiles | 24V DC | topLED




| 6,6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|--------------------|
| Transp. 94021 | M 2700 | 662 - 264 | 20 Spot - |
| | W 3000 | 720 - 288 | 07 Asymm. - |
| | N 4000 | 749 - 294 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 3 art. p 92 x l 117 x h 38 | ON/OFF 1 - 7 art. p 115 x l 140 x h 50 | ON/OFF 1 - 21 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 21 art. p 150 x l 60 x h 35 | DALI 1 - 18 art. p 191 x l 63 x h 38 |


| 13,6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|------------|--------------------|
| Transp. 94022 | M 2700 | 1208 - 496 | 20 Spot - |
| | W 3000 | 1313 - 537 | 07 Asymm. - |
| | N 4000 | 1365 - 548 | |




| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 3 art. p 115 x l 140 x h 50 | ON/OFF 1 - 11 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 11 art. p 150 x l 60 x h 35 | DALI 1 - 8 art. p 191 x l 63 x h 38 |

Cables, recessed casing and accessories Pag. 754-757


Paseo_L Anti-glare | Linear profiles | 190-250 V AC | topLED



| 6,2 W DC - 7 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|--------------------|
| Transp. 93994 | M 2700 | 662 - 264 | 20 Spot - |
| | W 3000 | 720 - 288 | 07 Asymm. - |
| | N 4000 | 749 - 294 | |




| 13,1 W DC - 15 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|------------|--------------------|
| Transp. 93995 | M 2700 | 1208 - 496 | 20 Spot - |
| | W 3000 | 1313 - 537 | 07 Asymm. - |
| | N 4000 | 1365 - 548 | |



Cables, recessed casing and accessories Pag. 754-757

Device equipped with Anti-glare profile for reducing direct glaring. The light emission intensity remains unvaried though.

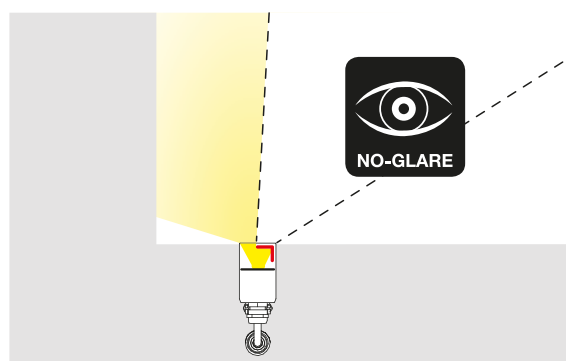

Paseo_L | Linear profiles | 24V DC | topLED




12 W DC

Opaline **84055**

Q RGBW natural white
V RGBW warm white

Optic

00 General -



| Driver | Switching | DMX | 99385 | 89365 |
|---|--|-----------------------------------|----------------------|-----------------------------|
| ON/OFF 24V DC 14W - 150W Pag. 940 - 941 | 24V DC Switching 50W - 750W Pag. 932 | DMX Controllers Pag. 952 - 953 | DMX/RDM addresser | 120 Ohm DMX line closure |


24 W DC

Opaline **84056**

Q RGBW natural white
V RGBW warm white

Optic

00 General -



| Driver | Switching | DMX | 99385 | 89365 |
|---|--|-----------------------------------|----------------------|-----------------------------|
| ON/OFF 24V DC 14W - 150W Pag. 940 - 941 | 24V DC Switching 50W - 750W Pag. 932 | DMX Controllers Pag. 952 - 953 | DMX/RDM addresser | 120 Ohm DMX line closure |


31 W DC

Opaline **84057**

Q RGBW natural white
V RGBW warm white

Optic


00 General -



| Driver | Switching | DMX | 99385 | 89365 |
|---|--|-----------------------------------|----------------------|-----------------------------|
| ON/OFF 24V DC 14W - 150W Pag. 940 - 941 | 24V DC Switching 50W - 750W Pag. 932 | DMX Controllers Pag. 952 - 953 | DMX/RDM addresser | 120 Ohm DMX line closure |

Cables, recessed casing and accessories Pag. 754-757

Paseo Dark | Linear profiles | 48V DC | topLED



6,2 W DC

Black **84214**

Cct



M 2700
W 3000
N 4000

lm S - D

441 - On req.
450 - On req.
495 - On req.

Optic

00 General -



| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |

12 W DC

Black **84215**

Cct


M 2700
W 3000
N 4000

lm S - D

882 - On req.
900 - On req.
990 - On req.

Optic

00 General -



| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |

15 W DC

Black **84216**

Cct



M 2700
W 3000
N 4000

lm S - D

1103 - On req.
1125 - On req.
1238 - On req.

Optic

00 General -




| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |

Accessories Pag. 757

For cables and power supply/control contact Linea Light support service.



Paseo Dark OFF




Paseo Dark ON




Paseo_X | Linear profiles | 190-250 V AC | powerLED



| 7 W DC - 7,7 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|---------------|-------------------------|
| Transp. 96196 | M 2700 | 1128 - On req | 08 Spot (17°) |
| | W 3000 | 1212 - 900 | 15 Flood (26°) |
| | N 4000 | 1284 - 952 | 30 Flood (29°) |
| | | | 60 W.Flood (51°) |
| | | | 25 Elliptic - |




| 17,3 W DC - 19,4 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|---------------|-------------------------|
| Transp. 96197 | M 2700 | 2544 - On req | 08 Spot (17°) |
| | W 3000 | 2736 - 1800 | 15 Flood (26°) |
| | N 4000 | 2904 - 1905 | 30 Flood (29°) |
| | | | 60 W.Flood (51°) |
| | | | 25 Elliptic - |




Paseo_X | Linear profiles | 190-250 V AC | powerLED



| 7 W DC - 7,7 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|---------------|-------------------------|
| Transp. 97255 | M 2700 | 1128 - On req | 08 Spot (17°) |
| | W 3000 | 1212 - 900 | 15 Flood (26°) |
| | N 4000 | 1284 - 952 | 30 Flood (29°) |
| | | | 60 W.Flood (51°) |
| | | | 25 Elliptic - |




| 17,3 W DC - 19,4 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|---------------|-------------------------|
| Transp. 97611 | M 2700 | 2256 - On req | 08 Spot (17°) |
| | W 3000 | 2424 - 1800 | 15 Flood (26°) |
| | N 4000 | 2568 - 1905 | 30 Flood (29°) |
| | | | 60 W.Flood (51°) |
| | | | 25 Elliptic - |




Paseo_X | Linear profiles | 190-250 V AC | powerLED




| 7 W DC - 7,7 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|---------------|-------------------------|
| Transp. 97256 | M 2700 | 1128 - On req | 08 Spot (17°) |
| | W 3000 | 1212 - 900 | 15 Flood (26°) |
| | N 4000 | 1284 - 952 | 30 Flood (29°) |
| | | | 60 W.Flood (51°) |
| | | | 25 Elliptic - |




| 17,3 W DC - 19,4 W AC | Cct | lm S - D | Optic |
|-----------------------|---------------|---------------|-------------------------|
| Transp. 97612 | M 2700 | 2256 - On req | 08 Spot (17°) |
| | W 3000 | 2424 - 1800 | 15 Flood (26°) |
| | N 4000 | 2568 - 1905 | 30 Flood (29°) |
| | | | 60 W.Flood (51°) |
| | | | 25 Elliptic - |




Paseo_X | Linear profiles | 190-250 V AC | powerLED



| 8 W DC - 9 W AC | Cct | Optic |
|----------------------|-----------------------------|----------------------|
| Transp. 84058 | Q RGBW natural white | 25 Elliptic - |
| | V RGBW warm white | |



| 17 W DC - 19 W AC | Cct | Optic |
|----------------------|-----------------------------|----------------------|
| Transp. 84059 | Q RGBW natural white | 25 Elliptic - |
| | V RGBW warm white | |



DMX 99385 89365
 DMX Controllers DMX/RDM 120 Ohm DMX line closure
 Pag. 952 - 953

Cables, recessed casing and accessories Pag. 754-757

Cables, recessed casing and accessories Pag. 754-757



Cables



24V DC 190-250V AC

99216 Conn. F.4 pin M12 (L 1,5m)

89190 Conn. F.4 pin M12 (L 5m)

suitable for: Paseo



DMX

89189 Conn. M.5 pin M12 (L 5m)


suitable for: Paseo



DMX

89186 Conn. M.5 pin M12 + M.3 pin XLR (L 5m)


suitable for: Paseo



DMX

98494 Conn. M.5 pin M12 + F.3 pin XLR (L 5m)

suitable for: Paseo



DMX

98493 Conn. M.5 pin M12 + M.5 pin XLR (L 5m)

suitable for: Paseo




1-10V & DALI

99879 Conn M. 5 pin M12 (L 5m)

suitable for: Paseo

RTG 99216 / 89190

Extension cables




24V DC 190-250V AC

98437 Conn M. + F. 4 pin M12 (L 1m)

98149 Conn M. + F. 4 pin M12 (L 5m)

89188 Conn M. + F. 4 pin M12 (L 10m)

suitable for: Paseo



DMX

98994 Conn. M. / F. 5 pin M12 (L 1m)

98993 Conn. M. / F. 5 pin M12 (L 5m)

89187 Conn. M. / F. 5 pin M12 (L 10m)

suitable for: Paseo




1-10V & DALI


89361 Conn M. + F. 5 pin M12 (L 10m)

suitable for: Paseo

Paseo | Outer casing for floor-mounted recessed installation



Outer casing



Cable gland

| Outer casing | Cable gland | |
|--------------|--------------|-----------------------------------|
| 98355 | 98471 | Anod. Al. 513 mm x Paseo 512 mm |
| 98430 | 98472 | Anod. Al. 577 mm x Paseo 576 mm |
| 98356 | 98473 | Anod. Al. 1153 mm x Paseo 1152 mm |
| 98357 | 98474 | Anod. Al. 1453 mm x Paseo 1452 mm |


suitable for: Paseo_L / Paseo_L Anti-glare / Paseo_X



Installation accessories




98876
2 x terminal caps for closing the profile.




98553
Joining cap between the outer casings with hole for passing cables through 2 pieces

RTG 98356

Paseo | Outer casing for floor-mounted or ceiling-mounted flushed installation




Outer casing



Cable gland

| Outer casing | Cable gland | |
|--------------|--------------|-----------------------------------|
| 98467 | 98471 | Anod. Al. 513 mm x Paseo 512 mm |
| 98468 | 98472 | Anod. Al. 577 mm x Paseo 576 mm |
| 98469 | 98473 | Anod. Al. 1153 mm x Paseo 1152 mm |
| 98470 | 98474 | Anod. Al. 1453 mm x Paseo 1452 mm |


suitable for: Paseo_L / Paseo_L Anti-glare / Paseo_X

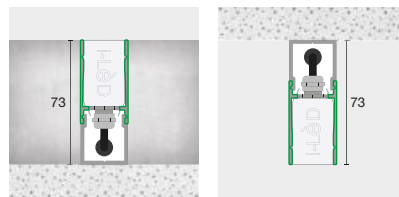

Installation accessories



98466
2 x terminal caps for closing the profile.





98554
Joining cap between the outer casings with hole for passing cables through 2 pieces

RTG 98469


RTG 98473

Paseo | Outer casing for installation on dropped ceiling with springs




| | | |
|----------|--------------|-------------------------|
| Anod. AL | 98374 | 513 mm x Paseo 512 mm |
| Anod. AL | 98435 | 577 mm x Paseo 576 mm |
| Anod. AL | 98375 | 1153 mm x Paseo 1152 mm |
| Anod. AL | 98376 | 1453 mm x Paseo 1452 mm |

suitable for: Paseo_L / Paseo_X




Installation accessories




98465
2 x terminal caps for closing the profile.

Paseo | Outer casing for flush-mounted installation on dropped ceiling



| | | |
|----------|--------------|-------------------------|
| Anod. AL | 98367 | 513 mm x Paseo 512 mm |
| Anod. AL | 98434 | 577 mm x Paseo 576 mm |
| Anod. AL | 98368 | 1153 mm x Paseo 1152 mm |
| Anod. AL | 98369 | 1453 mm x Paseo 1452 mm |

suitable for: Paseo_L / Paseo_X





Installation accessories




98464
2 x terminal caps for closing the profile.

Paseo | Outer casing for "3D" ceiling-mounted installation




| | | |
|----------|--------------|-------------------------|
| Anod. AL | 98836 | 513 mm x Paseo 512 mm |
| Anod. AL | 98839 | 577 mm x Paseo 576 mm |
| Anod. AL | 98837 | 1153 mm x Paseo 1152 mm |
| Anod. AL | 98838 | 1453 mm x Paseo 1452 mm |


suitable for: Paseo_L / Paseo_X



Installation accessories




98840
2 x terminal caps for closing the profile.




98841
Joining cap between the outer casings with hole for passing cables through 2 pieces

Paseo | Outer casing with bracket for wall-mounted installation




| | | |
|----------|--------------|-------------------------|
| Anod. AL | 98842 | 517 mm x Paseo 512 mm |
| Anod. AL | 98843 | 581 mm x Paseo 576 mm |
| Anod. AL | 98844 | 1157 mm x Paseo 1152 mm |
| Anod. AL | 98845 | 1457 mm x Paseo 1452 mm |

suitable for: Paseo_L / Paseo_X

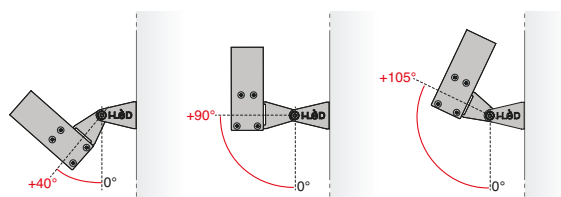


Installation accessories



Included
2 x terminal caps for closing the profile.

Paseo | Orientable floor-standing fixing system





Transp. **98771** 2 x Orientable clips

suitable for: Paseo_L / Paseo_X

Pair of fixing clips made of transparent polycarbonate so as not to alter the light emission of Paseo. Orientable accessory, allows to adjust the inclination of Paseo from +90° up to -90°.



Paseo | Fixing base




Steel **98772** L 300 - L1 200 mm Paseo 512 - 576 mm

Steel **98773** L 950 - L1 850 mm Paseo 1152 - 1452 mm

suitable for: Paseo_L / Paseo_X

Possibility of using the independent plate (plate + clip + Paseo) as moveable support without fixing it to a surface (clips 98771 not included).

Paseo | Extraction key




Anod. Al. **98475** Extraction key

suitable for: Paseo_L / Paseo_X

Paseo extraction key is the tool you need to extract Paseo from the outer casing. Compatible with any type of Paseo outer casing.



Paseo | Support bracket for wall installation



Steel **83162** Fixing brackets

suitable for: Paseo_L / Paseo_X / Paseo_Dark

thin66


Materials

Anodised aluminium body

Opalescent silicone resin coating




thin66 range

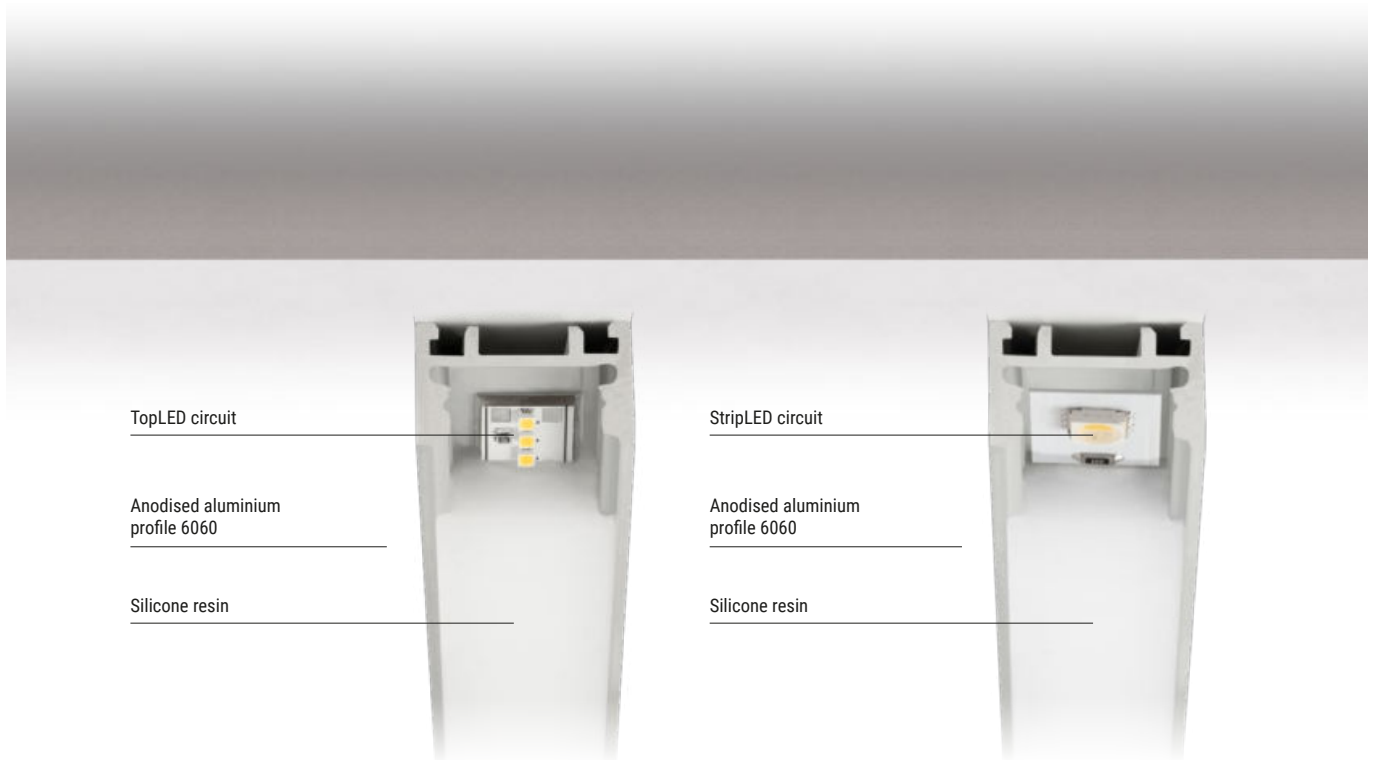


| | Thin66 | Thin66_RGBW |
|-------------------|---------------------------|--------------|
| 4,8 W | 539 x 18 mm | - |
| 9,6 W | 1039 x 18 mm | 539 x 18 mm |
| 14,4 W | 1539 x 18 mm | - |
| 19,2 W | 2039 x 18 mm | 1039 x 18 mm |
| 28,8 W | - | 1539 x 18 mm |
| 38,4 W | - | 2039 x 18 mm |
| Finish | Anod. Al. | Anod. Al. |
| topLED | 2700K - 3000K - 4000K | RGBW |
| Optics | General | General |
| Driver | On/Off 0/1-10V DALI | DMX |

Thin66 | Linear profiles | 24V DC | topLED



| 4,8 W DC | M | Cct | lm S - D | Optic |
|------------------------|---|--------|--------------|------------|
| Anod. AL. 83885 | | M 2700 | 425 - On req | 00 General |


| 4,8 W DC | M+F | W | lm S - D | Optic |
|------------------------|-----|--------|--------------|-------|
| Anod. AL. 83889 | | W 3000 | 440 - On req | |
| | | N 4000 | 480 - On req | |

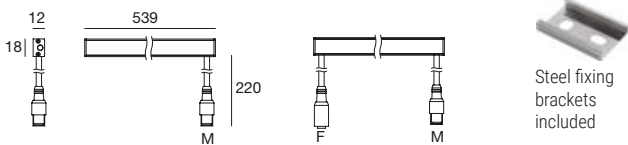

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1-4 art. p 92 x l 117 x h 38 | ON/OFF 1-8 art. p 115 x l 140 x h 50 | ON/OFF 1-25 art. p 150 x l 60 x h 35 | 0/1-10V 1-25 art. p 150 x l 60 x h 35 | DALI 1-20 art. p 191 x l 63 x h 38 |

| 9,6 W DC | M | Cct | lm S - D | Optic |
|------------------------|---|--------|--------------|------------|
| Anod. AL. 83886 | | M 2700 | 850 - On req | 00 General |


| 9,6 W DC | M+F | W | lm S - D | Optic |
|------------------------|-----|--------|--------------|-------|
| Anod. AL. 83890 | | W 3000 | 880 - On req | |
| | | N 4000 | 960 - On req | |

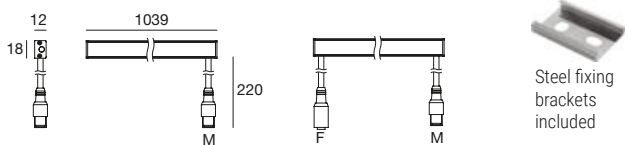

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1-2 art. p 92 x l 117 x h 38 | ON/OFF 1-4 art. p 115 x l 140 x h 50 | ON/OFF 1-12 art. p 150 x l 60 x h 35 | 0/1-10V 1-12 art. p 150 x l 60 x h 35 | DALI 1-10 art. p 191 x l 63 x h 38 |

| 14,4 W DC | M | Cct | lm S - D | Optic |
|------------------------|---|--------|---------------|------------|
| Anod. AL. 83887 | | M 2700 | 1275 - On req | 00 General |


| 14,4 W DC | M+F | W | lm S - D | Optic |
|------------------------|-----|--------|---------------|-------|
| Anod. AL. 83891 | | W 3000 | 1320 - On req | |
| | | N 4000 | 1440 - On req | |

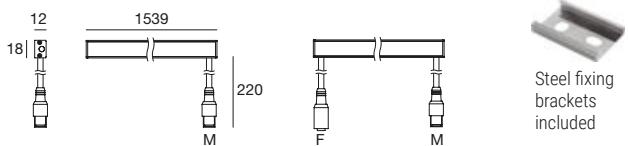

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1-2 art. p 115 x l 140 x h 50 | ON/OFF 1-7 art. p 150 x l 60 x h 35 | 0/1-10V 1-7 art. p 150 x l 60 x h 35 | DALI 1-6 art. p 191 x l 63 x h 38 |

| 19,2 W DC | M | Cct | lm S - D | Optic |
|------------------------|---|--------|---------------|------------|
| Anod. AL. 83888 | | M 2700 | 1700 - On req | 00 General |


| 19,2 W DC | M+F | W | lm S - D | Optic |
|------------------------|-----|--------|---------------|-------|
| Anod. AL. 83892 | | W 3000 | 1760 - On req | |
| | | N 4000 | 1920 - On req | |

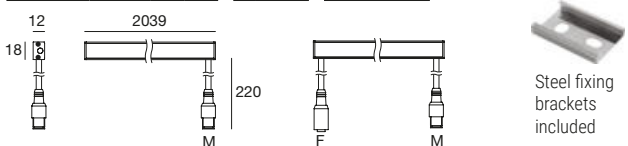

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1-2 art. p 115 x l 140 x h 50 | ON/OFF 1-6 art. p 150 x l 60 x h 35 | 0/1-10V 1-6 art. p 150 x l 60 x h 35 | DALI 1-5 art. p 191 x l 63 x h 38 |


Cables Pag. 761

Thin66 RGBW | Linear profiles | 24V DC | topLED



| 9,6 W DC | M | Optic |
|------------------------|---|--------------------------------|
| Anod. AL. 84060 | | V RGBW warm white 00 General - |


| 9,6 W DC | M+F | Optic |
|------------------------|-----|-------|
| Anod. AL. 84064 | | |

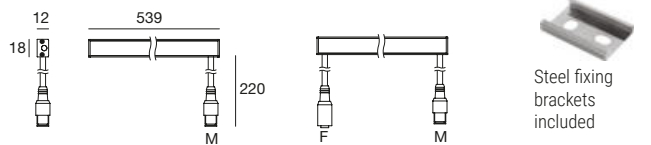

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

| 19,2 W DC | M | Optic |
|------------------------|---|--------------------------------|
| Anod. AL. 84061 | | V RGBW warm white 00 General - |


| 19,2 W DC | M+F | Optic |
|------------------------|-----|-------|
| Anod. AL. 84065 | | |

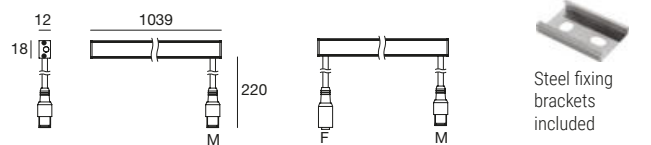

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

| 28,8 W DC | M | Optic |
|------------------------|---|--------------------------------|
| Anod. AL. 84062 | | V RGBW warm white 00 General - |


| 28,8 W DC | M+F | Optic |
|------------------------|-----|-------|
| Anod. AL. 84066 | | |

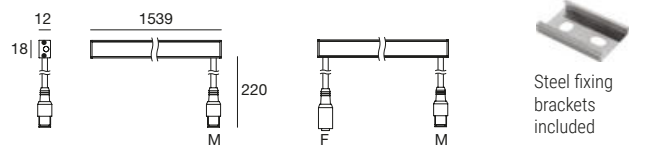

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

| 38,4 W DC | M | Optic |
|------------------------|---|--------------------------------|
| Anod. AL. 84063 | | V RGBW warm white 00 General - |


| 38,4 W DC | M+F | Optic |
|------------------------|-----|-------|
| Anod. AL. 84067 | | |

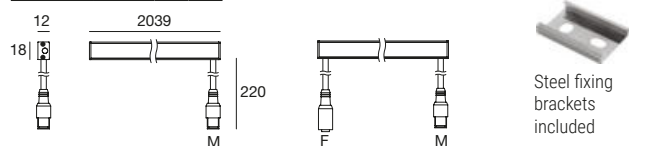

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

Cables Pag. 761

Cables



24V DC

| | |
|--------------|----------------------------|
| 99216 | Conn. F.4 pin M12 (L 1,5m) |
| 89190 | Conn. F.4 pin M12 (L 5m) |

suitable for: Thin66



24V DC RGBW

| | |
|--------------|--------------------------|
| 89362 | Conn F. 5 pin M12 (L 5m) |
|--------------|--------------------------|

suitable for: Thin66 RGBW


Extension cables



24V DC

| | |
|--------------|--------------------------------|
| 98437 | Conn M. + F. 4 pin M12 (L 1m) |
| 98149 | Conn M. + F. 4 pin M12 (L 5m) |
| 89188 | Conn M. + F. 4 pin M12 (L 10m) |

suitable for: Thin66



24V DC RGBW

| | |
|--------------|--------------------------------|
| 89361 | Conn M. + F. 5 pin M12 (L 10m) |
|--------------|--------------------------------|

suitable for: Thin66 RGBW

GV11 | Dubai, UAE




ice-cut66

Materials

Translucent polycarbonate body

Ice-Cut_FL | Linear profiles | 24V DC | topLED




| 6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|---------------------|
| Opaline 96740 | M 2700 | 420 - 244 | 00 General - |
| | W 3000 | 438 - 265 | |
| | N 4000 | 478 - 289 | |




| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 8 art. p 115 x l 140 x h 50 | ON/OFF 1 - 25 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 25 art. p 150 x l 60 x h 35 | DALI 1 - 20 art. p 191 x l 63 x h 38 |

| 12 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|---------------------|
| Opaline 96741 | M 2700 | 840 - 488 | 00 General - |
| | W 3000 | 875 - 530 | |
| | N 4000 | 956 - 579 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 4 art. p 115 x l 140 x h 50 | ON/OFF 1 - 12 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 12 art. p 150 x l 60 x h 35 | DALI 1 - 10 art. p 191 x l 63 x h 38 |

| 18 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|------------|---------------------|
| Opaline 96742 | M 2700 | 1260 - 731 | 00 General - |
| | W 3000 | 1313 - 749 | |
| | N 4000 | 1434 - 868 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 2 art. p 115 x l 140 x h 50 | ON/OFF 1 - 7 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 7 art. p 150 x l 60 x h 35 | DALI 1 - 6 art. p 191 x l 63 x h 38 |

Accessories and cables Pag. 763

Accessories




| 2 x | description |
|--------------------------------|--------------|
| 98398 | Fixing clips |
| suitable for: Ice-Cut66 | |

RTG 96741W00


RTG 98398 / 99231 / 99232

Linear lights

Ice-Cut_AL | Linear profiles | 24V DC | topLED




| 6 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|---------------------|
| Opaline 81255 | M 2700 | 420 - 244 | 00 General - |
| | W 3000 | 438 - 265 | |
| | N 4000 | 478 - 289 | |




| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 4 art. p 92 x l 117 x h 38 | ON/OFF 1 - 8 art. p 115 x l 140 x h 50 | ON/OFF 1 - 25 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 25 art. p 150 x l 60 x h 35 | DALI 1 - 20 art. p 191 x l 63 x h 38 |

| 12 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|---------------------|
| Opaline 81256 | M 2700 | 840 - 488 | 00 General - |
| | W 3000 | 875 - 530 | |
| | N 4000 | 956 - 579 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 4 art. p 115 x l 140 x h 50 | ON/OFF 1 - 12 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 12 art. p 150 x l 60 x h 35 | DALI 1 - 10 art. p 191 x l 63 x h 38 |

| 18 W DC | Cct | lm S - D | Optic |
|----------------------|---------------|------------|---------------------|
| Opaline 81257 | M 2700 | 1260 - 731 | 00 General - |
| | W 3000 | 1313 - 749 | |
| | N 4000 | 1434 - 868 | |



| 89179 | 89359 | 99331 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 | ON/OFF 1 - 2 art. p 115 x l 140 x h 50 | ON/OFF 1 - 7 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 7 art. p 150 x l 60 x h 35 | DALI 1 - 6 art. p 191 x l 63 x h 38 |

Cables Pag. 763

Cables



| 24V DC | |
|--|-------------------------|
| 99231 | Conn. F.4 pin M8 (L 1m) |
| suitable for: Ice-cut66 / Ice-cut66_F | |

Extension cables



| 24V DC | |
|--|------------------------------|
| 99232 | Conn M. + F. 4 pin M8 (L 1m) |
| suitable for: Ice-cut66 / Ice-cut66_F | |



skin

Materials


Aluminium body

Tempered glass diffuser



skin range

design Joerg Krewinkel

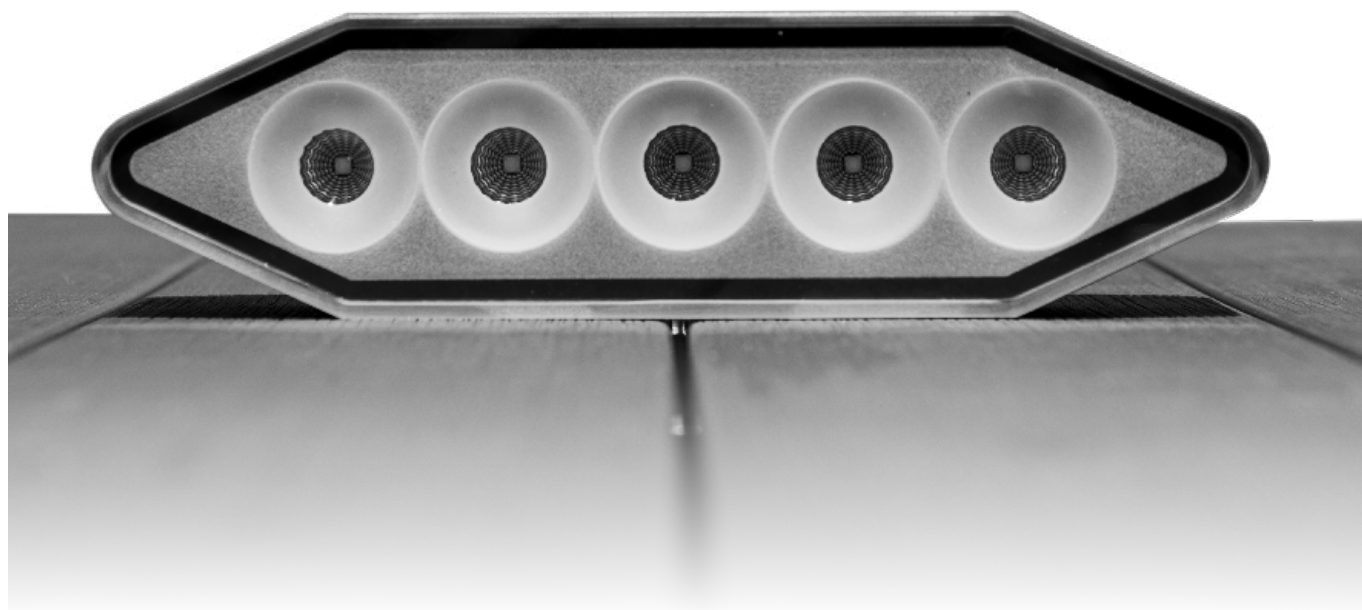

Skin_FL
Frameless Opaline




Skin_S
Surface



Skin_F
Frameless



Skin_Y
Asymmetric

| | | | | |
|--|-------------------------|--------------------------|--------------------------|-------------------------|
| 2,5 W | 166 x 57 mm | - | - | - |
| 3,8 W | 220 x 57 mm | - | - | - |
| 6,7 W | - | 166 x 57 mm | 166 x 57 mm | - |
| 11 W | - | 166 x 57 mm | 166 x 57 mm | - |
| 11,2 W | - | 220 x 57 mm | 220 x 57 mm | - |
| 14 W | - | - | - | 220 x 57 mm |
| 18 W | - | 220 x 57 mm | 220 x 57 mm | - |
| Finish | Black | Wh Bk | Black Bk Gold | Black |
| powerLED | - | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K |
| topLED | 2700K 3000K 4000K | - | - | - |
| Optics | General | Spot Flood W.Flood | Spot Flood W.Flood | Asymmetric |
| Driver  | On/Off | On/Off | On/Off | On/Off |

Beautiful and functional Skin

Skin is an innovative outdoor (IP67), versatile and modular lighting fixture. The brand new elongated hexagonal shape makes it easy to create continuous linear compositions, suitable for following and lighting the complex or misaligned silhouettes of modern architecture. This product can be used in various configurations: recess-mounted flush with the pavement, wall or ceiling-mounted, semi-recessed or surface-mounted. Skin's great versatility also spills over into the controlled-luminance optics available in various finishes. The structure is made of aluminium in embossed black finish, elegant and universal, perfect for any environment when it is exposed. The two types of recessed casings, one conceived for floor installation and the other for cast or plasterboard ceiling installation, contain a high-performance lighting machine with multiple sources and power variations.



Downlight
Recessed or surface mounted
Opal cells
Frosted glass
3/5 cells version



Downlight or uplight
Recessed or surface mounted
Black cells
Black silk-screened glass
3/5 cells version



Downlight or uplight
Recessed or surface mounted
Metal-finish cells
Black silk-screened glass




Downlight or uplight
Recessed or surface mounted
Opal glass



Downlight or uplight
Recessed or surface mounted
Gold cells
Black silk-screened glass
3/5 cells version

Installation flexibility and camouflage

Skin can be set up in different solutions designed to meet any design needs. The advantages include the possibility of semi-recessed mounting, a solution that leaves only the thickness of the glass exposed, adding a soft diffusion of light onto the surface it is installed on to the emission with precision optics, an absolutely elegant and clean solution, making the product almost invisible, allowing only the light to emerge, essential material for construction of an architecture. The glass diffuser is available in three versions: with ceramic-based painting for a path-marker effect, transparent with optics or with frosted glass in the semi-recessed version.

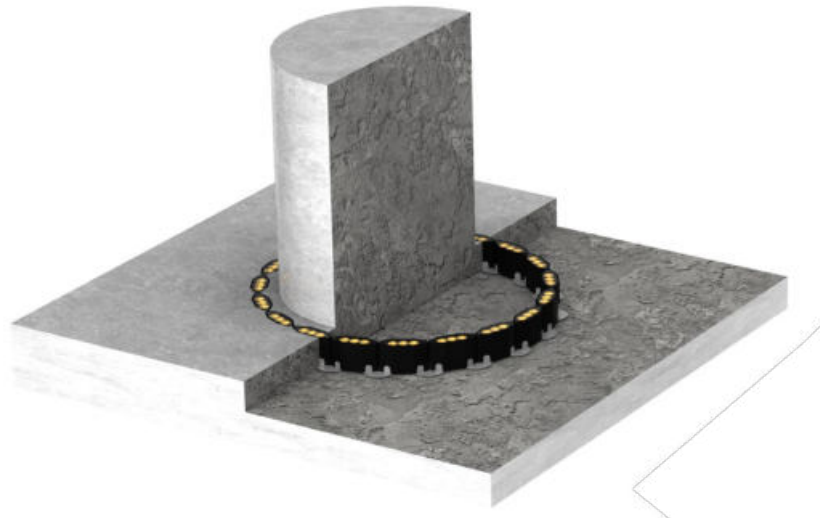

Variety of optics

Skin is available with 3 or 5 sources (length: 166 and 220 mm) and various optics: spot, flood and wide flood, asymmetric wall-washer and path-marker white diffuser, power settings that range from 2,5W to 18W. A complete technological package, designed to meet all the needs of even the most demanding designer.



Spot



Flood



W.Flood




General



Asymmetric


Skin_FL | Lines | 176-276 V AC | topLED



| 3,2 W DC - 3,8 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|----------|--------------|
| Black | 83872 | M 2700 | 381 - 80 | 00 General - |
| | | W 3000 | 399 - 84 | |
| | | N 4000 | 413 - 88 | |

Recessed casing Pag. 769

Skin_F | Lines | 176-240 V AC | powerLEDs





| 10 W DC - 11,2 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-------------|------------------|
| Black | 83869 | M 2700 | 1330 - 1030 | 15 Spot (15°) |
| Bk Gold | 83870 | W 3000 | 1420 - 1097 | 30 Flood (32°) |
| | | N 4000 | 1515 - 1170 | 45 W.Flood (46°) |

| 16,2 W DC - 18 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-------------|------------------|
| Black | 83866 | M 2700 | 2016 - 1332 | 15 Spot (15°) |
| Bk Gold | 83867 | W 3000 | 2016 - 1332 | 30 Flood (32°) |
| | | N 4000 | 2177 - 1348 | 45 W.Flood (46°) |

Recessed casing Pag. 769

Skin_S | Lines | 176-240 V AC | powerLEDs




| 10 W DC - 11,2 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|------------|------------------|
| Wh Bk | 83871 | M 2700 | 1330 - 875 | 15 Spot (15°) |
| | | W 3000 | 1420 - 931 | 30 Flood (32°) |
| | | N 4000 | 1515 - 994 | 45 W.Flood (46°) |

| 16,2 W DC - 18 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-------------|------------------|
| Wh Bk | 83868 | M 2700 | 2016 - 1237 | 15 Spot (15°) |
| | | W 3000 | 2016 - 1237 | 30 Flood (32°) |
| | | N 4000 | 2177 - 1336 | 45 W.Flood (46°) |

Recessed casing Pag. 769


Skin_Y | Lines | 176-240 V AC | powerLEDs



| 12,2 W DC - 14 W AC | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|------------|-------------|
| Black | 83873 | M 2700 | 1584 - 523 | 07 Asymm. - |
| | | W 3000 | 1700 - 561 | |
| | | N 4000 | 1834 - 606 | |

Recessed casing Pag. 769


Skin_FL | Lines | 176-276 V AC | topLED | 2,1 W DC



| 2,1 W DC - 2,5 W AC | Cct | lm S - D | Optic |
|---------------------|---------------|----------|---------------------|
| Black 83865 | M 2700 | 254 - 59 | 00 General - |
| | W 3000 | 266 - 62 | |
| | N 4000 | 275 - 65 | |

Recessed casing Pag. 769

Skin_F | Lines | 176-276 V AC | powerLEDs





| 6 W DC - 6,7 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|-----------|-------------------------|
| Black 83859 | M 2700 | 798 - 586 | 15 Spot (14°) |
| Bk Gold 83860 | W 3000 | 852 - 624 | 30 Flood (31°) |
| | N 4000 | 909 - 666 | 45 W.Flood (46°) |

| 9,6 W DC - 11 W AC | Cct | lm S - D | Optic |
|----------------------|---------------|------------|-------------------------|
| Black 83862 | M 2700 | 1210 - 861 | 15 Spot (14°) |
| Bk Gold 83863 | W 3000 | 1210 - 861 | 30 Flood (32°) |
| | N 4000 | 1306 - 930 | 45 W.Flood (46°) |

Recessed casing Pag. 769

Skin_S | Lines | 176-276 V AC | powerLEDs



| 6 W DC - 6,7 W AC | Cct | lm S - D | Optic |
|--------------------|---------------|-----------|-------------------------|
| Wh Bk 83864 | M 2700 | 798 - 547 | 15 Spot (14°) |
| | W 3000 | 852 - 582 | 30 Flood (31°) |
| | N 4000 | 909 - 621 | 45 W.Flood (46°) |

| 9,6 W DC - 11 W AC | Cct | lm S - D | Optic |
|--------------------|---------------|------------|-------------------------|
| Wh Bk 83861 | M 2700 | 1210 - 731 | 15 Spot (14°) |
| | W 3000 | 1210 - 731 | 30 Flood (31°) |
| | N 4000 | 1306 - 788 | 45 W.Flood (46°) |

Recessed casing Pag. 769

Recessed casing




description

83123 Recessed casing 175 mm

suitable for: Skin 166 mm

For installation:
uplight on
concrete floor.
downlight on brick
ceiling.



description

83125 Recessed casing 175 mm

suitable for: Skin 166 mm

For installation:
downlight on
drywall ceiling.
downlight on
concrete ceiling.

83126 Recessed casing 229 mm

suitable for: Skin 220mm

dirigo

Materials

Aluminium or AISI 316L stainless steel body





dirigo

design Rigo Architetti

Concept

Invisible during the day. Main actor during the night. Dirigo creates lighting paths through an elegant opposite plans game, hiding the source. Its peculiar profile's section makes the fixture compact and solid, perfectly integrated in all outdoor contexts.


Technology and materials

Dirigo series available in brushed stainless steel AISI 316L or anodized extruded aluminum with polyester powder pre-coating antioxiide treatment.



Grazing light

The internal Led source gradient was studied for the best lighting distribution, along the pathways..

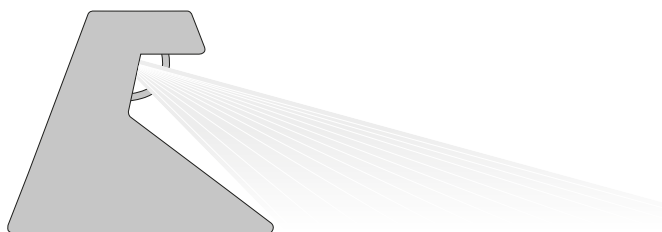

Range

Dirigo is available as single module or prepared for continuous line installation.

Single module (L. 1mt)

Sealed and complete source profile, end caps, integrated driver 24V DCo.


Continuous line installation modules

On measure cutting profiles, prepared for continuous line installation up to 5/10m. Led source available with a separated code and on measure cutting.
Mechanical connection joints between profiles.
Remote driver 24 V DC.





Robust design

The opposing level structure of Dirigo's single profile makes this appliance particularly sturdy and resistant. The absence of raw edges makes it ideal for public and private outdoor applications. Dirigo can be walked on and is extremely safe for users.

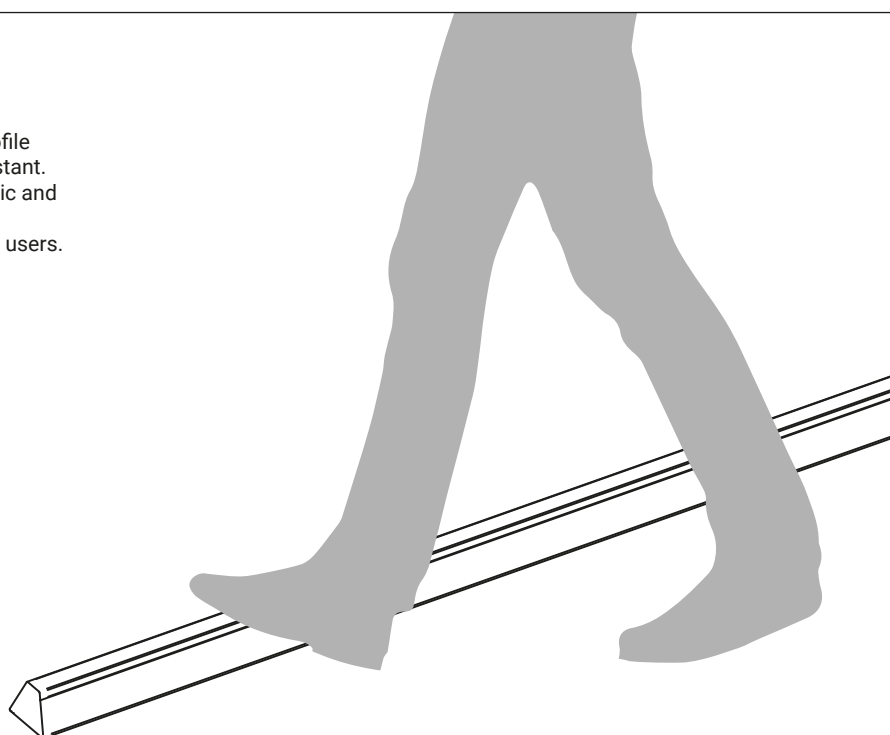

Dirigo_M2 Aluminium MASTER | Linear profiles





| | |
|-----------|--------------|
| BK Grey | 64645 |
| Grey | 64644 |
| DarkBrown | 64595 |

Master



To be completed with dedicated installation accessories and with lighting unit

Dirigo_M2 Aluminium SLAVE | Linear profiles





| | | L |
|-----------|--------------|---------|
| BK Grey | 62400 | 1000 mm |
| Grey | 62401 | 1000 mm |
| DarkBrown | 62402 | 1000 mm |
| BK Grey | 64647 | 2000 mm |
| Grey | 64646 | 2000 mm |
| DarkBrown | 64597 | 2000 mm |

Slave



To be completed with dedicated installation accessories and with lighting unit



Dirigo_M2 Aluminium IN-corner | Linear profiles



| | |
|-----------|--------------|
| BK Grey | 64664 |
| Grey | 64665 |
| DarkBrown | 64666 |

To be completed with dedicated installation accessories and with lighting unit


Dirigo_M2 Aluminium OUT-corner | Linear profiles



| | |
|-----------|--------------|
| BK Grey | 64667 |
| Grey | 64668 |
| DarkBrown | 64669 |

To be completed with dedicated installation accessories and with lighting unit


Dirigo Sealing caps | Linear profiles



2 x

| | |
|-----------|--------------|
| BK Grey | 64641 |
| Grey | 64640 |
| DarkBrown | 64589 |
| Steel | 64592 |


Dirigo Joining caps | Linear profiles



1 x


| | |
|-----------|--------------|
| BK Grey | 64661 |
| Grey | 64663 |
| DarkBrown | 64662 |
| Steel | 64593 |

Accessories and configuration




64589
Sealing caps

Aluminium
2 pcs



64662
Joining caps

Aluminium
5 pc



62403 (Pag. 909)
Lighting unit

Led strip 14,4 W/m
3000K
5 mt

62403N (Pag. 909)
Lighting unit

Led strip 14,4 W/m
4000K
5 mt



89629
Connection cable

(1 connector M)
2 mt




99000
Extension


(1 connector F)
2 mt

Electronics

| | | | | |
|--|--|---|---|--------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

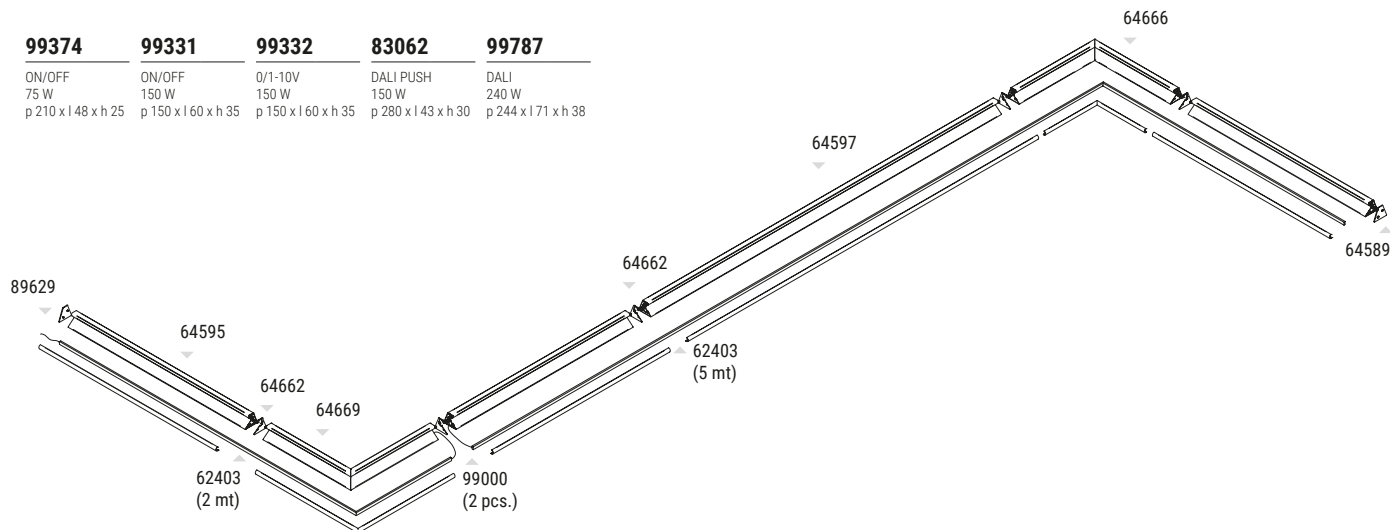


Dirigo_FL2 Aluminium | Linear profiles | 100-264 V AC | stripLED 14,4 W DC 17 W AC



| | Cct | lm S - D | Optic |
|------------------------|--------|-----------|--------------|
| BK Grey 64643 | W 3000 | 900 - 384 | 00 General - |
| Grey 64642 | | | |
| DarkBrown 64594 | | | |

Dirigo_FL1 Steel | Linear profiles | 100-264 V AC | stripLED 14,4 W DC 17 W AC




| | Cct | lm S - D | Optic |
|--------------------|--------|-----------|--------------|
| Steel 64590 | W 3000 | 900 - 450 | 00 General - |

Private house | Spain



Dirigo_M1 Steel MASTER | Linear profiles




Steel **64591**

Master



To be completed with dedicated installation accessories and with lighting unit

Dirigo_M1 Steel SLAVE | Linear profiles




Steel **64648**

Slave




To be completed with dedicated installation accessories and with lighting unit

Accessories and configuration




64592
Sealing caps

Stainless steel
2 pcs



64593
Joining caps

Stainless steel
1 pc



62403 (Pag. 909)
Lighting unit

Led strip 14,4 W/m
3000K
5 mt

62403N (Pag. 909)
Lighting unit
Led strip 14,4 W/m
4000K
5 mt



89629
Connection cable

(1 connector M)
2 mt




99000
Extension

(1 connector F)
2 mt

Electronics

| | | | | |
|--|--|---|--|---------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 143 x h 30 | DALI 240 W p 244 x l 171 x h 38 |

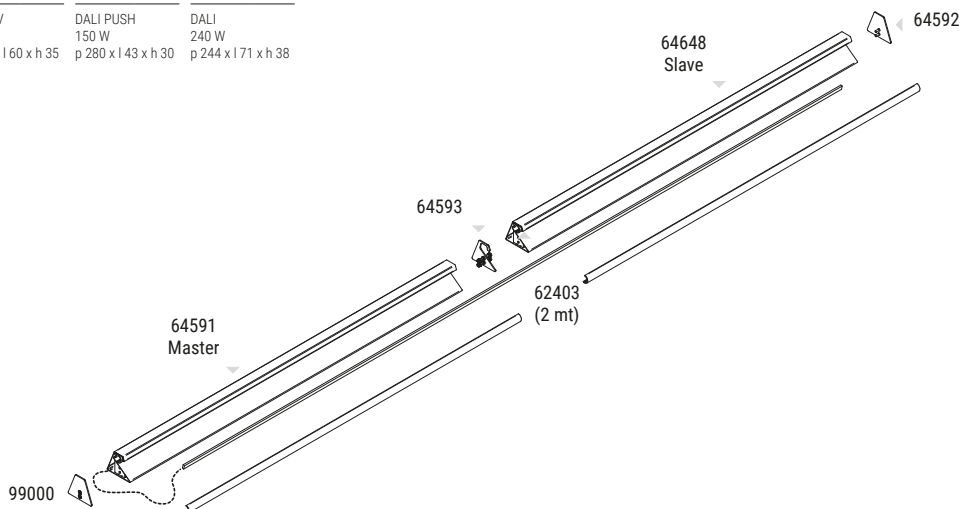



fylo+

Materials

Aluminium profile

Quartz powder resin and mixed
construction site material



fylo+ outdoor range




Recessed



| | |
|-------------------|---|
| Length | 1000 mm 2000 mm Custom 1100 - 1900 mm (minimum 100 mm unit) |
| LED source | StripLED |
| Driver | On/Off 0/1-10V DALI |

Installation process


Compared to the previous version, new Fylo+ Out modules maintain its aesthetic unchanged. When fully installed, profiles disappear by merging with the surrounding architecture; integrated light concept allows space customization with unusual and precious lighting details.

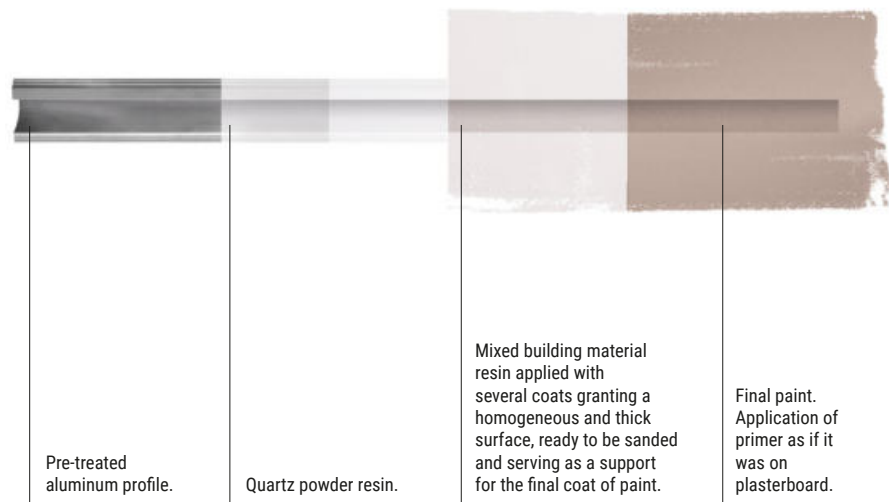

Full integration in the masonry



Its high resistance to weathering allows Fylo+ Out to be installed in complete safety. It provides high reliability thanks to its materials and build quality.

1. Make recess in masonry wall.
2. Insert EPS outer casing.
3. Block EPS outer casing into place using cement-based plaster.
4. Remove outer casing and prepare power supply cable.
5. Insert profile in the seat previously created.
6. Complete installation applying several coats of plaster making sure that mesh tape adheres on first coat. Carry out the electrical connection and insert the LED source.

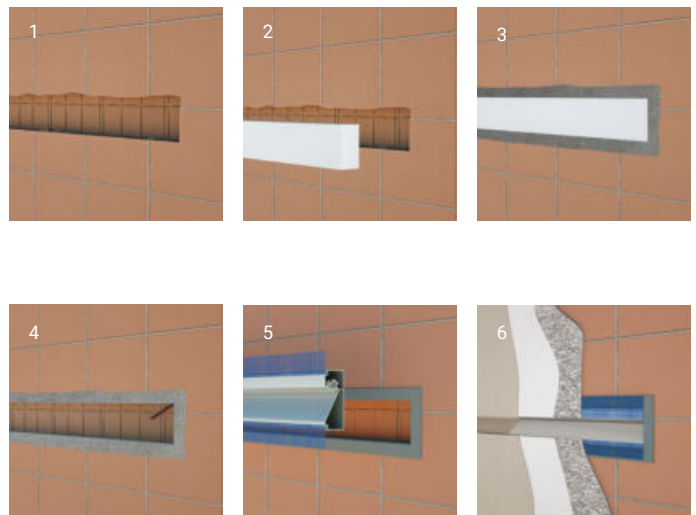



Full integration in the insulation system

1. Cut external wall insulation in order to create profile seat..
2. Pass power supply cables, apply polyurethane adhesive on profile rear side and insert it in seat. Install end caps if necessary.
3. Apply adhesive first coat. Position mesh tape with the sole exception of the profile part in relief. Apply the other adhesive coats and then plaster.
4. After completing all required operations, insert LED source in the relevant optical compartment and carry out electrical connections.

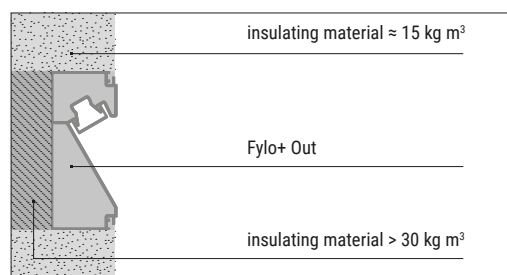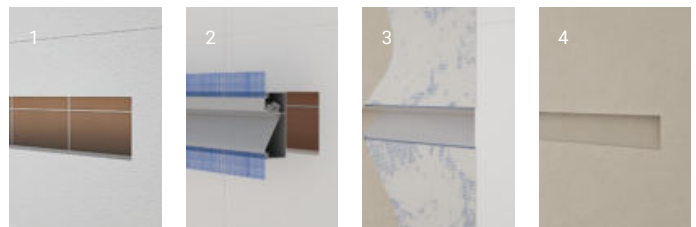

* It is advisable to opt for an insulating material with density at least twice greater than the one used for the cladding as the support surface for Fylo+ Out, so as to increase thermal insulation.

Fylo+ Out Recessed_S | Recessed light body



| | L mm |
|---------------------|---------|
| Primer 65036 | 1000 |
| Primer 65037 | 2000 |
| Primer 65090 | custom* |


The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.
For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65090.

Accessories Pag. 783

RTG 65037

Fylo+ Out Recessed_W | Recessed light body



| | L mm |
|---------------------|---------|
| Primer 65039 | 1000 |
| Primer 65040 | 2000 |
| Primer 65093 | custom* |


The modules must be completed with light source and power supply.

* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m.
For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65093.

Accessories Pag. 783

RTG 65039 / 65040

Silicone_F 120 LEDs/m | stripLED | 9.6 W/m 24 V



| | Cct | lm S - D |
|------------------|---------------|---------------|
| 62761 5 m | M 2700 | 3500 - On req |


Strip suggested for Fylo+ Out article

Electronics


| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

RTG 62761


Accessories




| description | |
|---|------------------|
| 62757 | Opaline diffuser |
| suitable for: Fylo+ Out Recessed_S Fylo+ Out Recessed_W | |




| description | |
|---|------------------|
| 62758 | Opaline diffuser |
| suitable for: Fylo+ Out Recessed_S Fylo+ Out Recessed_W | |




| description | |
|---|---------------------------|
| 65094 | Opaline diffuser (custom) |
| suitable for: Fylo+ Out Recessed_S Fylo+ Out Recessed_W | |




| 2 x description | |
|---|--------------|
| 65026 | Sealing caps |
| suitable for: Fylo+ Out Recessed_S | |



| 2 x description | |
|---|--------------|
| 65023 | Sealing caps |
| suitable for: Fylo+ Out Recessed_W | |



| description | |
|---|----------|
| 65035 | Template |
| suitable for: Fylo+ Out Recessed_S | |




| description | |
|---|----------|
| 65038 | Template |
| suitable for: Fylo+ Out Recessed_W | |

RTG 65094 / 62758 / 65035 / 65038 / 62757 / 65026 / 65023

Private residence | Italy



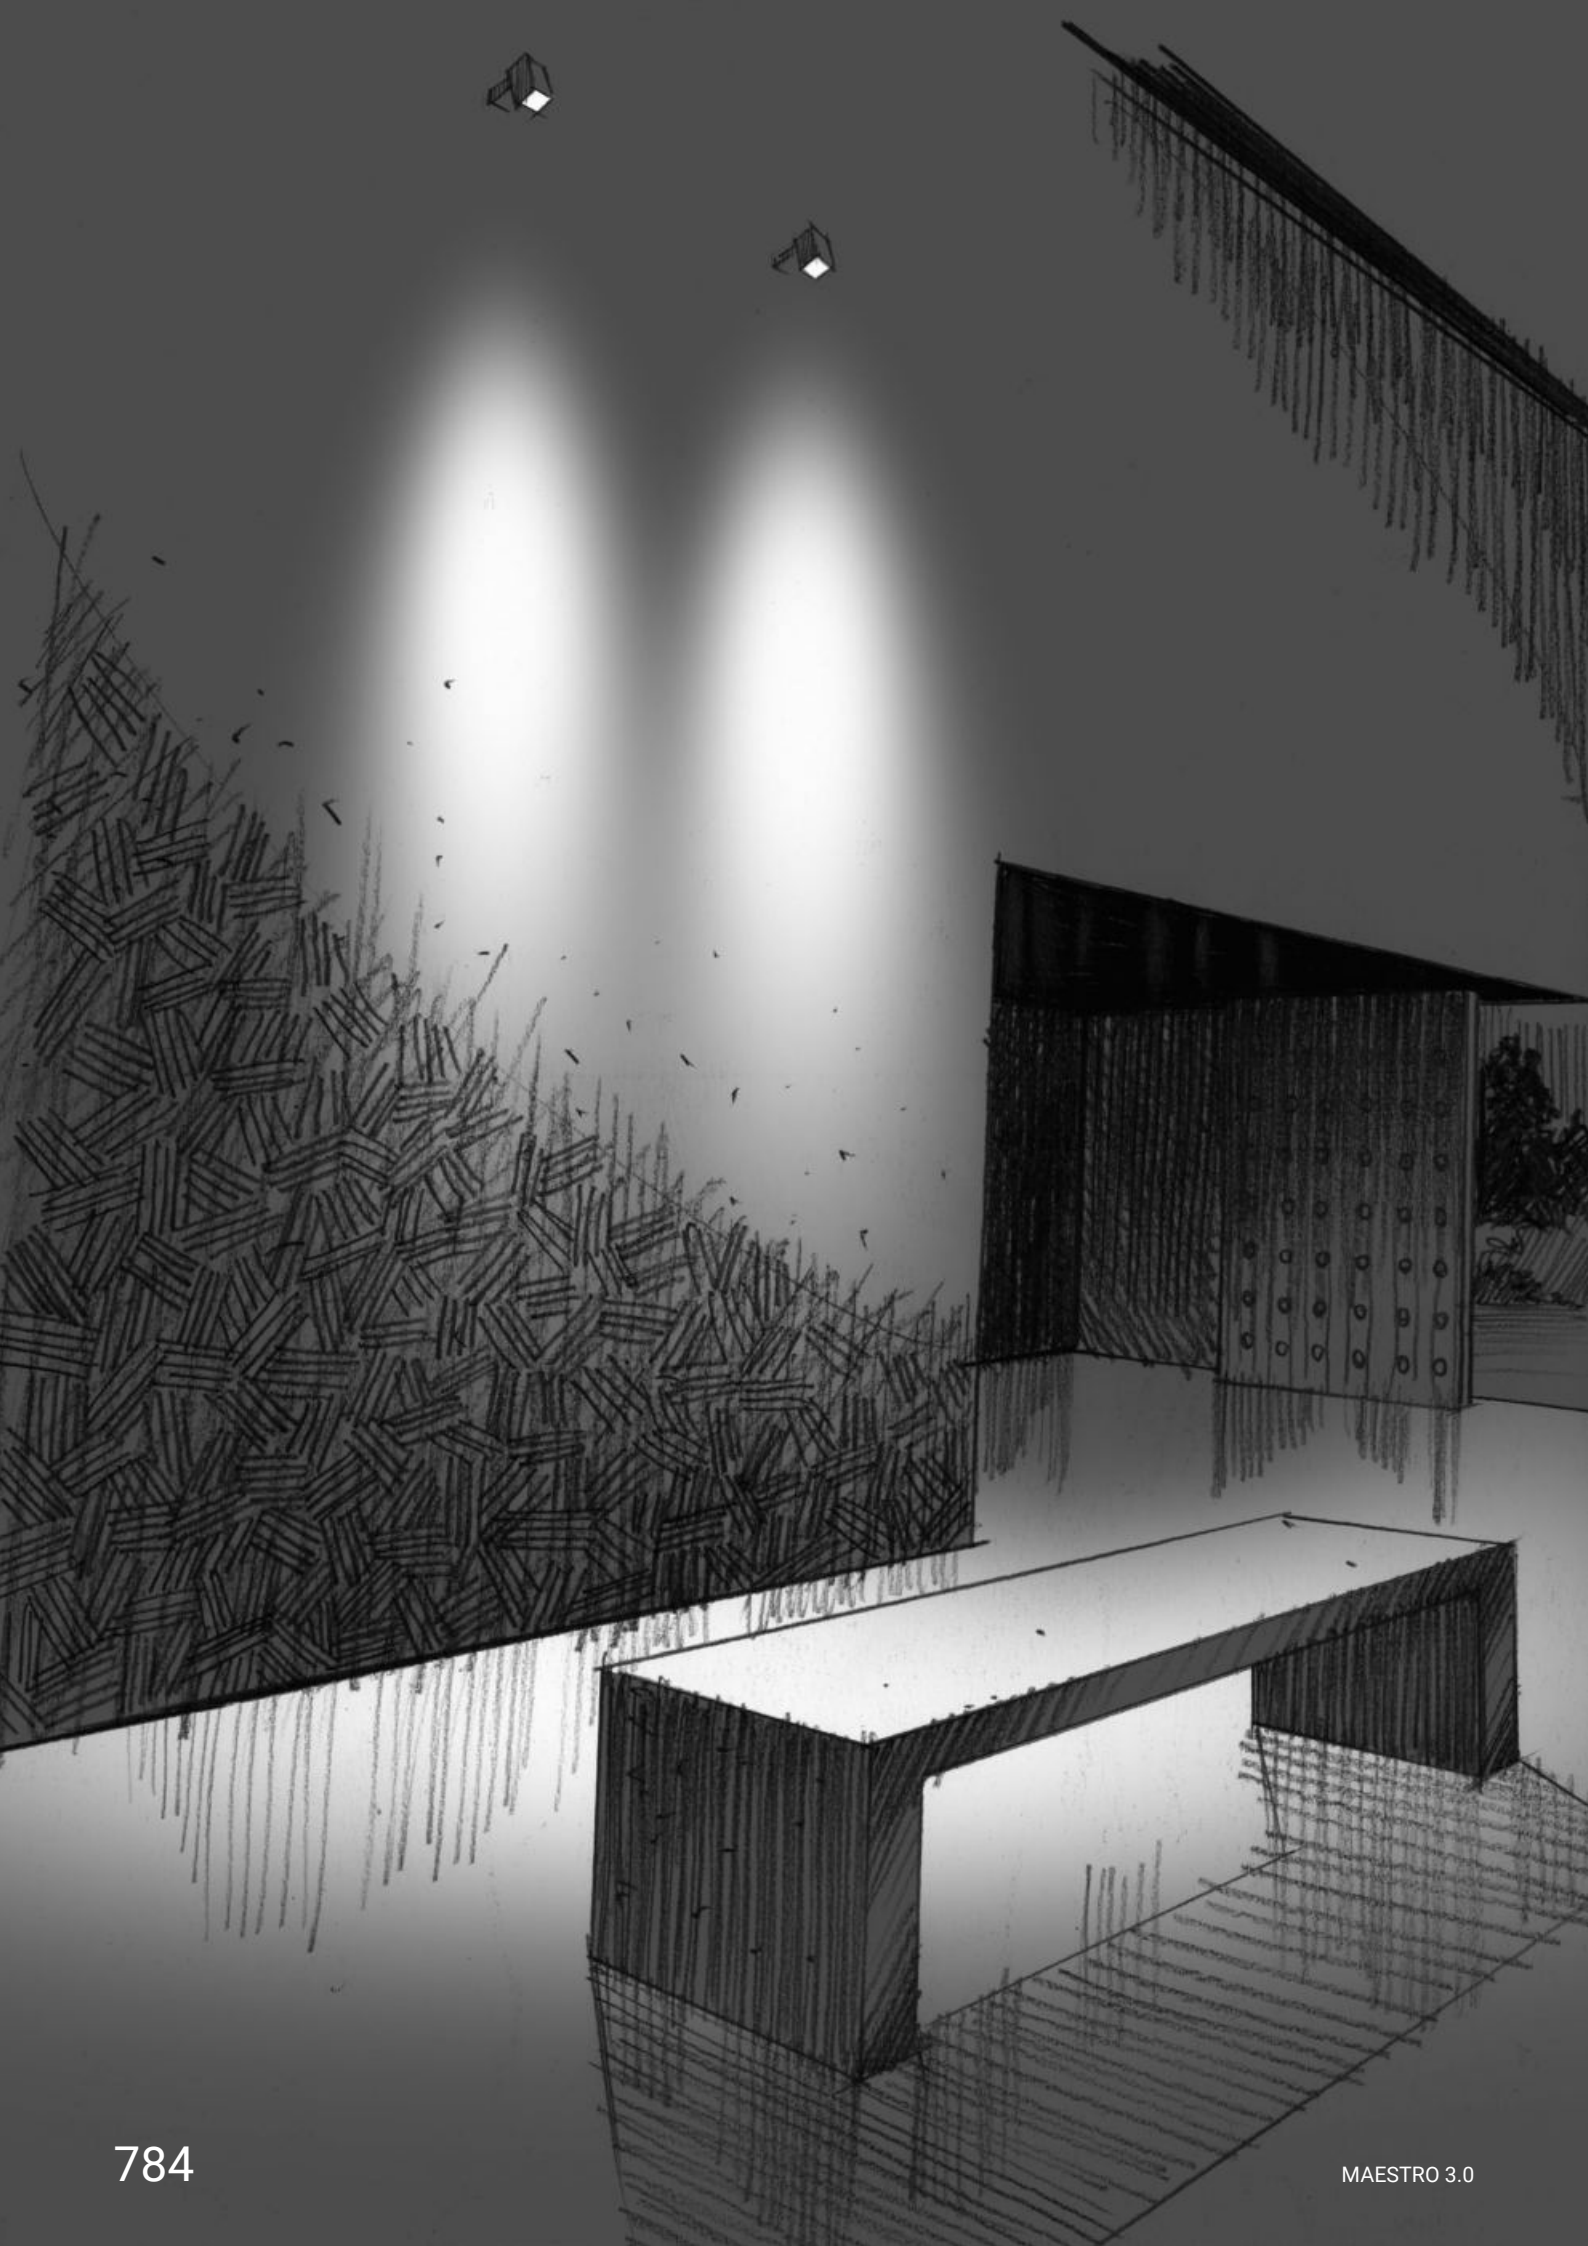




Accent lighting

accent lighting range index

Eyelet65

Eyelet65_R



789


Eyelet65_Q



789

Periskop

Periskop



794


Periskop Narrow



794

Shaker


Shaker



801

Gardener

Gardener



804

Narcissus


Narcissus



807


Clivo

Clivo




811

Clivo_2



811


Clivo_SL



811

Iris67

Iris67



814

Iris67 Elliptic



815

Vuelta

Vuelta_Y

Vuelta



817



817

Prolamp

Prolamp



820

Archiline

Archiline Twin



823



eyelet65

Materials

Aluminium body



Eyelet65_R | Accent lighting | powerLED 2 W DC 630 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------|----------------------------|
| White | 91214 | M 2700 | 219 - 151 | 15 Spot (23°) |
| Black | 91215 | W 3000 | 233 - 171 | 30 Flood (29°) |
| Grey | 91216 | N 4000 | 249 - 183 | 60 Wide Flood (65°) |



Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Accessories Pag. 789

RTG 91214W30 / 91215M30 / 91215M60 / 91215W15
91215W30 / 91215W60 / 91216W30 / 91216W60

Eyelet65_Q | Accent lighting | powerLED 2 W DC 630 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------|----------------------------|
| White | 91217 | M 2700 | 219 - 151 | 15 Spot (23°) |
| Black | 91219 | W 3000 | 233 - 171 | 30 Flood (29°) |
| Grey | 91220 | N 4000 | 249 - 183 | 60 Wide Flood (65°) |

Electronics

| 89420 | 99179 | 99186 | 83102 |
|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Accessories Pag. 789

RTG 91219W30 / 91219W60 / 91220W30 / 91220W60



Eyelet65 with integrated Snoot accessory

Accessories



| | description |
|--|------------------|
| 98624 | Steel peg 160 mm |
| suitable for: Eyelet65_R / Eyelet65_Q | |



| | description |
|--|------------------|
| 98669 | Steel peg 101 mm |
| suitable for: Eyelet65_R / Eyelet65_Q | |



| | description |
|--|-------------|
| 99746 | Snoot |
| suitable for: Eyelet65_R / Eyelet65_Q | |



| | description |
|--|---------------------------------|
| 84992 | Wrench for installing the Snoot |
| suitable for: Eyelet65_R / Eyelet65_Q | |

periskop

Materials


Aluminium body

Extra-clear tempered glass diffuser





periskop range

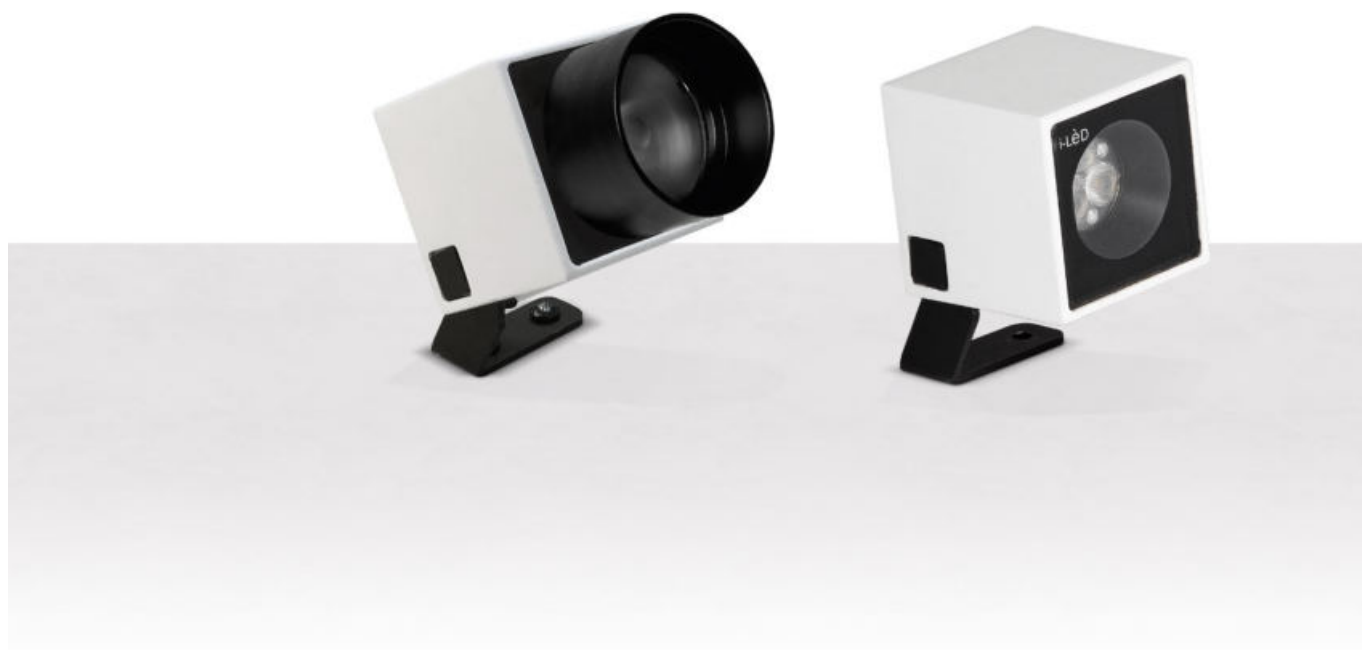


| | Periskop | Periskop Narrow |
|-------------|--|--|
| 4,5 W | □ 46 mm RGB | - |
| 6 W - 6,5 W | □ 46 mm - □ 76 mm | □ 46 mm |
| 8 W | □ 76 mm RGBW | □ 76 mm |
| 9 W | - | - |
| 18 W | □ 110 mm - □ 110 mm RGBW | □ 110 mm |
| 30 W | □ 162 mm | - |
| 37 W | □ 162 mm RGBW | - |
| 42 W | □ 162 mm | - |
| 46 W | □ 162 mm | □ 162 mm |
| Accessories | | |
| Optics | Spot - Narrow Spot - Flood - Wide Flood | Spot - Narrow Spot |
| Finish | White Black Grey DarkBrown | White Black Grey DarkBrown |
| Cct | 2700K - 3000K 4000K - RGB - RGBW | 2700K - 3000K 4000K |
| Control | On/Off - DALI | On/Off - DALI |

periskop accessories

Outdoor accessories - Anti-glare

Anti-glare accessories are conceived to reduce light glare. These accessories are made of black painted aluminium.




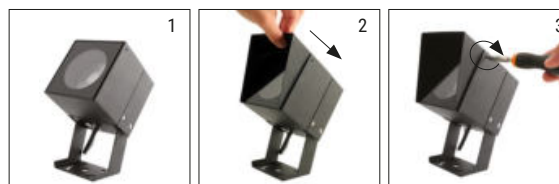


Indoor accessories - Honeycomb louvre and elliptic filter


The honeycomb louvre accessory was conceived to reduce light glaring. The elliptic filter allows to create ovalized projections. Available upon request only.



81168W08

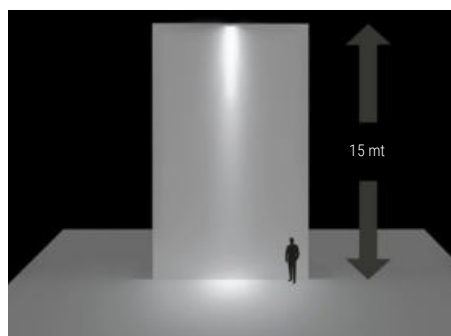

Periskop | Accent lighting | powerLED 6 W DC 500 mA



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 90519 | M 2700 | 659 - 396 | 15 Spot (14°) |
| Black | 90520 | W 3000 | 659 - 396 | 30 Flood (28°) |
| Grey | 90521 | N 4000 | 711 - 427 | 60 W.Flood (50°) |
| DarkBrown | 90522 | | | |


Electronics

| 99181 | 99185 | 83101 |
|---------------------|----------------------|---------------------|
| ON/OFF 1 art. | ON/OFF 2 - 3 art. | DALI 1 - 4 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 54 x l 121 x h 26 |

Accessories Pag. 799

RTG 90521W30 / 90520W30 / 90520W60 / 90522W30 / 90522W60

Periskop RGB | Accent lighting | powerLED 4,5 W DC 500 mA



| | | Z RGB | Optic |
|-----------|--------------|-------|--------------|
| White | 95068 | | 15 Spot - |
| Black | 95126 | | 60 W.Flood - |
| Grey | 95141 | | |
| DarkBrown | 95330 | | |


Electronics

| 99742+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|--------------------|--------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | Controllers CV 24V/48V Pag. 952 - 953 | CV 48V Pag. 941 | CV 48V Pag. 932 |

Accessories Pag. 799

RTG 95141Z15

Periskop Narrow | Accent lighting | powerLED 6 W DC 500 mA




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|---------------|
| White | 81788 | M 2700 | 659 - 487 | 08 Spot (11°) |
| Black | 81789 | W 3000 | 659 - 487 | |
| Grey | 81790 | N 4000 | 711 - 524 | |
| DarkBrown | 81791 | | | |

Electronics

| 99181 | 99185 | 83101 |
|---------------------|----------------------|---------------------|
| ON/OFF 1 art. | ON/OFF 2 - 3 art. | DALI 1 - 4 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 54 x l 121 x h 26 |

Accessories Pag. 799

Periskop | 198-264 V AC | Accent lighting | arrayLED 6,5 W DC - 8 W AC





| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|-------------------------|
| White | 95346 | M 2700 | 770 - 557 | 15 Spot (15°) |
| Black | 95347 | W 3000 | 770 - 597 | 30 Flood (37°) |
| Grey | 95348 | N 4000 | 831 - 645 | 60 W.Flood (62°) |
| DarkBrown | 95349 | | | |

Accessories Pag. 799

RTG 95347W30 / 95348W30 / 95349W30


Periskop Narrow | 198-264 V AC | Accent lighting | powerLED 8 W DC - 10 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|-----------------------|
| White | 81160 | M 2700 | 854 - 588 | 08 N.Spot (6°) |
| Black | 81161 | W 3000 | 854 - 588 | |
| Grey | 81162 | N 4000 | 922 - 635 | |
| DarkBrown | 81163 | | | |

Accessories Pag. 799

Periskop RGBW | Accent lighting | powerLED 8 W DC 630 mA




| | | | Optic |
|-----------|--------------|----------------------|-------------------|
| White | 81493 | Q RGBW natural white | 06 N.Spot |
| Black | 81494 | V RGBW warm white | 15 Flood |
| Grey | 81495 | | 45 W.Flood |
| DarkBrown | 81496 | | |

Electronics

| 99743+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Accessories Pag. 799



Periskop | 198-264 V AC | Accent lighting | arrayLED 18 W DC - 20 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-------------------------|
| White | 95366 | M 2700 | 2349 - 1700 | 15 Spot (17°) |
| Black | 95368 | W 3000 | 2510 - 1818 | 30 Flood (34°) |
| Grey | 95370 | N 4000 | 2510 - 1970 | 60 W.Flood (63°) |
| DarkBrown | 95378 | | | |

Accessories Pag. 799



Periskop Narrow | 198-264 V AC | Accent lighting | 3 x powerLEDs 18 W DC - 20 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|-----------------------|
| White | 81164 | M 2700 | 1977 - 1452 | 08 N.Spot (8°) |
| Black | 81165 | W 3000 | 1977 - 1452 | |
| Grey | 81166 | N 4000 | 2133 - 1567 | |
| DarkBrown | 81167 | | | |

Accessories Pag. 799

Periskop RGBW | Accent lighting | arrayLED 18 W DC 500 mA



| | | | Optic |
|-----------|--------------|-------------------|---------------------|
| White | 81497 | V RGBW warm white | 15 Spot - |
| Black | 81498 | | 30 Flood - |
| Grey | 81499 | | 60 W.Flood - |
| DarkBrown | 81500 | | |


Electronics

| 99742+99702 | 99333 | DMX | Driver | Switching |
|-------------------------|--------------------------|-------------------------------|--------------------|--------------------|
| Dimmer RF 1 - 4 art. | Dimmer DMX 1 - 4 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 | CV 48V Pag. 932 |

Accessories Pag. 799



Periskop | 198-264 V AC | Accent lighting | arrayLED





| 30 W DC - 33 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 81367 | M 2700 | 3991 - 3272 | 20 Spot (20°) |
| Black | 81368 | W 3000 | 4270 - 3501 | 30 Flood (27°) |
| Grey | 81369 | N 4000 | 4588 - 3762 | 60 W.Flood (51°) |
| DarkBrown | 81370 | | | |

| 46 W DC - 50 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 80383 | M 2700 | 6153 - 4538 | 20 Flood (26°) |
| Black | 80384 | W 3000 | 6153 - 4538 | 30 Flood (30°) |
| Grey | 80385 | N 4000 | 7074 - 5218 | 60 W.Flood (51°) |
| DarkBrown | 80386 | | | |

Accessories Pag. 799

Periskop | 100-277 V AC | Accent lighting | arrayLED




| 30 W DC - 33 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 81542 | M 2700 | 3991 - 3272 | 20 Spot (20°) |
| Black | 81543 | W 3000 | 4270 - 3501 | 30 Flood (27°) |
| Grey | 81544 | N 4000 | 4588 - 3762 | 60 W.Flood (51°) |
| DarkBrown | 81545 | | | |

| 42 W DC - 46 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-------------------------|
| White | 81546 | M 2700 | 5953 - 4389 | 20 Spot (25°) |
| Black | 81547 | W 3000 | 5953 - 4389 | 30 Flood (30°) |
| Grey | 81548 | N 4000 | 6845 - 5049 | 60 W.Flood (51°) |
| DarkBrown | 81549 | | | |

Accessories Pag. 799



Periskop Narrow | 198-264 V AC | Accent lighting | 9 x powerLEDs 46 W DC - 50 W AC



| 46 W DC - 50 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|--------|-------------|-----------------------|
| White | 81168 | M 2700 | 5243 - 3075 | 08 N.Spot (7°) |
| Black | 81169 | W 3000 | 5243 - 3075 | |
| Grey | 81170 | N 4000 | 5660 - 3320 | |
| DarkBrown | 81171 | | | |

Accessories Pag. 799

Periskop RGBW | 99-264 V AC | Accent lighting | arrayLED 37 W DC - 40 W AC



| 37 W DC - 40 W AC | | Cct | lm S - D | Optic |
|-------------------|--------------|-------------------|----------|---------------------|
| White | 81784 | V RGBW warm white | | 20 Spot - |
| Black | 81785 | | | 30 Flood - |
| Grey | 81786 | | | 60 W.Flood - |
| DarkBrown | 81787 | | | |

Electronics

| | | | |
|---|--------------------------------------|---|---|
| DMX DMX controllers Pag. 952 - 953 | 99385 DMX/RDM addresser | 98986 DMX LINE Clouser 120 Ohm | 98985/99390 Splitter ALLinONE Start & Continuity Pag. 956 |
|---|--------------------------------------|---|---|

Accessories and cables Pag. 799


Accessories



description

98624 Steel peg 160 mm

suitable for: Periskop 46mm / Periskop Narrow 46mm
Periskop RGB 46mm



description

98549 Peg

suitable for: Periskop 76/110/162mm
Periskop Narrow 76/110/162mm
Periskop RGBW 76/110/162mm



description

99802 Tree belt

suitable for: Periskop / Periskop Narrow
Periskop RGB / Periskop RGBW



description

98550 Peg

suitable for: Periskop 46mm
Periskop Narrow 46mm
Periskop RGB 46mm



description

98966 Anti-glare screen

suitable for: Periskop 76mm/ Periskop Narrow 76mm
Periskop RGBW 76mm



description

98967 Anti-glare screen

suitable for: Periskop 110mm / Periskop Narrow 110mm
Periskop RGBW 110mm



description

98968 Anti-glare screen

suitable for: Periskop 162mm / Periskop Narrow 162mm
Periskop RGBW 162mm



description

98969 Anti-glare pipe

suitable for: Periskop 76mm / Periskop RGBW 76mm



description

98970 Anti-glare pipe

suitable for: Periskop 110mm / Periskop RGBW 110mm



description

98971 Anti-glare pipe


suitable for: Periskop 162mm / Periskop RGBW 162mm



description

On request Honey-comb

suitable for: Periskop



description

On request Elliptical filter

suitable for: Periskop

Extension cables



AllinOne DMX 190-250V AC

98662 M. / F. 6 pin (L 1m)

98663 M. / F. 6 pin (L 5m)

suitable for: Periskop RGBW 40W

shaker


Materials

Aluminium body

Extra-clear tempered glass diffuser



Shaker | Accent lighting | 198-264 V AC | arrayLED 6,5 W DC - 8,5 W AC




| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-----------|------------------|
| White | 84522 | M 2700 | 770 - 730 | 15 Spot (11°) |
| Black | 84523 | W 3000 | 770 - 730 | 30 Spot (18°) |
| Grey | 84524 | N 4000 | 831 - 789 | 60 W.Flood (51°) |
| DarkBrown | 84525 | | | |
| Sand | 84526 | | | |

Accessories Pag. 801

RTG 84522W30 / 84522W60 / 84523W30 / 84523W60 /
84524W30 / 84524W60 / 84525W30 / 84525W60



Shaker | Accent lighting | 198-264 V AC | arrayLED 23 W DC - 26 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 84532 | M 2700 | 3149 - 2315 | 15 Spot (18°) |
| Black | 84533 | W 3000 | 3281 - 2411 | 30 Flood (34°) |
| Grey | 84534 | N 4000 | 3463 - 2543 | 60 W.Flood (63°) |
| DarkBrown | 84535 | | | |
| Sand | 84536 | | | |

Accessories Pag. 801

Shaker | Accent lighting | 198-264 V AC | arrayLED 15 W DC - 17 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|--------|-------------|------------------|
| White | 84527 | M 2700 | 1953 - 1262 | 15 Spot (13°) |
| Black | 84528 | W 3000 | 2088 - 1349 | 30 Flood (25°) |
| Grey | 84529 | N 4000 | 2088 - 1349 | 60 W.Flood (53°) |
| DarkBrown | 84530 | | | |
| Sand | 84531 | | | |

Accessories Pag. 801

Accessories



| description | |
|---------------------------|------------|
| 98514 | Anti-glare |
| suitable for: Shaker 6,5W | |



| description | |
|--------------------------|------------|
| 99819 | Anti-glare |
| suitable for: Shaker 15W | |



| description | |
|--|-----|
| 89371 | Peg |
| suitable for: Shaker 6,5W / Shaker 15W | |



| description | |
|--------------------------|-----|
| 98549 | Peg |
| suitable for: Shaker 23W | |

gardener

Materials

Aluminium body



Metallised polycarbonate reflector





Accent lighting



Gardener | Accent lighting | 198-264 V AC | arrayLED 8 W DC - 9 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 97270 | M 2700 | 1088 - 867 | 15 Spot (19°) |
| Black | 97271 | W 3000 | 1088 - 867 | 30 Flood (27°) |
| Grey | 97272 | N 4000 | 1173 - 933 | 60 W.Flood (71°) |
| DarkBrown | 97387 | | | |

Accessories Pag. 805


Gardener | Accent lighting | 198-264 V AC | arrayLED 18 W DC - 20 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 81308 | M 2700 | 2714 - 1832 | 15 Spot (18°) |
| Black | 81309 | W 3000 | 2900 - 1958 | 30 Flood (37°) |
| Grey | 81310 | N 4000 | 2900 - 1958 | 60 W.Flood (65°) |
| DarkBrown | 81311 | | | |

Accessories Pag. 805



Gardener | Accent lighting | 198-264 V AC | arrayLED 26 W DC - 29 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-------------------------|
| White | 81312 | M 2700 | 3400 - 2829 | 15 Spot (20°) |
| Black | 81313 | W 3000 | 3637 - 3023 | 30 Flood (28°) |
| Grey | 81314 | N 4000 | 3909 - 3252 | 60 W.Flood (52°) |
| DarkBrown | 81315 | | | |

Accessories Pag. 805

Gardener RGBW | Accent lighting | powerLED 8 W DC 630 mA



Optic



| | | | | |
|-----------|--------------|-------------------|-------------------|---|
| White | 81505 | V RGBW warm white | 05 Spot | - |
| Black | 81506 | | 15 Flood | - |
| Grey | 81507 | | 45 W.Flood | - |
| DarkBrown | 81508 | | | |

Electronics

| | | | | |
|--------------------------|---------------------------|---|------------------------------|---------------------------------|
| 99743+99702 | 99333 | DMX | Driver | Switching |
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers CV 24V/48V Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

Accessories Pag. 805

Gardener RGBW | Accent lighting | arrayLED 18 W DC 500 mA



Optic

| | | | | |
|-----------|--------------|-------------------|-------------------|---|
| White | 81501 | V RGBW warm white | 15 Spot | - |
| Black | 81502 | | 30 Flood | - |
| Grey | 81503 | | 60 W.Flood | - |
| DarkBrown | 81504 | | | |

Electronics

| | | | | |
|-------------------------|--------------------------|-------------------------------|--------------------|--------------------|
| 99742+99702 | 99333 | DMX | Driver | Switching |
| Dimmer RF 1 - 4 art. | Dimmer DMX 1 - 4 art. | Controllers Pag. 952 - 953 | CV 48V Pag. 941 | CV 48V Pag. 932 |

Accessories Pag. 805

Accessories



description

| | |
|---|-----|
| 89371 | Peg |
| suitable for: Gardener / Gardener RGBW | |


narcissus

Materials

AISI 316L stainless steel body
Extra-clear tempered glass diffuser




Narcissus | Accent lighting | 198-264 V AC | powerLED 2 W DC - 2,2 W AC



| | Cct | lm S - D | Optic |
|--------------------|---------------|--------------|-------------------------|
| Steel 95151 | M 2700 | 219 - 0n req | 08 Spot (15°) |
| | W 3000 | 233 - 178 | 15 Spot (23°) |
| | N 4000 | 249 - 189 | 30 Flood (27°) |
| | | | 60 W.Flood (54°) |

Accessories Pag. 807


Narcissus | Accent lighting | 198-264 V AC | powerLED 6 W DC - 8 W AC



| | Cct | lm S - D | Optic |
|--------------------|---------------|-----------|-------------------------|
| Steel 95152 | M 2700 | 536 - 476 | 15 Spot (23°) |
| | W 3000 | 566 - 503 | 30 Flood (27°) |
| | N 4000 | 626 - 556 | 60 W.Flood (54°) |

Accessories Pag. 807

Narcissus | Accent lighting | 198-264 V AC | arrayLED 13 W DC - 13,5 W AC




| | Cct | lm S - D | Optic |
|--------------------|---------------|---------------|---------------------|
| Steel 81945 | M 2700 | 1724 - 0n req | 15 Spot - |
| | W 3000 | 1724 - 0n req | 30 Flood - |
| | N 4000 | 1854 - 0n req | 60 W.Flood - |

Accessories Pag. 807

Accessories



| | description |
|--------------------------------|------------------|
| 84890 | Steel peg 250 mm |
| suitable for: Narcissus | |



| | description |
|--------------------------------|------------------|
| 98112 | Steel peg 700 mm |
| suitable for: Narcissus | |





HOTEL
EZZO



clivo

Materials

Brass or AISI 316L stainless steel body
Extra-clear tempered glass diffuser



Clivo | Accent lighting | 190-250 V AC | powerLED 2 W DC - 2,2 W AC





| | Cct | lm S - D | Optic |
|---------------------|--------|--------------|------------------|
| Chrome 92203 | M 2700 | 219 - On req | 85 Focus 10°-66° |
| Nickel 92204 | W 3000 | 233 - On req | |
| | N 4000 | 249 - On req | |

Accessories Pag. 811

RTG 92204W85

Clivo_2 | Accent lighting | powerLED 2 W DC 630 mA



| | Cct | lm S - D | Optic |
|------------------------|--------|--------------|------------------|
| White 84561 | M 2700 | 219 - On req | 85 Focus 10°-66° |
| Black 84562 | W 3000 | 233 - 168 | |
| Chrome 97072 | N 4000 | 249 - 180 | |
| Nickel 97071 | | | |
| DarkBrown 84563 | | | |
| Brass 81473 | | | |
| Steel 97073 | | | |


Electronics

| 89420 | 99179 | 99186 | 83102 |
|---|---|--|---|
| ON/OFF 1 - 2 art. p 65 x 174 x h 27 | ON/OFF 3 - 6 art. p 80 x 100 x h 31 | ON/OFF 6 - 12 art. p 92 x 117 x h 38 | DALI 1 - 14 art. p 54 x 1121 x h 26 |

Accessories Pag. 811

RTG 84562W85 / 84563W85

Clivo_SL | Accent lighting | powerLED 4 W DC 350 mA



| | Cct | lm S - D | Optic |
|------------------------|--------|--------------|------------------|
| White 84564 | M 2700 | 490 - On req | 85 Focus 10°-60° |
| Black 84565 | W 3000 | 490 - On req | |
| Chrome 90404 | N 4000 | 529 - On req | |
| Nickel 90403 | | | |
| DarkBrown 84566 | | | |
| Brass 81474 | | | |

Electronics

| 89421 | 99183 | 83100 |
|---------------------------------------|--|--|
| ON/OFF 1 art. p 65 x 174 x h 27 | ON/OFF 2 - 3 art. p 80 x 1100 x h 31 | DALI 1 - 4 art. p 54 x 1121 x h 26 |

Accessories Pag. 811

Accessories



description

84890 Steel peg 250 mm
suitable for: Clivo_2 2W / Clivo_SL 4W

RTG



description

98112 Steel peg 700 mm
suitable for: Clivo_2 2W / Clivo_SL 4W

RTG



description

98513 Anti-glare
suitable for: Clivo 2W / Clivo_2 2W / Clivo_SL 4W

RTG



description

89371 Peg
suitable for: Clivo 2W

RTG

iris67

Materials
Aluminium body




IP67 versatile spotlight

Aesthetically pleasing with minimal forms, Iris67 introduces the possibility of professionally managing the light beam in an outdoor environment, allowing a broad spectrum of lighting situations applicable to decorative elements (statues, installations) and high plants. A device for advanced lighting, IP67 and entirely in aluminium: the concrete and reliable design of Iris67 guarantees maximum protection against atmospheric agents, water (with the exception of immersion) and microscopic particles.



Adjustable optics

Iris67 allows the light beam to be adapted to the directing needs in outdoor settings in order to adapt to the growth of high trees and/or the enhancement of urban décor elements with different heights and dimensions. Thanks to the graduated focus-on-board ring nut, the beam aperture can be calibrated, variable depending on the selected model, making the directing operation simple and precise. The blocking system of the facilitated focus allows obtaining an opening precisely corresponding to the gradient indicated along the ring nut.


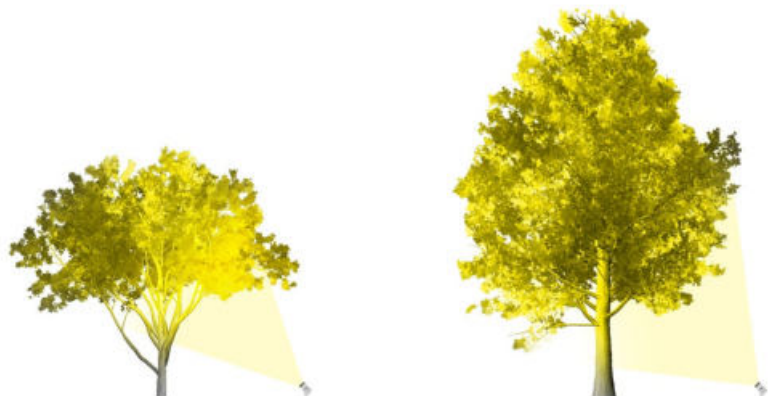


Dynamic optical range

The Elliptic version is the feather in the cap of the Iris67 family, a new product for that expands the potential of a highly professional outdoor spotlight. In addition to allowing adjustment of the beam aperture, Iris67 Elliptic lets you act on a second ring nut to control the movement of a specific filter placed at the end of the device. Increasing or decreasing the distance of the filter from the main lens, we can change the shape of the light beam, thereby obtaining a perfect elliptical lighting for very high plants or vertical urban elements (for example, signs).



Iris67 | Accent lighting | arrayLED 6 W DC 630 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|-------------------------|
| White | 84537 | M 2700 | 685 - On req | 85 Focus 15°-45° |
| Black | 84538 | W 3000 | 685 - On req | |
| Grey | 84539 | N 4000 | 739 - On req | |


Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Accessories Pag. 815

RTG 84537W85 / 84538W85 / 84539W85

Iris67 | Accent lighting | arrayLED 23 W DC 630 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|-------------------------|
| White | 84543 | M 2700 | 2714 - On req | 85 Focus 16°-52° |
| Black | 84544 | W 3000 | 2900 - On req | |
| Grey | 84545 | N 4000 | 2900 - On req | |

Electronics

| 99186 | 83102 |
|---|---------------------------------------|
| ON/OFF 1 art. p 92 x l 117 x h 38 | DALI x art. p 54 x l 121 x h 26 |

Accessories Pag. 815

Iris67 | Accent lighting | arrayLED 12 W DC 350 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|-------------------------|
| White | 84540 | M 2700 | 1724 - On req | 85 Focus 15°-62° |
| Black | 84541 | W 3000 | 1724 - On req | |
| Grey | 84542 | N 4000 | 1854 - On req | |


Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

Accessories Pag. 815

RTG 84540W85 / 84541W85 / 84542W85

Iris67 | Accent lighting | arrayLED 30 W DC 840 mA





| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|-------------------------|
| White | 84546 | M 2700 | 4220 - On req | 85 Focus 15°-56° |
| Black | 84547 | W 3000 | 4535 - On req | |
| Grey | 84548 | N 4000 | 4535 - On req | |

Electronics

| 99269 |
|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 |

Accessories Pag. 815

Iris67 Elliptic | Accent lighting | arrayLED 6 W DC 630 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|--------------------------|
| White | 84549 | M 2700 | 685 - On req | 88 Focus 15°- 45° |
| Black | 84550 | W 3000 | 685 - On req | |
| Grey | 84551 | N 4000 | 739 - On req | |

Electronics

| 99179 | 99186 | 83102 |
|---|---|---|
| ON/OFF 1 - 2 art. p 80 x l 100 x h 31 | ON/OFF 2 - 4 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Accessories Pag. 815

Iris67 Elliptic | Accent lighting | arrayLED 12 W DC 350 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|--------------------------|
| White | 84552 | M 2700 | 1724 - On req | 88 Focus 15°- 62° |
| Black | 84553 | W 3000 | 1724 - On req | |
| Grey | 84554 | N 4000 | 1854 - On req | |

Electronics

| 99183 | 83100 |
|---|---------------------------------------|
| ON/OFF 1 art. p 80 x l 100 x h 31 | DALI 1 art. p 54 x l 121 x h 26 |

Accessories Pag. 815

Iris67 Elliptic | Accent lighting | arrayLED 23 W DC 630 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|--------------------------|
| White | 84555 | M 2700 | 2714 - On req | 88 Focus 16°- 52° |
| Black | 84556 | W 3000 | 2900 - On req | |
| Grey | 84557 | N 4000 | 2900 - On req | |

Electronics

| 99186 | 83102 |
|---|---------------------------------------|
| ON/OFF 1 art. p 92 x l 117 x h 38 | DALI x art. p 54 x l 121 x h 26 |

Accessories Pag. 815

Iris67 Elliptic | Accent lighting | arrayLED 30 W DC 840 mA



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|--------------------------|
| White | 84558 | M 2700 | 4220 - On req | 88 Focus 15°- 56° |
| Black | 84559 | W 3000 | 4535 - On req | |
| Grey | 84560 | N 4000 | 4535 - On req | |

Electronics


| 99269 |
|---|
| ON/OFF 1 art. p 92 x l 117 x h 38 |

Accessories Pag. 815

Accessories



| | description |
|--|------------------|
| 84890 | Steel peg 250 mm |
| suitable for: Iris67 - Iris67 Elliptic | |
| RTG | |



| | description |
|--|------------------|
| 98112 | Steel peg 700 mm |
| suitable for: Iris67 - Iris67 Elliptic | |
| RTG | |

vuelta



Materials

Aluminium body

Transparent glass diffuser



Vuelta_Y | Outdoor spotlights | 100-264 V AC | arrayLED 13,5 W DC - 16 W AC





| | | Cct | lm S - D | Optic |
|---------|--------------|--------|------------|--------------------|
| Grey | 64522 | W 3000 | 1627 - 965 | 07 Asymm. - |
| BK Grey | 64523 | N 4000 | 1718 - 995 | |

Accessories Pag. 817

RTG 64522W07



Vuelta | Outdoor spotlights | 100-264 V AC | arrayLED 13,5 W DC - 16 W AC



| | | Cct | lm S - D | Optic |
|---------|--------------|--------|-------------|--------------------------|
| Grey | 64520 | W 3000 | 1627 - 1154 | 12 E.W.Flood(97°) |
| BK Grey | 64521 | N 4000 | 1718 - 1191 | |

Accessories Pag. 817

Vuelta_Y | Outdoor spotlights | Pole-top | 176-264 V AC | arrayLED 30 W DC - 32 W AC






| | | Cct | lm S - D | Optic |
|---------|--------------|--------|-------------|--------------------|
| Grey | 64530 | W 3000 | 3565 - 2736 | 07 Asymm. - |
| BK Grey | 64531 | N 4000 | 3832 - 2825 | |

Accessories Pag. 817

RTG 64530W07

Vuelta | Outdoor spotlights | Pole-top | 176-264 V AC | arrayLED 30 W DC - 32 W AC



| | | Cct | lm S - D | Optic |
|---------|--------------|--------|-------------|--------------------------|
| Grey | 64528 | W 3000 | 4171 - 3292 | 12 E.W.Flood(97°) |
| BK Grey | 64529 | N 4000 | 4486 - 3395 | |

Accessories Pag. 817

Peg



Angular bracket



Grid




Pole



Pole kit




Accessories




| | description | type |
|--|-------------|-------|
| 14931 | Peg | Black |
| suitable for: Vuelta_Y / Vuelta | | |
| RTG | | |




| | description | type |
|--|-------------|-------|
| 64534 | Grid | Black |
| suitable for: Vuelta_Y 30W / Vuelta 30W | | |



| | description | type |
|--|-------------|---------|
| 64532 | Pole kit | Grey |
| 64533 | Pole kit | BK Grey |
| suitable for: Vuelta_Y / Vuelta | | |



| | description | type |
|--|-----------------|---------|
| 64538 | Angular bracket | Grey |
| 64539 | Angular bracket | BK Grey |
| suitable for: Vuelta_Y / Vuelta | | |



| | description | type |
|--|-------------|---------|
| 64536 | Pole | Grey |
| 64537 | Pole | BK Grey |
| suitable for: Vuelta_Y / Vuelta | | |

prolamp



Materials

Powder-coated, open-pore-anodised aluminium body
Transparent glass diffuser





Prolamp | Accent lighting | 198-264 V AC | 2 x arrayLED 65 W DC - 72 W AC




| | Cct | lm S - D | Optic |
|---------------------------|---------------|-------------|-------------------------|
| Black 83851 | M 2700 | 8937 - 6657 | 15 Spot (17°) |
| DALI | W 3000 | 9313 - 6937 | 30 Flood (25°) |
| Black 83852 | N 4000 | 9830 - 7321 | 60 W.Flood (50°) |

In-out cable included

Cables Pag. 820

Prolamp | Accent lighting | 198-264 V AC | 3 x arrayLED 101 W DC - 111 W AC





| | Cct | lm S - D | Optic |
|---------------------------|---------------|---------------|-------------------------|
| Black 83853 | M 2700 | 13712 - 11003 | 15 Spot (17°) |
| DALI | W 3000 | 14289 - 11466 | 30 Flood (24°) |
| Black 83854 | N 4000 | 15082 - 12101 | 60 W.Flood (52°) |

In-out cable included

Cables Pag. 820

Prolamp | Accent lighting | 198-264 V AC | 4 x arrayLED 171 W DC - 180 W AC



| | Cct | lm S - D | Optic |
|---------------------------|---------------|---------------|-------------------------|
| Black 83855 | M 2700 | 23925 - 18636 | 15 Spot (20°) |
| DALI | W 3000 | 24932 - 19419 | 30 Flood (27°) |
| Black 83856 | N 4000 | 26320 - 20500 | 60 W.Flood (55°) |

In-out cable included

Cables Pag. 820

Cables




| On/Off 190-250V AC | |
|--------------------|----------------------|
| 99057 | Conn. F.3 pin (L 2m) |

suitable for: Prolamp



| DALI 190-250V AC | |
|------------------|-----------------------|
| 99826 | Conn. F. 5 pin (L 1m) |
| 99822 | Conn. F. 5 pin (L 5m) |

suitable for: Prolamp (DALI)



| On/Off 190-250V AC | |
|--------------------|-----------------------------|
| 98147 | Conn. M. / F. 3 pin (L 5m) |
| 98146 | Conn. M. / F. 3 pin (L 10m) |


suitable for: Prolamp



| DALI 190-250V AC | |
|------------------|-----------------------------|
| 99823 | Conn. M. / F. 5 pin (L 1m) |
| 99824 | Conn. M. / F. 5 pin (L 5m) |
| 99825 | Conn. M. / F. 5 pin (L 10m) |

suitable for: Prolamp (DALI)

Prolamp | Accent lighting | 48 V | 8 x powerLEDs 59 W DC - 64 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-------------|-----------------|
| Black | 81946 | W 3000 | 6473 - 4016 | 06 N.Spot (11°) |
| | | N 4000 | 6988 - 4337 | 25 Elliptic - |



| | | RGBW | Optic |
|-------|--------------|----------------------|-------------|
| Black | 81949 | Q RGBW natural white | 06 N.Spot |
| | | V RGBW warm white | 15 Spot |
| | | | 30 Flood |
| | | | 25 Elliptic |


Electronics

| | | | | |
|--------------|--------------------------------|-------------------|--------------------------|---|
| 99785 | DMX | 99385 | 98986 | 98985/99390 |
| ON/OFF 240W | DMX controllers Pag. 952 - 953 | DMX/RDM addresser | 120 Ohm DMX line closure | Connector splitter ALLinONE Start & Continuity Pag. 956 |

In-out cable included

Accessories and cables Pag. 821

Prolamp | Accent lighting | 220-240 V AC | 24 x powerLEDs 174 W DC - 190 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|-----------------|
| Black | 81948 | W 3000 | 19419 - 10032 | 06 N.Spot (12°) |
| | | N 4000 | 20964 - 10830 | 25 Elliptic - |



| | | RGBW | Optic |
|-------|--------------|----------------------|-------------|
| Black | 81951 | Q RGBW natural white | 06 N.Spot |
| | | V RGBW warm white | 15 Spot |
| | | | 30 Flood |
| | | | 25 Elliptic |

Electronics


| | | | |
|--------------------------------|-------------------|--------------------------|---|
| DMX | 99385 | 98986 | 98985/99390 |
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |

In-out cable included

Accessories and cables Pag. 821

Accent lighting

Prolamp | Accent lighting | 220-240 V AC | 18 x powerLEDs 133 W DC - 150 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|--------------|-----------------|
| Black | 81947 | W 3000 | 14564 - 7917 | 06 N.Spot (12°) |
| | | N 4000 | 15723 - 8546 | 25 Elliptic - |



| | | RGBW | Optic |
|-------|--------------|----------------------|-------------|
| Black | 81950 | Q RGBW natural white | 06 N.Spot |
| | | V RGBW warm white | 15 Spot |
| | | | 30 Flood |
| | | | 25 Elliptic |

Electronics

| | | | |
|--------------------------------|-------------------|--------------------------|---|
| DMX | 99385 | 98986 | 98985/99390 |
| DMX controllers Pag. 952 - 953 | DMX/RDM addresser | DMX LINE Clouser 120 Ohm | Splitter ALLinONE Start & Continuity Pag. 956 |

In-out cable included

Accessories and cables Pag. 821

Accessories

| | description |
|--|---|
| | On request Directional flaps - shaper |
| | suitable for: Prolamp 59W - 133W - 174W / Prolamp RGBW |

Cables

| On/Off 190-250V AC | |
|---------------------------|--|
| | 99057 Conn. F.3 pin (L 2m) |
| | suitable for: Prolamp 59W - 133W - 174W |

| AllinOne DMX cable 190-250V AC | |
|---------------------------------------|-----------------------------------|
| | 98660 F. 6 pin (L 1m) |
| | 98661 F. 6 pin (L 5m) |
| | suitable for: Prolamp RGBW |

Extension cables

| On/Off 190-250V AC | |
|---------------------------|--|
| | 98147 Conn. M. / F. 3 pin (L 5m) |
| | 98146 Conn. M. / F. 3 pin (L 10m) |
| | suitable for: Prolamp 59W - 133W - 174W |

| AllinOne DMX cable 190-250V AC | |
|---------------------------------------|-----------------------------------|
| | 98662 M. / F. 6 pin (L 1m) |
| | 98663 M. / F. 6 pin (L 5m) |
| | suitable for: Prolamp RGBW |


archiline

Materials

Aluminium body

Extra-light tempered glass diffuser





| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|---------------|
| Black | 81483 | M 2700 | 7258 - 0n req | 15 Spot - |
| | | W 3000 | 7258 - 0n req | 30 Flood - |
| | | N 4000 | 7834 - 0n req | 25 Elliptic - |


| | | Cct | lm S - D | Optic |
|-------|--------------|--------|---------------|-------------|
| Black | 81484 | M 2700 | 7258 - 0n req | 06 N.Spot - |
| | | W 3000 | 7258 - 0n req | |
| | | N 4000 | 7834 - 0n req | |

The image on page 822 is a custom solution.





Light effects

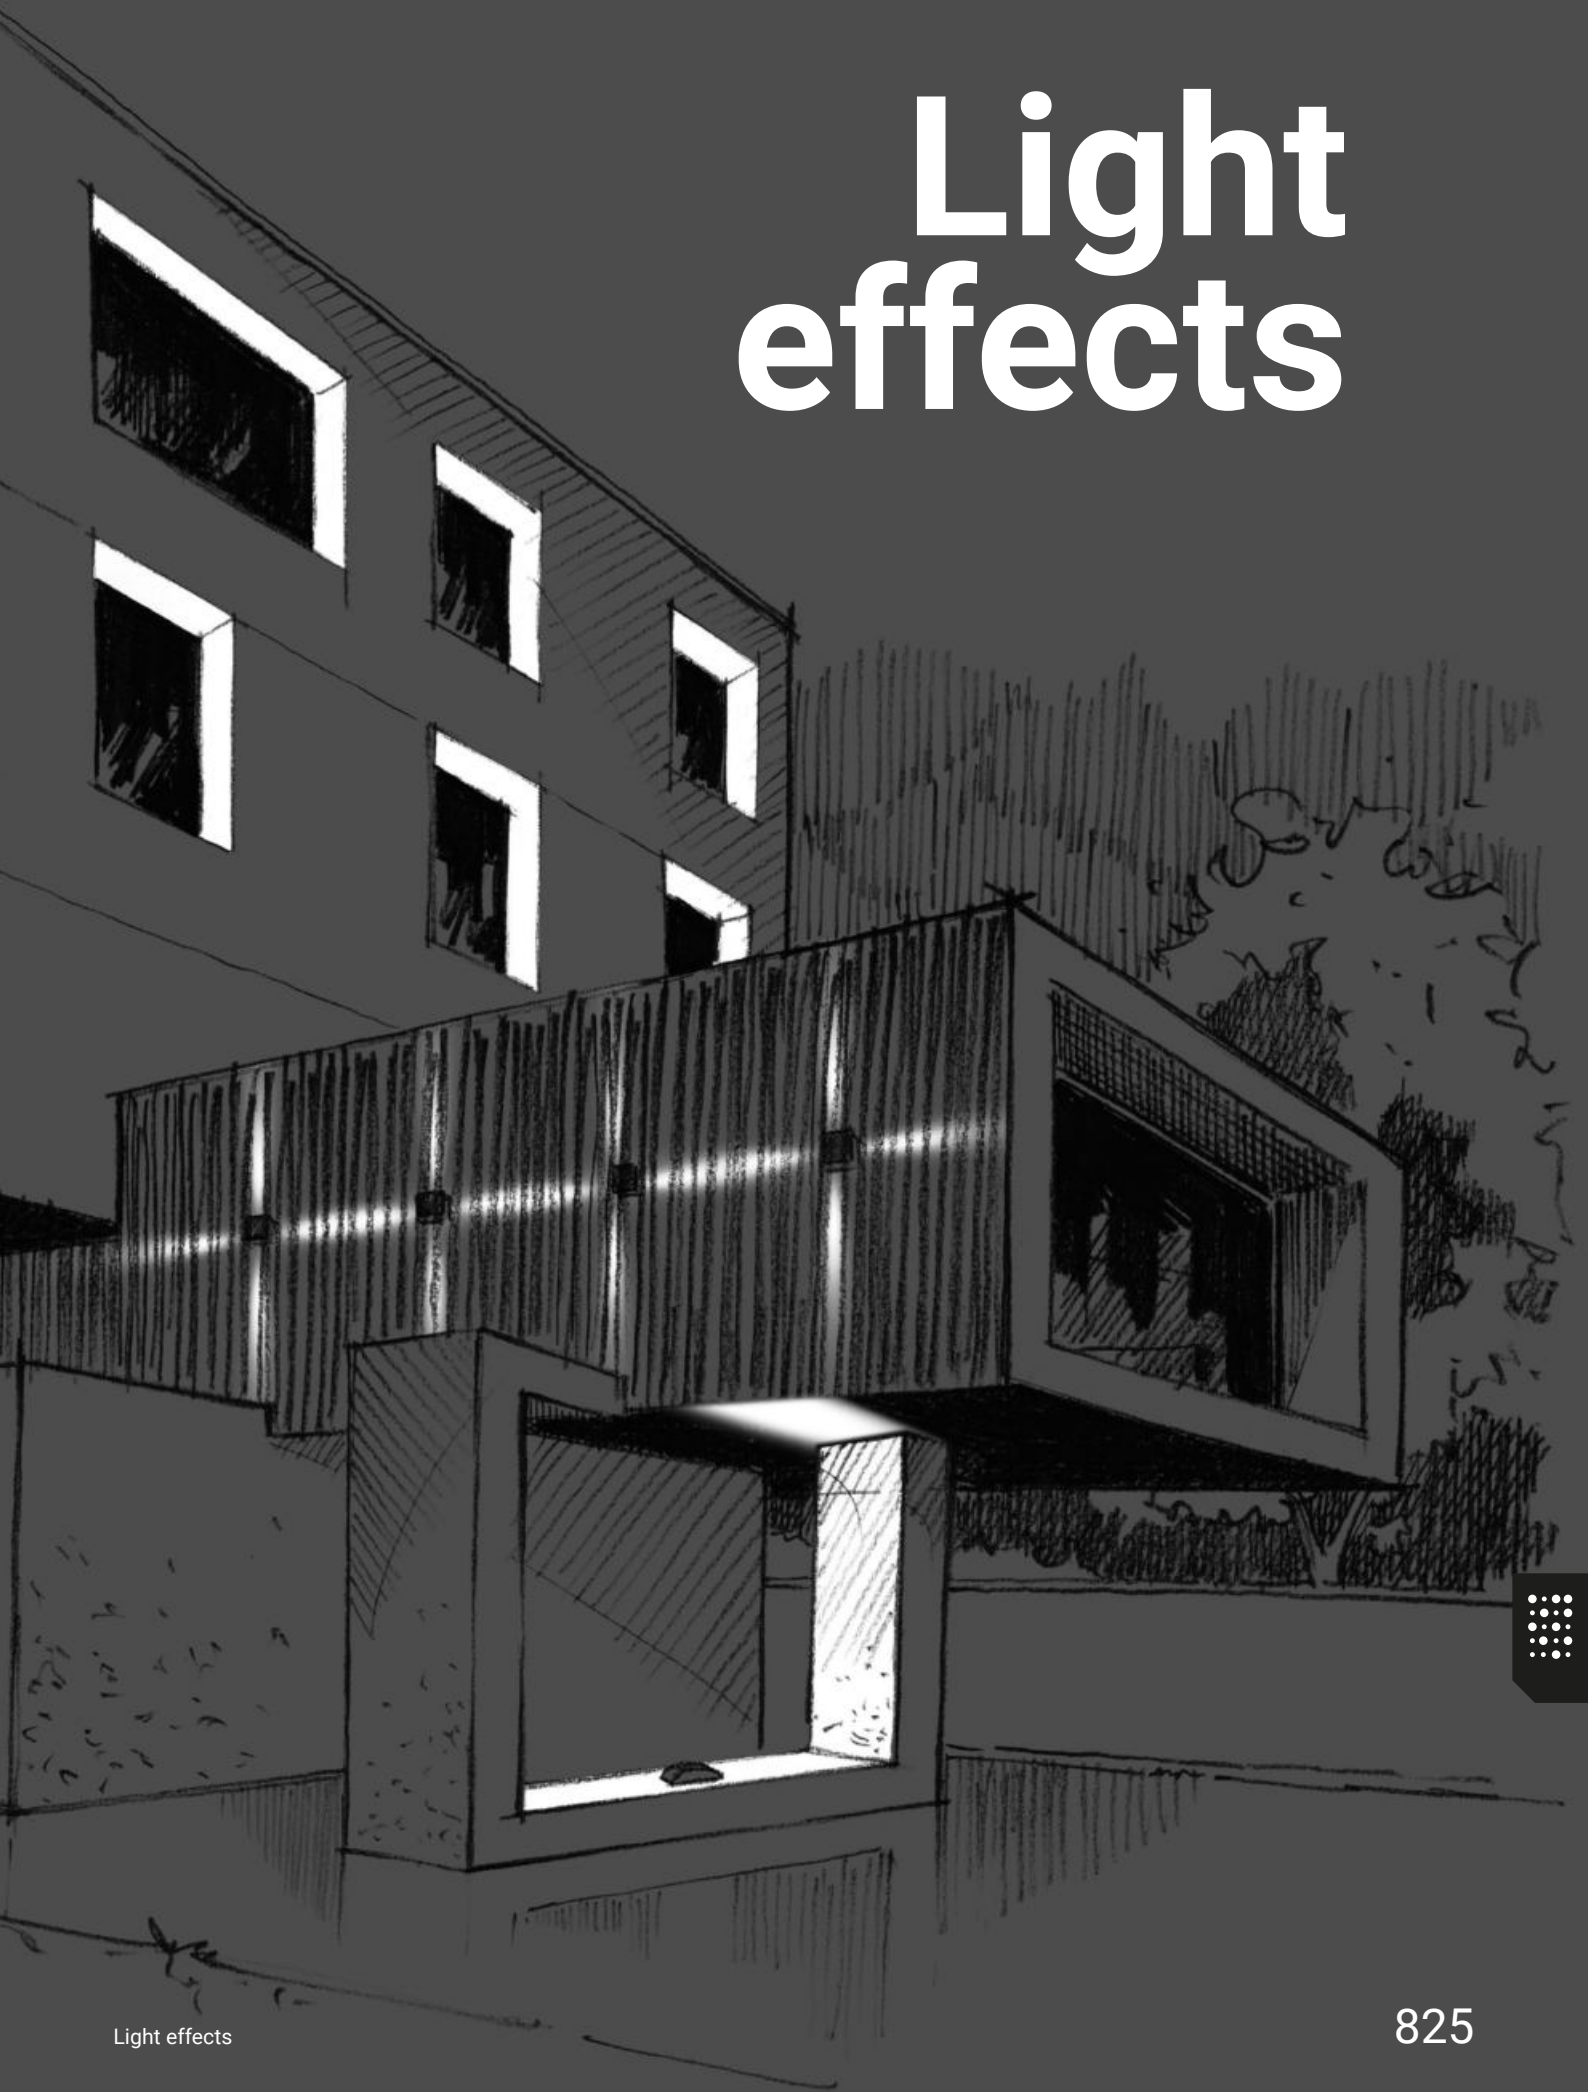

light effects range index

Arcada



Xenia



Orma



Myia



Lopp66



Xenia



Pixie



Paseo

Paseo_PIXEL

Paseo_PIXEL
Dark




851




new

851

Arcada

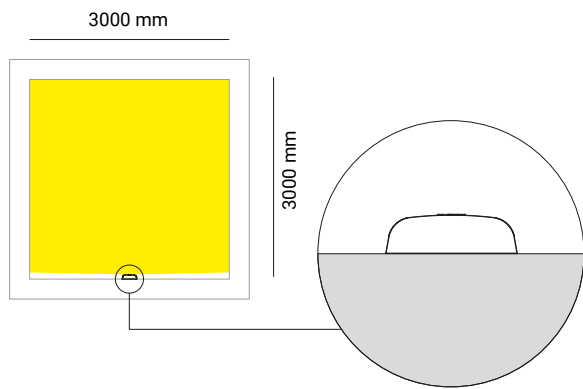


Arcada_Pro

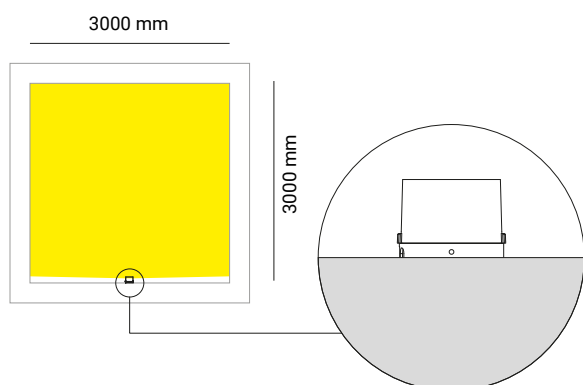


Xenia Blade



3000 mm

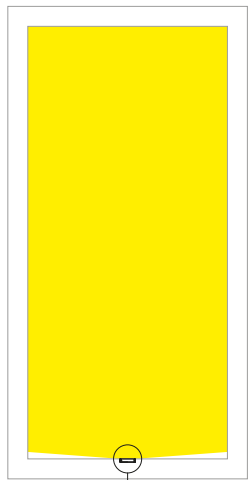


6500 mm




Orma



3000 mm



3000 mm



arcada


Materials

Aluminium body/polycarbonate






Arcada | Arc light | 198-264V AC | powerLED 4 W DC - 6 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-----------|-----------------------|
| White | 95454 | M 2700 | 544 - 394 | 18 E.W.Flood(18-140°) |
| Black | 95612 | W 3000 | 580 - 424 | |
| Grey | 95619 | N 4000 | 620 - 450 | |

Arcada | Arc light | powerLED 8W DC 630 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|--------|-----------|-----------------------|
| White | 95458 | M 2700 | 876 - 636 | 18 E.W.Flood(18-140°) |
| Black | 95616 | W 3000 | 932 - 678 | |
| Grey | 95623 | N 4000 | 996 - 724 | |

Electronics

| 99179 | 99186 | 83102 |
|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | DALI |
| 1 art. | 2 - 3 art. | 1 - 3 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 53 x l 121 x h 26 |

Arcada | Arc light | powerLED 8 W DC 220 mA x Ch







| | | | Optic |
|-------|--------------|-------|-----------------------|
| White | 95749 | Z RGB | 18 E.W.Flood(18-140°) |
| Black | 95750 | | |
| Grey | 95751 | | |


Electronics

| 99703+99702 | 99333 | DMX | Driver | Switching |
|-------------|------------|-----------------|----------|-----------|
| Dimmer RF | Dimmer DMX | DMX Controllers | Driver | Switching |
| 1 - 3 art. | 1 - 3 art. | Pag. 952 - 953 | CV 48V | CV 48V |
| | | | Pag. 941 | Pag. 932 |

95458N18

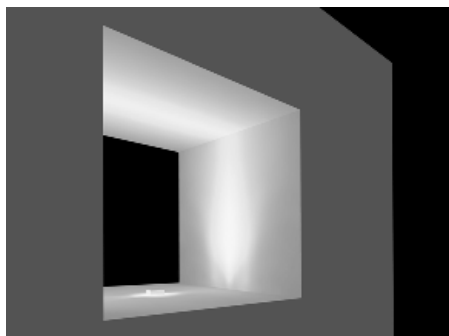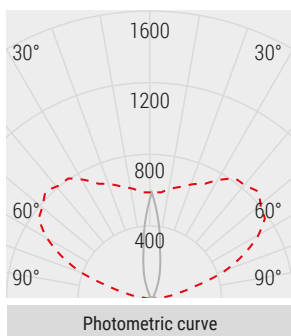


Arcada Pro | Arc light | 198-264V AC | powerLED 4 W DC - 6 W AC



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|-----------------------------|
| White | 84283 | M 2700 | 440 - 102 | 18 E.W.Flood(4-134°) |
| Black | 84284 | W 3000 | 500 - 115 | |
| Grey | 84285 | N 4000 | 536 - 124 | |

Arcada Pro | Arc light | powerLED 4 W DC 350 mA x Ch







| | | | Optic |
|-------|--------------|-----------------------------|-----------------------------|
| White | 84286 | Q RGBW natural white | 18 E.W.Flood(4-134°) |
| Black | 84287 | V RGBW warm white | |
| Grey | 84288 | | |

Electronics

| 99741+99702 | 99333 | DMX | Driver | Switching |
|--------------------------|---------------------------|-----------------------------------|------------------------------|---------------------------------|
| Dimmer RF 1 - 12 art. | Dimmer DMX 2 - 12 art. | DMX Controllers Pag. 952 - 953 | Driver CV 48V Pag. 941 | Switching CV 48V Pag. 932 |

84283N18

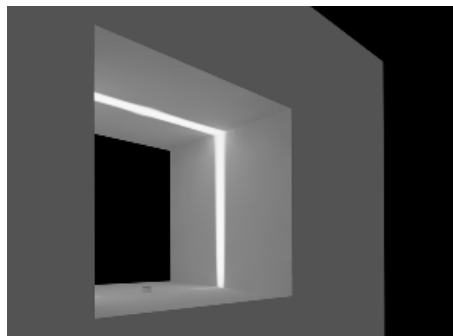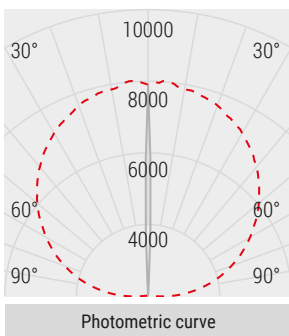





NYX HOTEL


xenia

Materials

Aluminium body



Xenia_A_Blade | Arc light | powerLED 6 W DC 500mA





| | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Anod. AL. 82761 | M 2700 | 453 - 236 | 18 W.Flood (8-74°) |
| | W 3000 | 516 - 268 | |
| | N 4000 | 552 - 287 | |

Electronics

| 99181 | 99185 | 83101 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Recessed casing and accessories Pag. 837

Xenia_AL_Blade | Arc light | powerLED 6 W DC 500mA



| | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Anod. AL. 82762 | M 2700 | 453 - 236 | 18 W.Flood (8-74°) |
| | W 3000 | 516 - 268 | |
| | N 4000 | 552 - 287 | |

Electronics

| 99181 | 99185 | 83101 |
|---|---|---|
| ON/OFF 1 art. p 80 x l 100 x h 31 | ON/OFF 2 - 3 art. p 92 x l 117 x h 38 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Recessed casing and accessories Pag. 837

Accessories



| description | |
|-------------------------------------|----------------------------|
| 99181 | Springs for false ceilings |
| suitable for: Xenia_AL_Blade | |

Recessed casing



| description | |
|------------------------------------|--------|
| 99933 | 205 mm |
| suitable for: Xenia_A_blade | |



| description | |
|-------------------------------------|--------|
| 99932 | 205 mm |
| suitable for: Xenia_AL_blade | |

Accessories



| x 2 | description |
|------------------------------------|-------------------|
| 99917 | Line sealing caps |
| suitable for: Xenia_A_blade | |



| x 2 | description |
|-------------------------------------|-------------------|
| 83188 | Line sealing caps |
| suitable for: Xenia_AL_blade | |

Light effects



orma


Materials

Aluminium body

AISI 316L stainless steel flange



Orma_AB | Arc light | powerLED



| C.C. - 8W DC 630 mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Steel/Alu 83642 | M 2700 | 854 - 217 | 18 W.Flood (9-64°) |
| | W 3000 | 854 - 217 | |
| | N 4000 | 922 - 234 | |

Electronics

| 99179 | 99186 | 83102 |
|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | DALI |
| 1 art. | 2 - 3 art. | 1 - 3 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 53 x l 121 x h 26 |


| C.V. 9W DC 24V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Steel/Alu 83643 | M 2700 | 854 - 217 | 18 W.Flood (9-64°) |
| | W 3000 | 854 - 217 | |
| | N 4000 | 922 - 234 | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---------------------|----------------------|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | ON/OFF | 0/1-10V | DALI |
| 1 - 2 art. | 1 - 5 art. | 1 - 15 art. | 1 - 15 art. | 1 - 12 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 191 x l 63 x h 38 |

Recessed casing Pag. 839

Orma_IB | Arc light | powerLED



| C.C. - 8W DC 630 mA | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Steel/Alu 83644 | M 2700 | 854 - 217 | 18 W.Flood (9-64°) |
| | W 3000 | 854 - 217 | |
| | N 4000 | 922 - 234 | |

Electronics

| 99179 | 99186 | 83102 |
|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | DALI |
| 1 art. | 2 - 3 art. | 1 - 3 art. |
| p 80 x l 100 x h 31 | p 92 x l 117 x h 38 | p 53 x l 121 x h 26 |

| C.V. 9W DC 24V DC | Cct | lm S - D | Optic |
|------------------------|---------------|-----------|---------------------------|
| Steel/Alu 83645 | M 2700 | 854 - 217 | 18 W.Flood (9-64°) |
| | W 3000 | 854 - 217 | |
| | N 4000 | 922 - 234 | |

Electronics

| 89179 | 89359 | 99331 | 99332 | 99722 |
|---------------------|----------------------|---------------------|---------------------|---------------------|
| ON/OFF | ON/OFF | ON/OFF | 0/1-10V | DALI |
| 1 - 2 art. | 1 - 5 art. | 1 - 15 art. | 1 - 15 art. | 1 - 12 art. |
| p 92 x l 117 x h 38 | p 115 x l 140 x h 50 | p 150 x l 60 x h 35 | p 150 x l 60 x h 35 | p 191 x l 63 x h 38 |

Recessed casing Pag. 839

Recessed casing



| description | type |
|--|------|
| 99651 Recessed casings | PVC |
| suitable for: Orma_AB / Orma_IB | |



| description | type |
|-------------------------------|------|
| 99563 Recessed casings | PVC |
| suitable for: Orma_AB | |



| description | type |
|-------------------------------|------|
| 99856 Recessed casings | PVC |
| suitable for: Orma_AB | |

Light effects





myia

Materials

Aluminium body



Myia | Wall light | 198-264V AC | powerLED 8,4W DC - 10,5W AC




| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------------|-----------------------|
| White | 91596 | M 2700 | 854 - On req | 90 E.W.Flood - |
| Black | 91597 | W 3000 | 854 - On req | |
| Grey | 91598 | N 4000 | 922 - On req | |

Private Villa | Athens, Greece





Light effects

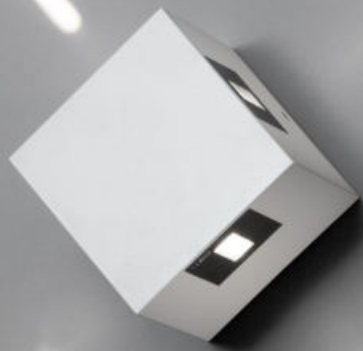

loop66

Materials
Aluminium body

Loop66 | Wall light | 198-264V AC | powerLEDs 23W DC - 25 W AC



| | | Cct | lm S - D | Optic |
|-----------|--------------|---------------|-----------------|-----------------------|
| White | 97065 | M 2700 | 2628 - 1170 | 05 N.Spot (5°) |
| Black | 97066 | W 3000 | 2796 - 1248 | |
| Grey | 97067 | N 4000 | 2988 - 1332 | |
| DarkBrown | 97357 | | | |



Light effects






xenia

Materials

Anodised 6060 aluminium alloy body



Xenia_PIXEL | Light effects | 48V DC | topLED 9,5 W DC




Optic

| | | | |
|-----------|--------------|-------|---------------------|
| Anod. AL. | 82596 | Z RGB | 00 General - |
|-----------|--------------|-------|---------------------|

Accessories Pag. 847

For cables and power supply/control contact Linea Light support service.

Xenia_PIXEL | Light effects | 48V DC | topLED 19 W DC



Optic

| | | | |
|-----------|--------------|-------|---------------------|
| Anod. AL. | 82597 | Z RGB | 00 General - |
|-----------|--------------|-------|---------------------|

Accessories Pag. 847

For cables and power supply/control contact Linea Light support service.

Accessories



| | |
|----------------------------------|--------------------------|
| x 2 | description |
| 89949 | Fixing brackets 46-67 mm |
| suitable for: Xenia_PIXEL | |



| | |
|----------------------------------|-----------------------|
| x 2 | description |
| 89045 | Fixing brackets 90 mm |
| suitable for: Xenia_PIXEL | |



| | |
|----------------------------------|------------------------|
| x 2 | description |
| 89046 | Fixing brackets 150 mm |
| suitable for: Xenia_PIXEL | |



| | |
|----------------------------------|------------------------|
| x 2 | description |
| 89047 | Fixing brackets 300 mm |
| suitable for: Xenia_PIXEL | |



| |
|----------------------------------|
| description |
| 83190 Anti-glaring 595 mm |
| suitable for: Xenia_PIXEL |



| |
|-----------------------------------|
| description |
| 83191 Anti-glaring 1170 mm |
| suitable for: Xenia_PIXEL |


pixie

Materials

Powder-coated, open-pore-anodised
aluminium body
Opalescent PMMA diffuser



Pixie_PIXEL | light effects | 48V DC | topLED 3,5 W DC




Optic


| | | | |
|------|--------------|-----------------------------|---------------------|
| Grey | 83841 | Q RGBW natural white | 00 General - |
|------|--------------|-----------------------------|---------------------|

Accessories and cables Pag. 849


For power supply/control contact Linea Light support service.

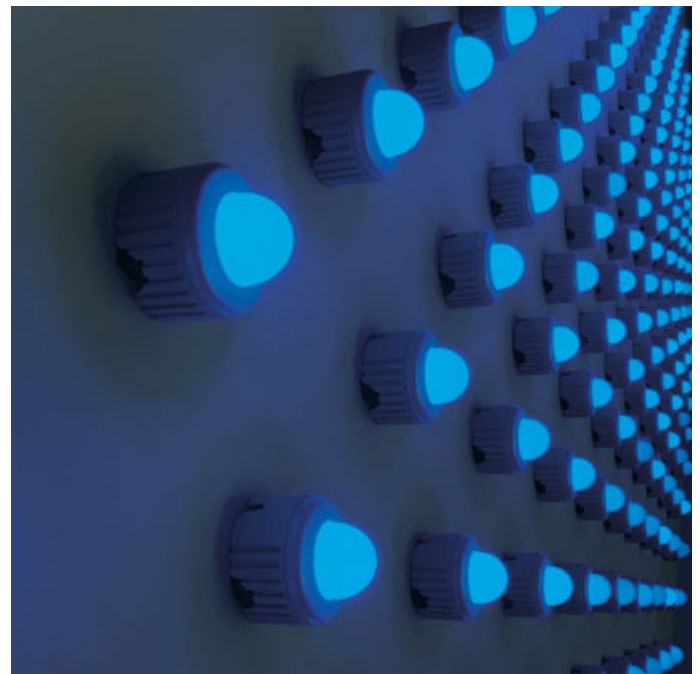

Accessories


| | x 2 | description |
|---|--------------|-------------------------------|
|  | 98659 | Couple of side fixing bracket |
| suitable for: Pixie_PIXEL | | |


| | description |
|---|------------------------------------|
|  | 98655 Fixing hidden bracket |
| suitable for: Pixie_PIXEL | |

| | description |
|---|------------------------------------|
|  | 98654 Fixing hidden bracket |
| suitable for: Pixie_PIXEL | |


| | description |
|---|-------------------------------------|
|  | 98653 Fixing tilting bracket |
| suitable for: Pixie_PIXEL | |


Cables

| | AllinOne SPI 48 V DC |
|---|--|
|  | 83201 Conn. M. 4 pin M12 (L 2,5m) |
| suitable for: Pixie_PIXEL | |

| | AllinOne SPI 48 V DC |
|---|--|
|  | 83202 Conn. F. 4 pin M12 (L 2,5m) |
| suitable for: Pixie_PIXEL | |

Extension cables


| | AllinOne SPI 48 V DC |
|---|---|
|  | 83199 Conn. M+F 4 pin M12 (L 1m) |
| | 83200 Conn. M+F 4 pin M12 (L 5m) |
| suitable for: Pixie_PIXEL | |

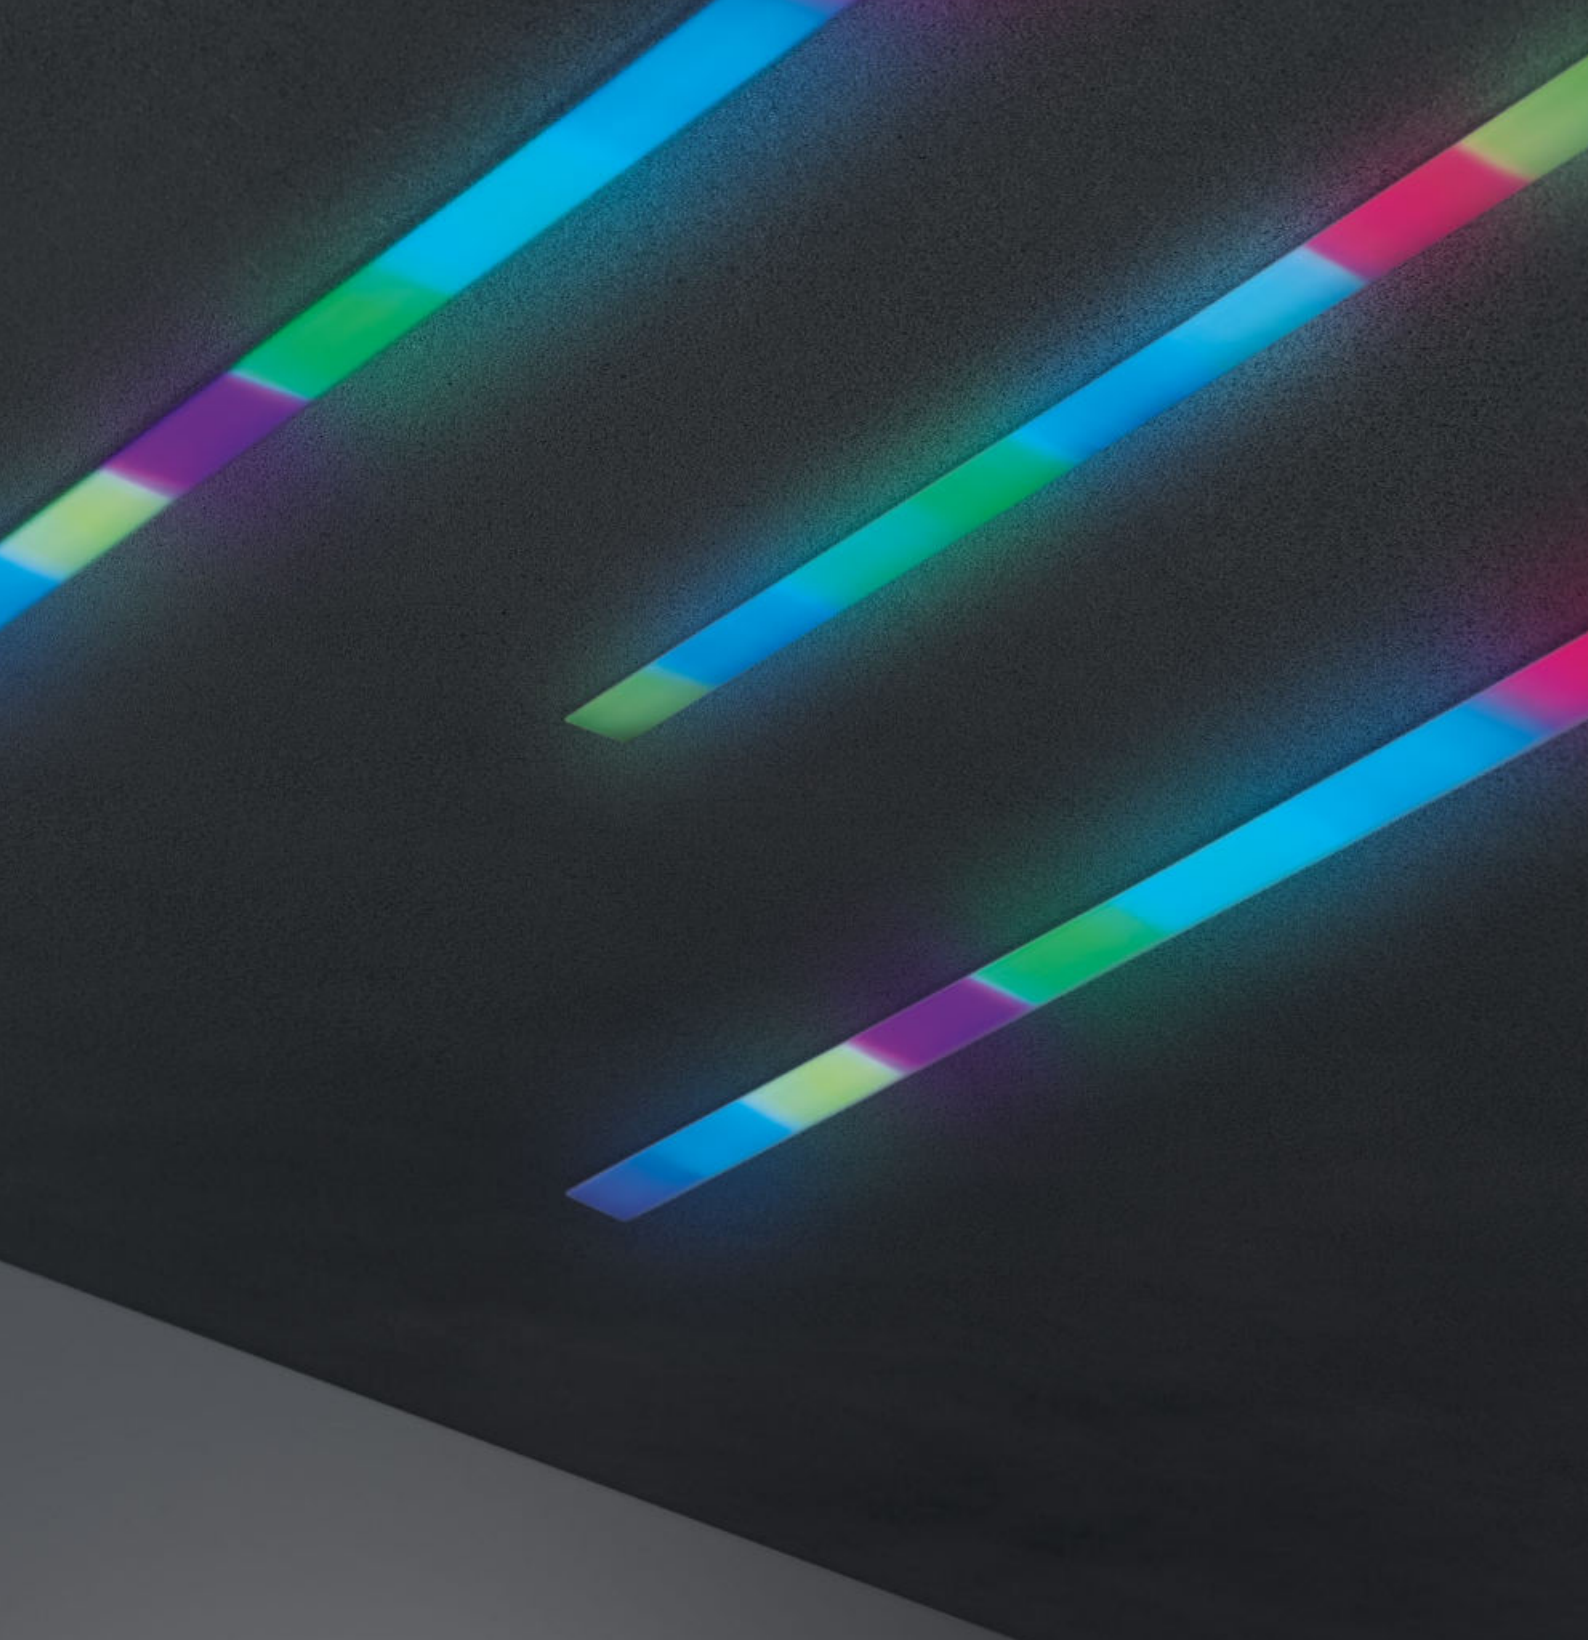

paseo

Materials
Polycarbonate body

Paseo_PIXEL | Light effects | 24V DC | topLED 9,5 W DC




| | | | |
|---------|--------------|-------|---------------------|
| Opaline | 81337 | Z RGB | 00 General - |
|---------|--------------|-------|---------------------|

Recessed casing Pag. 755/756/757

For cables and power supply/control contact Linea Light support service.

Paseo_PIXEL | Light effects | 24V DC | topLED 19,5W DC




| | | | |
|---------|--------------|-------|---------------------|
| Opaline | 81338 | Z RGB | 00 General - |
|---------|--------------|-------|---------------------|

Recessed casing Pag. 755/756/757

For cables and power supply/control contact Linea Light support service.

Paseo_PIXEL Dark | Light effects | 48V DC | topLED 9,5 W DC




| | | | |
|-------|--------------|-------|---------------------|
| Black | 84217 | Z RGB | 00 General - |
|-------|--------------|-------|---------------------|

Accessories Pag. 851

For cables and power supply/control contact Linea Light support service.



Paseo_PIXEL Dark | Light effects | 48V DC | topLED 19,5 W DC



| | | | |
|-------|--------------|-------|---------------------|
| Black | 84218 | Z RGB | 00 General - |
|-------|--------------|-------|---------------------|

Accessories Pag. 851

For cables and power supply/control contact Linea Light support service.



Accessories



| | description |
|--|---------------------------------------|
| 83162 | Support bracket for wall installation |
| suitable for: Paseo_PIXEL Dark 9,5W / 19,5W | |

Light effects

Paseo_PIXEL RGB

Lighting performance & engineering

The i-LèD Paseo PIXEL RGB bar redefines the surrounding landscape through the creation of dynamic lighting effects.

Every single RGB LED can be controlled individually, the available versions are Paseo PIXEL RGB 576mm with 32 RGB full-color LEDs, or Paseo PIXEL RGB 1152mm with 64 RGB full-color LEDs.



RGB
Pixel




Power
24V

Signal
DMX / RDM


To guarantee a top-level flexibility and an outstanding efficacy in terms of control, a single product allows for multiple resolutions; it is possible to vary the LED and Pixel ratio based on the size of the installation. Pixel is the RGB element that can be individually controlled.

At its maximum resolution, the 1152 mm Paseo_PIXEL RGB will have 64 independent pixels, whilst the 576 mm one will have 32 independent pixels. At its minimum resolution, 1152 mm Paseo_PIXEL RGB will be made up of 4 independent pixels, whilst the 576 mm one will be made up of 2 independent pixels.

The resolution setting can be made through the RDM* (Remote Device Management), a system permitting the bidirectional communication of lights. The device recommended for this kind of operation is Enttec Pro Mk2.

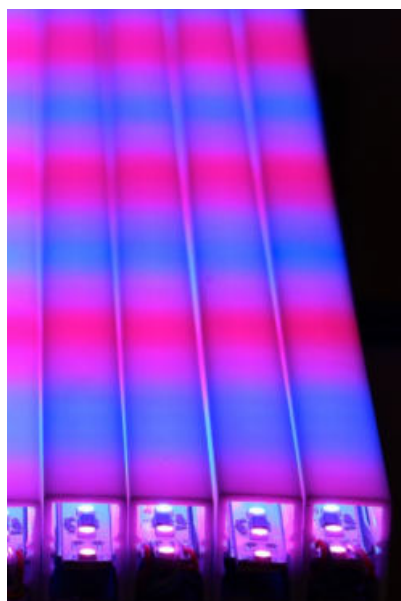

2 LEDs x Pixel

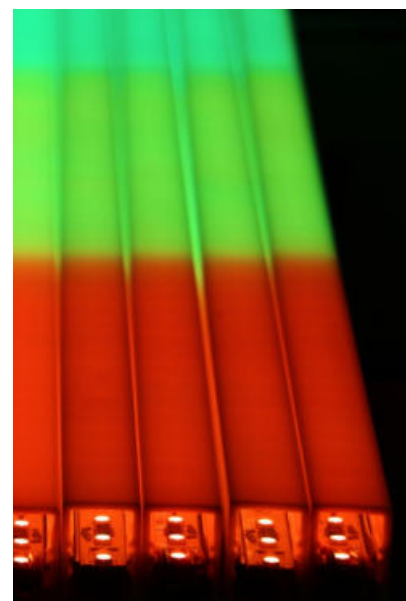

16 LEDs x Pixel



Some guidelines for the Pixel-Pitch sizing are reported hereunder:


The following calculations and examples are general guidelines to determine the minimum and maximum viewing distances when you wish to play a low-resolution video with the Paseo_Pixel RGBs.

- To determine the minimum viewing distance, multiply the size of the Pixel-Pitch times 100 units. For example, if the Pixel-Pitch is 36 mm, the minimum viewing distance is equal to 3.6 m
- To determine the maximum viewing distance for discernible videos, it is necessary to multiply the height of the screen by 20 units of distance. For example, if the screen is 30 m high, the maximum recognizable viewing distance for the video will be 600m.
- LED display videos can be viewed despite the maximum viewing distance for the discernible videos. To determine the maximum viewing distance for a suitable visual impact, multiply the height of the screen by 50 units of distance. For example, if the screen is 20m high, it will continue to create a visual impact up to 1000m.

However, it is possible to obtain a good visual impact up to 50 times the height of the screen also by overcoming the maximum viewing distance mentioned in the previous point.



Underwater

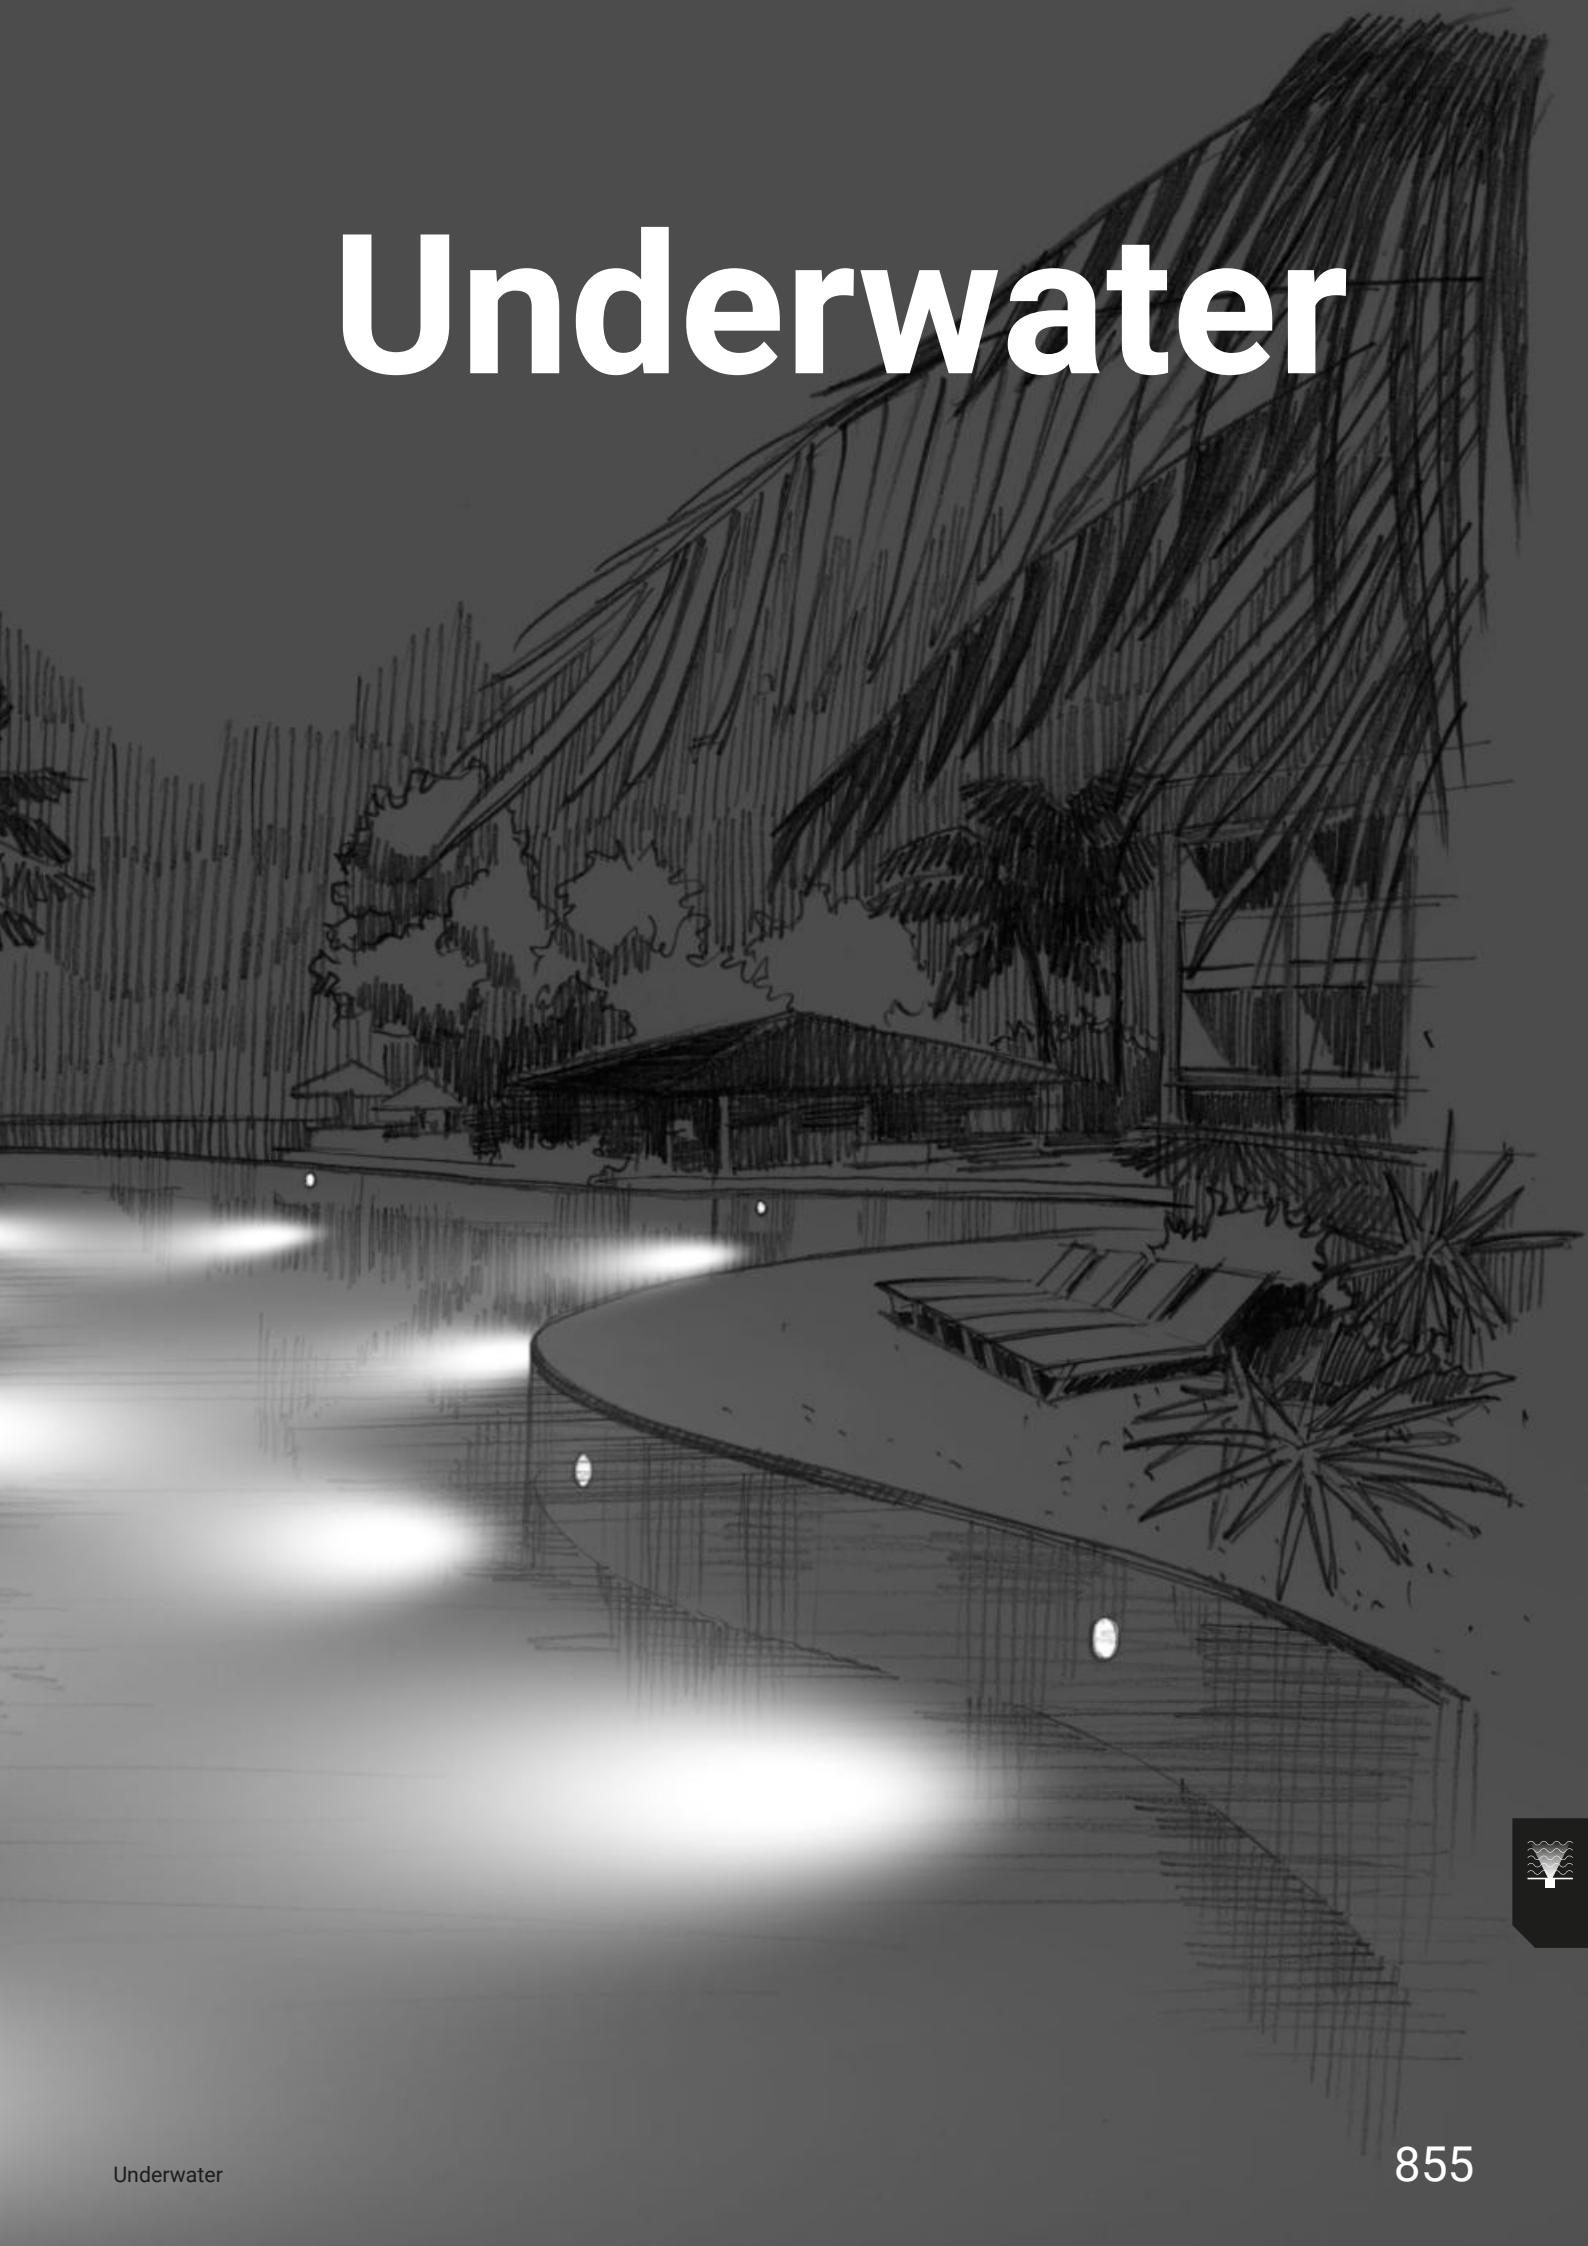

underwater range index

Nautilus

Nautilus_RF




864

Nautilus_R



866

Nautilus_RP



868

Suelo

Suelo_R



871

Suelo_R Pro



871

MK68

MK68_R



873

MK68_Q



873

Sub

Sub_R



875

Sub_Q



875

Rodix

Rodix



877

Rubber

Rubber 3D
PROtection



880









nautilus

Materials

AISI 316L stainless steel body




nautilus range



| | Nautilus_RF | Nautilus_R | Nautilus_RP |
|------------------|---|---|--------------------------------------|
| 4W | - | - | Ø 55 mm |
| 4,5W | Ø 108 mm | - | - |
| 6W | - | - | Ø 134 mm |
| 14W | Ø 148 mm | Ø 145 mm | Ø 134 mm |
| 26W | Ø 230 mm | Ø 226 mm | Ø 214 mm |
| 38W | Ø 230 mm | Ø 226 mm | Ø 214 mm |
| Finish | Steel | Steel | Steel |
| CCT | 3000K 4000K RGBW | 3000K 4000K RGBW | 3000K 4000K RGBW |
| Optics | Spot - Flood - Elliptic - Asymm. - Mix Flux | Spot - Flood - Elliptic - Asymm. - Mix Flux | Spot - Flood - Wide Flood - Elliptic |
| Electronics ⊗ | On/Off - DALI - RF - DMX | On/Off - DALI - RF - DMX | On/Off - DALI - RF - DMX |


Nautilus

Nautilus has an essential design defined by a stark steel frame flat or convex. The extra clear tempered glass diffuser with white silk-screened edge, to make it almost invisible once submerged. The advantages include the "Anti-Suction" system that protects against infiltrations, asymmetrical downward emissions for outstanding light distribution and the possibility of combining and independently checking different optics. All the models have white sources in 3000K or 4000K white or RGBW to create astonishing scenes.

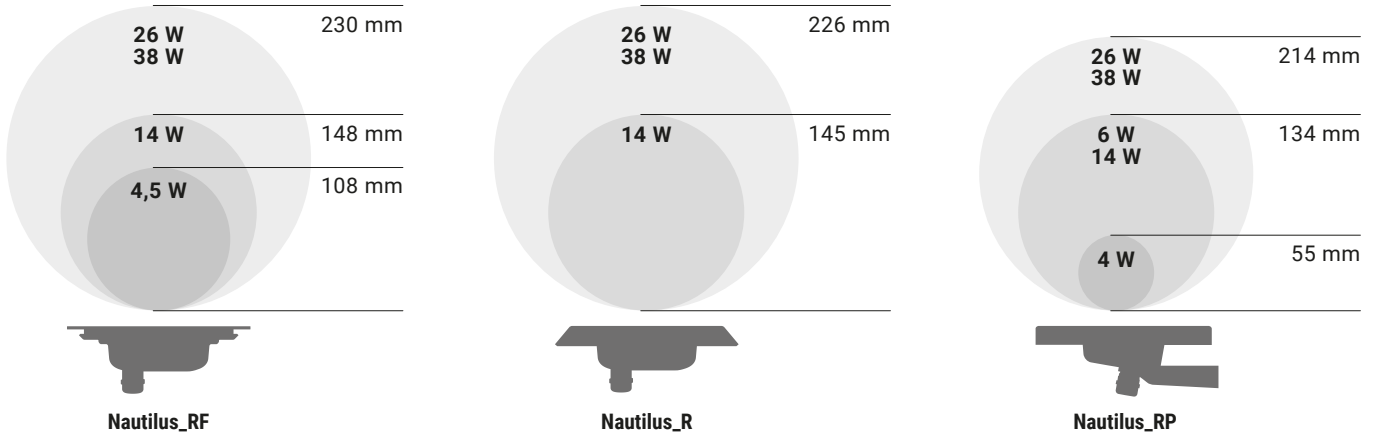


Nautilus goes down as far as 25 metres

Nautilus is the innovative, IP68 submersible recess-mount, ideal for creating underwater scenes. Thanks to the AISI 316L stainless steel flange, the waterproof recessed casing allows wall or floor positioning. The special structure gives the projector capacity to withstand a depth up to 25 metres.

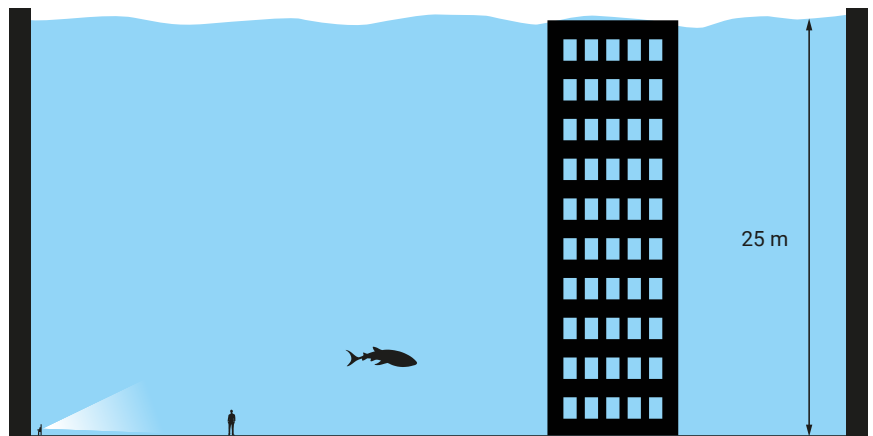


New optics


The new optics significantly increase the versatility and functionality of Nautilus. In addition to the fixed, Spot, Flood, Elliptic, Asymmetric + wall-washer, for the 6 and 9 LED versions, two new types of optics are available called Mixflux: Asymmetric + wall-washer e Asymmetric + Spot which, thanks to the DALI and DMX protocols, can be independently controlled, multiplying the designer's creative possibilities.

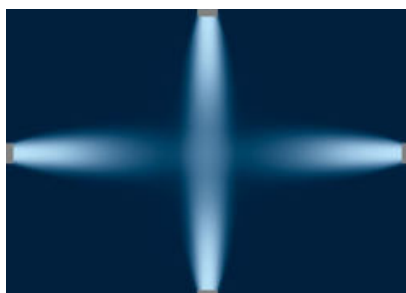

Example: Spot beam on

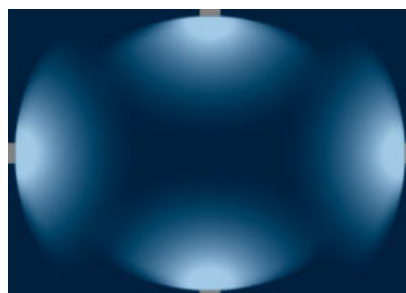


Example: Asymmetric beam on

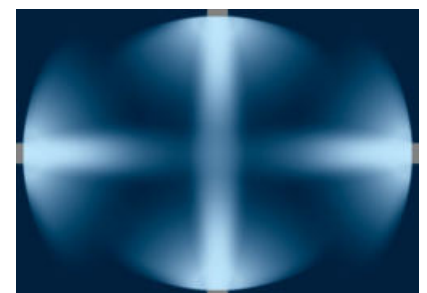

Example: Mix Fluxed double beam on

Nautilus_RF | Underwater luminaires | powerLED



| C.V. 4,5W DC 12V DC | | Cct | lm S - D | Optic |
|---------------------|--------------|---------------|-----------|-----------------------|
| Steel | 84031 | W 3000 | 575 - 473 | 20 Spot (21°) |
| | | N 4000 | 620 - 510 | 40 Flood (40°) |
| | | | | 07 Asymm. - |
| | | | | 25 Elliptic - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|--|--|--|
| ON/OFF 1 - 12 art. p 162 x l 42 x h 32 | ON/OFF 1 - 32 art. p 191 x l 63 x h 37 | DALI 1 - 12 art. p 191 x l 63 x h 38 | DALI 1 - 25 art. p 220 x l 71 x h 38 |

| RGBW - C.C. 4W DC - 350 mA | | | Optic |
|----------------------------|--------------|-----------------------------|-----------------------|
| Steel | 84032 | Q RGBW natural white | 20 Spot (21°) |
| | | V RGBW warm white | 40 Flood (40°) |
| | | | 07 Asymm. - |
| | | | 25 Elliptic - |

Electronics 12V DC

| 99741+99702 | 83187 | DMX | 83010 |
|-------------------------|--------------------------|------------------------------|----------------------|
| Dimmer RF 1 - 4 art. | Dimmer DMX 1 - 4 art. | Controllers Pag 952 - 953 | Driver CV 12V 60W |

Electronics 24V DC


| 99741+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|------------------------------|--------------------------|
| Dimmer RF 1 - 8 art. | Dimmer DMX 1 - 8 art. | Controllers Pag 952 - 953 | Driver CV 24V 150W DC |

Recessed casing Pag. 865

Note: the product can't be installed out of the water

RTG 84031W20 / 84032V40

Nautilus_RF | Underwater luminaires | powerLEDs



| C.V. 14W DC 12V DC | | Cct | lm S - D | Optic |
|--------------------|--------------|---------------|-------------|-----------------------|
| Steel | 84033 | W 3000 | 1521 - 1199 | 20 Spot (24°) |
| | | N 4000 | 1640 - 1296 | 40 Flood (44°) |
| | | | | 07 Asymm. - |
| | | | | 25 Elliptic - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|--|---|---|
| ON/OFF 1 - 4 art. p 162 x l 42 x h 32 | ON/OFF 1 - 10 art. p 191 x l 63 x h 37 | DALI 1 - 4 art. p 191 x l 63 x h 38 | DALI 1 - 8 art. p 220 x l 71 x h 38 |

| RGBW - C.C. 13W DC - 350 mA | | | Optic |
|-----------------------------|--------------|-----------------------------|-----------------------|
| Steel | 84034 | Q RGBW natural white | 20 Spot (24°) |
| | | V RGBW warm white | 40 Flood (44°) |
| | | | 07 Asymm. - |
| | | | 25 Elliptic - |

Electronics 12V DC


| 99741+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 99741+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | Driver CV 24V 150W DC |


Recessed casing Pag. 865

Note: the product can't be installed out of the water

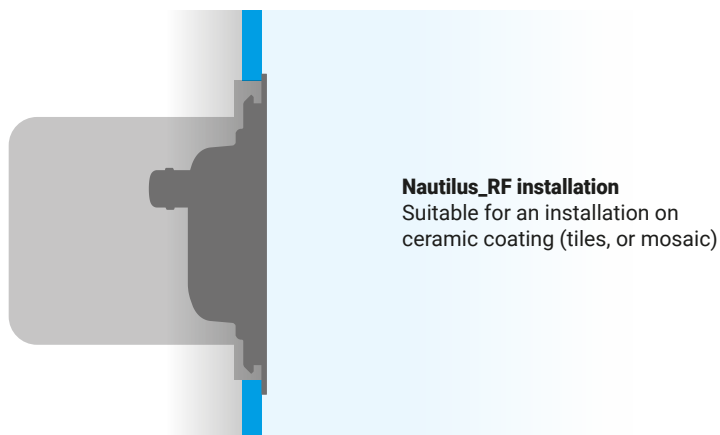

Nautilus_RF installation
Suitable for an installation on ceramic coating (tiles, or mosaics)

Nautilus_RF | Underwater luminaires | powerLEDs



| C.V. 26W DC 12V DC | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|----------------------------|
| Steel 84037 | W 3000 | 3042 - 2353 | 20 Spot (25°) |
| | N 4000 | 3281 - 2754 | 40 Flood (43°) |
| | | | 07 Asymm. - |
| | | | 25 Elliptic - |
| | | | 31 Mix Flux (07+25) |
| | | | 32 Mix Flux (07+20) |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 162 x 142 x h 32 | ON/OFF 1 - 5 art. p 191 x 163 x h 37 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI 1 - 4 art. p 220 x 171 x h 38 |

| RGBW - C.C. 18W DC - 500 mA | Optic |
|-----------------------------|----------------------------|
| Steel 84039 | 20 Spot (25°) |
| Q RGBW natural white | 40 Flood (43°) |
| V RGBW warm white | 07 Asymm. - |
| | 25 Elliptic - |
| | 31 Mix Flux (07+25) |
| | 32 Mix Flux (07+20) |

Electronics 12V DC

| 99742+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|-------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag. 952 - 953 | Driver CV 12V 60W DC |



Electronics 24V DC

| 99742+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|-------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | Driver CV 24V 150W DC |

Recessed casing Pag. 865

Note: the product can't be installed out of the water

Nautilus_RF | Underwater luminaires | powerLEDs



| C.V. 38W DC 12V DC | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|----------------------------|
| Steel 84038 | W 3000 | 4563 - 3341 | 20 Spot (23°) |
| | N 4000 | 4921 - 3604 | 40 Flood (43°) |
| | | | 07 Asymm. - |
| | | | 25 Elliptic - |
| | | | 31 Mix Flux (07+25) |
| | | | 32 Mix Flux (07+20) |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|--|--------------------------------------|--|
| ON/OFF 1 art. p 150 x 160 x h 35 | ON/OFF 1 - 3 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI 1 - 3 art. p 220 x 171 x h 38 |

| RGBW - C.C. 25W DC - 700 mA | Optic |
|-----------------------------|----------------------------|
| Steel 84040 | 20 Spot (23°) |
| Q RGBW natural white | 40 Flood (43°) |
| V RGBW warm white | 07 Asymm. - |
| | 25 Elliptic - |
| | 31 Mix Flux (07+25) |
| | 32 Mix Flux (07+20) |

Electronics 12V DC

| 83187 | DMX | 83010 |
|----------------------|-------------------------------|-------------------------|
| Dimmer DMX 1 art. | Controllers Pag. 952 - 953 | Driver CV 12V 60W DC |


Electronics 24V DC

| 83187 | DMX | 99331 |
|--------------------------|-------------------------------|--------------------------|
| Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | Driver CV 24V 150W DC |

Recessed casing Pag. 865

Note: the product can't be installed out of the water

Recessed casing



| description | PVC |
|---|-----|
| 83140 Outer casing IP68 for tiles or mosaics | |
| suitable for: Nautilus_RF 4,5W | |
| RTG 83140 | |




| description | PVC |
|--|-----|
| 83142 Outer casing IP68 for tiles or mosaics | |
| suitable for: Nautilus_RF 26W / Nautilus_RF 38W | |



| description | PVC |
|---|-----|
| 83141 Outer casing IP68 for tiles or mosaics | |
| suitable for: Nautilus_RF 14W | |

Nautilus_R | Underwater luminaires | powerLEDs



| C.V. 14W DC 12V DC | | Cct | lm S - D | Optic | |
|--------------------|--------------|---------------|-------------|--------------------|-------|
| Steel | 84035 | W 3000 | 1521 - 1199 | 20 Spot | (24°) |
| | | N 4000 | 1640 - 1296 | 40 Flood | (44°) |
| | | | | 07 Asymm. | - |
| | | | | 25 Elliptic | - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|---|--|--|
| ON/OFF 1 - 4 art. p 162 x 142 x h 32 | ON/OFF 1 - 10 art. p 191 x 163 x h 37 | DALI 1 - 4 art. p 191 x 163 x h 38 | DALI 1 - 8 art. p 220 x 171 x h 38 |

| RGBW - C.C. 13W DC - 350 mA | | | Optic | |
|-----------------------------|--------------|-----------------------------|--------------------|-------|
| Steel | 84036 | Q RGBW natural white | 20 Spot | (24°) |
| | | V RGBW warm white | 40 Flood | (44°) |
| | | | 07 Asymm. | - |
| | | | 25 Elliptic | - |

Electronics 12V DC

| 99741+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag 952 - 953 | Driver CV 12V 60W DC |


Electronics 24V DC

| 99741+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | Driver CV 24V 150W DC |

Recessed casing Pag. 867

Note: the product can't be installed out of the water

Nautilus_R | Underwater luminaires | powerLEDs



| C.V. 26W DC 12V DC | | Cct | lm S - D | Optic | |
|--------------------|--------------|---------------|-------------|--------------------|---------|
| Steel | 84041 | W 3000 | 3042 - 2353 | 20 Spot | (25°) |
| | | N 4000 | 3281 - 2754 | 40 Flood | (43°) |
| | | | | 07 Asymm. | - |
| | | | | 25 Elliptic | - |
| | | | | 31 Mix Flux | (07+25) |
| | | | | 32 Mix Flux | (07+20) |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 162 x 142 x h 32 | ON/OFF 1 - 5 art. p 191 x 163 x h 37 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI 1 - 4 art. p 220 x 171 x h 38 |

| RGBW - C.C. 18W DC - 500 mA | | | Optic | |
|-----------------------------|--------------|-----------------------------|--------------------|---------|
| Steel | 84043 | Q RGBW natural white | 20 Spot | (25°) |
| | | V RGBW warm white | 40 Flood | (43°) |
| | | | 07 Asymm. | - |
| | | | 25 Elliptic | - |
| | | | 31 Mix Flux | (07+25) |
| | | | 32 Mix Flux | (07+20) |

Electronics 12V DC


| 99742+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|-------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag. 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 99742+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|-------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | Driver CV 24V 150W DC |



Recessed casing Pag. 867

Note: the product can't be installed out of the water

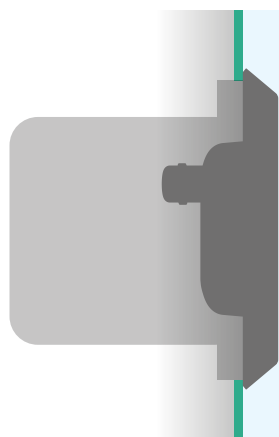

Nautilus_R installation
Suitable for an installation
on waterproofing coating,
or sheet coating

Nautilus_R | Underwater luminaires | powerLEDs



| C.V. 38W DC 12V DC | Cct | lm S - D | Optic |
|--------------------|---------------|-------------|----------------------------|
| Steel 84042 | W 3000 | 4563 - 3341 | 20 Spot (23°) |
| | N 4000 | 4921 - 3604 | 40 Flood (43°) |
| | | | 07 Asymm. - |
| | | | 25 Elliptic - |
| | | | 31 Mix Flux (07+25) |
| | | | 32 Mix Flux (07+20) |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|---|---------------------------------------|---|
| ON/OFF 1 art. p 150 x l 60 x h 35 | ON/OFF 1 - 3 art. p 150 x l 60 x h 35 | DALI 1 art. p 191 x l 63 x h 38 | DALI 1 - 3 art. p 220 x l 71 x h 38 |

| RGBW - C.C. 25W DC - 700 mA | Optic |
|-----------------------------|-----------------------------|
| Steel 84044 | Q RGBW natural white |
| | V RGBW warm white |
| | 20 Spot (23°) |
| | 40 Flood (43°) |
| | 07 Asymm. - |
| | 25 Elliptic - |
| | 31 Mix Flux (07+25) |
| | 32 Mix Flux (07+20) |

Electronics 12V DC

| 83187 | DMX | 83010 |
|----------------------|------------------------------|-------------------------|
| Dimmer DMX 1 art. | Controllers Pag 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 83187 | DMX | 99331 |
|--------------------------|------------------------------|--------------------------|
| Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | Driver CV 24V 150W DC |

Recessed casing Pag. 867

Note: the product can't be installed out of the water

Recessed casing



| | description | PVC |
|--------------|-----------------------------------|-----|
| 83197 | Outer casing IP68 (sheet) | |
| 83141 | Outer casing IP68 (waterproofing) | |


suitable for: Nautilus_R 14W



| | description | PVC |
|--------------|-----------------------------------|-----|
| 83198 | Outer casing IP68 (sheet) | |
| 83142 | Outer casing IP68 (waterproofing) | |

suitable for: Nautilus_R 26W / Nautilus_R 38W

Nautilus_RP | Underwater luminaires | powerLED 4W DC 350 mA




| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-----------|-------------------------|
| Steel | 80314 | W 3000 | 490 - 360 | 15 Spot (15°) |
| | | N 4000 | 529 - 389 | 30 Flood (28°) |
| | | | | 60 W.Flood (59°) |

Electronics

| 89421 | 99183 | 83100 |
|--|---|---|
| ON/OFF 1 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 80 x l 100 x h 31 | DALI 1 - 4 art. p 54 x l 121 x h 26 |

Nautilus_RP | Underwater luminaires | powerLEDs



| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|------------|-----------------------|
| Steel | 84193 | W 3000 | 945 - 745 | 20 Spot (24°) |
| | | N 4000 | 1019 - 805 | 40 Flood (44°) |
| | | | | 25 Elliptic - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|--|---|--|
| ON/OFF 1 - 9 art. p 162 x l 42 x h 32 | ON/OFF 1 - 24 art. p 191 x l 63 x h 37 | DALI 1 - 9 art. p 191 x l 63 x h 38 | DALI 1 - 19 art. p 220 x l 71 x h 38 |

| | | | Optic |
|-------|--------------|-----------------------------|-----------------------|
| Steel | 84194 | Q RGBW natural white | 20 Spot (24°) |
| | | V RGBW warm white | 40 Flood (44°) |
| | | | 25 Elliptic - |

Electronics 12V DC

| 99703+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 99703+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | Driver CV 24V 150W DC |

| | | Cct | lm S - D | Optic |
|-------|--------------|---------------|-------------|-----------------------|
| Steel | 84025 | W 3000 | 1521 - 1199 | 20 Spot (24°) |
| | | N 4000 | 1640 - 1296 | 40 Flood (44°) |
| | | | | 25 Elliptic - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|--|---|---|
| ON/OFF 1 - 4 art. p 162 x l 42 x h 32 | ON/OFF 1 - 10 art. p 191 x l 63 x h 37 | DALI 1 - 4 art. p 191 x l 63 x h 38 | DALI 1 - 8 art. p 220 x l 71 x h 38 |

| | | | Optic |
|-------|--------------|-----------------------------|-----------------------|
| Steel | 84026 | Q RGBW natural white | 20 Spot (24°) |
| | | V RGBW warm white | 40 Flood (44°) |
| | | | 25 Elliptic - |

Electronics 12V DC



| 99741+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 99741+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag 952 - 953 | Driver CV 24V 150W DC |

Note: the product can't be installed out of the water

Nautilus_RP | Underwater luminaires | powerLEDs



| C.V. 26W 12V DC | | Cct | lm S - D | Optic |
|-----------------|--------------|---------------|-------------|-----------------------|
| Steel | 84027 | W 3000 | 3042 - 2553 | 20 Spot (25°) |
| | | N 4000 | 3281 - 2754 | 40 Flood (43°) |
| | | | | 25 Elliptic - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 162 x 142 x h 32 | ON/OFF 1 - 5 art. p 191 x 163 x h 37 | DALI 1 - 2 art. p 191 x 163 x h 38 | DALI 1 - 4 art. p 220 x 171 x h 38 |

| RGBW - C.C. 18W DC - 500 mA | | Optic |
|-----------------------------|--------------|-----------------------------|
| Steel | 84029 | Q RGBW natural white |
| | | 20 Spot (25°) |
| | | V RGBW warm white |
| | | 40 Flood (43°) |
| | | 25 Elliptic - |

Electronics 12V DC


| 99742+99702 | 83187 | DMX | 83010 |
|---------------------|----------------------|-------------------------------|-------------------------|
| Dimmer RF 1 art. | Dimmer DMX 1 art. | Controllers Pag. 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 99742+99702 | 83187 | DMX | 99331 |
|-------------------------|--------------------------|-------------------------------|--------------------------|
| Dimmer RF 1 - 2 art. | Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | Driver CV 24V 150W DC |

Note: the product can't be installed out of the water

Nautilus_RP | Underwater luminaires | powerLEDs



| C.V. 38W 12V DC | | Cct | lm S - D | Optic |
|-----------------|--------------|---------------|-------------|-----------------------|
| Steel | 84028 | W 3000 | 4563 - 3420 | 20 Spot (23°) |
| | | N 4000 | 4921 - 3604 | 40 Flood (43°) |
| | | | | 25 Elliptic - |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|--|--|--------------------------------------|--|
| ON/OFF 1 art. p 150 x 160 x h 35 | ON/OFF 1 - 3 art. p 150 x 160 x h 35 | DALI 1 art. p 191 x 163 x h 38 | DALI 1 - 3 art. p 220 x 171 x h 38 |

| RGBW - C.C. 25W DC - 700 mA | | Optic |
|-----------------------------|--------------|-----------------------------|
| Steel | 84030 | Q RGBW natural white |
| | | 20 Spot (23°) |
| | | V RGBW warm white |
| | | 40 Flood (43°) |
| | | 25 Elliptic - |

Electronics 12V DC

| 83187 | DMX | 83010 |
|----------------------|-------------------------------|-------------------------|
| Dimmer DMX 1 art. | Controllers Pag. 952 - 953 | Driver CV 12V 60W DC |

Electronics 24V DC

| 83187 | DMX | 99331 |
|--------------------------|-------------------------------|--------------------------|
| Dimmer DMX 1 - 2 art. | Controllers Pag. 952 - 953 | Driver CV 24V 150W DC |


Note: the product can't be installed out of the water

suelo

Materials

AISI 316L stainless steel body

Suelo_R | Up-Light | 1 W powerLED 350mA




| C.C. | Cct | lm S - D | Optic |
|--------------------|---------------|-----------|-----------------------|
| Steel 80432 | M 2700 | 136 - 104 | 20 Spot (26°) |
| | W 3000 | 145 - 111 | 35 Flood (36°) |
| | N 4000 | 155 - 119 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 871

Suelo_R Pro | Up-Light | powerLED



| C.C. - 350 mA - 1W DC | Cct | lm S - D | Optic |
|-----------------------|---------------|-----------|-----------------------|
| Steel 80433 | M 2700 | 136 - 96 | 20 Spot (23°) |
| | W 3000 | 145 - 102 | 35 Flood (34°) |
| | N 4000 | 155 - 110 | |

Electronics

| 89419 | 89421 | 99183 | 83100 |
|--|--|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 65 x l 74 x h 27 | ON/OFF 6 - 12 art. p 80 x l 100 x h 31 | DALI 1 - 14 art. p 54 x l 121 x h 26 |

| C.V. - 24V DC - 1,5W DC | Cct | lm S - D | Optic |
|-------------------------|---------------|-----------|-----------------------|
| Steel 80434 | M 2700 | 136 - 96 | 20 Spot (23°) |
| | W 3000 | 145 - 102 | 35 Flood (34°) |
| | N 4000 | 155 - 110 | |

Electronics

| 89488 | 89179 | 89359 | 99332 | 99722 |
|---|--|---|--|---|
| ON/OFF 1 - 9 art. p 80 x l 100 x h 31 | ON/OFF 1 - 15 art. p 92 x l 117 x h 38 | ON/OFF 1 - 30 art. p 115 x l 140 x h 50 | 0/1-10V 1 - 98 art. p 150 x l 160 x h 35 | DALI 1 - 78 art. p 191 x l 163 x h 38 |

Recessed casing Pag. 871

Recessed casing



| description | PVC |
|-----------------------------------|------|
| 99678 Recessed casing IP68 | IP68 |
| suitable for: Suelo_R | |



| description | PVC |
|-----------------------------------|------|
| 99679 Recessed casing IP68 | IP68 |
| suitable for: Suelo_R Pro | |

Underwater

MK68

Materials

Polycarbonate body

AISI 316L stainless steel/polycarbonate closures



MK68_R | Underwater luminaires | 12 V DC | topLED



| 694 mm - 11W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------------|
| Transp. 82642 | W 3000 | 1470 - 1227 | 36 Diffused (111°) |
| | N 4000 | 1538 - 1284 | |
| | C 6000 | 1538 - 1284 | |

| 694 mm - 11W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------|
| Opaline 82646 | W 3000 | 1470 - 1161 | 00 General - |
| | N 4000 | 1538 - 1215 | |
| | C 6000 | 1538 - 1215 | |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|--|---|--|
| ON/OFF 1 - 5 art. p 150 x l 60 x h 35 | ON/OFF 1 - 13 art. p 150 x l 60 x h 35 | DALI 1 - 5 art. p 191 x l 63 x h 38 | DALI 1 - 10 art. p 220 x l 71 x h 38 |


| 1290 mm - 20W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------------|
| Transp. 82644 | W 3000 | 2940 - 2455 | 36 Diffused (111°) |
| | N 4000 | 3078 - 2568 | |
| | C 6000 | 3078 - 2568 | |

| 1290 mm - 20W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------|
| Opaline 82648 | W 3000 | 2940 - 2323 | 00 General - |
| | N 4000 | 3076 - 2430 | |
| | C 6000 | 3076 - 2430 | |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|---|---|---|
| ON/OFF 1 - 3 art. p 150 x l 60 x h 35 | ON/OFF 1 - 7 art. p 150 x l 60 x h 35 | DALI 1 - 3 art. p 191 x l 63 x h 38 | DALI 1 - 6 art. p 220 x l 71 x h 38 |

Accessories



| 2 x | description |
|--------------------------------------|-------------|
| 83020 | Brackets |
| suitable for: MK68_R / MK68_Q | |



ZeroAir system

Thanks to the experience gained in the design of immersion fixtures, Linea Light Group has realized a special system called ZeroAir, which definitively solves the formation of moisture inside the product, so as to preserve the LED circuit from the generation of condensation.



Underwater

MK68_Q | Underwater luminaires | 12 V DC | topLED



| 694 mm - 11W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------------|
| Transp. 82650 | W 3000 | 1470 - 1259 | 36 Diffused (102°) |
| | N 4000 | 1538 - 1317 | |
| | C 6000 | 1538 - 1317 | |

| 694 mm - 11W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------|
| Opaline 82654 | W 3000 | 1470 - 1009 | 00 General - |
| | N 4000 | 1538 - 1055 | |
| | C 6000 | 1538 - 1055 | |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|--|---|--|
| ON/OFF 1 - 5 art. p 150 x l 60 x h 35 | ON/OFF 1 - 13 art. p 150 x l 60 x h 35 | DALI 1 - 5 art. p 191 x l 63 x h 38 | DALI 1 - 10 art. p 220 x l 71 x h 38 |

| 1290 mm - 20W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------------|
| Transp. 82652 | W 3000 | 2940 - 2519 | 36 Diffused (102°) |
| | N 4000 | 3078 - 2635 | |
| | C 6000 | 3078 - 2635 | |


| 1290 mm - 20W DC | Cct | lm S - D | Optic |
|----------------------|---------------|-------------|---------------------|
| Opaline 82656 | W 3000 | 2940 - 2518 | 00 General - |
| | N 4000 | 3076 - 2111 | |
| | C 6000 | 3076 - 2111 | |

Electronics

| 83010 | 83013 | 83012 | 83015 |
|---|---|---|---|
| ON/OFF 1 - 3 art. p 150 x l 60 x h 35 | ON/OFF 1 - 7 art. p 150 x l 60 x h 35 | DALI 1 - 3 art. p 191 x l 63 x h 38 | DALI 1 - 6 art. p 220 x l 71 x h 38 |

MK68 goes down as far as 25 metres

The special structure gives the MK68 capacity to withstand a depth up to 25 metres.


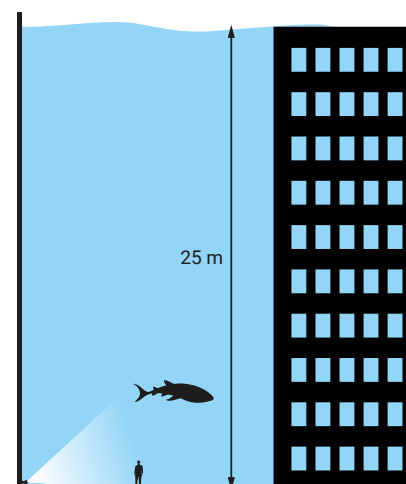


sub

Materials

AISI 316L stainless steel body

Sub_R | Underwater luminaires | powerLED 1.5W DC 500 mA



| | Cct | lm S - D | Optic |
|--------------------|---------------|--------------|-------------------------|
| Steel 97315 | M 2700 | 187 - On req | 15 Spot (21°) |
| | W 3000 | 199 - 161 | 30 Flood (27°) |
| | N 4000 | 213 - 171 | 60 W.Flood (50°) |
| | | | 00 General - |



Electronics

| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 875

RTG 97315W15 / 97315W30 / 97315W60 / 97315W00 / 97315N30

Sub_Q | Underwater luminaires | powerLED 1.5W DC 500 mA



| | Cct | lm S - D | Optic |
|--------------------|---------------|--------------|-------------------------|
| Steel 97317 | M 2700 | 187 - On req | 15 Spot (21°) |
| | W 3000 | 199 - 161 | 30 Flood (27°) |
| | N 4000 | 213 - 171 | 60 W.Flood (50°) |
| | | | 00 General - |

Electronics


| 89422 | 89423 | 99181 | 99185 | 83101 |
|--|--|---|--|--|
| ON/OFF 1 - 2 art. p 65 x l 74 x h 27 | ON/OFF 2 - 3 art. p 65 x l 74 x h 27 | ON/OFF 3 - 6 art. p 80 x l 100 x h 31 | ON/OFF 6 - 12 art. p 92 x l 117 x h 38 | DALI 1 - 12 art. p 54 x l 121 x h 26 |

Recessed casing Pag. 875

Recessed casing



| description | PVC |
|-----------------------------------|-------------|
| 98148 Recessed casing IP68 | IP68 |
| suitable for: Sub_R / Sub_Q | |
| RTG 98148 | |



| description | PVC |
|------------------------------|-----|
| 98060 Recessed casing | |
| suitable for: Sub_R / Sub_Q | |
| RTG 98060 | |

rodix

Materials

AISI 316L stainless steel body




Rodix | Underwater luminaires | 12 V DC | powerLEDs



| 14W DC | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-------------|-----------------------|
| Steel | 84212 | M 2700 | 1596 - 905 | 15 Flood (26°) |
| | | W 3000 | 1704 - 967 | 30 Flood (30°) |
| | | N 4000 | 1818 - 1036 | 60 Flood (42°) |
| | | | | 25 Elliptic - |


6 LEDs



| 83010 | 83013 | 83012 | 83015 |
|---|---|---|---|
| ON/OFF 1 - 3 art. p 162 x l 42 x h 32 | ON/OFF 1 - 9 art. p 191 x l 63 x h 37 | DALI 1 - 4 art. p 150 x l 53 x h 35 | DALI 1 - 7 art. p 191 x l 63 x h 37 |

| 28W DC | | Cct | lm S - D | Optic |
|--------|--------------|---------------|-------------|-----------------------|
| Steel | 84213 | M 2700 | 3192 - 1813 | 15 Flood (26°) |
| | | W 3000 | 3408 - 1937 | 30 Flood (30°) |
| | | N 4000 | 3636 - 2075 | 60 Flood (42°) |
| | | | | 25 Elliptic - |


12 LEDs




| 83010 | 83013 | 83012 | 83015 |
|---|---|---------------------------------------|---|
| ON/OFF 1 art. p 162 x l 42 x h 32 | ON/OFF 1 - 4 art. p 191 x l 63 x h 37 | DALI 1 art. p 150 x l 53 x h 35 | DALI 1 - 3 art. p 191 x l 63 x h 37 |

Recessed casing Pag. 877

Recessed casing



| description | Steel |
|-------------------------|-------|
| 83160 336 mm | |
| suitable for: Rodix 14W | |



| description | Steel |
|-------------------------|-------|
| 83161 586 mm | |
| suitable for: Rodix 28W | |

Underwater

A white, curved, flexible strip, likely made of rubber or a similar material, is shown floating on a surface of rippling water. The strip is curved in an S-shape, starting from the top left, curving down and then up towards the right. The water is dark blue-green with many small, shimmering ripples. The lighting is soft, highlighting the texture of the water and the smooth surface of the strip.

rubber

Materials

Technopolymer body

Diffuser in polyethylene resin

Rubber 3D PROtection

IP68 and permanent submersion


Rubber 3D PROtection is certified with a grade of IP68, therefore it lends itself well to permanent installations, submerged up to 3 metres, in environments such as pools, fountains, vertical waterfalls, modern showers and similar, at the same time guaranteeing maximum flexibility. In addition, the waterproof power cable allows protection from the water. An amazing 5 metres long, much longer than the average if we consider similar products already available on the market, the cable allows placement of the power supply unit in a separate site, helping the installer and facilitating subsequent maintenance and/or any replacements.



IP69

IP69 is a classification of the German DIN 40050-9 standard that extends the standard IP classification, developed for sectors where supplementary protection against high pressures and high temperatures is needed. Rubber 3D PROtection has passed the IP69 test: once installed in a pool or other environments that require periodic cleaning through the use of a pressure washer, Rubber PROtection withstands jets of high-pressure or hot water aimed directly on the product, without needing to be removed and subsequently repositioned. This is a considerable advantage that lets you avoid maintenance operations which would otherwise be compulsory and need to be repeated over time. IP69 is an additional classification that comes alongside the IP68 standard set forth by the IEC60529 system. Rubber 3D PROtection is certified for both grades of protection.


 **High Temperature 80°C**
High Pressure 80/100 bar

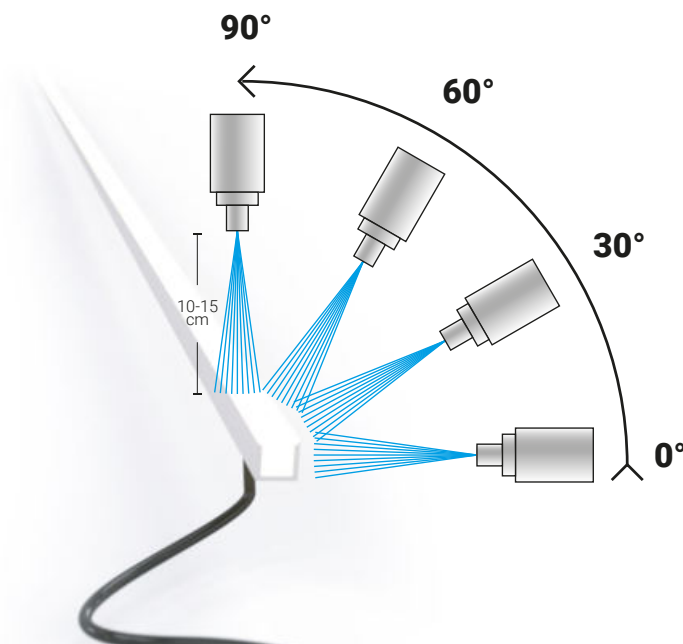

Rubber 3D PROtection | LED strip | 10W/m 24V DC




| CRI 85 - 10 W - 1 m | Cct | lm S - D | |
|---------------------|------|------------|-----|
| White 80415 | 2700 | 1020 - 455 | 1 m |
| White 80416 | 3000 | 1100 - 506 | 1 m |
| White 80417 | 4000 | 1190 - 542 | 1 m |



Electronics

| 89179 | 89359 | 99331 | 83019 | 99332 | 99722 |
|---|--|--|--|---|--|
| ON/OFF 1 - 2 art. p 92 x l 117 x h 38 | ON/OFF 1 - 4 art. p 115 x l 140 x h 50 | ON/OFF 1 - 15 art. p 150 x l 60 x h 35 | PUSH 1 - 15 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 15 art. p 150 x l 60 x h 35 | DALI 1 - 12 art. p 191 x l 63 x h 38 |

| CRI 85 - 50 W - 5 m | Cct | lm S - D | |
|---------------------|------|-------------|-----|
| White 99543 | 2700 | 5100 - 2275 | 5 m |
| White 99544 | 3000 | 5500 - 2528 | 5 m |
| White 99545 | 4000 | 5950 - 2710 | 5 m |




Electronics

| 99331 | 83019 | 99332 | 99722 | 99787 |
|---|---|--|---|---|
| ON/OFF 1 - 3 art. p 150 x l 60 x h 35 | PUSH 1 - 3 art. p 150 x l 60 x h 35 | 0/1-10V 1 - 3 art. p 150 x l 60 x h 35 | DALI 1 - 2 art. p 191 x l 63 x h 38 | DALI 1 - 4 art. p 191 x l 63 x h 38 |


RTG 80416 / 80417 / 99544 / 99545

Accessories Pag. 881

Rubber 3D PROtection | LED strip | 16,6 W/m 24V DC




| | | |
|--------------------|--------------|-----|
| White 80730 | RGBW (3000K) | 1 m |
|--------------------|--------------|-----|



Electronics

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

| | | |
|--------------------|--------------|-----|
| White 80731 | RGBW (3000K) | 5 m |
|--------------------|--------------|-----|



Electronics


| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

RTG 80730 / 80731

Accessories Pag. 881


Accessories

Rubber | Linear profile




| description | | PVC |
|---|-----------------------|-----|
| 80418 | 1000 mm/ 18 mm/ 19 mm | |
| suitable for: Rubber 3D PROtection | | |

Rubber | Linear profile with cable run




| description | | PVC |
|---|-----------------------|-----|
| 80419 | 1000 mm/ 39 mm/ 19 mm | |
| suitable for: Rubber 3D PROtection | | |

Rubber | Clip



| description | | PVC |
|---|---------------------|-----|
| 80733 | 50 mm/ 18 mm/ 19 mm | |
| suitable for: Rubber 3D PROtection | | |

Rubber | Clip with cable run



| description | | PVC |
|---|---------------------|-----|
| 80734 | 50 mm/ 39 mm/ 19 mm | |
| suitable for: Rubber 3D PROtection | | |

Rubber | Recessed casing




| description | |
|---|--|
| 98148 | |
| suitable for: Rubber 3D PROtection | |

Rubber | Double-sided tape



| description | |
|---|------|
| 99520 | 33 m |
| suitable for: Rubber 3D PROtection | |

Rubber | Connector



| description | |
|---|--|
| 89548 | |
| suitable for: Rubber 3D PROtection | |

Rubber | Connector








| description | |
|---|--|
| 98990 | |
| suitable for: Rubber 3D PROtection | |
| (not suitable RGBW) | |







RTG 98148 / 99520 / 89548

flex light range index






Rubber

| Rubber_2D | Rubber 3D | Rubber 3D Optics | Rubber 3D Protection | Accessories |
|--|--|--|--|---|
| new  Mado in Italy | new  Mado in Italy | new  Mado in Italy | new  Mado in Italy | new  |
| 890 | 892 | 893 | 878 | 894 |






Ribbon Plus


| Ribbon Plus 70 | Ribbon Plus Hi-Flux | Ribbon Plus 140 | Ribbon Plus WT | Ribbon Plus Dynamic | Ribbon Plus RGBW |
|--|--|--|--|--|--|
|  Mado in Italy |  Mado in Italy |  Mado in Italy |  Mado in Italy |  Mado in Italy |  Mado in Italy |
| 900 | 900 | 900 | 901 | 901 | 901 |

PU_C





| PU_C Plus 70 | PU_C Plus Hi-Flux | PU_C Plus 140 | PU_C Plus 140 Hi-Flux | PU_C RGBW 60 |
|--|--|--|--|--|
|  Mado in Italy |  Mado in Italy | new  Mado in Italy | new  Mado in Italy | new  Mado in Italy |
| 902 | 902 | 902 | 902 | 903 |

Ribbon





| Ribbon Basic 60 | Ribbon Hi-Flux | Ribbon 120 | Ribbon 240 | Ribbon Slim | Ribbon Hi-Flux 150 |
|--|--|--|--|--|--|
|  Mado in Italy |  Mado in Italy | new  Mado in Italy |  Mado in Italy | new  Mado in Italy | new  Mado in Italy |
| 906 | 906 | 906 | 906 | 906 | 907 |

| Ribbon Dynamic | Ribbon RGB | Ribbon RGBW |
|--|--|--|
|  Mado in Italy |  Mado in Italy | new  Mado in Italy |
| 907 | 907 | 907 |

Dropper

| Dropper Basic | Dropper Hi-Flux | Dropper 120 | Dropper RGB |
|--|--|--|--|
|  Mado in Italy |  Mado in Italy |  Mado in Italy |  Mado in Italy |
| 908 | 908 | 908 | 908 |

Silicone_C

| Silicone_C Basic | Silicone_C Hi-Flux | Silicone_C 120 | Silicone_C RGB |
|--|--|--|--|
| new  Mado in Italy |  Mado in Italy |  Mado in Italy |  Mado in Italy |
| 909 | 909 | 909 | 909 |

Accessories

Accessories



912






rubber

Materials

Technopolymer body

Diffuser in polyethylene resin



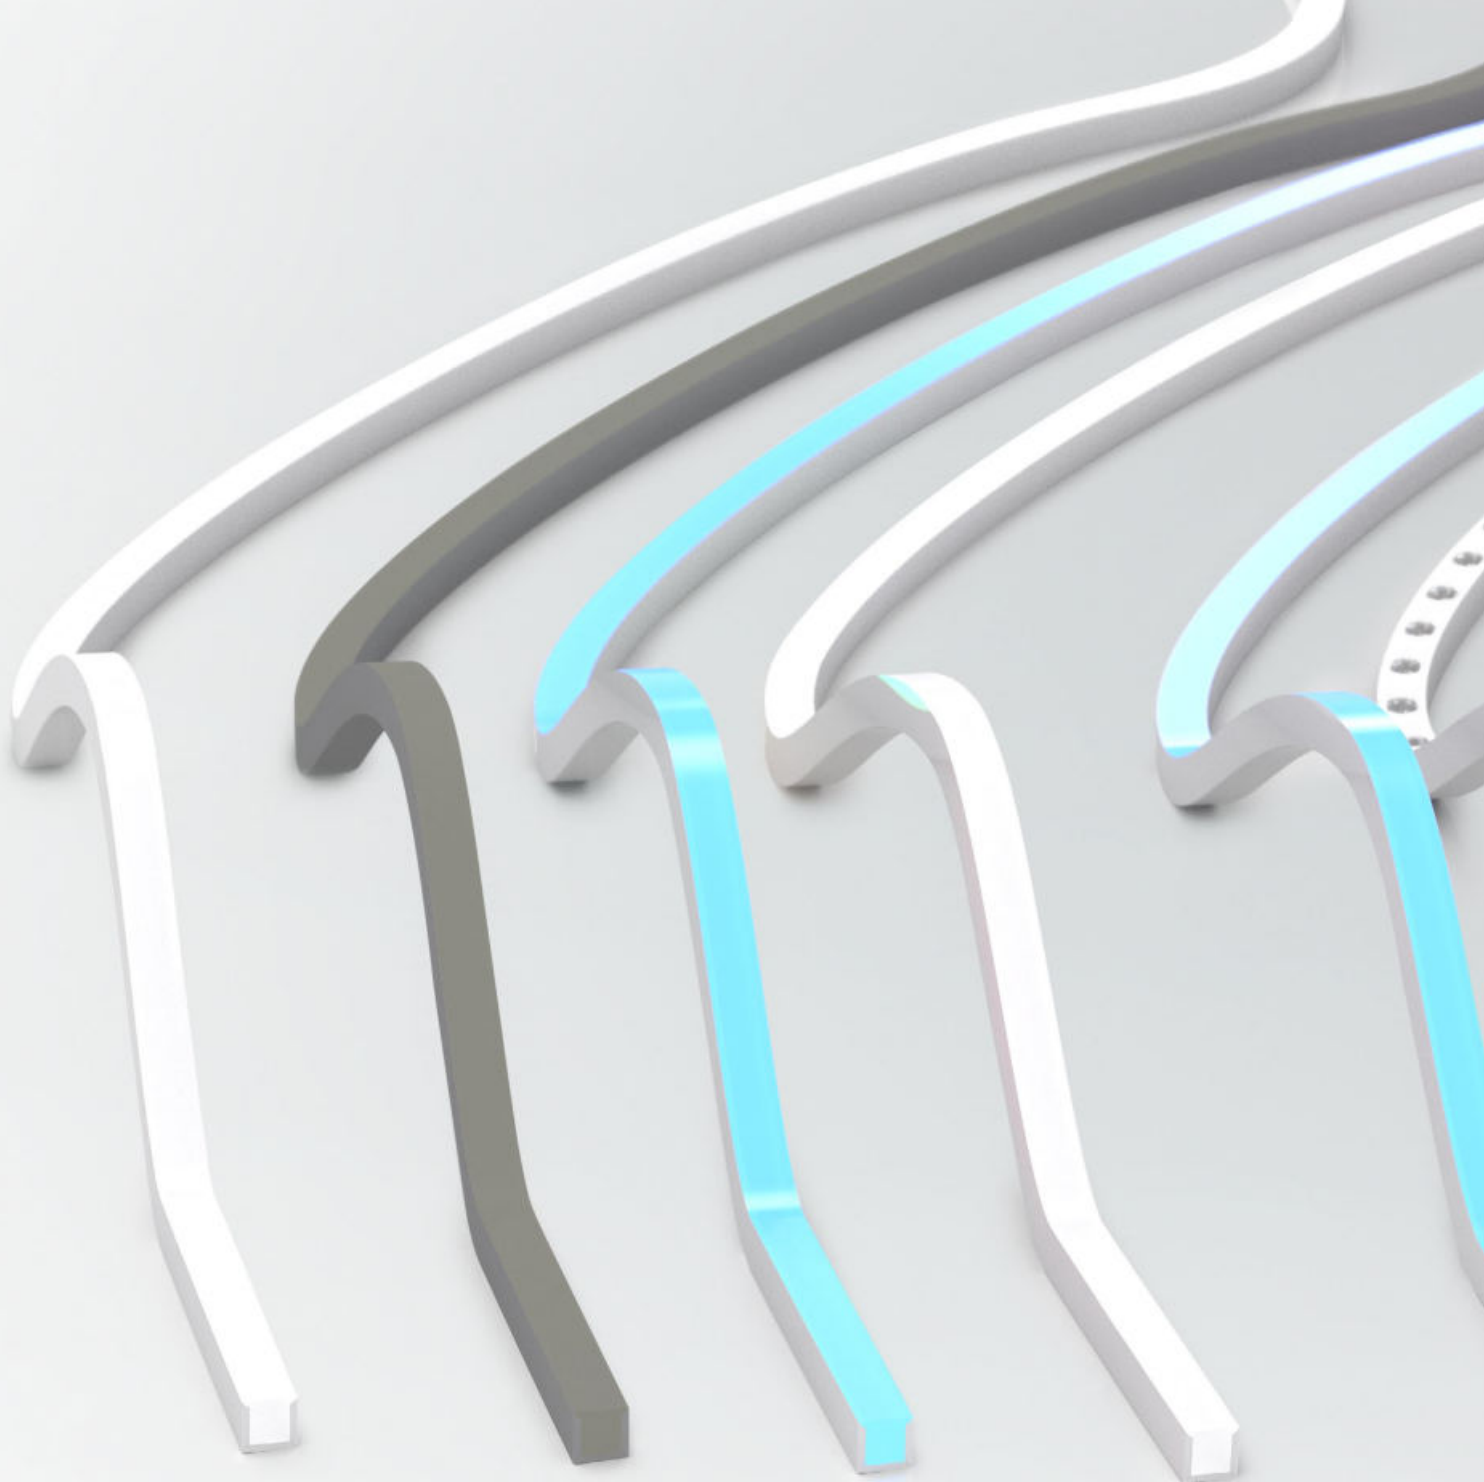

Rubber 3D
White finish

Rubber 3D
Concrete
finish

Rubber 3D
White finish
RGBW

**Rubber 3D
PROtection**
White finish
(pag 878)



**Rubber 3D
PROtection**
White finish
RGBW

**Rubber 3D
Optics**
White finish

**Rubber 3D
Optics**
Black finish

**Rubber 2D
Mini**
White finish

Rubber 2D
White finish

Rubber 2D
White finish
48 V

3D

Rubber 3D is unique in its kind. Thanks to the patented structure of the internal circuit, the product can bend on all axes and make new installation methods and application concepts possible. There is no limit to imagination: organic and fluid curved structures with abrupt direction changes are no longer a problem, thanks to the unrestricted flexibility of Rubber 3D. The rolls can be easily cut every 45 millimetres to guarantee maximum versatility of use. The input/output cables permit the connection of multiple fixtures in series, maintaining uniform and constant light for the entire overall length of the installation, without interruptions in the junction points.

Minimum curvature radius: 250mm



IP68 and permanent submersion

Pag. 878


Rubber 3D PROtection is certified with a grade of IP68, therefore it lends itself well to permanent installations, submerged up to 3 metres, in environments such as pools, fountains, vertical waterfalls, modern showers and similar, at the same time guaranteeing maximum flexibility. In addition, the waterproof power cable allows protection from the water. An amazing 5 metres long, much longer than the average if we consider similar products already available on the market, the cable allows placement of the power supply unit in a separate site, helping the installer and facilitating subsequent maintenance and/or any replacements.



Cove Light

Product installed: Rubber 3D Optic
White Finish | Optic 20°
Installation distance: 10cm
Wall length: 32.5m

Walkway lighting:
250lux medium

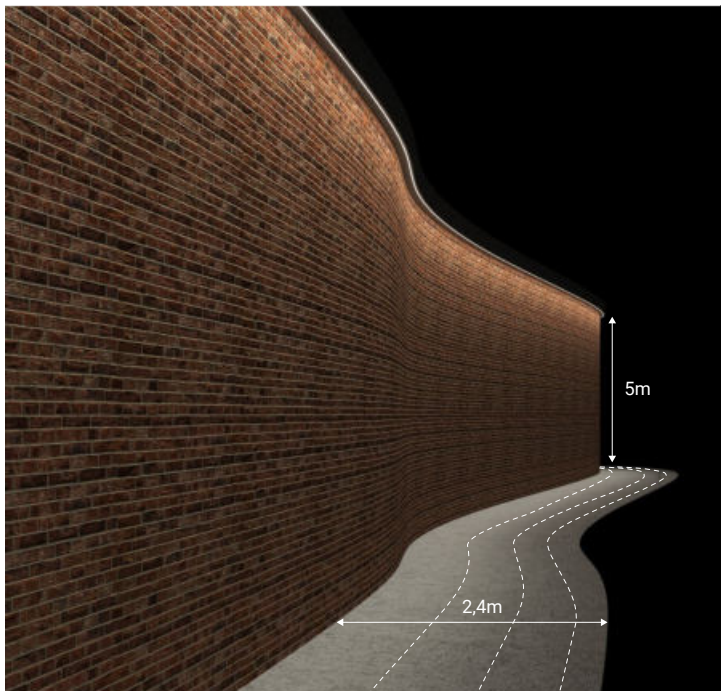

2D

Rubber 2D and the new Rubber 2D Mini complete the Rubber family, expanding the range of choices. Rubber 2D is extremely flexible and can bend all the way to cover a very narrow radius, perfectly adapting to the sinuous profiles and following curves and reverse curves. Rubber 2D is available up to 10 metres in length maximum per single roll and can be cut every 50 mm, allowing great composition adaptability. IP67 guarantees various outdoor installation environments. Thanks to the connection with in/out cables, the light is uniform and constant along its entire length, even at the junction points.

Minimum curvature radius: 250mm



The main characteristic that Linea Light Group introduces through the Rubber 2D 48V units is the ability to increase the usable section even on projects where significant lengths are foreseen. Thereby simplifying planning and installation.




Rubber 2D Mini

Like the standard 14mm model, the Mini version is also an ideal solution for curves and reverse curves that demand bending on a single axis, combining flexible installation with high performance. IP67 certified, it differs from any other Rubber with its extremely reduced dimensions. Rubber 2D Mini packs in just 6mm a custom designed circuit that allows extremely high performance to be achieved with very thin light for discrete and elegant linear effects. Just like the internal electronics, the accessories, clips and profiles are also specifically designed for the minimum bulk of the Rubber 2D Mini.


Minimum curvature radius: 150mm



Rubber 2D_mini | LED strip | 5 W/m 24 V DC




| CRI 85 | Cct | lm S - D |
|--------------------|------|-----------|
| White 82147 | 2700 | 510 - 129 |
| White 82148 | 3000 | 550 - 140 |
| White 82149 | 4000 | 595 - 151 |




| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

| CRI 85 | Cct | lm S - D |
|--------------------|------|------------|
| White 82150 | 2700 | 2550 - 645 |
| White 82151 | 3000 | 2750 - 700 |
| White 82152 | 4000 | 2975 - 755 |



| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |


| CRI 85 | Cct | lm S - D |
|--------------------|------|-------------|
| White 82153 | 2700 | 5100 - 1290 |
| White 82154 | 3000 | 5500 - 1400 |
| White 82155 | 4000 | 5950 - 1510 |



| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

**RTG 82147 / 82148 / 82149 / 82150 / 82151
82152 / 82153 / 82154 / 82155**


Accessories and cables Pag. 894/895

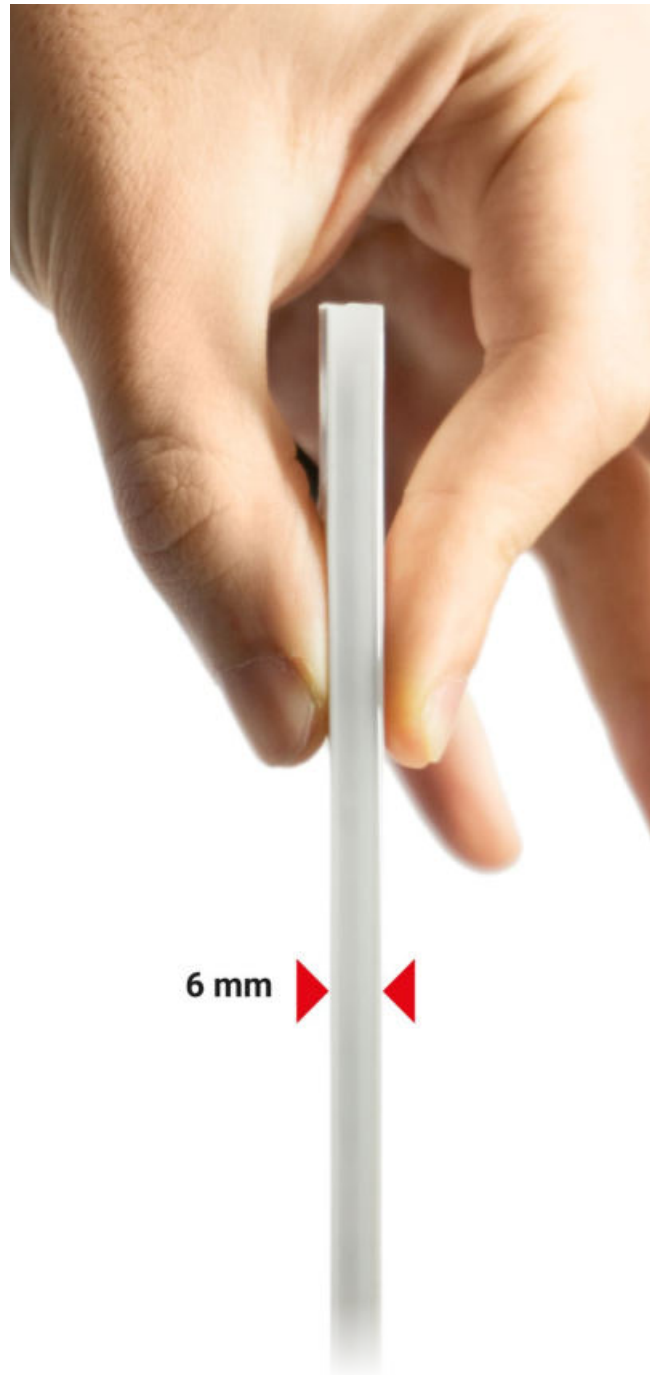

Rubber 2D | LED strip | 10 W/m 24 V DC




| CRI 85 | Cct | lm S - D |
|--------------------|------|------------|
| White 80409 | 2700 | 1060 - 437 |
| White 80410 | 3000 | 1145 - 472 |
| White 80411 | 4000 | 1236 - 509 |




| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

| CRI 85 | Cct | lm S - D |
|--------------------|------|-------------|
| White 80412 | 2700 | 5300 - 2185 |
| White 80413 | 3000 | 5725 - 2360 |
| White 80414 | 4000 | 6180 - 2545 |



| 99374 | 99331 | 99332 | 83062 | 99787 |
|--|--|---|---|--------------------------------------|
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |

| CRI 85 | Cct | lm S - D |
|--------------------|------|--------------|
| White 80391 | 2700 | 10600 - 4370 |
| White 80392 | 3000 | 11450 - 4720 |
| White 80393 | 4000 | 12360 - 5090 |



| 99331 | 99332 | 83062 | 99787 |
|--|---|---|--------------------------------------|
| ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 43 x h 30 | DALI 240 W p 244 x l 71 x h 38 |


RTG 80409 / 80410 / 80411 / 80412 / 80413 / 80414 / 80391 / 80392 / 80393

Accessories and cables Pag. 894/895

Rubber 2D | LED strip | 10 W/m 48 V DC




| CRI 85 | Cct | lm S - D |
|--------------------|------|------------|
| White 82135 | 2700 | 1060 - 411 |
| White 82136 | 3000 | 1145 - 444 |
| White 82137 | 4000 | 1236 - 479 |




| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |

| CRI 85 | Cct | lm S - D |
|--------------------|------|-------------|
| White 82138 | 2700 | 5300 - 2055 |
| White 82139 | 3000 | 5725 - 2220 |
| White 82140 | 4000 | 6180 - 2395 |



| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |

| CRI 85 | Cct | lm S - D |
|--------------------|------|--------------|
| White 82141 | 2700 | 10600 - 4110 |
| White 82142 | 3000 | 11450 - 4440 |
| White 82143 | 4000 | 12360 - 4790 |



| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |

RTG 82135 / 82136 / 82137 / 82138 / 82139 / 82140 / 82141 / 82142 / 82143


48V The main characteristic that Linea Light Group introduces through the Rubber 2D 48V units is the ability to increase the usable section even on projects where significant lengths are foreseen. Thereby simplifying planning and installation.

Accessories and cables Pag. 894/895

Rubber 3D | LED strip | 10W/m 24 V DC




| CRI 85 | Cct | lm S - D |
|-----------------------|------|------------|
| White 80394 | 2700 | 1020 - 455 |
| White 80395 | 3000 | 1100 - 506 |
| Concrete 82208 | 3000 | 1100 - 250 |
| White 80396 | 4000 | 1190 - 542 |




| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

| CRI 85 | Cct | lm S - D |
|-----------------------|------|-------------|
| White 80397 | 2700 | 5100 - 2275 |
| White 80398 | 3000 | 5500 - 2528 |
| Concrete 82211 | 3000 | 5500 - 1187 |
| White 80399 | 4000 | 5950 - 2710 |



| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

| CRI 85 | Cct | lm S - D |
|--------------------|------|--------------|
| White 80400 | 2700 | 10200 - 4550 |
| White 80401 | 3000 | 11000 - 5055 |
| White 80402 | 4000 | 11900 - 5420 |



| 99331 | 99332 | 83062 | 99787 |
|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |


RTG 80394 / 80395 / 80396 / 80397 / 80398 / 80399 / 80400 / 80401 / 80402 / 82208 / 82211



Rubber 3D RGBW | LED strip | 16,5 W/m 24 V DC




| | | |
|--------------------|-----------------------|-----|
| White 80403 | RGBW (3000K) (CRI 85) | 1 m |
|--------------------|-----------------------|-----|



| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|---------------------------------------|------------|-----------------------------------|---------------------------------------|
| Dimmer RF | CV 24V 150 W p 150 x 160 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x 160 x h 35 |

| | | |
|--------------------|-----------------------|-----|
| White 80404 | RGBW (3000K) (CRI 85) | 5 m |
|--------------------|-----------------------|-----|




| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|---------------------------------------|------------|-----------------------------------|---------------------------------------|
| Dimmer RF | CV 24V 150 W p 150 x 160 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x 160 x h 35 |


RTG 80403 / 80404

Accessories and cables Pag. 894/895

Rubber 3D optics | LED strip | 24 V DC




| CRI 85 - 22 W - 1 m | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-------------|------------------|
| White | 82216 | M 2700 | 2185 - 1867 | 20 Spot - (17°) |
| Black | 82219 | W 3000 | 2300 - 1965 | 30 Flood - (29°) |
| | | N 4000 | 2415 - 2063 | |




| | | | | |
|--|--|---|--|---------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 143 x h 30 | DALI 240 W p 244 x l 171 x h 38 |

| CRI 85 - 33 W - 1,5 m | | Cct | lm S - D | Optic |
|-----------------------|--------------|--------|-------------|------------------|
| White | 82217 | M 2700 | 3277 - 2785 | 20 Spot - (17°) |
| Black | 82220 | W 3000 | 3450 - 2931 | 30 Flood - (29°) |
| | | N 4000 | 3622 - 3078 | |



| | | | | |
|--|--|---|--|---------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 143 x h 30 | DALI 240 W p 244 x l 171 x h 38 |

| CRI 85 - 66 W - 3 m | | Cct | lm S - D | Optic |
|---------------------|--------------|--------|-------------|------------------|
| White | 82218 | M 2700 | 6554 - 5431 | 20 Spot - (17°) |
| Black | 82221 | W 3000 | 6900 - 5716 | 30 Flood - (29°) |
| | | N 4000 | 7244 - 6001 | |



| | | | | |
|--|--|---|--|---------------------------------------|
| 99374 | 99331 | 99332 | 83062 | 99787 |
| ON/OFF 75 W p 210 x l 148 x h 25 | ON/OFF 150 W p 150 x l 60 x h 35 | 0/1-10V 150 W p 150 x l 60 x h 35 | DALI PUSH 150 W p 280 x l 143 x h 30 | DALI 240 W p 244 x l 171 x h 38 |

RTG 82216W20 / 82216W30 / 82216N20 / 82216N30 / 82217W20 / 82217W30 / 82217N20 / 82217N30 / 82218W20 / 82218W30 / 82218N20 / 82218N30 / 82219M20 / 82219M30 / 82219W20 / 82219W30 / 82219N20 / 82219N30 / 82220M20 / 82220M30 / 82220W20 / 82220W30 / 82220N20 / 82220N30 / 82221M20 / 82221M30 / 82221W20 / 82221W30 / 82221N20 / 82221N30


Accessories and cables Pag. 894/895



Rubber 3D Optics
White finish




Rubber 3D Optics
Black finish

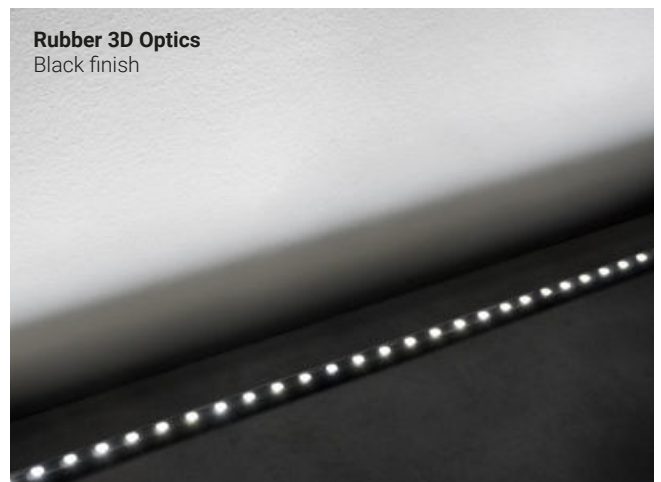

Accessories


Rubber | Linear profile



| description | | Anod. AL |
|--------------|-----------------------|----------|
| 99549 | 1000 mm/ 18 mm/ 19 mm | |
| 82198 | 2000 mm/ 18 mm/ 19 mm | |

suitable for: Rubber 2D / Rubber 3D

Rubber | Linear profile




| description | | PVC |
|--------------|-----------------------|-----|
| 80418 | 1000 mm/ 18 mm/ 19 mm | |

suitable for: Rubber 2D / Rubber 3D

RTG 99549 / 80418 / 83034 / 80419 / 82846


Rubber | Linear profile with cable run



| description | | Anod. AL |
|--------------|-----------------------|----------|
| 83034 | 1000 mm/ 39 mm/ 19 mm | |
| 82199 | 2000 mm/ 39 mm/ 19 mm | |

suitable for: Rubber 2D / Rubber 3D


Rubber | Linear profile with cable run



| description | | PVC |
|--------------|-----------------------|-----|
| 80419 | 1000 mm/ 39 mm/ 19 mm | |

suitable for: Rubber 2D / Rubber 3D


Rubber | Linear profile



| description | | Anod. AL |
|--------------|-----------------------|----------|
| 82846 | 1000 mm/ 20 mm/ 10 mm | |
| 82202 | 2000 mm/ 20 mm/ 10 mm | |

suitable for: Rubber 2D Mini

Rubber | Flexible profile



| description | | Steel |
|--------------|-------------------------|-------|
| 99541 | 1045 mm/ 19 mm/ 16,2 mm | |

suitable for: Rubber 2D / Rubber 3D

RTG 99541

Rubber | Clip with toothed spring



| description | | Anod. AL |
|--------------|---------------------|----------|
| 99536 | 50 mm/ 23 mm/ 21 mm | |

suitable for: Rubber 2D / Rubber 3D

Rubber | Clip



| description | | PVC |
|--------------|---------------------|-----|
| 80733 | 50 mm/ 18 mm/ 19 mm | |

suitable for: Rubber 2D / Rubber 3D

RTG 99536 / 80733 / 99537 / 80734 / 82847


Rubber | Clip with toothed spring with cable run



| description | | Anod. AL |
|--------------|---------------------|----------|
| 99537 | 50 mm/ 41 mm/ 21 mm | |

suitable for: Rubber 2D / Rubber 3D


Rubber | Clip with cable run



| description | | PVC |
|--------------|---------------------|-----|
| 80734 | 50 mm/ 39 mm/ 19 mm | |

suitable for: Rubber 2D / Rubber 3D

Rubber | Clip with toothed spring



| description | | Anod. AL |
|--------------|---------------------|----------|
| 82847 | 50 mm/ 20 mm/ 10 mm | |

suitable for: Rubber 2D Mini

Accessories

Rubber | Cap kits




| description | |
|--|--|
| 99539 | |
| suitable for: Rubber 2D / Rubber 3D | |

Rubber | Cap kits



| description | |
|-------------------------------------|--|
| 99538 | |
| suitable for: Rubber 2D Mini | |

Rubber | Rubber preparation kit



| description | |
|--|-----------------------|
| 99521 | 1100 mm/ 40 mm/ 22 mm |
| suitable for: Rubber 2D / Rubber 3D | |

RTG 99539 / 99521 / 99538

Cables

Rubber | Cable with female connector



| description | |
|---|-------------------|
| 99688 | 2x 0,75 / 2000 mm |
| suitable for: Rubber 2D / Rubber 2D_mini / Rubber 3D | |

Rubber | Cable with male connector



| description | |
|---|-------------------|
| 99689 | 2x 0,75 / 2000 mm |
| suitable for: Rubber 2D / Rubber 2D_mini / Rubber 3D | |

Rubber | Cable with female connector RGBW



| description | |
|-------------------------------------|-------------------|
| 99692 | 5x 0,75 / 2000 mm |
| suitable for: Rubber 3D RGBW | |

Rubber | Cable with male connector RGBW



| description | |
|-------------------------------------|-------------------|
| 99693 | 5x 0,75 / 2000 mm |
| suitable for: Rubber 3D RGBW | |

RTG 99688 / 99689 / 99692 / 99693

Accessories

Rubber | Connector




| description | |
|---|------------------|
| 98990 | Connector 2 ways |
| suitable for: Rubber 2D / Rubber 3D (not suitable RGBW) | |

Rubber | Double-sided tape



| description | |
|--------------------------------|------|
| 99520 | 33 m |
| suitable for: Rubber 3D | |

Rubber | Connector



| description | |
|--|--|
| 89548 | |
| suitable for: Rubber 2D / Rubber 3D | |

RTG 99520 / 89548




ribbon Plus PU_C



QUALITY, MATERIAL, SECURITY MEASURE, TEST AND CONTROL SPEAK ONLY ONE LANGUAGE



Made in Italy

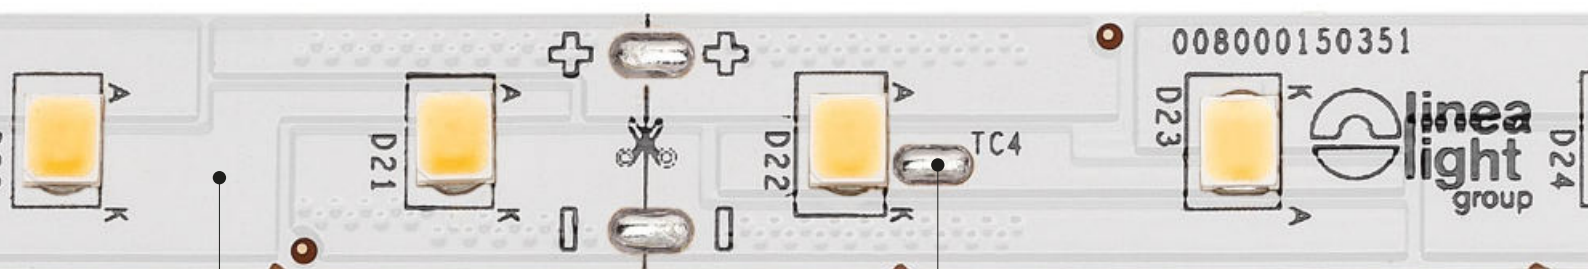

Quality

Rubber and Strip, like all the Light Group Line products, are certified and guaranteed for 3 years and up to 5 upon request. The various types, colour temperatures, and power, thanks to a short and controlled supply chain totally Made in Italy, are available immediately. The company is ISO 9001 certified. The materials and components used for the creation of our products are guaranteed by international certifying bodies such as IMQ and UL, and are marked and tested in accordance with EC standards.





Material

All the material used to create Rubber and Strip is of very high quality. Rubber has its structure in stabilised polyurethane and the diffuser in polyurethane resin, which guarantees maximum flexibility and versatility thanks to the quality raw materials used. Strip LED is covered in polyurethane, a material capable of resisting stresses and high temperatures. In addition, they are all prepared to resist ageing and yellowing over time. The copper used for the circuits, which is 99.9% pure, guarantees the perfect continuity of the electronic connections. The Flex Light range is by its very nature self-dissipating, it does not need additional dissipating bodies or systems.




Dissipation

Rubber is made up of different materials: the structure in polyurethane and the diffuser in polyurethane resin. Strip is coated in silicone. Like all plastic materials, these are also subject to chromatic and physical variations over time. Linea Light Group has selected materials that prevent these side effects. The purpose of the UV rays test is to predict ageing in the products, simulating extreme conditions (up to 80°C) and thermal shocks. This allows us to guarantee the material and their performance over time.

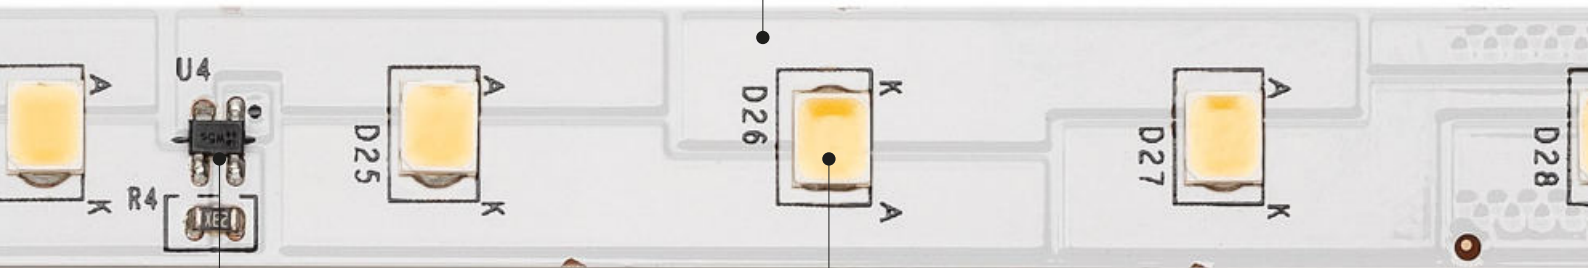

IC regulators

The entire Flex Light range has a reverse polarity system, which works as a guarantee and protection in case of assembly with reversed poles. Furthermore, the presence of IC regulators guarantee light uniformity and homogeneity the entire installed length.




Test e control

Rubber and Strip LEDs have been designed and created to ensure the best visual comfort possible. The entire range is set up to support the circadian rhythm, simply by regulating the light intensity and the colour temperature gradually from 3000 K to 6000 K. This makes it possible to control the melatonin and set the cortisol, both indispensable for the visual and vital well-being of man. Moreover, the numerous tests serve as guarantee of durability and retention of the efficacy and quality of the light, factors of great importance in closed or protected environments, such as offices or hospitals.



Ribbon Plus 70 LEDs/m | LED strip | 3,2 W/m 24 V DC

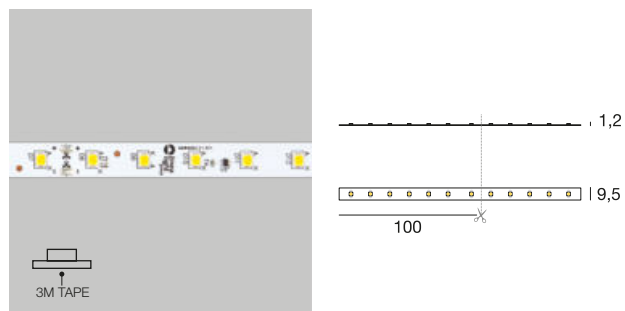


| CRI 85 - 5 m 16W | Cct | lm S - D |
|------------------|------|---------------|
| 98635 | 2700 | 1970 - On req |
| 98636 | 3000 | 2140 - On req |
| 98637 | 4000 | 2309 - On req |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

RTG 98635 / 98636 / 98637

Ribbon Plus 140 LEDs/m | LED strip | 7,2 W/m 24 V DC

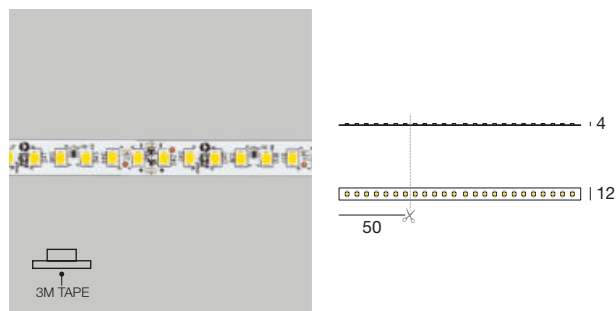


| CRI 85 - 5 m 36W | Cct | lm S - D |
|------------------|------|---------------|
| 98945 | 2700 | 4115 - On req |
| 98946 | 3000 | 4400 - On req |
| 98948 | 4000 | 4490 - On req |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

RTG 98945 / 98946 / 98948

Ribbon Plus Hi-Flux 70 LEDs/m | LED strip | 12,6 W/m 24 V DC

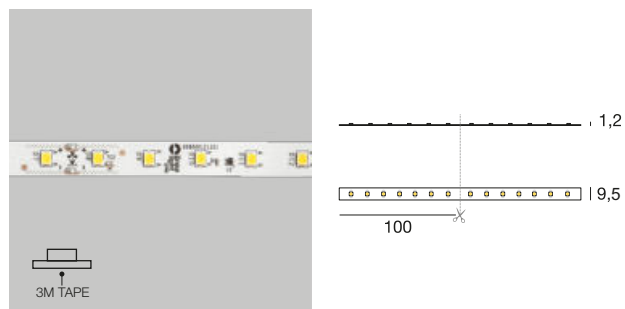


| CRI 85 - 5 m 63W | Cct | lm S - D |
|------------------|------|---------------|
| 98638 | 2700 | 7375 - On req |
| 98639 | 3000 | 7975 - On req |
| 98640 | 4000 | 8550 - On req |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

RTG 98638 / 98639 / 98640

Ribbon Plus 140 Hi-Flux LEDs/m | LED strip | 25 W/m 24 V DC

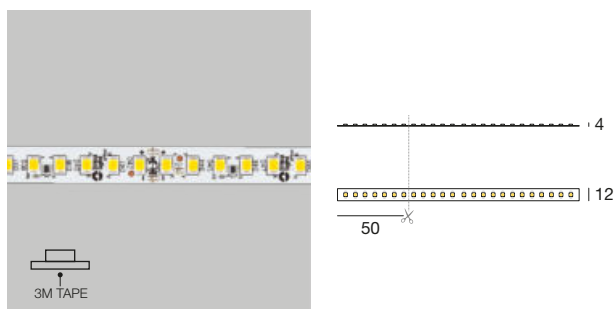

| CRI 85 - 5 m 125W | Cct | lm S - D |
|-------------------|------|----------------|
| 81956 | 2700 | 11500 - On req |
| 81957 | 3000 | 12050 - On req |
| 81958 | 4000 | 12500 - On req |

| 99331 | 99332 | 83062 | 99787 |
|---------------------------------------|--|--|-------------------------------------|
| ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

RTG 81956 / 81957 / 81958

Ribbon Plus WT 70+70 LEDs/m | LED strip | 13 W/m 24 V DC




CRI 85 - 5 m 65W
99671 1800-3000 K

| | | | | |
|--------------------|--|--------------|----------------------------------|--|
| 99694+99700 | 99331 | 99278 | DMX | 99331 |
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

RTG 99671

Ribbon Plus Dynamic White 70+70 LEDs/m | LED strip | 12,8 W/m 24 V DC

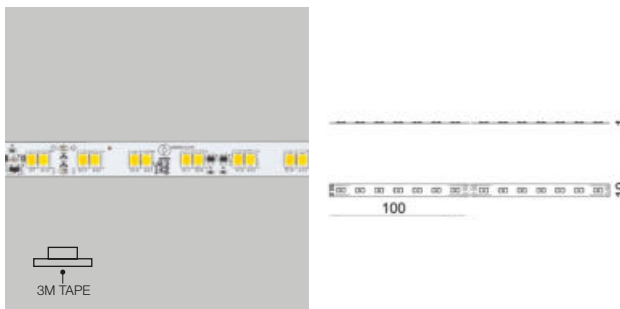

CRI 85 - 5 m 64W
99672 1800-5000 K

| | | | | |
|--------------------|--|--------------|-----------------------------------|--|
| 99695+99701 | 99331 | 99278 | DMX | 99331 |
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

RTG 99672

Ribbon Plus RGBW | LED strip 60+60 LEDs/m | 19,6 W/m 24 V DC




5 m 98W
99670 RBGW - 3000 K (CRI 85)

| | | | | |
|--------------------|--|--------------|-----------------------------------|--|
| 99696+99702 | 99331 | 99278 | DMX | 99331 |
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

RTG 99670

PU_C Plus 70 LEDs/m | LED strip | 3,2 W/m 24 V DC

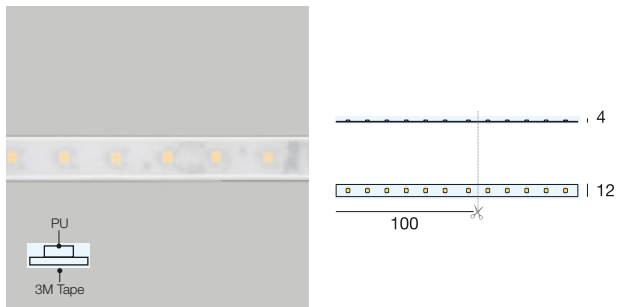


| CRI 85 - 5 m 16W | Cct | lm S - D |
|------------------|------|-------------|
| 98774 | 2700 | 2070 - 1495 |
| 98776 | 3000 | 2245 - 1625 |
| 98775 | 4000 | 2425 - 1895 |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF 75 W | ON/OFF 150 W | 0/1-10V 150 W | DALI PUSH 150 W | DALI 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |

RTG 98774 / 98776 / 98775

PU_C Plus 140 LEDs/m | LED strip | 7,2 W/m 24 V DC


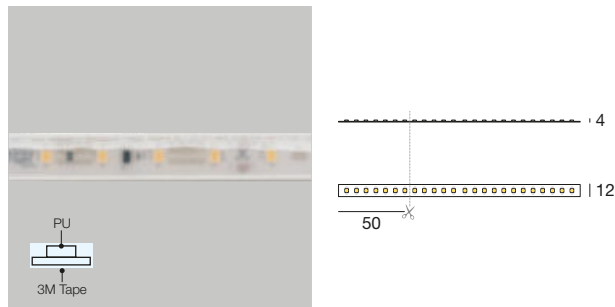


| CRI 85 - 5 m 36W | Cct | lm S - D |
|------------------|------|-------------|
| 81959 | 2700 | 4315 - 3450 |
| 81960 | 3000 | 4615 - 3700 |
| 81961 | 4000 | 4715 - 3775 |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF 75 W | ON/OFF 150 W | 0/1-10V 150 W | DALI PUSH 150 W | DALI 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |

RTG 81959 / 81960 / 81961

PU_C Plus Hi-Flux 70 LEDs/m | LED strip | 12,6 W/m 24 V DC

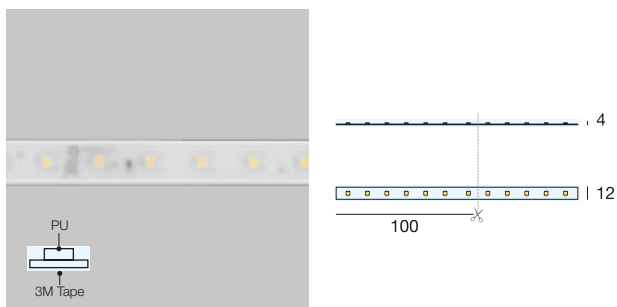


| CRI 85 - 5 m 63W | Cct | lm S - D |
|------------------|------|-------------|
| 98777 | 2700 | 7745 - 5890 |
| 98779 | 3000 | 8385 - 6495 |
| 98778 | 4000 | 8980 - 6935 |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF 75 W | ON/OFF 150 W | 0/1-10V 150 W | DALI PUSH 150 W | DALI 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |

RTG 98777 / 98779 / 98778

PU_C Plus 140 Hi-Flux LEDs/m | LED strip | 25 W/m 24 V DC


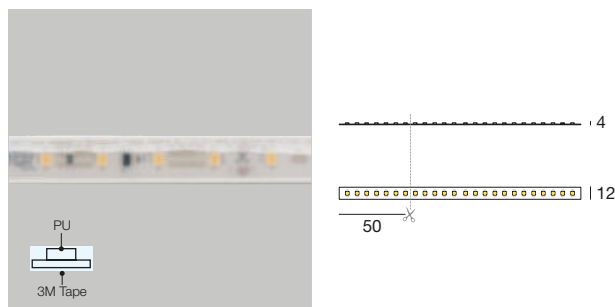


| CRI 85 - 5 m 125W | Cct | lm S - D |
|-------------------|------|---------------|
| 81962 | 2700 | 12080 - 9000 |
| 81963 | 3000 | 12655 - 9550 |
| 81964 | 4000 | 13130 - 10000 |

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF 75 W | ON/OFF 150 W | 0/1-10V 150 W | DALI PUSH 150 W | DALI 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |

RTG 81962 / 81963 / 81964

PU_C RGBW 60+60 LEDs/m | LED strip | 19,6 W/m 24 V DC



5 m 98W

81965 RGBW - 3000 K (CRI 85)

99696+99702

Dimmer RF

99331

CV 24V
150 W
p 150 x 160 x h 35

99278

Dimmer DMX

DMX

DMX Controllers
Pag. 952 - 953


99331

CV 24V
150 W
p 150 x 160 x h 35

RTG 81965

Cables

PU_C | Extension + connector



description

98947 Conn. M. 5 pin (L 0,25 m)
+ conn. F. 5 pin (L 1 m)

suitable for: PU_C

RTG

PU_C | Extension + connector



description


99542 Conn. M. 2 pin (L 0,25 m)
+ conn. F. 2 pin (L 1 m)

suitable for: PU_C

RTG

Accessories

PU_C Plus | Fixing kit



description

98964 1 x glue
20 x brackets
40 x M3x25 screws
10 x caps

suitable for: 5 m PU_C

RTG

PU_C Plus | Fixing brackets



description

89223 10 x brackets
20 x M3x25 screws

suitable for: 5 m PU_C


RTG

ribbon dropper silicone_C






Ribbon Basic 60 LEDs/m | LED strip | 4,8 W/m 24 V DC

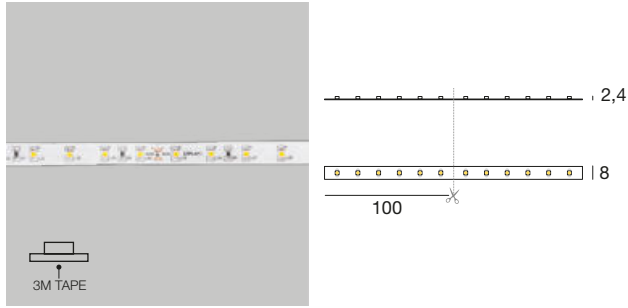


| CRI 80 - 5 m 25W | Cct | lm S - D |
|------------------|------|---------------|
| 98011 | 2700 | 1800 - On req |
| 98556 | 3000 | 1825 - On req |
| 98012 | 4000 | 1850 - On req |

Ribbon 120 LEDs/m | LED strip | 9,6 W/m 24 V DC

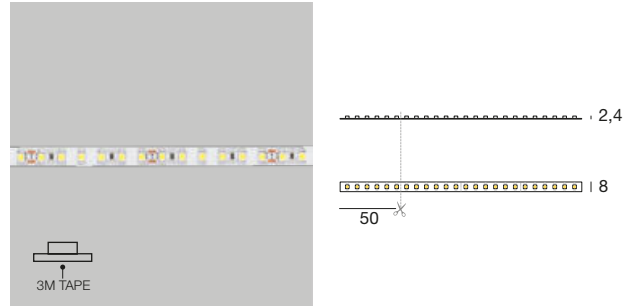



| CRI 80 - 5 m 48W | Cct | lm S - D |
|------------------|------|---------------|
| 83659 | 2700 | 4250 - On req |
| 83657 | 3000 | 4400 - On req |
| 83658 | 4000 | 4800 - On req |

Ribbon Hi-Flux 60 LEDs/m | LED strip | 12 W/m 24 V DC

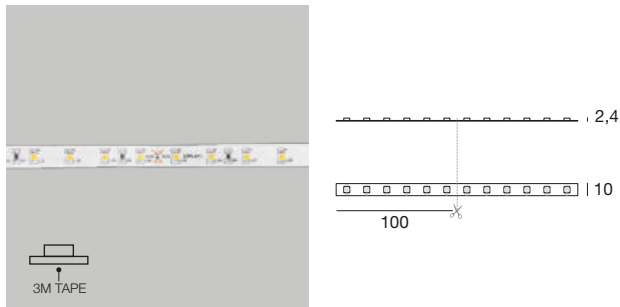


| CRI 80 - 5 m 60W | Cct | lm S - D |
|------------------|------|----------------|
| 99608 | 2700 | 4900 - On req. |
| 99612 | 3000 | 5100 - On req. |
| 99610 | 4000 | 5500 - On req. |

Ribbon 240 LEDs/m | LED strip | 19,2 W/m 24 V DC

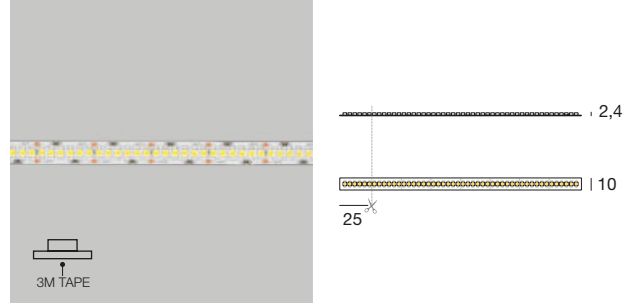


| CRI 80 - 5 m 96W | Cct | lm S - D |
|------------------|------|---------------|
| 98084 | 2700 | 7200 - On req |
| 98570 | 3000 | 7250 - On req |
| 98083 | 4000 | 7400 - On req |

Ribbon 120 LEDs/m | LED strip | 12 W/m 24 V DC

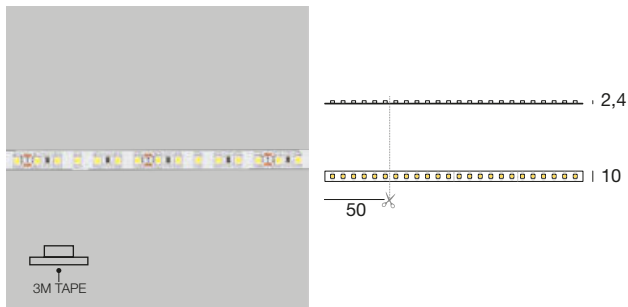

| CRI 80 - 5 m 60W | Cct | lm S - D |
|------------------|------|---------------|
| 98078 | 2700 | 4900 - On req |
| 98568 | 3000 | 5100 - On req |
| 98077 | 4000 | 6000 - On req |

Ribbon Slim 120 LEDs/m | LED strip | 8,4 W/m 24 V DC

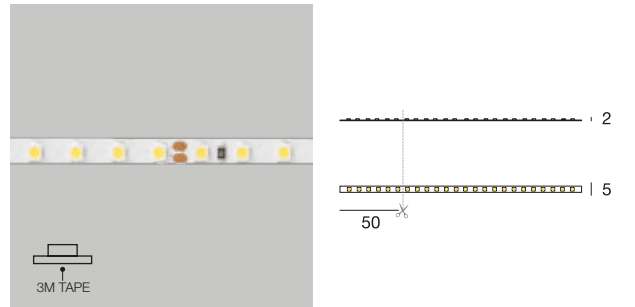


| CRI 80 - 5 m 42W | Cct | lm S - D |
|------------------|------|---------------|
| 84219 | 2700 | 3650 - On req |
| 84220 | 3000 | 3850 - On req |
| 84221 | 4000 | 4000 - On req |

Electronics

| 99374 | 99331 | 99332 | 83062 | 99787 |
|--------------------|--------------------|--------------------|--------------------|--------------------|
| ON/OFF | ON/OFF | 0/1-10V | DALI PUSH | DALI |
| 75 W | 150 W | 150 W | 150 W | 240 W |
| p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |


Ribbon Hi-Flux 150 LEDs/m | LED strip | 20 W/m 48 V DC

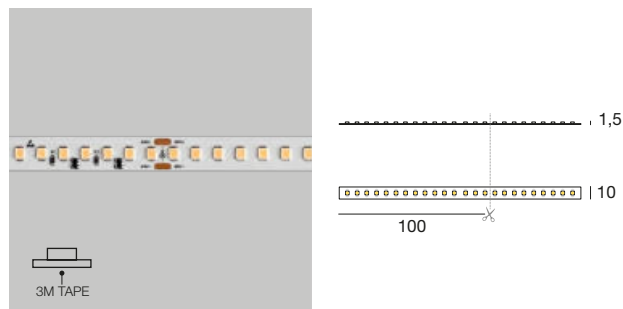

| CRI 95 - 10 m 200W | Cct | lm S - D |
|--------------------|------|----------------|
| 84195 | 3000 | 17250 - On req |
| 84196 | 4000 | 19500 - On req |

| 99784 | 99785 | 83179 | Switching | 83177 |
|-----------------------|-----------------------|---------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | DALI 150W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 312W |


Ribbon RGB 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

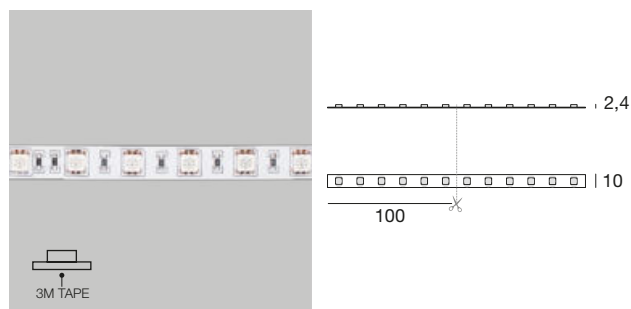

| 5 m 72W | 98017 | RGB |
|---------|-------|-----|
|---------|-------|-----|

| 99696+99702 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |


Ribbon RGBW 54 LEDs/m | LED strip | 13,5 W/m 48 V DC

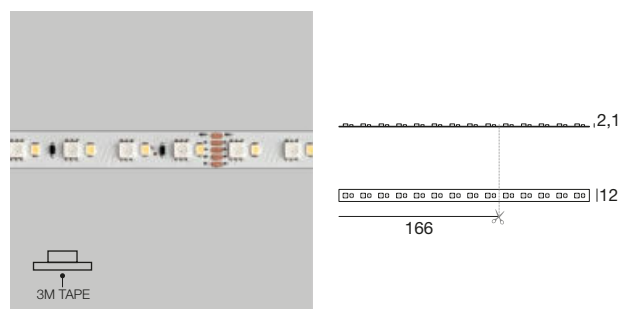

| CRI 80 - 5 m 67,5W | 84197 | 84198 |
|--------------------|------------------------|------------------------|
| | RGBW - 3000 K (CRI 80) | RGBW - 4000 K (CRI 80) |

| 99784 | 99785 | Switching | 83178 |
|-----------------------|-----------------------|------------------------------|--------------------|
| ON/OFF 150W CV 48V | ON/OFF 240W CV 48V | Switching CV 48V Pag. 932 | Dimmer DMX 384W |

Ribbon Dynamic White 60+60 LEDs/m | LED strip | 19,2 W/m 24 V DC

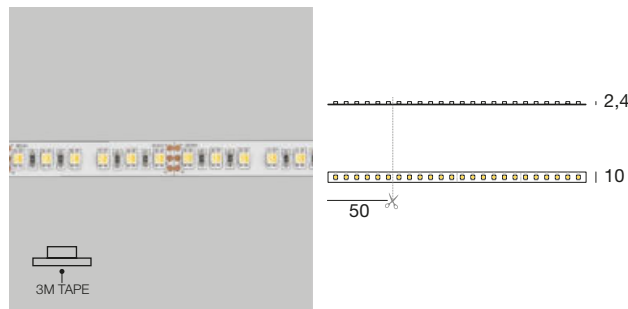

| CRI 85 - 5 m 96W | 98548 |
|------------------|---------------|
| | 3000 - 6000 K |

| 99695+99701 | 99331 | 99278 | DMX | 99331 |
|-------------|--|------------|-----------------------------------|--|
| Dimmer RF | CV 24V 150 W p 150 x l 60 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x l 60 x h 35 |

Pag. 906

RTG 98011 / 98556 / 98012

RTG 83659 / 83657 / 83658

RTG 99608 / 99612 / 99610

RTG 98078 / 98568 / 98077

RTG 98084 / 98570 / 98083

RTG 84219 / 84220 / 84221


Pag. 907

RTG 84195 / 84196

RTG 98017

RTG 84197 / 84198


Dropper Basic 60 LEDs/m | LED strip | 5 W/m 24 V DC

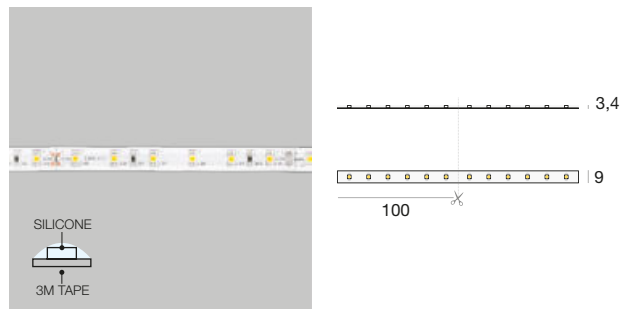

| CRI 80 - 5 m 25W | Cct | lm S - D |
|------------------|------|---------------|
| 99588 | 2700 | 2300 - On req |
| 99592 | 3000 | 2400 - On req |
| 99590 | 4000 | 2500 - On req |

★ Electronics **RTG 99588 / 99592 / 99590**


Dropper Hi-Flux 60 LEDs/m | LED strip | 12 W/m 24 V DC

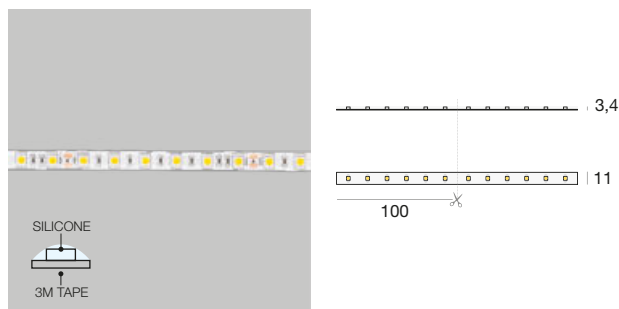

| CRI 80 - 5 m 60W | Cct | lm S - D |
|------------------|------|---------------|
| 99628 | 2700 | 4750 - On req |
| 99632 | 3000 | 4875 - On req |
| 99630 | 4000 | 5250 - On req |

★ Electronics **RTG 99628 / 99632 / 99630**


Dropper Hi-Flux 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

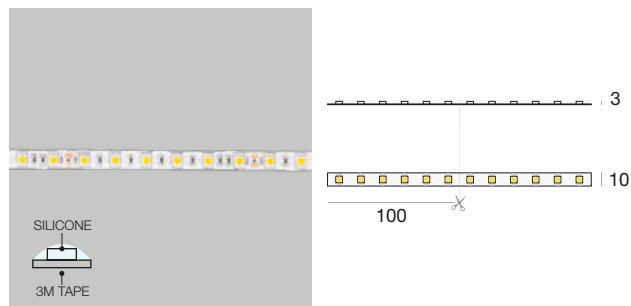

| CRI 80 - 5 m 72W | Cct | lm S - D |
|------------------|------|---------------|
| 98092 | 2700 | 5400 - On req |

★ Electronics **RTG 98092**


Dropper 120 LEDs/m | LED strip | 9,6 W/m 24 V DC

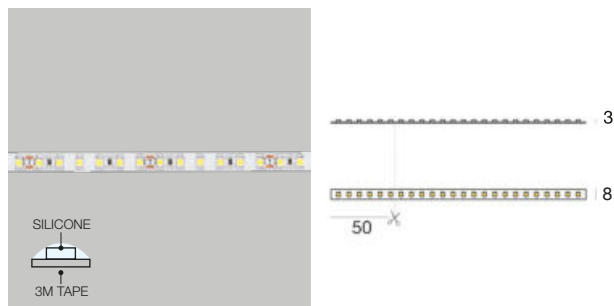

| CRI 80 - 5 m 48W | Cct | lm S - D |
|------------------|------|---------------|
| 98572 | 3000 | 3610 - On req |
| 98574 | 4000 | 3700 - On req |

★ Electronics **RTG 98572 / 98574**

Dropper RGB 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

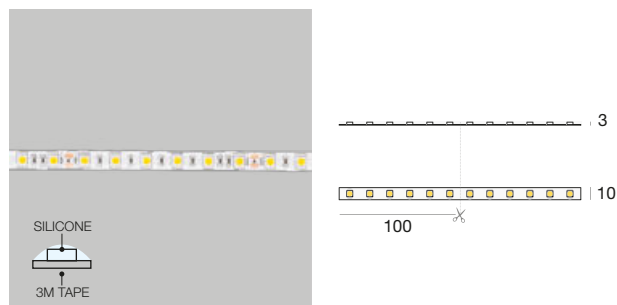


| 5 m 72W | |
|--------------|-----|
| 98025 | RGB |

★★ Electronics **RTG 98025**

| ★ | 99374 | 99331 | 99332 | 83062 | 99787 |
|---|--------------------|--------------------|--------------------|--------------------|--------------------|
| | ON/OFF | ON/OFF | 0/1-10V | DALI PUSH | DALI |
| | 75 W | 150 W | 150 W | 150 W | 240 W |
| | p 210 x 148 x h 25 | p 150 x 160 x h 35 | p 150 x 160 x h 35 | p 280 x 143 x h 30 | p 244 x 171 x h 38 |

| ★★ | 99696+99702 | 99331 | 99278 | DMX | 99331 |
|----|-------------|--------------------|------------|-----------------|--------------------|
| | Dimmer RF | CV 24V | Dimmer DMX | DMX Controllers | CV 24V |
| | | 150 W | | Pag. 952 - 953 | 150 W |
| | | p 150 x 160 x h 35 | | | p 150 x 160 x h 35 |


Silicone_C Basic 60 LEDs/m | LED strip | 5 W/m 24 V DC

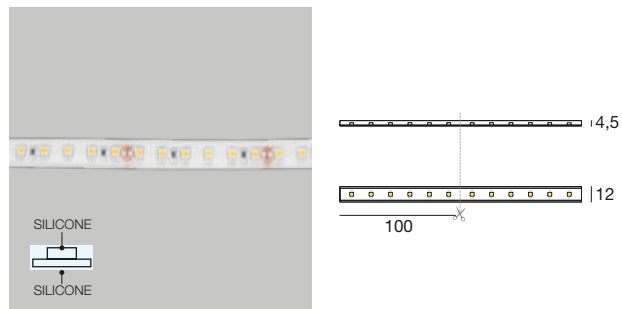

| CRI 80 - 5 m 25W | Cct | lm S - D |
|------------------|------|---------------|
| 99598 | 2700 | 2250 - On req |
| 99602 | 3000 | 2300 - On req |
| 99600 | 4000 | 2400 - On req |

★ Electronics **RTG 99598 / 99602 / 99600**


Silicone_C Hi-Flux 60 LEDs/m | LED strip | 12 W/m 24 V DC

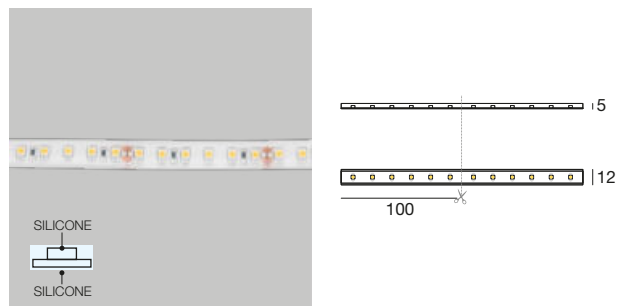

| CRI 80 - 5 m 60W | Cct | lm S - D |
|------------------|------|---------------|
| 99622 | 3000 | 4750 - On req |
| 99620 | 4000 | 5100 - On req |

★ Electronics **RTG 99622 / 99620**


Silicone_C Hi-Flux 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

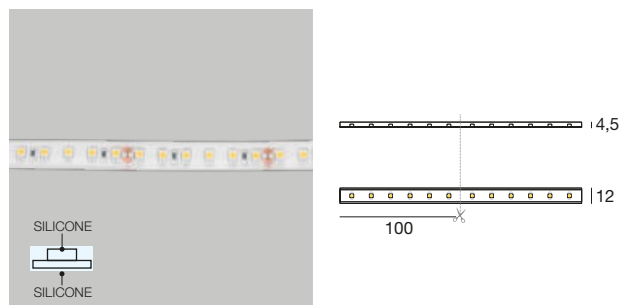

| CRI 80 - 5 m 72W | Cct | lm S - D |
|------------------|------|----------------|
| 98042 | 2700 | 5400 - On req. |

★ Electronics **RTG 98042**


Silicone_C 120 LEDs/m | LED strip | 14,4 W/m 24 V DC

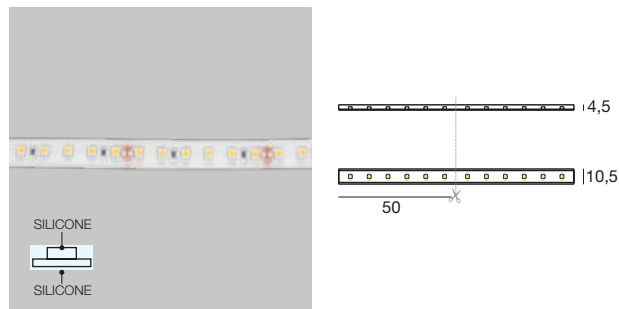

| CRI 80 - 5 m 72W | Cct | lm S - D |
|------------------|------|---------------|
| 62403 | 3000 | 7230 - On req |
| 62403N | 4000 | 7495 - On req |

★ Electronics **RTG 62403 / 62403N**


Silicone_C Basic RGB 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

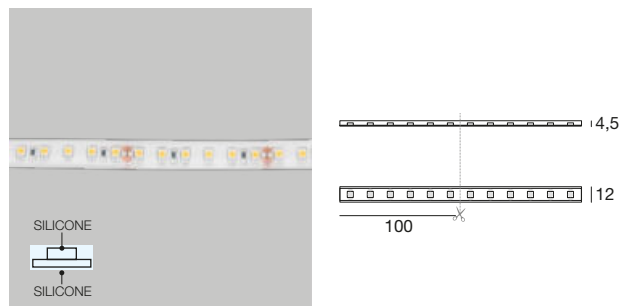

| | |
|----------------|-----|
| 5 m 72W | |
| 98033 | RGB |

★★ Electronics **RTG 98033**

Silicone_C | Fixing kit



| | description |
|--------------|---|
| 98373 | 1 x glue 20 x brackets 40 x M3x25 screws 10 x caps |

suitable for: 5 m Silicone_C

Silicone_C | Fixing brackets



| | description |
|--------------|------------------------------------|
| 89223 | 10 x brackets 20 x M3x25 screws |

suitable for: 5 m Silicone_C

RTG 89223

| ★ | 99374 | 99331 | 99332 | 83062 | 99787 |
|---|--------------------------------------|---------------------------------------|--|--|-------------------------------------|
| | ON/OFF 75 W p 210 x 148 x h 25 | ON/OFF 150 W p 150 x 160 x h 35 | 0/1-10V 150 W p 150 x 160 x h 35 | DALI PUSH 150 W p 280 x 143 x h 30 | DALI 240 W p 244 x 171 x h 38 |

| ★★ | 99696+99702 | 99331 | 99278 | DMX | 99331 |
|----|-------------|---------------------------------------|------------|-----------------------------------|---------------------------------------|
| | Dimmer RF | CV 24V 150 W p 150 x 160 x h 35 | Dimmer DMX | DMX Controllers Pag. 952 - 953 | CV 24V 150 W p 150 x 160 x h 35 |

LED Strips | Multiple outlet cable



RTG

| | connector | L mm | sec. Ø | available for |
|--------------|-----------|------|--------------------------|---------------|
| 89121 | F | 300 | 2 x 0,35 mm ² | Ribbon mono |
| | | | | Dropper mono |

LED Strips | Extension for multiple outlets



RTG

| | connector | L mm | sec. Ø | available for |
|--------------|-----------|------|--------------------------|---------------|
| 89123 | M + F | 1000 | 2 x 0,35 mm ² | Ribbon mono |
| 89125 | M + F | 3000 | 2 x 0,35 mm ² | Dropper mono |

LED Strips | Quick connector



RTG

| | connector | L mm | sec. Ø | available for |
|--------------|-----------|------|--------------------------|---------------------|
| 98384 | 1 clip | 150 | 2 x 0,35 mm ² | Ribbon basic mono |
| | | | | Ribbon Hi-Flux mono |

LED Strips | Extension of the quick connector



RTG

| | connector | L mm | sec. Ø | available for |
|--------------|-----------|------|--------------------------|---------------------|
| 98379 | 2 clip | 150 | 2 x 0,70 mm ² | Ribbon basic mono |
| | | | | Ribbon Hi-Flux mono |

LED Strips | Quick connector joint



RTG

| | connector | available for |
|--------------|-----------|---------------------|
| 98383 | 2 clip | Ribbon basic mono |
| | | Ribbon Hi-Flux mono |
| | | Ribbon basic RGB |
| | | Ribbon Hi-Flux RGB |

LED Strips | Multiple outlet cable



RTG

| | connector | L mm | sec. Ø | available for |
|--------------|-----------|------|--------------------------|-------------------|
| 89119 | 6 M | 1000 | 2 x 0,35 mm ² | Ribbon basic mono |
| | | | | Dropper mono |

LED Strips | Extension for multiple outlets



RTG

| | connector | sec. Ø | available for |
|--------------|-----------|--------------------------|----------------------|
| 99357 | F | 3 x 0,35 mm ² | Ribbon Dynamic White |
| 99358 | M | 3 x 0,35 mm ² | Ribbon Dynamic White |

LED Strips | Extension for multiple outlets



RTG

| | connector | L mm | sec. Ø | available for |
|--------------|-----------|--------|--------------------------|----------------------|
| 98551 | M + F | 1000 m | 3 x 0,35 mm ² | Ribbon Dynamic White |
| 98552 | M + F | 3000 m | 3 x 0,35 mm ² | Ribbon Dynamic White |

RGB Strips | Multiple outlet cable



RTG

| | connector | L mm | sec. Ø | available for |
|-------|-----------|------|--------------------------|---------------------------|
| 89122 | F | 300 | 4 x 0,35 mm ² | Ribbon RGB Dropper RGB |

RGB Strips | Extension for multiple outlets



RTG

| | connector | L mm | sec. Ø | available for |
|-------|-----------|------|--------------------------|---------------|
| 89124 | M + F | 1000 | 2 x 0,35 mm ² | Ribbon RGB |

LED Strips | IP66 cable



RTG

| | connector | L mm | sec. Ø | available for |
|-------|-----------|------|--------------------------|-----------------|
| 89629 | 1 M | 1000 | 2 x 0,75 mm ² | Silicone_C mono |

LED Strips | IP66 extension



RTG

| | connector | L mm | sec. Ø | available for |
|-------|-----------|------|--------------------------|-----------------|
| 99000 | 1 F | 2000 | 2 x 0,75 mm ² | Silicone_C mono |

RGB Strips | IP66 cable



RTG

| | connector | L mm | sec. Ø | available for |
|-------|-----------|------|--------------------------|----------------|
| 89630 | 1 M | 2000 | 4 x 0,35 mm ² | Silicone_C RGB |


RGB Strips | IP66 extension



RTG

| | connector | L mm | sec. Ø | available for |
|-------|-----------|------|--------------------------|----------------|
| 99001 | 1 F | 2000 | 4 x 0,35 mm ² | Silicone_C RGB |

Vojo_17/08 | Low surface profile | Indoor LED Strips




| | | L mm | |
|-----------|--------------|------|----------------------|
| Anod. AL | 98891 | 2000 | Profilo - Profile |
| Black | 83129 | 2000 | Profilo - Profile |
| Transp. | 98941 | 2000 | Diffusore - Diffuser |
| Satinized | 98942 | 2000 | Diffusore - Diffuser |
| Opaline | 98943 | 2000 | Diffusore - Diffuser |
| Black | 83132 | 2000 | Diffusore - Diffuser |
| | 98892 | 2 x | Tappi - Caps |
| Black | 83133 | 2 x | Tappi - Caps |
| | 98944 | 5 x | Staffe - Brackets |

| KIT composition | | KIT composition Black | |
|----------------------------------|-----------------------|----------------------------------|-----------------------|
| 98954 | 98955 | 84446 | 84447 |
| 1 x (98891-98943 98892-98944) | 10 x (98891 98943) | 1 x (83129-83132 83133-98944) | 10 x (83129 83132) |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

RTG 98891 / 83129 / 98941 / 98942 / 98943 83132 / 83133 / 98954
98955 / 84446 / 84447

Luno_20/27 | High square surface profile | Indoor LED Strips




| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98929 | 2000 | Profilo - Profile |
| Black | 83137 | 2000 | Profilo - Profile |
| Opaline | 98930 | 2000 | Diffusore - Diffuser |
| Black | 83138 | 2000 | Diffusore - Diffuser |
| | 98932 | 2 x | Tappi - Caps |
| Black | 83139 | 2 x | Tappi - Caps |
| | 98931 | 5 x | Staffe - Brackets |

| KIT composition | | KIT composition Black | |
|----------------------------------|-----------------------|----------------------------------|-----------------------|
| 84452 | 99986 | 84450 | 84451 |
| 1 x (98929-98930 98932-98931) | 10 x (98929 98930) | 1 x (83137-83138 83139-98931) | 10 x (83137 83138) |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - PU_C Plus

RTG 98929 / 98930 / 83138 / 98932 / 83139 / 98931 / 99986 / 84450 / 84451

Vojo_17/08 | Low surface profile | Indoor LED Strips




| | | L mm | |
|-----------|--------------|------|----------------------------|
| Anod. AL | 98891 | 2000 | Profilo - Profile |
| Satinized | 98925 | 2000 | Diffusore - Diffuser (90°) |
| | 98928 | 2 x | Tappi - Caps |
| | 98944 | 5 x | Staffe - Brackets |

| KIT composition | | | |
|----------------------------------|-----------------------|--|--|
| 99983 | 99984 | | |
| 1 x (98891-98925 98928-98944) | 10 x (98891 98925) | | |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

RTG 98891 / 98925 / 98928 / 98944 / 99983 / 99984

Luno_20/27 | High round surface profile | Indoor LED Strips





| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98929 | 2000 | Profilo - Profile |
| Black | 83137 | 2000 | Profilo - Profile |
| Opaline | 98934 | 2000 | Diffusore - Diffuser |
| Black | 83183 | 2000 | Diffusore - Diffuser |
| | 98936 | 2 x | Tappi - Caps |
| Black | 83184 | 2 x | Tappi - Caps |
| | 98931 | 5 x | Staffe - Brackets |

| KIT composition | | KIT composition Black | |
|----------------------------------|-----------------------|----------------------------------|-----------------------|
| 84453 | 99988 | 84454 | 84455 |
| 1 x (98929-98934 98936-98931) | 10 x (98929 98934) | 1 x (83137-83183 83184-98931) | 10 x (83137 83183) |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - PU_C Plus

RTG 98929 / 83137 / 98934 / 83183 / 83184 / 98936 / 98931 / 99988
84454 / 84455

Rive_17/16 | High surface profile | Indoor LED Strips




| | | L mm | |
|-----------|--------------|------|----------------------|
| Anod. AL | 98893 | 2000 | Profilo - Profile |
| Black | 83130 | 2000 | Profilo - Profile |
| Transp. | 98941 | 2000 | Diffusore - Diffuser |
| Satinized | 98942 | 2000 | Diffusore - Diffuser |
| Opaline | 98943 | 2000 | Diffusore - Diffuser |
| Black | 83132 | 2000 | Diffusore - Diffuser |
| | 98894 | 2 x | Tappi - Caps |
| Black | 83135 | 2 x | Tappi - Caps |
| | 98944 | 5 x | Staffe - Brackets |

| KIT composition | | KIT composition Black | |
|----------------------------------|-----------------------|----------------------------------|-----------------------|
| 99905 | 99906 | 84448 | 84449 |
| 1 x (98893-98943 98894-98944) | 10 x (98893 98943) | 1 x (83130-83132 83135-98944) | 10 x (83130 83132) |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim- Dropper - Silicone_C - PU_C Plus

RTG 98893 / 83130 / 98941 / 98942 / 98943 / 98894 / 83135 / 98944 / 99905 / 99906 / 84448 / 84449

Sageto_24/08 | Low recessed profile | Indoor LED Strips




| | | L mm | |
|-----------|--------------|------|----------------------|
| Anod. AL | 98895 | 2000 | Profilo - Profile |
| Transp. | 98941 | 2000 | Diffusore - Diffuser |
| Satinized | 98942 | 2000 | Diffusore - Diffuser |
| Opaline | 98943 | 2000 | Diffusore - Diffuser |
| | 98896 | 2 x | Tappi - Caps |
| | 98944 | 5 x | Staffe - Brackets |

| KIT composition | |
|----------------------------------|-----------------------|
| 98965 | 99907 |
| 1 x (98895-98943 98896-98944) | 10 x (98895 98943) |



Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

RTG 98895 / 98941 / 98942 / 98943 / 98896 / 98944 / 98965 / 99907

Example with black profile + black diffuser.

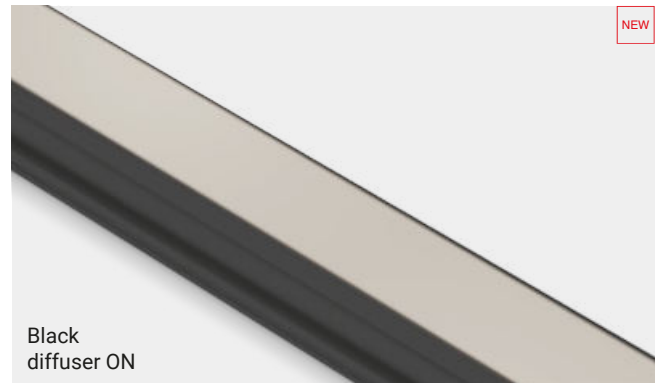

Roko_33/15 | Low recessed profile | Indoor LED Strips




| | | L mm | |
|-----------|--------------|------|----------------------|
| Anod. AL | 98897 | 2000 | Profilo - Profile |
| Transp. | 98898 | 2000 | Diffusore - Diffuser |
| Satinized | 98899 | 2000 | Diffusore - Diffuser |
| Opaline | 98900 | 2000 | Diffusore - Diffuser |
| | 98902 | 2 x | Tappi - Caps |
| | 98901 | 5 x | Staffe - Brackets |

| KIT composition | |
|----------------------------------|--|
| 99908 | |
| 1 x (98897-98900 98902-98901) | |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

RTG 98897 / 98898 / 98899 / 98900 / 98902 / 98901 / 99908

Ghost_64/14 | Low integrated profile | Indoor LED Strips



| | | L mm | |
|-----------|--------------|------|----------------------|
| Anod. AL | 98906 | 2000 | Profilo - Profile |
| Transp. | 98898 | 2000 | Diffusore - Diffuser |
| Satinized | 98899 | 2000 | Diffusore - Diffuser |
| Opaline | 98900 | 2000 | Diffusore - Diffuser |
| | 98907 | 2 x | Tappi - Caps |

KIT composition


99989

1 x (98906-98900
98907)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

RTG 98906 / 98898 / 98899 / 98900 / 98907 / 99989

Papilio_41/41 | Integrated corner profile | Indoor LED Strips




| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98919 | 2000 | Profilo - Profile |
| Opaline | 98917 | 2000 | Diffusore - Diffuser |
| | 98920 | 2 x | Tappi - Caps |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

RTG 98919 / 98917 / 98920

Armata_58/15 | Integrated linear profile | Indoor LED Strips




| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98916 | 2000 | Profilo - Profile |
| Opaline | 98917 | 2000 | Diffusore - Diffuser |
| | 98918 | 2 x | Tappi - Caps |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

RTG 98916 / 98917 / 98918

Tabulo_35/14 | Integrated side profile | Indoor LED Strips





| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98921 | 2000 | Profilo - Profile |
| Opaline | 98917 | 2000 | Diffusore - Diffuser |
| | 98922 | 2 x | Tappi - Caps |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

RTG 98921 / 98917 / 98922

Ribba_09/15 | High slim surface profile | Indoor LED Strips



| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98908 | 2000 | Profilo - Profile |
| Opaline | 98909 | 2000 | Diffusore - Diffuser |
| | 98911 | 2 x | Tappi - Caps |
| | 98910 | 5 x | Staffe - Brackets |

KIT composition


99998

10 x (98908
90909)

Compatible with: Ribbon slim

RTG 98908 / 98909 / 98911 / 98910 / 99998

Fonis_06/11 | Low slim surface profile | Indoor LED Strips



| | | L mm | |
|-----------|--------------|------|----------------------|
| Anod. AL | 98885 | 2000 | Profilo - Profile |
| Transp. | 98886 | 2000 | Diffusore - Diffuser |
| Satinized | 98887 | 2000 | Diffusore - Diffuser |
| Opaline | 98888 | 2000 | Diffusore - Diffuser |
| | 98890 | 2 x | Tappi - Caps |
| | 98889 | 5 x | Staffe - Brackets |

KIT composition



83003 83004

1 x (98885-98888) 10 x (98885
98890-98889) 98888)

Compatible with: Ribbon slim

RTG 98885 / 98886 / 98887 / 98888 / 98890 / 98889 / 83003 / 83004

Alise_10/10 | Square slim surface profile | Indoor LED Strips



| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98912 | 2000 | Profilo - Profile |
| Opaline | 98913 | 2000 | Diffusore - Diffuser |
| | 98915 | 2 x | Tappi - Caps |
| | 98914 | 5 x | Staffe - Brackets |

KIT composition


99998

10 x (98908
90909)

Compatible with: Ribbon slim

RTG 98912 / 98913 / 98915 / 98914 / 83002

Suo_56/10 | Flat surface profile | Indoor LED Strips



| | | L mm | |
|----------|--------------|------|----------------------|
| Anod. AL | 98937 | 2000 | Profilo - Profile |
| Opaline | 98938 | 2000 | Diffusore - Diffuser |
| | 98940 | 2 x | Tappi - Caps |
| | 98939 | 5 x | Staffe - Brackets |

KIT composition


83006

10 x (98937
98943)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - PU_C Plus

RTG 98937 / 98943 / 98940 / 98939 / 83006

Ozner_25/10 | Low surface profile | Indoor LED Strips





| | L mm | |
|------------------------|------|----------------------|
| Anod. AL. 98419 | 2000 | Profilo - Profile |
| Opaline 98395 | 2000 | Diffusore - Diffuser |
| 98418 | 2 x | Tappi - Caps |
| 98420 | 5 x | Staffe - Brackets |

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

RTG 98419 / 98395 / 98418 / 98420

Svik_00/00 | Heat sink | Indoor LED Strips



| | L mm | |
|------------------------|------|-------------------------|
| Anod. AL. 98956 | 2000 | Dissipatore - Heat sink |

KIT composition

99999 10 x (**98956**)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

RTG 98956 / 99999

Cela_18/18 | Corner profile | Indoor LED Strips



| | L mm | |
|------------------------|------|----------------------|
| Anod. AL. 98903 | 2000 | Profilo - Profile |
| Black 83131 | 2000 | Profilo - Profile |
| Transp. 98941 | 2000 | Diffusore - Diffuser |
| Satinized 98942 | 2000 | Diffusore - Diffuser |
| Opaline 98943 | 2000 | Diffusore - Diffuser |
| Black 83132 | 2000 | Diffusore - Diffuser |
| 98905 | 2 x | Tappi - Caps |
| Black 83136 | 2 x | Tappi - Caps |
| 98904 | 5 x | Staffe - Brackets |

KIT composition

99910 **99911**

1 x (98903-98943
98905-98904)

10 x (98903
98943)

KIT composition Black

84456 **84457**

1 x (83131-83132
83136-98904)

10 x (83131
83132)



Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - PU_C Plus

**RTG 98903 / 83131 / 98941 / 98942 / 98943 / 98905 / 83136 / 98904
99910 / 99911 / 84456 / 84457**

Example with black profile + black diffuser.



Narp_12/12 | Slim profile kit | Indoor LED Strips




| | L mm | |
|---------------------------|------|--|
| Anod. AL. 63560L02 | 2000 | Profilo + diffusore - Profile + diffuser |

Compatible with: Ribbon - Dropper

RTG 63560L02

Ice_14/11 | Low recessed profile | Indoor LED Strips

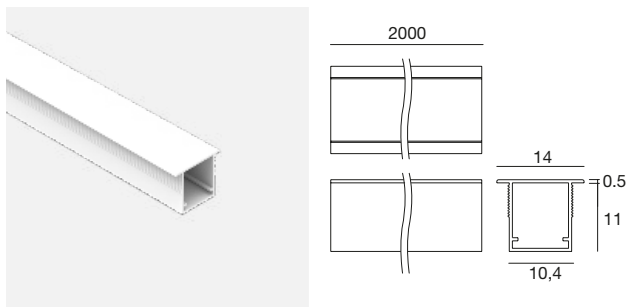


| | | L mm | |
|---------|--------------|------|-------------------|
| Opaline | 99977 | 2000 | Profilo - Profile |
| | 99976 | 2 x | Tappi - Caps |

Compatible with: Ribbon 83657, 83658, 83659 - Ribbon Slim 84219, 84220, 84221

RTG 99977 / 99976

Ice_10/10 | Low square surface profile | Indoor LED Strips

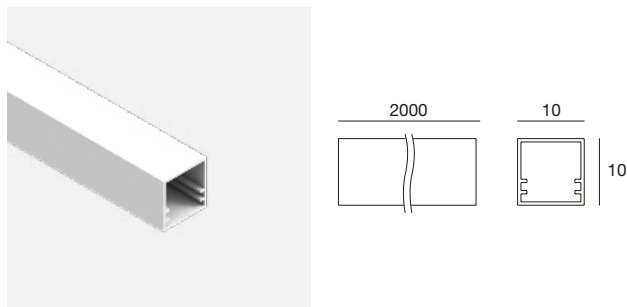

| | | L mm | |
|---------|--------------|------|-----------------------------------|
| Opaline | 99979 | 2000 | Profilo - Profile |
| | 99978 | 2 x | Tappi - Caps |
| | 98398 | 5 x | Clips di fissaggio - Fixing clips |

Compatible with: Ribbon 83657, 83658, 83659 - Ribbon Slim 84219, 84220, 84221

RTG 99979 / 99978 / 98398

GavriiLux FourSeasons Astir | Greece




electronics range index

| Indoor | | | |
|-----------------|-------------------------|---------------|-----|
| | Bluetooth | Hendriks | 922 |
| | | Cherokee | 922 |
| | | Easyfit | 922 |
| | | Mura | 922 |
| | | Mean BT | 923 |
| | | G500 BT | 923 |
| Costant current | Over voltage protection | Defender | 923 |
| | On/Off | Bit | 924 |
| | | Slim | 924 |
| | | Simon | 924 |
| | | Leon | 925 |
| | | Jeti | 925 |
| | | Wade | 925 |
| | | Smart 50 | 926 |
| | Triac | Edge | 926 |
| | | WT | 926 |
| | 0/1-10V | Maxi JOLLY HV | 926 |
| | | Slim | 927 |
| | | Simon | 927 |
| | | Boson | 927 |
| | | WT | 927 |
| | DALI | Slim | 928 |
| | | Simon | 928 |
| | | Argo | 928 |
| | | Planck | 929 |
| | | WT | 929 |
| | DALI 2 | Dynamic Drive | 928 |
| | | DualDrive | 929 |
| | | Maxi JOLLY | 929 |
| | | Maxi JOLLY HV | 930 |
| | | Lco | 930 |
| Converter CC | 0/1-10V | Slim | 930 |
| | DALI | Slim | 930 |
| Costant voltage | On/Off | Slim | 931 |
| | | Fusion | 931 |
| | | Reson_75 | 931 |
| | | Peta | 932 |
| | | Peta / Exa | 932 |
| | | Peta | 932 |
| | | Peta / Exa | 932 |
| | | Peta / Exa | 932 |
| | | Peta / Exa | 932 |
| | | Peta / Exa | 933 |
| | | Peta | 933 |
| | On/Off + N/O button | KIT_RESON | 934 |
| | | KIT_RESON | 934 |
| | DALI | Trid | 934 |
| Converter CV | N/O button | Nyquist | 935 |
| | DALI 0/1-10V | Bode | 935 |
| | DALI | Berda mini | 935 |
| | DALI | Berda Maxi | 935 |
| Outdoor | | | |
| Costant current | On/Off | Mini_Penny | 936 |
| | | Mini_Aqualed | 936 |
| | | Penny_Q | 936 |
| | | Penny | 937 |
| | | Aqualed | 937 |
| | | Maxi_Aqualed | 937 |
| | 0/1-10V | Mean | 938 |
| | DALI 2 | Aqualed_DALI | 938 |
| | DALI | Mean | 939 |
| | | Mean | 939 |
| | | Mean | 939 |

| | | | | |
|--------------------------------|--------------------------------------|---------------------------------|-----------------------------------|-----|
| Constant voltage | On/Off | AquaLED | 940 | |
| | | Lingotto | 940 | |
| | | Maxi_AquaLED | 940 | |
| | | Giant_AquaLED | 940 | |
| | | Reson_150 | 941 | |
| | | Mean | 941 | |
| | | Mean On/Off Driver 48V | 941 | |
| | | Mean On/Off Driver 48V | 941 | |
| | | Mean On/Off 12V | 942 | |
| | | Mean On/Off 12V | 942 | |
| | | 0/1-10V | Reson_150 | 943 |
| | | DALI | Mean DALI driver 12V | 942 |
| | | | Mean DALI driver 12V | 942 |
| | | | Mean DALI Driver 24V | 943 |
| | | | Mean DALI Driver 24V | 943 |
| Mean DALI Driver 48V | 943 | | | |
| Converter CV | On/Off | Round | 944 | |
| Master & Controller | RF remote | Smart RF remote | 944 | |
| | | Smart RF remote | 945 | |
| | TRIAC Controller | Eltako | 945 | |
| | DALI power Supply | Dali_PS2 | 946 | |
| | | Dali_PS1 | 946 | |
| | DALI Controller | Dali_USB | 947 | |
| | | Dali_XC | 947 | |
| | | UPB4 | 948 | |
| | | SceneCOM | 948 | |
| | | Pannel DALI | 948 | |
| | | basicDIM DGC | basicDIM DGC Digital controller | 949 |
| | | basicDIM DGC Sensor 5DPI 14rc | 949 | |
| | | basicDIM DGC Full Programmer | 949 | |
| | | basicDIM DGC Easy Programmer | 949 | |
| | DMX | Real_T | 950 | |
| | DMX/RDM | Dalc MAXI CC DMX/RDM 4ch | 950 | |
| | | Dalc Mono CV DMX/RDM 1ch | 951 | |
| | | Dalc Maxi CV DMX/RDM 4ch | 951 | |
| | DMX | Spectrum DMX 4ch | 951 | |
| | DMX Controller | Slesa_U11 DMX Controller | 952 | |
| | DMX/RDM Controller | Dina DR1 DMX controller | 952 | |
| | DMX Controller | Stick_GU2 DMX Controller | 953 | |
| | | Stick_DE3 DMX Controller | 953 | |
| | ArtNet RDM/DMX controller | Pixie_PIXEL box | 954 | |
| | | Paseo_PIXEL box | 954 | |
| | | Pix2048 | 954 | |
| | ArtNet DMX Recorder | Pixout | 955 | |
| | converter ArtNet DMX\RDM | Pixtwo | 955 | |
| | Splitter line isolator Boost DMX/RDM | Line isolator DMX | 955 | |
| | | Splitter Visual | 956 | |
| | | Splitter SWI | 956 | |
| | ArtNet DMX controller | Titan | 956 | |
| | | Pro Mk2 | 956 | |
| | ArtNet converter | DMXnode | 957 | |
| | | Key Madrix 5 | 957 | |
| | | WS WorkStation HP | 957 | |
| | | MHD Monitor | 957 | |
| | | HPE Ethernet Switch | 957 | |
| | Emergency Kit | Emergency | Emergency light kit Emergency | 958 |
| | | | Emergency light kit Emergency | 959 |




CONFIGURE YOUR NETWORK

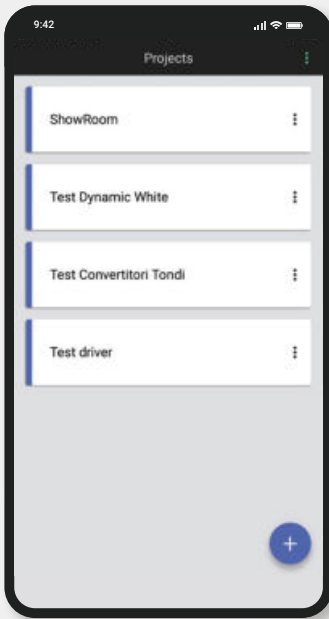


1. Identify your control areas in just a few, simple steps.




2. Load your detailed floor plans and configure the fixtures.

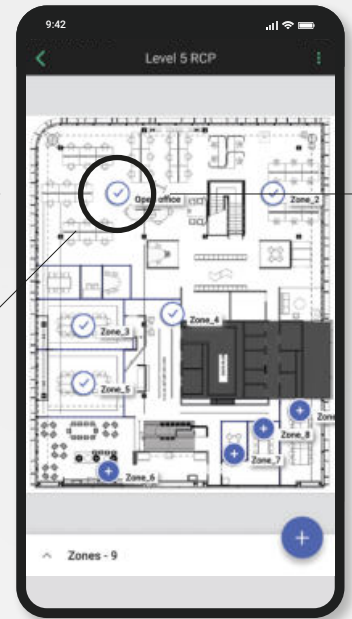

3. Once your areas are configured, the Silvoir App allows access to any area of the selected area.

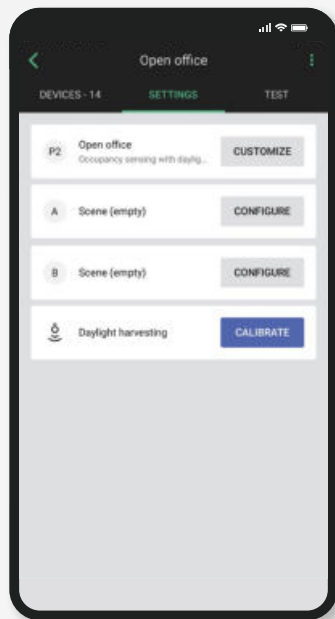


6. In just a few, simple steps, customizable scenarios can be set up based on the foreseen needs in that area.

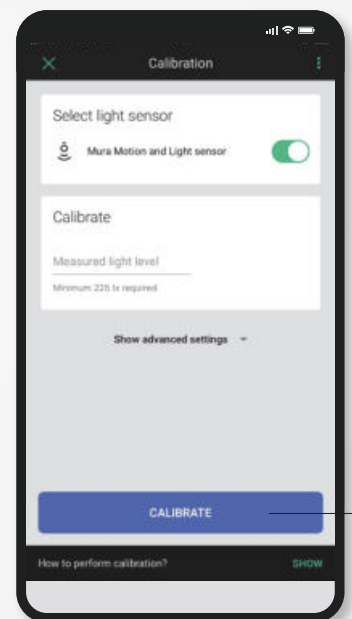



7. The Mura sensor can be calibrated selecting the quantity of light expected in a determined area, therefore personalizing the environments based on the needs of the users.

Technology Partner
SILVAIR






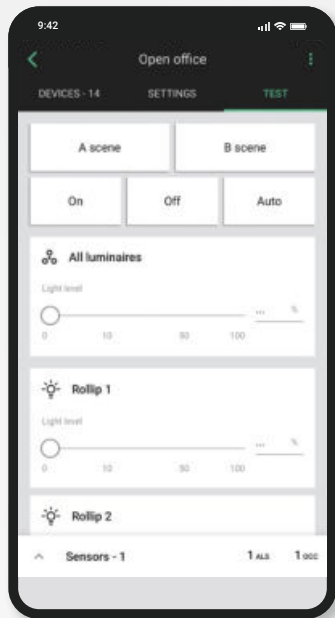

4. The control panel allows management of all the fixtures simultaneously or individually to personalise the building's lighting levels.

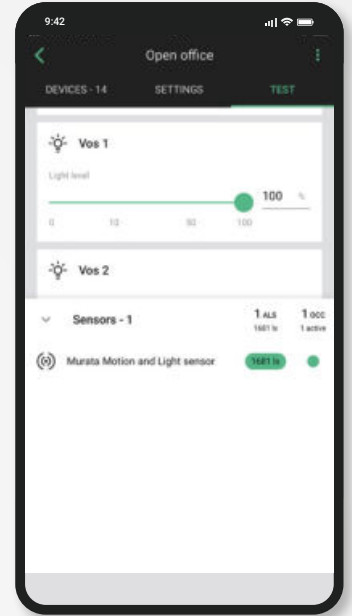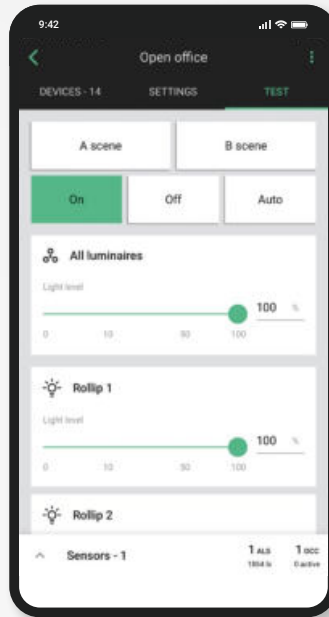

5. Thanks to the Mura Sensor, the fixtures can be configured, making the on, off and dimming system autonomous and guaranteeing greater energy savings.

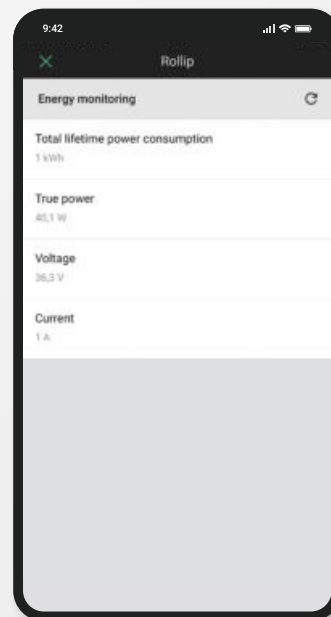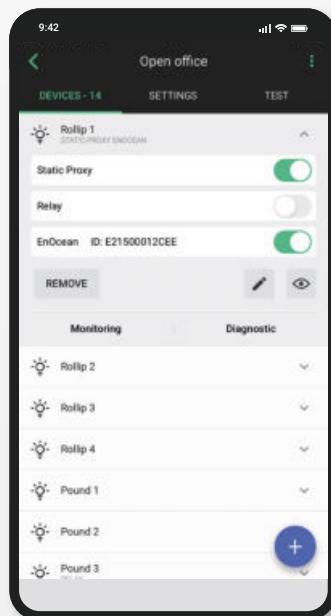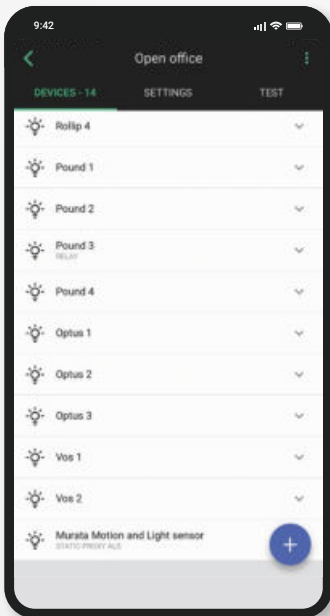

8. The system allows the operating status of each individual fixture to be monitored, guaranteeing an immediate check of the consumption in the various configured environments.




Mura Sensor

Bluetooth mesh qualified sensor suitable for controlling DALI or 1/10V drivers with additional DALI or 1/10V bus power supply.

Pag. 922.


Hendriks | Driver Bluetooth mesh



| | range | output | input | eff. | PF | surge |
|--------------|-----------------|------------|--------------|------|--------|-------|
| 83104 | 12W DC arrayLED | 350 mA 37V | 198~264 V AC | 71% | 0.85 C | 4kV |
| 83105 | 15W DC arrayLED | 450 mA 37V | 198~264 V AC | 73% | 0.87 C | 4kV |
| 83106 | 25W DC arrayLED | 700 mA 37V | 198~264 V AC | 79% | 0.93 C | 4kV |
| 83107 | 35W DC arrayLED | 950 mA 37V | 198~264 V AC | 84% | 0.96 C | 4kV |

Qualified Bluetooth mesh driver featuring a constant current output which makes it ideal for any independent application from 12W to 35W.


Cherokee | Controller Bluetooth mesh 0/1-10V 2 uscite 24/48 V DC




| | range | output | input | surge |
|--------------|------------------------------|-------------|--------------|-------|
| 83189 | 2ch. x (1- 96W stripLED/ch.) | 2xch 4A 24V | 198-264 V AC | 1kV |
| | 2ch. x (1- 72W stripLED/ch.) | 2xch 3A 48V | 198-264 V AC | |

Bluetooth mesh qualified controller featuring two 24/48VDC outputs. Suitable for controlling drivers with 0/1-10V interface. Power metre feature on the primary, measuring power consumption and energy consumed during the entire life cycle of the article. The range of the signal reaches 30 metres as the crow flies and 10 metres in an enclosed environment.

Easyfit | switch Bluetooth



83017




83226

| | type | frequency | range |
|--------------|-------|-------------------------|----------|
| 83017 | White | Radio Frequency 2.4 GHz | 2 button |
| 83226 | White | Radio Frequency 2.4 GHz | 4 button |

Switch that transmits its status based on Bluetooth low energy technology. No power supply required. The signal range is 10 m in an enclosed environment.

Mura | sensor Bluetooth mesh



| | type | frequency | control |
|--------------|-------|-------------------------|---------|
| 83016 | White | Radio Frequency 2.4 GHz | DALI |
| 83225 | White | Radio Frequency 2.4 GHz | 1-10V |




99309
DALI Power Supply
for **83016**

99658
1-10V Power Supply
for **83225**

Bluetooth mesh qualified sensor suitable for controlling DALI or 1/10V drivers with additional DALI or 1/10V bus power supply. The sensor is a LUX/PIR type. Maximum installation height 3 metres. The signal range is 10 m in an enclosed environment.


Bit | On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|------------------|-----------|-------------|------|-------|--------|
| 99243 | 6.5W DC arrayLED | 700mA 10V | 100~240V AC | 80% | 0.6 C | 0.5 kV |
| 99370 | 10W DC arrayLED | 300mA 36V | 100~240V AC | 80% | 0.6 C | 0.5 kV |

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.


Slim | On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|---------------------------------------|------------|-------------|------|-------|-------|
| 99307 | 0.7-1.5W DC powerLEDs | 220mA 6.6V | 198~264V AC | 80% | 0.6 C | 4 kV |
| 83007 | 2-5W DC powerLEDs | 220mA 20V | 198~264V AC | 80% | 0.9 C | 2 kV |
| 89144 | 1-2W DC powerLEDs 1-2.5W DC topLED | 350mA 6.6V | 198~264V AC | 80% | 0.6 C | 4 kV |
| 89145 | 3-6W DC powerLEDs 3.5-7W DC topLED | 350mA 20V | 198~264V AC | 80% | 0.6 C | 4 kV |
| 99375 | 6-12W DC powerLEDs | 350mA 40V | 198~264V AC | 80% | 0.9 C | 2 kV |
| 99195 | 1.5-3W DC powerLEDs | 500mA 6.6V | 198~264V AC | 80% | 0.6 C | 4 kV |
| 89146 | 3-5W DC powerLEDs | 500mA 10V | 198~264V AC | 80% | 0.6 C | 4 kV |
| 99377 | 4.5-10W DC powerLEDs | 500mA 20V | 198~264V AC | 80% | 0.9 C | 2 kV |
| 89147 | 2-4W DC powerLEDs | 630mA 6.6V | 198~264V AC | 80% | 0.6 C | 4 kV |
| 99376 | 6-12W DC powerLEDs | 630mA 20V | 198~264V AC | 80% | 0.9 C | 2 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Simon | On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|---|---------------------------------------|-------------|------|-------|-------|
| 99198 | 8W DC arrayLED 3-7W DC powerLEDs 8W DC topLED | 220mA 39V | 198~264V AC | 89% | 0.9 C | 4 kV |
| 99126 | 13.5W DC topLED 6-12W DC powerLEDs | 350mA 39V | 198~264V AC | 89% | 0.9 C | 4 kV |
| 99128 | 4.5-9W DC powerLEDs | 500mA 20V | 198~264V AC | 89% | 0.9 C | 4 kV |
| 99129 | 6-12W DC powerLEDs | 630mA 20V | 198~264V AC | 89% | 0.9 C | 4 kV |
| 99734 | 8W DC arrayLED 11W DC arrayLED 15W DC arrayLED | 220mA 37V 300mA 37V 400mA 37V | 198~264V AC | 82% | 0.96 | 2 kV |
| 99735 | 6W DC powerLEDs 6.5-7W DC arrayLED 10W DC powerLEDs | 500mA 12V 700mA 9-12V 800mA 12V | 198~264V AC | 74% | 0.96 | 2 kV |

| | range | output | input | eff. | PF | surge |
|--------------|--|-------------------------------------|-------------|------|-------|-------|
| 99260 | 13W DC topLED | 350mA 36V | 190~250V AC | 89% | 0.9 C | 4 kV |
| 99740 | 8W DC arrayLED 11W DC arrayLED 15W DC arrayLED | 220mA 37V 300mA 37V 400mA 37V | 190~250V AC | 82% | 0.96 | 2 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection against overheating, overloading, open circuits and short-circuits along the output line. For codes 99734, 99735 and 99740, the current is selected via the jumper.




Easy Plug connector included for codes **99260, 99740**

Leon | On/Off Driver



64



Easy Plug connector included for codes **99261, 99112, 99093, 99146.**

| | range | output | input | eff. | PF | surge |
|--------------|-------------------------------------|-----------|-------------|------|------|-------|
| 99106 | 9-18W DC powerLEDs 19W DC topLED | 500mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99105 | 12-24W DC powerLEDs | 630mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99147 | 25W DC arrayLED | 700mA 37V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99135 | 30W DC arrayLED 30W DC topLED | 840mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99239 | 35W DC arrayLED | 950mA 37V | 198~264V AC | 89% | 0.95 | 4 kV |


| | range | output | input | eff. | PF | surge |
|--------------|----------------------------------|-----------|-------------|------|------|-------|
| 99261 | 23W DC topLED | 630mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99112 | 25W DC arrayLED | 700mA 37V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99093 | 30W DC arrayLED 30W DC topLED | 840mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99146 | 35W DC arrayLED | 950mA 37V | 198~264V AC | 89% | 0.95 | 4 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

Jeti | On/Off Driver



56



Easy Plug connector included for code **83113, 83114**

| | range | output | input | eff. | PF | surge |
|--------------|-----------------|------------|--------------|------|-----|-------|
| 83111 | 40W DC arrayLED | 1100mA 37V | 198~264 V AC | 90% | 0.9 | 4 kV |
| 83113 | 40W DC arrayLED | 1100mA 37V | 198~264 V AC | 90% | 0.9 | 4 kV |


| | range | output | input | eff. | PF | surge |
|--------------|-----------------|------------|--------------|------|-----|-------|
| 83112 | 50W DC arrayLED | 1250mA 37V | 198~264 V AC | 90% | 0.9 | 4 kV |
| 83114 | 50W DC arrayLED | 1250mA 37V | 198~264 V AC | 90% | 0.9 | 4 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

Wade | On/Off Driver




98



| | range | output | input | eff. | PF | surge |
|--------------|---------------|-----------|-------------|------|------|-------|
| 99717 | 70W DC topLED | 1.75A 37V | 198~264V AC | 88% | 0.97 | 5 kV |
| 99718 | 90W DC topLED | 2.25A 37V | 198~264V AC | 88% | 0.97 | 5 kV |

Protection against overheating, overloading, open circuits and short-circuits along the output line.


Smart 50 | On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|-------------------|-----------|-------------|------|------|-------|
| 83122 | 38 W DC powerLEDs | 600mA 60V | 198~264V AC | 90% | 0.95 | 2 kV |
| | 46 W DC powerLEDs | 600mA 72V | | | | |

Protection against overheating, overloading, open circuits and short-circuits along the output line.

Edge | Triac Multi Current




| | range | output | input | eff. | PF | surge |
|--------------|-----------------------|-----------|-------------|------|------|-------|
| 99141 | 1-12 W DC powerLEDs | 350mA 39V | 198~264V AC | 85% | 0.97 | 1 kV |
| | 1.5-18 W DC powerLEDs | 500mA 39V | | | | |
| | 2-24 W DC powerLEDs | 550mA 39V | | | | |
| | 25 W DC arrayLED | 700mA 37V | | | | |

Adjustment via Phase Cut or TRIAC Dimmer.
 Operation also at 24V DC, maximum 22W.
 Selection of output current intensity via dip-switch.
 Protection against over-temperature, short circuits, overloading and mains overvoltages.

98436

Cable and connector

WT | Triac Multi Current




| | range | output | input | eff. | PF | surge |
|--------------|---------------|-----------|-------------|------|-----|-------|
| 99360 | 8 W arrayLED | 250mA 37V | 200~240V AC | 88% | 0.9 | 1 kV |
| | 13 W arrayLED | 350mA 37V | | | | |
| | 25 W arrayLED | 700mA 37V | | | | |

Adjustment via Phase Cut or TRIAC Dimmer.
 Selection of output current intensity via dip-switch.
 Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

98436

Cable and connector

Maxi JOLLY HV | 0/1-10V PUSH Multi Current




| | range | output | input | eff. | PF | surge |
|--------------|-------------------|------------|------------|------|------|-------|
| 83143 | 68 W DC powerLEDs | 550mA 108V | 99~264V AC | 92% | 0.95 | 4 kV |

Multipower driver supplied with dip-switch for the selection of the output current. Protections: against overheating and short circuits, against mains voltage spikes, against overloads.
 Light regulation 0/1 - 100 % by means of PUSH function, 0/1...10 V interface (I=1 mA) or 100 Kohm potentiometer.
 Possibility to use PUSH function to 4/5 drivers without sync cable.
 Maximum length of the cable, from push button to last driver, must be max. 15 m.

Slim | 0/1-10V Driver



29



| | range | output | input | eff. | PF | surge |
|--------------|------------------|-----------|-------------|------|-----|-------|
| 99714 | 6 W DC powerLEDs | 500mA 12V | 198~264V AC | 80% | 0.6 | 4 kV |


Settings via 0/1-10 V interface or potentiometer. Assembled driver + converter. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Simon | 0/1-10V Multi Current



48



| | range | output | input | eff. | PF | surge |
|----------------------|------------------|-----------|-------------|------|------|-------|
| 99732 / 99739 | 8 W DC arrayLED | 220mA 37V | 198~264V AC | 82% | 0.96 | 2 kV |
| | 11 W DC arrayLED | 300mA 37V | | | | |
| | 15 W DC arrayLED | 400mA 37V | | | | |

| | range | output | input | eff. | PF | surge |
|--------------|-------------------------|-------------|-------------|------|------|-------|
| 99733 | 6 W DC powerLEDs | 500mA 12V | 198~264V AC | 82% | 0.96 | 2 kV |
| | 6,5 W - 7 W DC arrayLED | 700mA 9-12V | | | | |
| | 10 W DC powerLEDs | 800mA 12V | | | | |

Selection of output current intensity via jumper. Settings via 0/1-10V interface or potentiometer. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




Easy Plug connector included for codes **99739**

Boson | 0/1-10V N/O button Multi Current



56



| | range | output | input | eff. | PF | surge |
|--------------|-----------------------|-----------|-------------|------|-------|-------|
| 99115 | 1-15 W DC powerLEDs | 350mA 45V | 198~264V AC | 87% | 0.6 C | 4 kV |
| | 15 W DC topLED | 350mA 39V | | | | |
| | 1.5-18 W DC powerLEDs | 500mA 39V | | | | |
| | 19 W DC topLED | 500mA 39V | | | | |
| | 2-20 W DC powerLEDs | 630mA 33V | | | | |


| | range | output | input | eff. | PF | surge |
|--------------|----------------|-----------|-------------|------|-------|-------|
| 99262 | 13 W DC topLED | 350mA 37V | 198~264V AC | 87% | 0.6 C | 4 kV |
| | 18 W DC topLED | 500mA 37V | | | | |
| | 20 W DC topLED | 630mA 33V | | | | |

Selection of output current intensity via dedicated terminal. Settings via interface, or 0/1-10V potentiometer, or N/A button. Possibility of connecting up to 50 drivers (via the Sync bus). Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

WT | 0/1-10V Multi Current



56



| | range | output | input | eff. | PF | surge |
|--------------|------------------|-----------|-------------|------|-----|-------|
| 99361 | 8 W DC arrayLED | 250mA 37V | 200~240V AC | 88% | 0.9 | 1 kV |
| | 13 W DC arrayLED | 350mA 37V | | | | |
| | 25 W DC arrayLED | 700mA 37V | | | | |

Settings via 0/1-10V interface or potentiometer. Selection of output current intensity via dip-switch. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

98436


Cable and connector

Indoor CC dimmable driver

Slim | DALI Driver



29



| | range | output | input | eff. | PF | surge |
|--------------|-----------------|-----------|-------------|------|-----|-------|
| 99715 | 6W DC powerLEDs | 500mA 12V | 198~264V AC | 80% | 0.6 | 4 kV |


Settings via the DALI interface. Optimisation of the DALI transmission signal. Assembled driver + converter. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Simon | DALI Push and Simply Dim Multi Current



48



| | range | output | input | eff. | PF | surge |
|----------------------|--------------------|-------------|--------------|------|------|-------|
| 99730 / 99738 | 8 W DC powerLEDs | 220mA 37V | 198~264 V AC | 75% | 0.96 | 2 kV |
| | 11W DC arrayLED | 300mA 37V | 198~264 V AC | 79% | 0.96 | 2 kV |
| | 15W DC arrayLED | 400mA 37V | 198~264 V AC | 81% | 0.96 | 2 kV |
| 99731 | 6W DC powerLEDs | 500mA 12V | 198~264 V AC | 71% | 0.96 | 2 kV |
| | 6.5-7W DC arrayLED | 700mA 9-12V | 198~264 V AC | 74% | 0.96 | 2 kV |
| | 10 W powerLEDs | 800mA 12V | 198~264 V AC | 73% | 0.96 | 2 kV |

Selection of current intensity output via jumper. Settings via the DALI interface. Optimisation of the DALI transmission signal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




Easy Plug connector included for codes **99738**

Argo | DALI Push and Simply Dim Multi Current



56



| | range | output | input | eff. | PF | surge |
|----------------------|----------------------|-------------|-------------|------|------|-------|
| 99344 / 99721 | 3.5-12W DC powerLEDs | 350mA 9-39V | 198~264V AC | 83% | 0.95 | 4 kV |
| | 4.5-18W DC powerLEDs | 500mA 9-39V | | | | |
| | 6-24W DC powerLEDs | 630mA 9-39V | | | | |
| 99345 / 99330 | 6-25W DC arrayLED | 700mA 9-37V | 198~264V AC | 85% | 0.95 | 4 kV |
| | 7.5-30W DC arrayLED | 840mA 9-37V | | | | |
| | 9-35W DC arrayLED | 950mA 9-37V | | | | |

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Selection of current intensity via dedicated terminal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




Easy Plug connector included for codes **99721, 99330**

Dynamic Drive | DRIVER DALI 2 DT8 2CH




66



| | range | output | input | eff. | PF | surge |
|--------------|--------------------|-----------|-------------|------|-----|-------|
| 83159 | 14-35W DC arrayLED | 700mA 37V | 198-264V AC | 88% | 0.9 | 1kV |

Settings via the DALI interface. Driver for Dinamic White DT8. dimming level from 0/1-100%.

Maxi JOLLY HV | DALI2 0/1-10V PUSH Multi Current



| | range | output | input | eff. | PF | surge |
|--------------|-------------------|------------|------------|------|------|-------|
| 83120 | 38 W DC powerLEDs | 600mA 60 V | 99~264V AC | 92% | 0.95 | 4 kV |
| | 46 W DC powerLEDs | 600mA 72V | | | | |

Multipower driver supplied with dip-switch for the selection of the output current. Protections: against overheating and short circuits, against mains voltage spikes, against overloads.

RIPPLE FREE $\leq 3\%$.


On request BIS certification.

Light regulation 0/1 - 100 % by means of PUSH function, 0/1...10 V interface (I=1 mA) or 100 Kohm potentiometer and DALI.

Possibility to use PUSH function to 4/5 drivers without sync cable.

Maximum length of the cable, from push button to last driver, must be max. 15 m.


Lco | DALI2 Multi Current



| | range | output | input | eff. | PF | surge |
|--------------|-------------------|-------------|------------|------|------|-------|
| 83121 | 68 W DC powerLEDs | 550mA 108 V | 99~264V AC | 92% | 0.98 | 6 kV |

Protections: against overheating and short circuits, against mains voltage spikes, against overloads. Light regulation 0/1 - 100 % by means of DALI.

Slim | 0/1-10V Converter





| | range | output | input | eff. |
|--------------|-------------------|-------------|--------|------|
| 99708 | 1.6 W powerLEDs | 350mA 3-18V | 24V DC | 95% |
| 99709 | 1.5-9 W powerLEDs | 500mA 3-18V | 24V DC | 95% |
| 99710 | 2-12 W powerLEDs | 630mA 3-18V | 24V DC | 95% |

Converter 0/1-10V.

Settings via 0/1-10V interface or potentiometer. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




Slim | DALI Converter




| | range | output | input | eff. |
|--------------|-------------------|-------------|--------|------|
| 99711 | 1.6 W powerLEDs | 350mA 3-18V | 24V DC | 95% |
| 99712 | 1.5-9 W powerLEDs | 500mA 3-18V | 24V DC | 95% |
| 99713 | 2-12 W powerLEDs | 630mA 3-18V | 24V DC | 95% |

DALI converter.

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

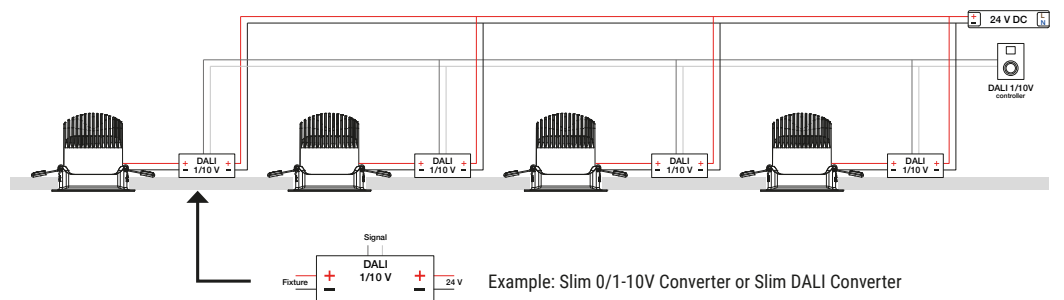



Slim |On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|------------------|-----------|-------------|------|-------|-------|
| 89408 | 1-5W DC stripLED | 200mA 24V | 198~264V AC | 80% | 0.6 C | 4 kV |
| | 1-5W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.


Fusion |On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|-------------------|--------|-------------|------|-------|-------|
| 84829 | 1-24W DC stripLED | 1A 24V | 198~264V AC | 88% | 0.6 C | 2 kV |
| | 1-24W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.

Reson_75 |On/Off Driver




| | range | output | input | eff. | PF | surge |
|--------------|--------------------|------------|-------------|------|------|-------|
| 99374 | 1-75 W DC stripLED | 3.125A 24V | 198~264V AC | 91% | 0.96 | 4 kV |
| | 1-75 W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.
High efficiency, long operating life and high PF.

Peta | Switching Driver 50 W DC

 C.V.




| | type | output | input | cooling | PF |
|--------------|------|----------|------------|--------------------|--------|
| 99371 | Peta | 2.2A 24V | 88~264V AC | Natural Convection | No PFC |

Protection self-resetting against open circuits and short-circuits along the output line.

Peta / Exa | Switching Driver 75 W DC

 C.V.




| | type | output | input | cooling | PF |
|--------------|------|----------|------------|--------------------|--------|
| 84700 | Peta | 3.2A 24V | 88~264V AC | Natural Convection | No PFC |

Protection self-resetting against open circuits and short-circuits along the output line.

Peta | Switching Driver 100 W DC


 C.V.




| | type | output | input | cooling | PF |
|--------------|------|----------|------------|--------------------|--------|
| 99372 | Peta | 4.5A 24V | 88~264V AC | Natural Convection | No PFC |

Protection self-resetting against open circuits and short-circuits along the output line.

Peta / Exa | Switching Driver 150 W DC

 C.V.




| | type | output | input | cooling | PF |
|--------------|------|----------|------------|--------------------|--------|
| 84701 | Peta | 6.5A 24V | 88~264V AC | Natural Convection | No PFC |

Protection self-resetting against open circuits and short-circuits along the output line.


Peta / Exa | Switching Driver 200 W DC

 C.V.




| | type | output | input | cooling | PF |
|--------------|------|----------|------------|--------------------|------|
| 99682 | Peta | 8.4A 24V | 88~264V AC | Natural Convection | 0.95 |

Protection self-resetting against open circuits and short-circuits along the output line.




| | type | output | input | cooling | PF |
|--------------|------|-----------|------------|--------------|------|
| 99683 | Peta | 13.4A 24V | 88~264V AC | Forced conv. | 0.95 |
| 99725 | Exa | 6.7A 48V | 88~264V AC | Forced conv. | 0.95 |

Protection self-resetting against open circuits and short-circuits along the output line.



| | type | output | input | cooling | PF |
|--------------|------|---------|------------|--------------|------|
| 84787 | Peta | 21A 24V | 88~264V AC | Forced conv. | 0.95 |

Protection self-resetting against open circuits and short-circuits along the output line.



| | type | output | input | cooling | PF |
|--------------|------|---------|------------|-------------------|------|
| 84626 | Exa | 10A 48V | 88~264V AC | Forced convection | 0.95 |


Protection self-resetting against open circuits and short-circuits along the output line.

KIT_RESON | Driver + N/O button



99374

56




| | range | output | input | eff. PF | surge |
|--------------|-----------|------------|-------------|----------|-------|
| 83018 | 1-75 W DC | 3.125A 24V | 198~264V AC | 91% 0.96 | 4 kV |



99077

48



Suitable for powering LED strips and 5 mm constant voltage LEDs. Dimming from 0 to 100% using the N/A button.
 Each driver can work as a Master or a Slave.
 Possibility of connecting up to 20 drivers via the Sync bus.
 Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




KIT_RESON | Driver + N/O button



99331

70




| | range | output | input | eff. PF | surge |
|--------------|----------|-----------|-------------|----------|-------|
| 83019 | 150 W DC | 6,25A 24V | 198~264V AC | 95% 0.98 | 4 kV |



99723

48




Suitable for powering LED strips and 5 mm constant voltage LEDs. Dimming from 0 to 100% using the N/A button.
 Each driver can work as a Master or a Slave.
 Possibility of connecting up to 20 drivers via the Sync bus.
 Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Trid | Driver DALI PUSH




29



| | range | output | input | eff. PF | surge |
|--------------|---------|-----------|-------------|----------|-------|
| 83062 | 150W DC | 6.25A 24V | 198-264V AC | 94% 0.99 | 1 kV |

Set-up via the DALI interface.
 24V constant voltage LED driver dimmable from 1 to 100% via DALI or PUSH interface.


Nyquist | N/O button



| | range | output | input | eff. |
|--------------|---------------------------------|------------|--------|------|
| 99077 | 3ch. x (1-72 W DC stripLED/ch.) | 3A 24V/ch. | 24V DC | 95% |
| | 3ch. x (1-72 W DC topLED/ch.) | | | |
| 99723 | 1-216 W DC stripLED | 9A 24V | 24V DC | 95% |
| | 1-216 W DC topLEDs | | | |

Suitable for powering LED strips and 5 mm constant voltage LED tops.
Dimming from 0 to 100% using the N/A button.
Each driver can work as a Master or a Slave.
Possibility of connecting up to 20 drivers via the Sync bus.



Bode | DALI 0/1-10V



| | range | output | input | eff. |
|--------------|---------------------------------|------------|--------|------|
| 99074 | 3ch. x (1-72 W DC stripLED/ch.) | 3A 24V/ch. | 24V DC | 95% |
| | 3ch. x (1-72 W DC topLED/ch.) | | | |
| 99660 | 1-216 W DC stripLED | 9A 24V | 24V DC | 95% |
| | 1-216 W DC topLEDs | | | |

Suitable for powering LED strips and 5 mm constant voltage LED tops.
Adjustment via DALI, 0/1-10V interface or potentiometer.


Berda mini | DALI converter



| | range | output | input |
|--------------|---------------------|--------|--------|
| 83041 | 1-60 W DC stripLED | 5A 12V | 12V DC |
| | 1-120 W DC stripLED | 5A 24V | 24V DC |

Suitable for powering 12/24V constant voltage products.
Adjustment via DALI, PUSH 1-10V interface.



Berda Maxi | DALI converter



| | range | output | input |
|--------------|---------------------|---------|--------|
| 83042 | 1-144 W DC stripLED | 12A 12V | 12V DC |
| | 1-288 W DC stripLED | 12A 24V | 24V DC |

Suitable for powering 12/24V constant voltage products.
Adjustment via DALI, PUSH 0/1-10V interface or potentiometer.

Mini_Penny |On/Off Driver





| | range | output | input | eff. | PF | surge |
|--------------|----------------------|------------|-------------|------|-------|--------|
| 89148 | 1-2 W DC powerLEDs | 350mA 6.6V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89149 | 3-6 W DC powerLEDs | 350mA 20V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89150 | 3-4.5 W DC powerLEDs | 500mA 10V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89151 | 2-4 W DC powerLEDs | 630mA 6.6V | 198~264V AC | 80% | 0.6 C | 0.5 kV |

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Mini_Aquaed |On/Off Driver




| | range | output | input | eff. | PF | surge |
|--------------|------------------------|------------|-------------|------|-------|--------|
| 89419 | 1-2.5 W DC powerLEDs | 350mA 6.6V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89421 | 3.5-6.5 W DC powerLEDs | 350mA 20V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89422 | 1.5-3.5 W DC powerLEDs | 500mA 6.6V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89423 | 3-5 W DC powerLEDs | 500mA 10V | 198~264V AC | 80% | 0.6 C | 0.5 kV |
| 89420 | 2-4 W DC powerLEDs | 630mA 6.6V | 198~264V AC | 80% | 0.6 C | 0.5 kV |

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Penny_Q |On/Off Driver





| | range | output | input | eff. | PF | surge |
|--------------|-----------------|-----------|-------------|------|-------|-------|
| 99716 | 7.5 W DC topLED | 180mA 40V | 198~264V AC | 76% | 0.6 C | 4 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF.
Protection against overheating, overloading, open circuits and short-circuits along the output line.



Penny |On/Off Driver




| | range | output | input | eff. | PF | surge |
|--------------|----------------------|-----------|-------------|------|------|-------|
| 99177 | 6-12 W DC powerLEDs | 350mA 39V | 198~264V AC | 84% | 0.96 | 4 kV |
| 99176 | 4.5-9 W DC powerLEDs | 500mA 20V | 198~264V AC | 84% | 0.96 | 4 kV |
| 99175 | 6-12 W DC powerLEDs | 630mA 20V | 198~264V AC | 84% | 0.96 | 4 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF.
Protection against overheating, overloading, open circuits and short-circuits along the output line.



Aquaed |On/Off Driver




| | range | output | input | eff. | PF | surge |
|--------------|-----------------------|-----------|-------------|------|-------|-------|
| 99342 | 3.8-8.4W DC powerLEDs | 220mA 39V | 198~264V AC | 84% | 0.6 C | 4 kV |
| 99183 | 13 W DC arrayLED | 350mA 36V | 198~264V AC | 84% | 0.95 | 4 kV |
| | 6-12 W DC powerLEDs | | | | | |
| 99181 | 4.5-9 W DC powerLEDs | 500mA 20V | 198~264V AC | 80% | 0.95 | 4 kV |
| 99179 | 6-12 W DC powerLEDs | 630mA 20V | 198~264V AC | 80% | 0.95 | 4 kV |

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




Maxi_Aquaed |On/Off Driver



| | range | output | input | eff. | PF | surge |
|--------------|----------------------|-----------|-------------|------|------|-------|
| 99185 | 20 W DC arrayLED | 500mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| | 9-18 W DC powerLEDs | | | | | |
| 99340 | 20 W DC arrayLED | 580mA 37V | 198~264V AC | 91% | 0.95 | 4 kV |
| 99186 | 20 W DC arrayLED | 630mA 39V | 198~264V AC | 91% | 0.95 | 4 kV |
| | 12-24 W DC powerLEDs | | | | | |
| 99269 | 30 W DC arrayLED | 840mA 37V | 198~264V AC | 91% | 0.95 | 4 kV |

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF.
Protection against overheating, overloading, open circuits and short-circuits along the output line.






| | range | output | input | eff. | PF | surge |
|--------------|----------------|-----------|-------------|------|-----|-------|
| 99726 | 70 W DC topLED | 1.8A 37V | 100~250V AC | 93% | 0.9 | 4 kV |
| 99728 | 90 W DC topLED | 2.28A 37V | 100~250V AC | 93% | 0.9 | 4 kV |

Settings via 0/1-10 V interface or potentiometer. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

98436
Cable and connector



| | range | output | input | eff. | PF | surge |
|--------------|----------------------|--------------|-------------|------|------|-------|
| 83154 | 4-12W DC powerLEDs | 250mA 15-49V | 99~264 V AC | >88% | 0,95 | 4kV |
| 83100 | 1-14W DC powerLEDs | 350mA 2-49V | 99~264 V AC | >88% | 0,95 | 4kV |
| 83101 | 1,5-21W DC powerLEDs | 500mA 2-49V | 99~264 V AC | >88% | 0,95 | 4kV |
| 83102 | 2-28W DC powerLEDs | 630mA 2-49V | 99~264 V AC | >88% | 0,95 | 4kV |
| 83103 | 2,5-30W DC powerLEDs | 700mA 2-43V | 99~264 V AC | >88% | 0,95 | 4kV |


Settings via the DALI 2 interface. Protection against overheating, overloading, open circuits and short-circuits along the output line.



99309
DALI Power supply



Mean | DALI Driver




| | range | output | input | eff. | PF | surge |
|--------------|----------------|-----------|-------------|------|-----|-------|
| 83194 | 54 W DC topLED | 1.45A 36V | 100~305V AC | 89% | 0.9 | 4 kV |
| 83195 | 75 W DC topLED | 2.1A 36V | 100~305V AC | 89% | 0.9 | 4 kV |

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



99309
DALI Power supply

Mean | DALI Driver




| | range | output | input | eff. | PF | surge |
|--------------|----------------|-----------|-------------|------|-----|-------|
| 99727 | 70 W DC topLED | 1.8A 37V | 120~277V AC | 93% | 0.9 | 2 kV |
| 99729 | 90 W DC topLED | 2.28A 37V | 120~277V AC | 93% | 0.9 | 2 kV |

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



99309
DALI Power supply

Mean | DALI Driver




| | range | output | input | eff. | PF | surge |
|--------------|----------------|-----------|-------------|------|-----|-------|
| 83196 | 157W DC topLED | 4.35A 42V | 100~305V AC | 92% | 0.9 | 4 kV |

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



99309
DALI Power supply

AquaLED |On/Off Driver 24V





| | range | output | input | eff. | PF | surge |
|--------------|--------------------------------|--------|-------------|------|-------|--------|
| 89488 | 1-14.4 W DC stripLED 600mA 24V | | 190~250V AC | 80% | 0.6 C | 0.5 kV |
| | 1-14.4 W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.




Lingotto |On/Off Driver 24V



| | range | output | input | eff. | PF | surge |
|--------------|--------------------|-----------|-------------|------|-------|-------|
| 83009 | 1-18 W DC stripLED | 750mA 24V | 190~250V AC | 82% | 0.6 C | 3 kV |
| | 1-18 W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.

Maxi_AquaLED |On/Off Driver 24V




| | range | output | input | eff. | PF | surge |
|--------------|--------------------|--------|-------------|------|-------|-------|
| 89179 | 1-24 W DC stripLED | 1A 24V | 198~264V AC | 88% | 0.6 C | 2 kV |
| | 1-24 W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.




Giant_AquaLED |On/Off Driver 24V




| | range | output | input | eff. | PF | surge |
|--------------|--------------------|--------|-------------|------|-------|-------|
| 89359 | 1-48 W DC stripLED | 2A 24V | 198~264V AC | 89% | 0.6 C | 1 kV |
| | 1-48 W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
Protection self-resetting against open circuits and short-circuits along the output line.

Reson_150 |On/Off Driver 24V



70



| | range | output | input | eff. | PF | surge |
|--------------|---------------------|-----------|-------------|------|------|-------|
| 99331 | 1-150 W DC stripLED | 6.25A 24V | 198~264V AC | 95% | 0.98 | 5 kV |
| | 1-150 W DC topLED | | | | | |


Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF.



Mean |On/Off Driver 24V



81




| | range | output | input | eff. | PF | surge |
|--------------|---------------------|---------|-------------|------|------|-------|
| 99786 | 1-240 W DC stripLED | 10A 24V | 100~240V AC | 92% | 0.95 | 6 kV |
| | 1-240 W DC topLED | | | | | |

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against the open circuit and the short-circuit along the output line.

Mean |On/Off Driver 48V




80




| | range | output | input | eff. | PF | surge |
|--------------|------------|-----------|-------------|------|------|-------|
| 99784 | 1-150 W DC | 3.13A 48V | 180~295V AC | 91% | 0.95 | 6 kV |

Suitable for Real_T, Smart, Pixie. Protection self-resetting against the open circuit and short-circuit along the output line.

Mean |On/Off Driver 48V



81




| | range | output | input | eff. | PF | surge |
|--------------|------------|--------|-------------|------|------|-------|
| 99785 | 1-240 W DC | 5A 48V | 100~240V AC | 92% | 0.95 | 2 kV |

Suitable for Real_T, Smart, Pixie. Protection self-resetting against the open circuit and short-circuit along the output line.

Mean | On/Off Driver 12V

NEW □ C.V. IP67




| | range | output | input | eff. | PF | surge |
|--------------|----------|--------|------------|------|----|-------|
| 83010 | 1-60W DC | 5A 12V | 90~264V AC | 83% | | 3 kV |

Suitable for Nautilus, MK68.
Protection self-resetting against the open circuit and short-circuit along the output line.

Mean | On/Off Driver 12V

NEW □ C.V. IP67




| | range | output | input | eff. | PF | surge |
|--------------|-----------|-----------|-------------|------|----|-------|
| 83013 | 1-150W DC | 12.5A 12V | 180~305V AC | 87% | | 3 kV |

Suitable for Nautilus, MK68.
Protection self-resetting against the open circuit and short-circuit along the output line.



Mean | DALI driver 12V

NEW □ C.V. DALI IP67




| | range | output | input | eff. | PF | surge |
|--------------|---------|---------|------------|------|-----|-------|
| 83015 | 120W DC | 10A 12V | 90~305V AC | 88% | 0.9 | 2kV |

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Mean | DALI driver 12V

NEW □ C.V. DALI IP67




| | range | output | input | eff. | PF | surge |
|--------------|--------|--------|------------|------|-----|-------|
| 83012 | 60W DC | 5A 12V | 90~305V AC | 86% | 0.9 | 2kV |

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Reson_150 | 0/1-10V Driver 24V



70



| | range | output | input | eff. | PF | surge |
|--------------|---------------------|-----------|-------------|------|------|-------|
| 99332 | 1-150 W DC stripLED | 6.25A 24V | 198~264V AC | 95% | 0.98 | 5 kV |
| | 1-150 W DC topLED | | | 95% | 0.98 | 5 kV |


Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top.
 Protection self-resetting against open circuits and short-circuits along the output line.
 High efficiency, long operating life and high PF.
 Adjustment via 0/1-10V interface or potentiometer.



Mean | DALI Driver 24V



73




| | range | output | input | eff. | PF | surge |
|--------------|---------------------|--------|-------------|------|------|-------|
| 99722 | 1-120 W DC stripLED | 5A 24V | 190~250V AC | 90% | 0.9C | 2 kV |

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Mean | DALI Driver 24V



81




| | range | output | input | eff. | PF | surge |
|--------------|---------------------|---------|-------------|------|------|-------|
| 99787 | 1-240 W DC stripLED | 10A 24V | 180~295V AC | 91% | 0.95 | 2 kV |
| | 1-240 W DC topLED | | | | | |

Suitable for powering LED strips and 5 mm constant voltage LEDs. Adjustment via the DALI interface.
 Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Mean | DALI Driver 48V




80



| | range | output | input | eff. | PF | surge |
|--------------|-----------|-----------|-------------|------|------|-------|
| 83179 | 1-150W DC | 3.13A 48V | 180~295V AC | 90% | 0.95 | 6 kV |

Suitable for powering LED strips and 5 mm constant voltage LEDs. Adjustment via the DALI interface.
 Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Round | On/Off Converter



| | range | output | input | eff. |
|--------------|------------------------|-----------|--------|------|
| 89175 | 1-3 W DC powerLEDs | 350mA 12V | 12V DC | 95% |
| | 1-6 W DC powerLEDs | 350mA 24V | 24V DC | 95% |
| 89176 | 1.5-4.5 W DC powerLEDs | 500mA 12V | 12V DC | 95% |
| | 1.5-9 W DC powerLEDs | 500mA 24V | 24V DC | 95% |
| 89177 | 2-6 W DC powerLEDs | 630mA 12V | 12V DC | 95% |
| | 2-12 W DC powerLEDs | 630mA 24V | 24V DC | 95% |

Protection against overheating, overloading, open circuits and short-circuits along the output line.

Smart | RF remote



| | range | output | input | eff. |
|--------------|----------------------------------|-----------|--------|------|
| 99703 | 4ch. x (0.6-8.4 W powerLEDs/ch.) | 220mA 39V | 48V DC | 95% |
| | 4ch. x (0,6-4,2 W powerLEDs/ch.) | 220mA 20V | 24V DC | |
| 99741 | 4ch. x (1-12 W powerLEDs/ch.) | 350mA 39V | 48V DC | 95% |
| | 4ch. x (1-6 W powerLEDs/ch.) | 350mA 20V | 24V DC | |
| 99742 | 4ch. x (1.5-18 W powerLEDs/ch.) | 500mA 39V | 48V DC | 95% |
| | 4ch. x (1.5-9 W powerLEDs/ch.) | 500mA 20V | 24V DC | |
| 99743 | 4ch. x (2-24 W powerLEDs/ch.) | 630mA 39V | 48V DC | 95% |
| | 4ch. x (2-12 W powerLEDs/ch.) | 630mA 20V | 24V DC | |

48V DC switching

| | |
|--------------|----------------|
| 99784 | Exa 150 W IP65 |
|--------------|----------------|

24V DC switching

| | |
|--------------|-------------|
| 99371 | Peta 50 W |
| 84700 | Peta 75 W |
| 99374 | Reason 75 W |

FR Remote



99700
RF Remote
Full MONO



99701
RF Remote
Full DYNAMIC




99702
RF Remote
Full RGB/RGBW


Dimming via radio frequency remote control or single N/A button.
Synchronisation of 20 items with only one remote control. Device with 4 channels and dedicated dip switch for configuration: MONO, DYNAMIC, RGB, RGBW.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

RF FULL remote control functions:

- on/off
- dimming
- recall of max 4 scenes



99540



| | range | output | input | eff. |
|--------------|-------------------|---------------|--------|------|
| 99694 | MONO stripLED | 3A x 4ch. 24V | 24V DC | 95% |
| 99695 | DYNAMIC stripLED | 3A x 4ch. 24V | 24V DC | 95% |
| 99696 | RGB/RGBW stripLED | 3A x 4ch. 24V | 24V DC | 95% |
| 99540 | Repeater | 5A x 4ch. 24V | 24V DC | 95% |

| 24V DC switching | | 24V DC switching | |
|------------------|-------------|------------------|--------------|
| 99371 | Peta 50 W | 99331 | Reason 150 W |
| 84700 | Peta 75 W | 99786 | Mean 240 W |
| 99374 | Reason 75 W | | |

Dimming via radio frequency remote control or single N/A button.
Synchronisation of 20 items with only one remote control. Device with 4 channels for configuration: MONO, DYNAMIC, RGB, RGBW.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

RF FULL remote control functions:

- on/off
- dimming
- recall of max 4 scenes

FR Remote




99700
RF Remote
Full MONO



99701
RF Remote
Full DYNAMIC




99702
RF Remote
Full RGB/RGBW




| | comand | output | connector | input |
|----------------|----------|--------|-----------|-------------|
| KIT0027 | Push DIM | 350W | CLAMP | 220~240V AC |

Phase Cut Dimmer, via N/A button.
Rotating selectors for the choice of dimming and ascent and descent time.
AUTO configuration that enables the dimming of any type of 230V AC lamp.




| | type | signal output | connector | input |
|--------------|-------|----------------|-----------|-------------|
| 99310 | White | DALI 15~16V DC | CLAMP | 220~240V AC |

Power supply for 240 mA DALI BUS, for DALI devices, or control modules without own power supply. Power supply suitable for mounting on 35mm Omega DIN rail.



| | type | signal output | connector | input |
|--------------|---------|----------------|-----------|-------------|
| 99309 | Transp. | DALI 15~16V DC | CLAMP | 220~240V AC |

Power supply for 200 mA DALI BUS, for DALI devices, or control modules without own power supply.




| | type | signal output | connector | input |
|--------------|---------|---------------|-----------|-----------|
| 99308 | Transp. | DALI | CLAMP USB | 4.5~5V DC |

PC/DALI interface.
 It allows the PC to interface with the DALI system and to address individual drivers, managing scenes and groups.
 The system must be integrated with the free "MasterCONFIGURATOR" software.
 Powered by DALI cable and USB interface.



99309
 Power supply




| | type | signal output | connector | input |
|--------------|-------|---------------|-----------|-----------|
| 99311 | White | DALI | CLAMP | 15~16V DC |

4 independent inputs for N/O contacts/buttons.
 Operating mode adjustable via 2 rotary switches.
 Possibility of connecting multiple DALI MSensors in a group and on the DALI line.
 Power supply via DALI cable.
 Connection cables, with a length of 25 cm, depending on the colours of the terminal, included.



99309
 Power supply


XC G2 | DALI2



| | type | signal output | connector | input |
|--------------|-------|---------------|-----------|-----------|
| 83147 | White | DALI | CLAMP | 15-16V DC |

4 independent inputs for contacts and N / O buttons.
 Possibility of connecting several XC G2s on the DALI line.
 Power supply via DALI cable.
 Connection cables with a length of 25cm according to the colors of the terminal.

SceneCOM EVO | DALI2




| | type | signal output | connector | input |
|--------------|-------|---------------|-----------|-------------|
| 83146 | White | 3 DALI Lines | CLAMP | 220~240V AC |

DALI2 control unit.
 Maximum number of DALI drivers that can be connected 192.
 3 DALI outputs.
 Web interface for programming. Schedules and programmable calendar functions

basicDIM DGC | Digital controller

IP20




| | type | signal output | connector | input |
|--------------|-------|---------------|-----------|-------------|
| 83115 | White | DALI/DSI | CLAMP | 220~240V AC |

2 broadcast control outputs for 10 + 10 DALI \ DSI drivers.
Possibility of programming via TLC FULL programmer 83118 or via free "MasterCONFIGURATOR" software.

basicDIM DGC | Sensor 5DPi 14rc

  IP20




| | type | signal output | connector | input |
|--------------|-------|---------------|-----------|-----------|
| 83116 | White | DALI/DSI | CLAMP | 15-16V DC |

LUX \ PIR sensor, maximum 4 sensors connected to a 83115 digital controller.
Possibility of programming via TLC FULL programmer 83118 or via free "MasterCONFIGURATOR" software

basicDIM DGC | Full Programmer

 IP20



| | L x W x H |
|--------------|-----------|
| 83118 | 130x56x15 |

Programming remote control for 83115 and 83116.
Programming functions: brightness levels and delay time for switching on and off, possibility to deactivate LUX or \ and PIR sensor.


basicDIM DGC | Easy Programmer

 IP20



| | L x W x H |
|--------------|--------------|
| 83119 | 86.5x40.5x72 |

Remote control for 83115 and 83116 management.
On, Off and Dimming functionality.
Activation of automatic lighting control (LUX).




| | range | output | input | eff. |
|--------------------------------|----------------------------------|-----------|--------|------|
| 99333 | 4ch. x (0.6-8.4 W powerLEDs/ch.) | 220mA 39V | 48V DC | 95% |
| | 4ch. x (1-12 W powerLEDs/ch.) | 350mA 39V | | |
| | 4ch. x (15 W arrayLED/ch.) | 400mA 37V | | |
| | 4ch. x (1.5-18 W powerLEDs/ch.) | 500mA 39V | | |
| | 4ch. x (2-24 W powerLEDs/ch.) | 630mA 39V | | |
| | 4ch. x (25 W arrayLED/ch.) | 700mA 37V | | |
| | 4ch. x (30 W arrayLED/ch.) | 840mA 37V | | |
| | 4ch. x (35 W arrayLED/ch.) | 950mA 37V | | |
| | 4ch. x (0,6-4,2 W powerLEDs/ch.) | 220mA 20V | | |
| 4ch. x (1-6 W powerLEDs/ch.) | 350mA 20V | | | |
| 4ch. x (1.5-9 W powerLEDs/ch.) | 500mA 20V | | | |
| 4ch. x (2-12 W powerLEDs/ch.) | 630mA 20V | | | |

Compatible with USITT DMX 512-A protocol.
 DMX addressing via push-button interface: CH1 - CH512.
 Possibility to set the output current from 220mA to 1A, via push-button interface.
 Display of the current and the DMX address on the display screen.
 Change settings, DMX address and current, in real time. Possibility of managing 3 or 4 DMX addresses/channels (RGB - RGBW - WRGB) via the jumper.
 Fixture suitable for mounting on 35mm Omega DIN rail.



84865
DMX cable

| 48V DC switching | | 24V DC switching | |
|------------------|------------|------------------|--------------|
| 99784 | Mean 150 W | 99371 | Peta 50 W |
| 99785 | Mean 240 W | 84700 | Peta 75 W |
| | | 99374 | Reason 75 W |
| | | 99331 | Reason 150 W |




| | range | output | input |
|--------------|----------------|--------|--------------|
| 83187 | 4ch x 3/6/12W | 250mA | 12/24/48V DC |
| | 4ch x 4/8/16W | 350mA | 12/24/48V DC |
| | 4ch x 6/12/24W | 500mA | 12/24/48V DC |
| | 4ch x 8/16/33W | 700mA | 12/24/48V DC |

Suitable for powering Nautilus RGBW products.
 Regulation via DMX interface, PUSH, 0 / 1-10V interface and potentiometer. Four output channels.
 Dimming functions warm tune, dynamic white, RGB, RGBW. Current and dmX address settable via rotay switch or via DMX \ RDM.



84865
Cable

| 12V DC switching | | 24V DC switching | |
|------------------|------------|------------------|--------------|
| 83010 | Mean 60 W | 99371 | Peta 50 W |
| 83013 | Mean 120 W | 84700 | Peta 75 W |
| | | 99374 | Reason 75 W |
| | | 99331 | Reason 150 W |
| 48V DC switching | | | |
| 99784 | Mean 150 W | | |
| 99785 | Mean 240 W | | |



| | range | output | input | eff. |
|--------------|------------|----------|--------|------|
| 83177 | 1-78 W DC | 6.5A 12V | 12V DC | 95% |
| | 1-156 W DC | 6.5A 24V | 24V DC | 95% |
| | 1-312 W DC | 6.5A 48V | 48V DC | 95% |



84865
Cable

Suitable for powering 12/24/48V constant voltage products.
Regulation via DMX interface, PUSH, 0 / 1-10V interface or potentiometer. Single output channel.

12V DC switching


| | |
|--------------|------------|
| 83010 | Mean 60 W |
| 83013 | Mean 120 W |

48V DC switching

| | |
|--------------|------------|
| 99784 | Mean 150 W |
| 99785 | Mean 240 W |

24V DC switching

| | |
|--------------|--------------|
| 99371 | Peta 50 W |
| 84700 | Peta 75 W |
| 99374 | Reason 75 W |
| 99331 | Reason 150 W |



| | range | output | input | eff. |
|--------------|--------------------|-----------|--------|------|
| 83178 | 4ch (1-60W DC/ch) | 5A 12V/ch | 12V DC | 95% |
| | 4ch (1-120W DC/ch) | 5A 24V/ch | 24V DC | 95% |
| | 4ch (1-240W DC/ch) | 5A 48V/ch | 48V DC | 95% |



84865
Cable

Suitable for powering 12/24/48V constant voltage products.
Regulation via DMX interface, PUSH, 0 / 1-10V interface.
Four output channels. Warm tune, dynamic white, RGB, RGBW dimming functions.

12V DC switching


| | |
|--------------|------------|
| 83010 | Mean 60 W |
| 83013 | Mean 120 W |

48V DC switching

| | |
|--------------|------------|
| 99784 | Mean 150 W |
| 99785 | Mean 240 W |

24V DC switching

| | |
|--------------|--------------|
| 99371 | Peta 50 W |
| 84700 | Peta 75 W |
| 99374 | Reason 75 W |
| 99331 | Reason 150 W |



| | range | output | input | eff. |
|--------------|------------------------------|-----------|--------|------|
| 99278 | 4ch. x (1-72 W stripLED/ch.) | 3A 24V/ch | 24V DC | 95% |
| | 4ch. x (1-72 W topLED/ch.) | | | |





84865
Cable

Suitable for powering LED strips and 5 mm LEDs, including RGB.
DMX address selectable via 3 rotary switches.
Compatible with USITT DMX 512-A protocol.
Maximum of 256 devices can be installed on the same DMX bus.
DMX addressing: CH1 - CH512. Maximum length of the DMX line: 300 m
Possibility of managing 3 or 4 DMX addresses/channels (RGB - RGBW - WRGB) via the jumper.

24V DC switching

| | |
|--------------|--------------|
| 99371 | Peta 50 W |
| 84700 | Peta 75 W |
| 99374 | Reason 75 W |
| 99331 | Reason 150 W |





| | signal output | connector | input |
|----------------------|---------------|----------------------------|-----------|
| 83243 + 83244 | DMX | RJ45 XLR 3 Pin F. USB C | 5.5~6V DC |

Move from 1 to 99 different pages.
 5 zone selector.
 Graphic display of the running mode.
 "Live" function via USB.
 Compatible with the remote application that allows the creation of a custom interface and the connection of any controller command.




89186
 5 m extension M 5
 pin M12
 M 3 pin XLR



84869
 Connector
 M 3 pin XLR



84865
 DMX cable




| | signal output | connector | input |
|--------------|---------------|-------------------------------|--------|
| 83144 | 6 uni DMX/RDM | CLAMP Ethernet RJ45 USB typeC | 12V DC |

DMX/RDM control unit which can control up to 6 universal DMX that can handle diverse (scenografie) sets through the contacts. (difficile non so cosa vuoi dire qui). Power relay handling.
 Available remote control APP.



83145
 Power Supply




| | type | signal output | connector | input |
|--------------|-------|---------------|-----------------|-----------|
| 99045 | White | DMX | CLAMP micro USB | 5.5~6V DC |
| 99046 | Black | DMX | CLAMP micro USB | 5.5~6V DC |

Mode selector: Color, Scene and Dimmer.
 In scene mode it is possible to recall a series of set values.
 During the execution of a program, the dimmer function can be used to vary the intensity.
 In colour mode, it is possible to recall a series of pre-set static colours.
 All functions can be configured by hardware manager (enable/disable the different modes, select starting scenario, etc.).



- 
99184
 Power supply
- 
84865
 DMX cable
- 
98140
 Outer casing




| | type | signal output | connector | input |
|--------------|-------|---------------|---------------------|-----------|
| 99234 | White | DMX | CLAMP RJ45 mini USB | 5.5~6V DC |
| 99235 | Black | DMX | CLAMP RJ45 mini USB | 5.5~6V DC |

Zone selector to simultaneously activate up to 10 scenes.
 Dimmer to adjust light intensity and saturation.
 Selector of up to 50 scenes with the possibility of choosing between dynamic or static. The arrows allow you to change the active scene.
 Colour selector to choose from 16 million colours. The arrows allow you to enter RGB values.
 Possibility of increasing or reducing the speed of dynamic scenes and colour effects.



- 
99184
 Power supply
- 
84865
 DMX cable
- 
98140
 Outer casing

Pixie_PIXEL box | ArtNet RDM/DMX controller for Pixie_PIXEL




| | signal output | signal input | connector | Power input |
|--------------|---------------|--------------|-----------|-------------|
| 83220 | Pixie cable | DMX512/RDM | 5 Pin F. | 48 V DC |

Required to drive PIXEL Pixies.
Programmable via RDM. Electrically isolates the PIXEL Pixie line from the DMX/RDM line to avoid disturbance propagation.

- 98493**
5 m extension
M 5 pin M12
M 5 pin XLR
- 89187**
M. / F.
5pin M12
- 83199**
M. / F. 4 pin
- 84865**
DMX cable
- 99785**
48V
- 89365**
DMX Line closure

Paseo_PIXEL box | ArtNet RDM/DMX controller for Paseo_PIXEL




| | signal output | signal input | connector | Power input |
|--------------|---------------|--|-----------|--------------|
| 99388 | 4 Paseo cable | DMX512/RDM ETHERNET (Artnet, sACN) | 5 Pin M12 | 100~240 V AC |

Required to drive Paseo_PIXEL in high pixel-density mode.
Bridge RDM for the programming of Paseo_PIXEL.
Supports 16 DMX universes via ARTNET or sACN protocol.
Generate the RS-485 signal required by Paseo_PIXEL.


- 98493**
5 m extension
M 5 pin M12
M 5 pin XLR
- 99346**
Connector
M 5 pin XLR
- 84865**
DMX cable

Pix2048 | start pixel box




| | type | signal output | signal input | connector | Power input |
|--------------|-------|---------------|---------------|-----------|-------------|
| 83193 | Black | DMX 2048 | DMX 512 / RDM | CLAMP | 24 - 48V DC |

Non isolated control interface for rgb / rgbw article with digital control. Recommended for Xenia_PIXEL and Paseo_PIXEL_Dark or for Linea Light items only. Maximum distance from the ArtNet node 50 meters. Control via DMX / RDM 99385 addresser.




| | signal output | connector | Input |
|--------------|---------------|-----------|------------|
| 99575 | 16 Uni ArtNet | RJ45 | 12~40 V DC |
| 99576 | 32 Uni ArtNet | RJ45 | 12~40 V DC |
| 99577 | 64 Uni ArtNet | RJ45 | 12~40 V DC |

ArtNet DMX stand alone recorder of ArtNet DMX sequences.
It can be accessed from a mobile device or web browser to adjust the recording and triggering settings.



| | signal output | signal input | connector | Power input |
|--------------|---------------|--------------------------------|------------|--------------|
| 83192 | 2 x DMX-RDM | ETHERNET (Artnet4 protocol) | CLAMP RJ45 | 12 ~ 24 V DC |


ArtNet-DMX RDM signal converter.
Possibility to configure via web page.



| | signal output | signal input | connector | Power input |
|--------------|---------------|--------------|-----------|-------------|
| 99657 | Bus DMX512 | Bus DMX512 | Clamp | 12V DC |


The Line isolator galvanically isolates the DMX512/RDM input with the output.
Through RDM it is possible to set the personality and therefore the type of operation.






| | signal output | signal input | connector input |
|--------------|---------------|--------------|-----------------|
| 99386 | 6 DMX512/RDM | DMX512/RDM | CLAMP 9~24V DC |

The DMX-512 Splitter takes the DMX input signal and sends it back to the 6 DMX output ports. The splitter can also function as a signal amplifier, because each port supports another 300-metre long connection. This splitter complies with the RDM protocol for bi-directional communication on DMX. Fixture suitable for mounting on 35mm Omega DIN rail.


- 
99658
 Power supply
- 
84865
 DMX cable
- 
89189
 5m cable M 5 pin M12
- 
98985
 ALLinONE splitter signal/power



| | signal output | signal input | connector Input |
|--------------|-----------------|---------------|-----------------|
| 83148 | 6 DMX 512 / RDM | DMX 512 / RDM | Clamp 10~48 VDC |

The DMX-512 Splitter takes the DMX input signal and sends it back to the 6 DMX output ports. The splitter can also function as a signal amplifier, because each port supports another 300-metre long connection. This splitter complies with the RDM protocol for bi-directional communication on DMX. Fixture suitable for mounting on 35mm Omega DIN rail.


- 
99658
 Power supply
- 
84865
 DMX cable
- 
89189
 5m cable M 5 pin M12
- 
98985
 ALLinONE splitter signal/power



| | LxPxH mm | signal output | signal input | connector | Power input |
|--------------|------------|---------------|---------------|--------------|-------------|
| 99381 | 140x63x38 | 2 DMX512 | Ethernet RJ45 | XLR 5 Pin F. | 100~240V AC |
| 99382 | 138x93x38 | 4 DMX512 | Ethernet RJ45 | XLR 5 Pin F. | 100~240V AC |
| 99383 | 483x137x44 | 8 DMX512 | Ethernet RJ45 | XLR 5 Pin F. | 100~240V AC |
| 99384 | 483x137x44 | 16 DMX512 | Ethernet RJ45 | XLR 5 Pin F. | 100~240V AC |

The ArtNet protocol is received via Ethernet. Generate the DMX512 signal. Perfect synchronisation between universes. Configurable via web page.

- 
98493
 5 m extension M 5 pin M12 M 5 pin XLR
- 
99346
 Connector M 5 pin XLR
- 
84865
 DMX cable
- 
89189
 5m cable M 5 pin M12



| | signal output | signal input | connector | Power input |
|--------------|---------------|----------------|--------------|-------------|
| 99385 | 2 DMX512 | USBtypeMicro-B | XLR 5 Pin F. | USB 5V |

ENTTEC software included. Required to program DMX/RDM devices. Test the correct operation of the installation. It is possible to use the two DMX universes and the stand-alone mode for small installations (1024 pixels).

- 
89186
 5 m extension M 5 pin M12 M 3 pin XLR
- 
98493
 5 m extension M 5 pin M12 M 5 pin XLR
- 
99346
 Connector M 5 pin XLR
- 
84865
 DMX cable
- 
89189
 5m cable M 5 pin M12

DMXnode | ArtNet converter

NEW  IP20



| | signal output | signal Input | Connector | Power Input |
|--------------|---------------|--------------|-----------|-------------|
| 83149 | 4 UNI | ArtNet | RJ45 XLR3 | 100~240V AC |
| 83150 | 4 UNI | ArtNet | RJ45 XLR3 | |
| 83151 | 8 UNI | ArtNet | RJ45 XLR3 | |


83152
 Plug Power DMXnode

Art-Net and sACN to DMX converter for 4 and 8 independent universes. 4 and 8 individually optically isolated DMX ports. Graphic display and encoder knob for easy configuration and accurate status information. Web interface for status observation, settings adjustment and firmware updates. Neutrik powerCON input and output

Key | Madrix 5



| | type | signal output |
|--------------|--------------|------------------|
| 81828 | entry | 8 DMX Universe |
| 81829 | basic | 32 DMX Universe |
| 81830 | professional | 128 DMX Universe |
| 81831 | ultimate | 512 DMX Universe |

Licence for Madrix software to enable the ArtNet output signal. The MADRIX® 5 software is the lighting instrument preferred by professionals in the sector, lighting designers.

WS | WorkStation HP

NEW  IP20



| | Power input |
|--------------|-------------|
| 81835 | 100~240 vAC |


MHD | Monitor

NEW  IP20




| | | | Power input |
|--------------|------------|------|-------------|
| 81836 | 24 pollici | HDMI | 100~240 vAC |

HPE | Ethernet Switch

NEW  IP20



| | signal output | Power input |
|--------------|---------------|-------------|
| 99578 | 8 RJ45 | 100~240 vAC |
| 99579 | 24 RJ45 | 100~240 vAC |




Switchable (on/off) in the presence of mains via switch on SL input (switched line). Automatic reset following battery and/or LED lamp replacement. Electronic multi-level charging system. Supplied with 3,000 mAh battery pack.


| | range | output | input | eff. | PF | surge |
|--------------|-----------|----------------|-------------|------|-----|-------|
| 99355 | Universal | 6-60V 40-400mA | 220~240V AC | 86% | 0.5 | 4 kV |

| | |
|--------------------------------------|--|
| Frequency | 50-60 Hz |
| Nominal input current | 40 mA (30 A inrush current with cold start) |
| Outout voltage (without load) | 6-60V |
| TA Operating temperature | -25 +50 °C |
| Max casing temperature TC | 70 °C |
| Control interface | Switch Line, Rest mode |
| Protections | Overtemperature, overload, overvoltage, short-circuit, open circus |
| Charge current | 200 mA |
| Emergency output current | 400-40 mA |
| Emergency power | 2,4W |
| Emergency output current | 20 h |

Reference norms
 IEC 61347-2-7:2011, IEC 61347-2-7:2011/AMD1:2017, IEC 61347-1:2015, IEC 61347-1:2015/AMD1:2017, EN 61347-1:2015, EN 61347-2-7:2012+A1:2019, EN 55015:2013/A1:2015, EN61547:2009, EN 61000-3-2: 2014, EN 61000-3-3: 2013

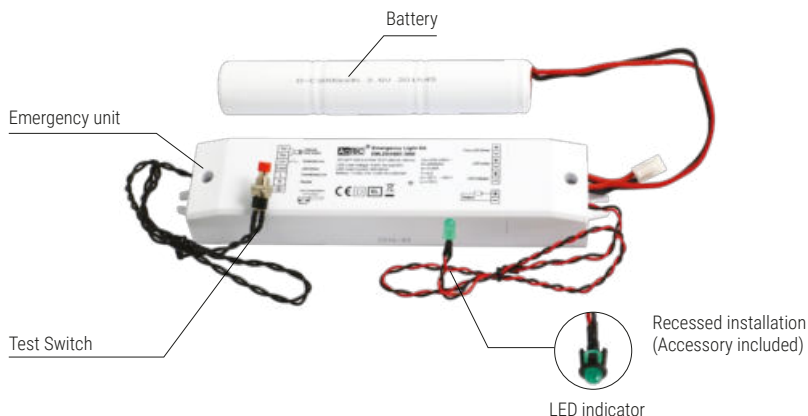


Unswitch Switch

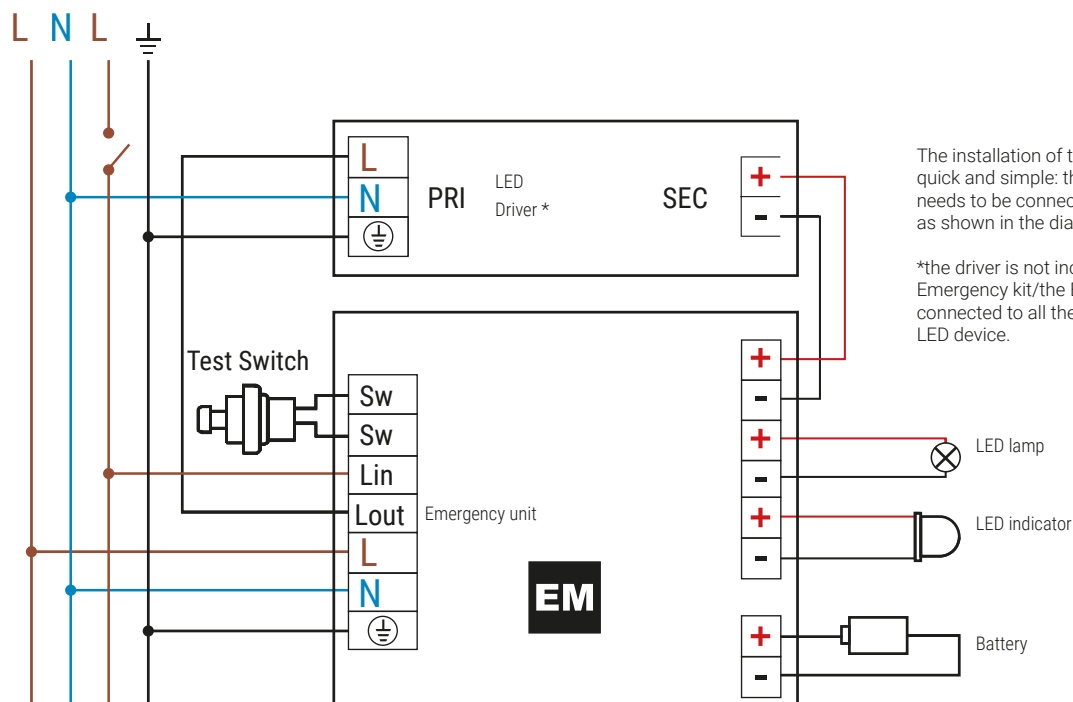


The installation of the emergency kit is quick and simple: the Emergency unit only needs to be connected to the LED driver as shown in the diagram.

*the driver is not included in the Emergency kit/the Emergency kit can be connected to all the original drivers of the LED device.



- Maintained or non maintained operation
- Suitable for electronic driver, dimmable electronic driver
- Adjustable version dip-switch, constant current or constant voltage to power LED to LED modules
- Connected to power supplies with maximum output voltage and current 90V and 2A
- Automatic operation
- High temperature NiCd batteries
- Charge indicator with FROR led cable
- Protection device against extensive discharge
- MAT4 DALI self diagnosis system with external module
- Charging device with supply is reinforced insulation able to recharge the battery normally after the test in clause 22.3 of the IEC 61347-2-7:2007.
- Supplied with 3,000 mAh battery pack.

| | range | output | input | PF |
|--------------------------------------|--|----------------|-------------|-----|
| KIT0014 | Universal C.C. | 9-57V 350-60mA | 220~240V AC | 0.5 |
| | Universal C.V. | 24V 2000mA | | |
| Frequency | 50-60 Hz | | | |
| Nominal input current | 20 mA | | | |
| Outout voltage (without load) | 9-57V C.C. / 24V C.V. | | | |
| TA Operating temperature | 0 +50 °C | | | |
| Max casing temperature TC | 70 °C | | | |
| Control interface | Switch Line, Rest mode | | | |
| Protections | Overtemperature, overload, overvoltage, short-circuit, open circus | | | |
| Emergency output current | 350-60 mA C.C. / 2000mA C.V. | | | |
| Emergency power | 3,4W | | | |
| Recharging time | 24 h | | | |
| Reference norms | EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2 | | | |

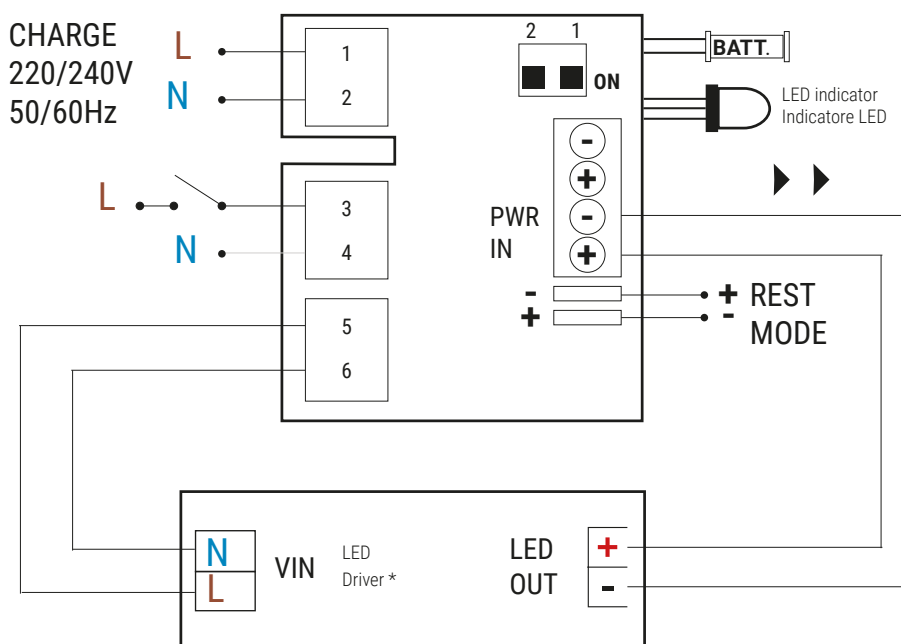

The installation of the emergency kit is quick and simple: the Emergency unit only needs to be connected to the LED driver as shown in the diagram.

*the driver is not included in the Emergency kit/the Emergency kit can be connected to all the original drivers of the LED device.

cables

| application | type | voltage | insulation | Ø | nomenclature | sec. mm | cable colour | core colour | cable gland | temperature | |
|--------------------|------|---------|------------|--------------|--------------|----------|--------------|-------------------|-------------|-------------|--------------|
| indoor | RGB | low | PVC + PVC | 7 mm | -- | 6 x 0,75 | ● | ○ ● ● ● ● ● ● ● ● | PG7 | -- | 84874 |
| outdoor | MONO | low | FEP + PCP | 5,3 mm | -- | 2 x 0,5 | ● | ● ● | -- | 70-90°C | 99237 |
| outdoor | MONO | low | GUM | 6,5 mm | -- | 2 x 1 | ● | ● ● | PG7 | -- | 84888 |
| outdoor | MONO | low | GUM + PCP | 8,3 mm | H07RN8-F | 2 x 1 | ● | ● ● | PG9 | 60-90°C | 84875 |
| indoor out-door | MONO | low | FEP + FEP | 1,9 x 3,3 mm | -- | 2 x 0,5 | ● ● | ● ● | -- | 180°C | 84892 |
| outdoor | -- | high | GUM + PCP | 6,2 mm | H05RN-F | 2 x 0,75 | ● | ● ● | PG7 | 60-90°C | 99353 |
| outdoor | -- | high | GUM + PCP | 6,5 mm | H05RN-F | 2 x 1 | ● | ● ● | PG7 | 60-90°C | 99229 |
| outdoor | -- | high | GUM + PCP | 7,2 mm | H05RN-F | 3 x 1 | ● | ● ● ● | PG7 | 60-90°C | 84887 |
| outdoor underwater | MONO | low | NEOPRENE | 5,3 mm | -- | 2 x 0,5 | ● | ● ● | -- | 70-90°C | 99002 |
| outdoor underwater | MONO | low | NEOPRENE | 6,5 mm | -- | 3 x 1 | ● | ● ● ● | PG9 | -- | 84876 |
| outdoor underwater | RGB | low | NEOPRENE | 9,6 mm | -- | 7 x 1 | ● | ○ ● ● ● ● ● ● ● ● | PG9 | -- | 84864 |


Extension cables

The conductor cables to utilize for installing our outdoor fixtures has to be NEOPRENE H07 that respond to technical requests of EN60598 sez. 5.2.2:

- temperature of use 90°C
- Type of conductor red copper wire
- Execution tension 450/750V
- Nomenclature H07RN-F
- Conforming of the normative CEI 20-19
- Conforming on the requests of directive B.T.73/23CEE e 93/68CEE


The cable is suitable for humid and dry outdoor ambient; Water resist, on erosion, on frequent flexions. The cable resist on temperature up to -25°C without any superficial cracks; is necessary to protect it anyway even on surface that is use for pathways or drive over in order to prevent curving at 30°.

| application | voltage | insulation | sec. mm | length mm | colour | temperature | |
|-------------|---------|------------|---------|-----------|--------|-------------|--------------|
| indoor | low | PVC | 3 x 0,5 | 1500 | ● ● ● | 90°C | 84866 |
| indoor | low | PVC | 3 x 0,5 | 3000 | ● ● ● | 90°C | 84867 |
| indoor | low | PVC | 3 x 0,5 | 1500 | ● ● ● | 90°C | 84872 |
| indoor | low | PVC | 3 x 0,5 | 1500 | ● ● ● | 90°C | 84873 |

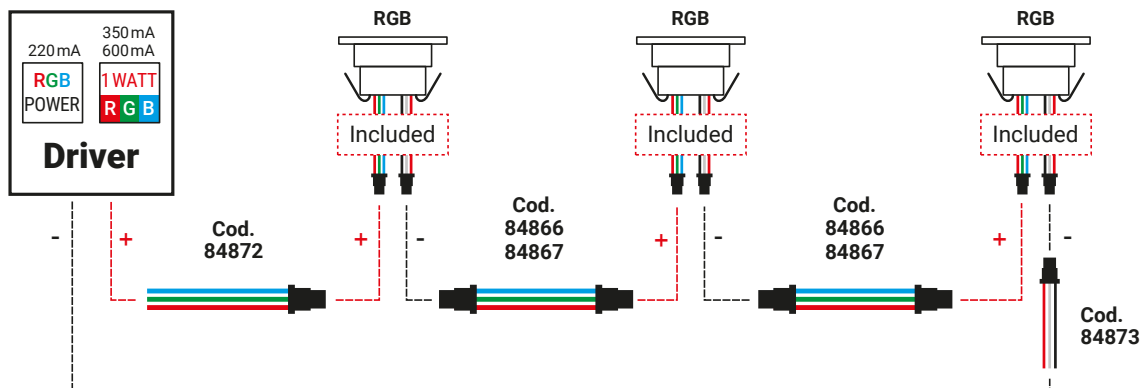


junction boxes | DMX accessories

Junction box | connector gel 2 ways




| connectors | External Ø of the cable | |
|--------------------------------|-------------------------|--------------|
| IP68 2x0,75 mm ² | Ø 4,8 ~ Ø 6 mm | 98989 |

Junction box | connector 2 ways




| connectors | External Ø of the cable | |
|---|-------------------------|--------------|
| IP68 min. 2x0,25 mm ² max. 2x1,0 mm ² | Ø 3 ~ Ø 8 mm | 98990 |

Junction box | connector gel 2 ways




| connectors | External Ø of the cable | |
|------------------------------------|-------------------------|--------------|
| IP68 max. 3x1.5 mm ² | Ø 5,5 ~ Ø 10 mm | 98991 |

Junction box | connector 2 ways



| connectors | External Ø of the cable | |
|--|-------------------------|--------------|
| IP68 min. 2x0,5 mm ² max. 2x2.5 mm ² | Ø 7 ~ Ø 13,5 mm | 84893 |

Junction box | connector gel 4 ways



| connectors | External Ø of the cable | |
|------------------------------------|-------------------------|--------------|
| IP68 max. 4x1,5 mm ² | Ø 6,5 ~ Ø 12 mm | 84894 |

Cables | DMX



| connectors | sec. Ø | L m | |
|-------------|-----------------------------------|-----|--------------|
| F 3 pin XLR | 2 x 0,25 mm ² + shield | 1 | 84895 |
| | | 5 | 84994 |

Extension cables | DMX



| connectors | sec. Ø | L m | |
|-----------------|-----------------------------------|-----|--------------|
| M + F 3 pin XLR | 2 x 0,25 mm ² + shield | 1 | 84871 |
| | | 5 | 84885 |

Connectors | DMX



| connectors | sec. Ø | L m | |
|------------|--------|-----|--------------|
| XLR | | 3 M | 84869 |
| | | 3 F | 84870 |
| | | 5 M | 99346 |
| | | 5 F | 99379 |

| | | |
|-------|-----|---|
| | GND | 1 |
| — | B | 2 |
| — | A | 3 |



84869



84865



84870

Ø 21,5 mm

| | | |
|-------|-----|---|
| | GND | 1 |
| — | B | 2 |
| — | A | 3 |
| — | | 4 |
| — | | 5 |



99346



84865



99379

Ø 21,5 mm

DMX accessories

Cable | DMX



price / m

sec. Ø

order: x m / 84865

2 x 0,25 mm² + shield

84865

Connector | DMX line closure adapter



*accessory to be installed obligatorily at the end of each continuous row of appliances.

suitable for

input

output

*Paseo RGBW

Bus DMX 512

120 Ohm

89365

*Paseo_PIXEL RGB

*Xenia 2.0 RGBW

*Pixie_PIXEL_box

Connector | ALLinONE DMX line closure adapter



*accessory to be installed obligatorily at the end of each continuous row of appliances.

suitable for

input

output

*Archiline RGBW

Bus DMX 512

120 Ohm

98986

*Prolamp RGBW

Connector splitter | ALLinONE splitter power/DMX

Start splitter suitable for

Archiline RGBW
Prolamp RGBW

input


① 3x1,5 mm² (for power supply)

② 2x0,25 mm² (for DMX) +shield

output

③ ALLinONE F
3 x 1,5 mm² +
2 x 0,2 mm² +shield

98985



Continuity splitter A suitable for

Archiline RGBW
Prolamp RGBW

input



① ALLinONE M
3x1,5 mm² + 2x0,2 mm² +shiel

② 3x1,5 mm² (for power supply)

output

③ ALLinONE F
3 x 1,5 mm² +
2 x 0,2 mm² +shield


99390

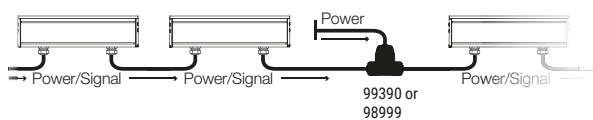


credits



Damac Tower
Dubai (UAE)
Project KEO:
Lighting Concept: DPA
Lighting Consultants:
Oxford




Museum des Arts Decoratifs
Paris (France)
Project:
Arch. Emmanuel Clair
Photography:
Nicolas Cardin



Vida Residence
Dubai (UAE)
Project:
Lighting Design: Neolight
Photography:
Neolight




Hard Rock Caffè
Ibiza (Spain)
Project:
Palladium Hotel Group



NGC HQ
Como (Italy)
Project:
Arch. Giuseppe Tortato
Architetti Firm
Photography:
Carola Merello



Timinis Store
Limassol (Cyprus)




Four Season Hotel
Athens (Greece)
Project:
Lighting design: L+DG
Lighting Architects
Photography: Gavriilux
Papadiotis




Zeche Zollverein
Essen (Germany)
Project:
Lighting Design: Engineer
Büro Paulus Essen, Herr
Gräf



Capricorn Bridge
Dusseldourf (Germany)
Lighting design:
Jack Be Nimble
Project: Arch. SUPERGELB
Architekten
Photography: HGEsch



Agemar HQ
Athens (Greece)
Project:
Arch. Eleftheria Deko
Photography:
Nikos Daniilidis




Omantel
Mascate (Oman)
Project:
Arch. Visual Energy




Bosco Verticale
Milan (Italy)
Project:
Arch. Stefano Boeri
Photography:
Andrea Badoni



NGC HQ
Como (Italy)
Project:
Arch. Giuseppe Tortato
Architetti Firm
Photography:
Carola Merello



Barton Park
Perugia (Italy)
Project:
Arch. Studio Giovagnoni
Architetti Studio Bonucci
e Tognellini Drisaldi
Associati
Photography:
F16 Studio



Ferro Wine
Treviso (Italy)



Private house
Perugia (Italy)
Project:
Arch. A25design
Photography: Mattia
Micheli




Off. Prestito Felice
Milan (Italy)
Project:
Arch. CMA Design Studio
Arch. Giorgio Colombo
Photography:
Andrea Badoni



Private house
Milan (Italy)




Showroom Copatlife
Pordenone (Italy)
Project:
Studio Gherardi
Photography:
Eye Studio



Melia Hotel
Petrovac (Montenegro)
Project:
Arch. Cedomir Mijovick
Photography: Milos
Martinovic


credits



National Museum Riga
Riga (Lettonia)



Bloomingdale's
Kuwait City (Kuwait)
Project:
Lighting Design:
Nulty+Nulty+
Photography:
Romeo Productions



Annico church
Cremona (Italy)
Project:
Studio Archidue
Photography:
Francesco Roncoli



FKT
Venice (Italy)
Project:
Arch. Massimiliano
Pagnin
Photography:
Enrico Maria Verni



Universität Wr. Neustadt
(Austria)
Project:
Arch. Alexander Magyar
Photography: Alexander
Magyar



Grand Hotel Tremezzo
Como (Italy)
Project:
Arch. Silvia Perego
Photography:
Stefano Anzani




**Ristorante Gabin
Gusto Esclamativo**
Udine (Italy)



Ekipe Sporting Center
Catania (Italy)
Project:
Arch. Puleo Salvatore;
Arch. Catanese Angela;
Ing. Neri
Photography:
Fabio Gambina




Arcadia Center
Milan (Italy)
Project:
Arch. Giuseppe Tortato
Photography:
Moreno Maggi



Happy Fit
Marghera (Italy)
Project:
Arch. Francesco Di Nisio
Photography:
Luigi De Nadai



NGC HQ
Como (Italy)
Project:
Arch. Giuseppe Tortato
Architetti Firm
Photography:
Carola Merello



NGC HQ
Como (Italy)
Project:
Arch. Giuseppe Tortato
Architetti Firm
Photography:
Carola Merello



Off. Prestito Felice
Milan (Italy)
Project:
CMA Design Studio
Arch. Giorgio Colombo
Photography:
Andrea Badoni



Ca' Grande
Abano Terme (Italy)
Photography:
Studio Pointer




Uramakao
Sicily (Italy)
Project:
Arch. Salvo Puleo
Photography:
Giorgio Bottitta




Private House
Treviso (Italy)
Project:
Arch. Didonè Comacchio
Photography:
Alberto Sinigaglia




Residential Building
Milan (Italy)
Project:
Arch. Antonio Bonsante



Kaplica
Hockberg (Poland)
Project:
Anpa Techniki
Oswietlenione Z.O.O.
Photography:
Szymon Aleksandrowicz



Off. Prestito Felice
Milan (Italy)
Project: CMA Design
Studio
Arch. Giorgio Colombo
Photography:
Andrea Badoni



The Residency Tower
Puducherry (India)
Project:
Lighting Designer: Litelab



The River
New York City (USA)

Project:
Bentel & Bentel

Photography:
Arcphoto



Excelsior Hotel Gallia
Milan (Italy)

Project:
Marco Piva Architeti

Photography:
Fabio Gambina,
Eye Studio



4-Spa
Catania (Italy)

Photography:
Fabio Gambina,
Eye Studio



Watergate hotel
Washington (USA)

Project:
Arch. Cm Kling +
Associates Inc.

Photography:
Laura Arnold, Cm Kling
+ Associates Inc.



Eos Hotel
Lecce (Italy)



Almar Hotel
Jesolo (Italy)

Photography:
Studio Pointer



Botanica di Leonardo
Florence (Italy)

Project:
Studio Light Company

Photography:
Lungimirante



Pixartprinting
Treviso (Italy)

Project:
Arch. Zambonin Nicola

Photography:
Corrado Covre



Vida Residence
Dubai (UAE)

Project:
Lighting Design: Neolight

Photography:
Neolight



Agemar HQ
Athens (Greece)


Project:
Arch. Eleftheria Deko

Photography:
Nikos Danilidis



Villa San Gottardo
Vittorio Veneto (Italy)

Photography:
Studio Pointer



GV11
Dubai (UAE)

Project:
Arch. Light Concept


Photography:
Light Concept



Blue Waters Island
Dubai (UAE)


Project:
Lighting Design: Neolight

Photography:
Neolight



H-Farm
Treviso (Italy)

Photography:
Studio Pointer



Private Residence
Treviso (Italy)


Project:
Studio Architetti Cinel

Photography:
Arch. Enrico Scapinello



Private apartments
Jesolo (Italy)

Photography:
Corrado Covre



Almar Hotel
Jesolo (Italy)

Photography:
Studio Pointer




Private Residence
Venice (Italy)



Sharjah Mosque
Dubai (UAE)

Project:
Study Light Concept

Photography:
Khacho Damergian



Chq-building
Dublin (Ireland)

credits




Ansam Yas Island
Abu Dhabi (UAE)
Photography:
Khacho Damerjian




Private House
Castelfranco Veneto
(Italy)
Project:
Studio Architetti Cinel
Photography:
Arch. Enrico Scapinello



Private Residence
Castelfranco Veneto
(Italy)
Photography:
Corrado Covre



Private Villa
Athens (Greece)
Project:
Ifi Group - Isv Architects
Photography:
Yannis Kontos
Photo Journalist




Marionette Theatre
Düsseldorf (Germany)
Project:
Arch. Doc. Edmund Spohr, Dus-Illuminated
Photography:
Corrado Covre



Four Season Astir Palace Hotel
Athens (Greece)
Project:
Lighting design: L+DG
Lighting Architects
Photography:
Gavriilux Papadiotis




Private Residence
Leman (Switzerland)
Project:
Mise en scène
Lighting planning: DCUBE.
Swiss
Photography: DCUBE.Swiss




Private Residence
Treviso (Italy)
Project:
Studio Architetti Cinel
Photography:
Arch. Enrico Scapinello



Capricorn Bridge
Dusseldourf (Germany)
Lighting design:
Jack Be Nimble
Project: Arch. SUPERGELB
Architekten
Photography: HGEsch



Vida Residence
Dubai (UAE)
Project:
Lighting Design: Neolight
Photography:
Neolight




Via Broletto,
ESA engineering
Milan (Italy)
Project:
Antonio Buonsante
Photography:
Antonio Buonsante



College Place d'Armes
Yverdon-les-Bains
(Switzerland)




Sharjah Mosque
Dubai (UAE)
Project:
Study Light Concept
Photography:
Khacho Damerjian




Hotel 47
Roma (Italy)
Project:
Studio Faber Technica
s.a.s.
Photography:
Matteo Canestraro



GV11
Dubai (UAE)
Project:
Light Concept
Photography:
Light Concept



Private House
Cataluña (Spain)
Project:
Vié Il-luminació
Photography:
Vié Il-luminació




Private residence
Padova (Italy)




Private Residence
Leman (Switzerland)
Project:
Mise en scène
Lighting planning: DCUBE.
Swiss
Photography: DCUBE.Swiss



GV11
Dubai (UAE)
Project:
Light Concept
Photography:
Light Concept




Grand Hotel Tremezzo
Como (Italy)
Project:
Arch. Silvia Perego
Photography:
Stefano Anzani



NYX Hotel
Milan (Italy)


Project:
Arch. Studio Luce Sacchi

Photography:
Andrea Badoni



Palazzo Vecchio
Florence (Italy)

Photography:
Lungimirante




Damac Tower
Dubai (UAE)

Project KEO:
Lighting Concept: DPA
Lighting Consultants:
Oxford



Private residence
(Greece)

Project:
Ifi Group
Isv Architects



**Caramel Grecotel
Boutique Resort**
Crete (Greece)


Project:
Visual Energy



Four Season Hotel
Athens (Greece)

Project:
Lighting design: L+DG
Lighting Architects

Photography: Gavriilux
Papadiotis



Ansam Yas Island
Abu Dhabi (UAE)

Photography:
Khacho Damergian



Four Season Hotel
Athens (Greece)


Project:
Lighting design: L+DG
Lighting Architects

Photography: Gavriilux
Papadiotis


how to read symbols & suffixes

| | | | | | |
|---|---|---|---|------------------------|-----------------------------|
|  | Indoor installation |  | Class III - IEC protection class | _A | Aluminium |
|  | Outdoor installation |  | T3 Over Voltage Protection | _A (Orma) | Round |
|  | Wall mounting |  | Smartwave™ | _AB | Alluminium Blade |
|  | Ground mounting | C.C. | Constant Current | _AJ | Alluminium Adjustable |
|  | Ceiling mounting | C.V. | Constant Voltage | _AL | Alluminium Opaline |
|  | Wall or ground mounting |  | D.O.B. Dimming on board | _AM | Alluminium Adjustable |
|  | Ceiling or wall mounting |  | Simply DIM | _C | Ceiling |
|  | Ceiling, wall or ground mounting |  | Phase-cut | _CD | Ceiling Direct |
|  | Ceiling or ground mounting |  | 1-10 V | _Cell_C | Cell Ceiling |
|  | Protection index (IEC 60529) against foreign bodies and water |  | DALI Digital Addressable Lighting Interface | _Cell_P | Cell Pendant |
|  | Product designed to withstand temporary immersions |  | DALI2 Digital Addressable Lighting Interface | _CI | Ceiling Internal |
|  | Optical compartment protection index |  | DALI PUSH Digital Addressable Lighting Interface | _D | Double |
|  | Protection index (IEC 62262) against external mechanical impacts | DMX 512 | DMX 512 | _EX | Extactable |
|  | Walkable device |  | RDM, DMX 512 | _F | Frameless |
|  | Carriageable device |  | Infrared | _FJ | Frameless Adjustable |
|  | Stainless steel |  | Radio frequency remote control | _FL | Frameless Opaline |
|  | Article protected by resin |  | P.I.R. Sensor | _FO | Frameless Concentrica |
|  | Circular installation hole |  | Power Supply With Safety Transformer | _I | Inox |
|  | Square installation hole |  | Independent Power Supply | _IB | Inox Blade |
|  | Directional light beam |  | Thermally Protected Power Supply | _IJ | Inox Adjustable |
|  | Tilting light beam |  | Reinforced insulation | _IL | Inox Opaline |
|  | Emergency version available |  | Unified Glare Rating | _IM | Inox Moon |
|  | Power supply cable included |  | Motion sensor | _M | Modular |
|  | Device suitable to be mounted on furniture |  | Integrated antenna | _P | Pendant |
|  | Device suitable to be mounted on normally flammable surfaces (EN 60598) |  | External Antenna | _PD | Pendant direct |
|  | Device with built-in thermal protection |  | The power supply does not switch into the installation hole | _PI | Pendant Internal |
|  | Driver included |  | PointToPoint DALI Dimmering on single item | _PU | Pendant Up |
|  | Driver not included | | | _Q | Square |
|  | Class I - IEC protection class | | | _QD | Square Double |
|  | Class II - IEC protection class | | | _QJ | Square Adjustable |
| | | | All articles belong to energy class A++. The connection diagrams for electronics articles are included in the technical documentation. | _QV | Square vertical |
| | | | | _R | Round |
| | | | | _R PRO | Round Professional |
| | | | | _RD (LV44) | Round Dynamic White |
| | | | | _RDX | Round Double + Screws |
| | | | | _RF | Round Frameless |
| | | | | _RFJ | Round Frameless Adjustable |
| | | | | _RJ | Round Adjustable |
| | | | | _RP (Nautilus) | Round Projectors |
| | | | | _RX | Round Big |
| | | | | _RX (Suelo) | Round + Screws |
| | | | | _RX PRO (Suelo) | Pound + Screws Professional |
| | | | | _RXJ (Suelo) | Round + Screws + Adjustable |
| | | | | _RY | Round Asymmetric |
| | | | | _S | Surface |
| | | | | _T | Track |
| | | | | _W | Wall |
| | | | | _WF | Wall Frameless |
| | | | | _Ww | Wall Washer |
| | | | | _X (Anton) | Big |
| | | | | _X (Paseo) | PowerLED |
| | | | | _Y | Asymmetric |


finishes materials




White | RAL 9003 embossed




Grey | RAL 9006 embossed



Satin finish



Primer



Anodised aluminium



Aluminium




Steel




Brushed nickel



Chrome



Anodised Black



Gray Black | RAL 7021 embossed



Black | RAL 9005 embossed




Transparent PMMA



Opaline PMMA



Gold

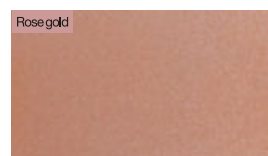

Rose gold




Brass




Bronze



Brown



Dark brown




Sand



Cement



Anthracite



Burnished

The drawings, the measurements, the materials and the colours in this catalogue are understood to be indicative. In the interest of the clientele, the company reserves the right to modify the models at any time and without any obligation of advance notice.

The indication of the Italian flag in this catalogue is purely indicative. The products could be of origins other than those indicated.

"Linea Light Group" reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information in the catalogue are binding for "Linea Light Group". "Linea Light Group" will not be held liable for any illustration, text and/or translation errors. More product characteristics are contained in the relative technical data sheets and instruction sheets. This catalogue is protected by copyright (law 22/04/1941 No. 633 and law 14/12/1942 No. 1485: this prohibits any reproduction, total or even partial). All values indicated in the catalogue are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|----------------|-----------------|------|----------------|---------------|------|-----------------|-------------|------|--------------|---------------|------|
| | | 655 | | | | | | | | | |
| 14931 | Accessories | 661 | 62504 | Fled_E | 452 | 62915 | Pool_S | 260 | 63733 | Tour_PU | 240 |
| | | 685 | 62510.L | Onsight_W | 454 | 62916 | Pool_P | 261 | 63734 | Tour_PU | 240 |
| | | 817 | 62510.R | Onsight_W | 454 | 62921 | Pool_P | 261 | 63736 | Tour_PI | 239 |
| 53890 | Accessories | 689 | 62510.U | Onsight_W | 454 | 62922 | Pool_S | 260 | 63737 | Tour_PI | 239 |
| 56990 | Accessories | 689 | 62511.L | Onsight_W | 454 | 62923 | Pool_S | 260 | 63738 | Tour_PI | 239 |
| 58675 | Accessories | 687 | 62511.R | Onsight_W | 454 | 62925 | Pool_S | 260 | 63740 | Tour_CD | 234 |
| 59165 | Joe | 655 | 62511.U | Onsight_W | 454 | 62926 | Pool_P | 261 | 63750 | Tour_CD | 234 |
| 59166 | Joe | 655 | 62514 | Fled_E | 452 | 62931 | Pool_C | 260 | 63760 | Tour_CD | 234 |
| 59950 | Accessories | 687 | 62520.L | Onsight_SF | 454 | 62932 | Pool_C | 260 | 63772 | Accessories | 248 |
| 60830 | Accessories | 133 | 62520.R | Onsight_SF | 454 | 62933 | Pool_C | 260 | 63773 | Accessories | 248 |
| 60861 | Rollip60_MP | 320 | 62520.U | Onsight_SF | 454 | 62934 | Pool_C | 260 | 63778 | Accessories | 248 |
| 60862 | Rollip60_MP | 320 | 62521.L | Onsight_SF | 454 | 62935 | Pool_C | 260 | 63779 | Accessories | 248 |
| 60863 | Rollip60_MP | 320 | 62521.R | Onsight_SF | 454 | 62936 | Pool_C | 260 | 63782 | Accessories | 248 |
| 60864 | Rollip60_MP | 320 | 62521.U | Onsight_SF | 454 | | | 317 | 63783 | Accessories | 248 |
| 60865 | Rollip60_MP | 320 | 62524 | Fled_P | 453 | 63300 | Accessories | 319 | 63788 | Accessories | 248 |
| 60866 | Rollip60_MP | 320 | 62530.S | Onsight_SF | 454 | | | 321 | 63789 | Accessories | 248 |
| 60867 | Rollip60_MP | 320 | 62530.U | Onsight_SF | 454 | | | 317 | 63798 | Accessories | 248 |
| 60868 | Rollip60_MP | 320 | 62531.S | Onsight_SF | 454 | | | 317 | 63799 | Accessories | 248 |
| 60869 | Rollip35_PC | 322 | 62531.U | Onsight_SF | 454 | 63301 | Accessories | 319 | 63945 | Rollip7035_MP | 318 |
| 60871 | Rollip35_PC | 322 | 62534 | Fled_P | 453 | | | 319 | 63946 | Rollip7035_MP | 318 |
| 60872 | Rollip35_PC | 322 | 62540.L | Onsight_RF | 455 | | | 321 | 63947 | Rollip7035_MP | 318 |
| 60873 | Rollip35_PC | 322 | 62540.R | Onsight_RF | 455 | | | 321 | 63948 | Rollip7035_MP | 318 |
| 60874 | Rollip35_PC | 322 | 62540.U | Onsight_RF | 455 | 63302 | Accessories | 319 | 63949 | Rollip7035_MP | 318 |
| 60875 | Rollip35_PC | 322 | 62541.L | Onsight_RF | 455 | | | 321 | 63955 | Rollip7035_MP | 318 |
| 60876 | Rollip35_PC | 322 | 62541.R | Onsight_RF | 455 | 63445 | Stalk | 689 | 63956 | Rollip7035_MP | 318 |
| 60877 | Rollip7035_PC | 322 | 62541.U | Onsight_RF | 455 | 63446 | Stalk | 689 | 63957 | Rollip7035_MP | 318 |
| 60878 | Rollip7035_PC | 322 | 62544 | Fled_O | 453 | 63455 | Stalk | 689 | 63958 | Rollip7035_MP | 318 |
| 60879 | Rollip7035_PC | 322 | 62550.S | Onsight_RF | 455 | 63456 | Stalk | 689 | 63959 | Rollip7035_MP | 318 |
| 60881 | Rollip60_PC | 323 | 62550.U | Onsight_RF | 455 | 63465 | Stalk | 689 | 63965 | Rollip7035_MP | 318 |
| 60883 | Rollip60_PC | 323 | 62551.S | Onsight_RF | 455 | 63466 | Stalk | 689 | 63966 | Rollip7035_MP | 318 |
| 60884 | Rollip60_PC | 323 | 62551.U | Onsight_RF | 455 | 63495 | Stalk | 689 | 63967 | Rollip7035_PC | 322 |
| 60885 | Rollip60_PC | 323 | 62554 | Fled_O | 453 | 63496 | Stalk | 689 | 63968 | Rollip7035_PC | 322 |
| 60886 | Rollip60_PC | 323 | 62757 | Accessories | 783 | 63505 | Stalk | 689 | 63969 | Rollip7035_PC | 322 |
| 60887 | Rollip60_PC | 323 | 62758 | Accessories | 783 | 63506 | Stalk | 689 | 63975 | Rollip7035_PC | 322 |
| 60888 | Rollip60_PC | 323 | 62761 | Silicone_F | 782 | 63560L02 | Accessories | 916 | 63976 | Accessories | 319 |
| 60889 | Rollip60_MP | 320 | 62781 | Rollip7035_MP | 318 | 63700 | Accessories | 249 | 64005 | Accessories | 317 |
| 60891 | Rollip35_PC | 322 | 62782 | Rollip7035_MP | 318 | 63701 | Accessories | 248 | | | 315 |
| 60892 | Rollip7035_PC | 322 | 62783 | Rollip7035_MP | 318 | 63702 | Accessories | 248 | 64006 | Accessories | 321 |
| 60893 | Rollip60_PC | 323 | 62784 | Rollip7035_MP | 318 | 63703 | Accessories | 248 | | | 314 |
| 61115 | Pilos | 687 | 62785 | Rollip7035_MP | 318 | 63704 | Accessories | 248 | 64015 | Accessories | 317 |
| 61125 | Pilos | 687 | 62786 | Rollip7035_MP | 318 | 63706 | Accessories | 248 | | | 315 |
| 61145 | Pilos | 687 | 62787 | Rollip7035_MP | 318 | 63707 | Accessories | 248 | 64016 | Accessories | 321 |
| 62400 | Dirigo_M2 Slave | 774 | 62788 | Rollip7035_MP | 318 | 63708 | Accessories | 248 | | | 314 |
| 62401 | Dirigo_M2 Slave | 774 | 62789 | Rollip7035_MP | 318 | 63709 | Accessories | 248 | 64025 | Accessories | 317 |
| 62402 | Dirigo_M2 Slave | 774 | 62791 | Rollip7035_MP | 318 | 63710 | Tour_R | 232 | | | 315 |
| 62403 | Silicone_C | 909 | 62792 | Rollip7035_MP | 318 | 63711 | Tour_D | 241 | 64026 | Accessories | 321 |
| 62403N | Silicone_C | 909 | 62793 | Rollip7035_MP | 318 | 63712 | Tour_D | 241 | | | 314 |
| 62460 | Accessories | 304 | 62794 | Rollip7035_PC | 322 | 63713 | Tour_D | 241 | 64035 | Accessories | 317 |
| 62461 | Accessories | 304 | 62795 | Rollip7035_PC | 322 | 63714 | Tour_D | 241 | 64045 | Accessories | 319 |
| 62462 | Accessories | 304 | 62796 | Rollip7035_PC | 322 | 63716 | Accessories | 248 | 64055 | Accessories | 319 |
| 62463 | Accessories | 304 | 62797 | Rollip7035_PC | 322 | 63717 | Accessories | 248 | 64065 | Accessories | 319 |
| 62464 | Accessories | 304 | | | 365 | 63720 | Tour_R | 232 | 64075 | Accessories | 319 |
| 62465 | Accessories | 304 | | | 365 | 63721 | Tour_Cl | 235 | 64200 | Accessories | 667 |
| 62470 | RollipPRO | 304 | | | 366 | 63722 | Tour_Cl | 235 | 64210 | Accessories | 681 |
| 62471 | RollipPRO | 304 | | | 366 | 63723 | Tour_Cl | 235 | 64240 | Accessories | 249 |
| 62472 | RollipPRO | 304 | | | 366 | | | 234 | 64250 | Tour_QV | 244 |
| 62473 | RollipPRO_C | 305 | | | 367 | 63724 | Accessories | 235 | 64252 | Apache | 681 |
| 62474 | RollipPRO_C | 305 | 62900 | Accessories | 367 | 63726 | Tour_PD | 238 | 64253 | Apache | 681 |
| 62500.L | Onsight_W | 454 | | | 368 | 63727 | Tour_PD | 238 | 64254 | Apache | 681 |
| 62500.R | Onsight_W | 454 | | | 368 | 63728 | Tour_PD | 238 | 64255 | Apache | 681 |
| 62500.U | Onsight_W | 454 | | | 368 | 63729 | Tour_PD | 238 | 64256 | Apache | 681 |
| 62501.L | Onsight_W | 454 | | | 369 | 63730 | Tour_R | 232 | 64257 | Apache | 681 |
| 62501.R | Onsight_W | 454 | 62911 | Pool_S | 260 | 63731 | Tour_PU | 240 | 64258 | Apache | 681 |
| 62501.U | Onsight_W | 454 | 62912 | Pool_S | 260 | 63732 | Tour_PU | 240 | 64259 | Apache | 681 |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|---------------|------|-------|------------------|------|-------|----------------------|------|-------|------------------|------|
| 64260 | Tour_QV | 244 | 64506 | Cem_WF | 503 | 64612 | Puro | 663 | 64720 | Puro | 663 |
| 64262 | Apache | 681 | 64507 | Cell | 134 | 64613 | Puro | 663 | 64721 | Ryo | 650 |
| 64263 | Apache | 681 | 64508 | Cell | 134 | 64630 | Gypsum_Cell | 132 | 64722 | Ryo | 651 |
| 64264 | Apache | 681 | 64509 | Cell | 134 | 64631 | Gypsum_Cell | 132 | 64723 | Ryo | 650 |
| 64265 | Apache | 681 | 64510 | Cell | 134 | 64632 | Gypsum_Cell | 132 | 64724 | Ryo | 651 |
| 64266 | Apache | 681 | 64520 | Vuelta | 817 | 64633 | Gypsum_Cell | 132 | 64726 | Ryo | 650 |
| 64267 | Apache | 681 | 64521 | Vuelta | 817 | | | 314 | 64727 | Ryo | 651 |
| 64268 | Apache | 681 | 64522 | Vuelta_Y | 817 | 64634 | Accessories | 317 | 64728 | Ryo | 650 |
| 64269 | Apache | 681 | 64523 | Vuelta_Y | 817 | | | 655 | 64729 | Ryo | 651 |
| 64270 | Accessories | 249 | 64526 | Cell | 134 | 64635 | Joe | 655 | 64734 | Ryo | 650 |
| 64272 | Rollip7035_MP | 318 | 64527 | Cell | 134 | 64636 | Joe | 655 | 64735 | Ryo | 651 |
| 64273 | Rollip7035_MP | 318 | 64528 | Vuelta | 817 | 64637 | Gypsum_Cell | 132 | 64736 | Ryo | 650 |
| 64274 | Rollip7035_MP | 318 | 64529 | Vuelta | 817 | 64638 | Gypsum_Cell | 132 | 64737 | Ryo | 651 |
| 64275 | Rollip7035_MP | 318 | 64530 | Vuelta_Y | 817 | | | 317 | 64738 | Baton_R | 283 |
| 64276 | Rollip7035_MP | 318 | 64531 | Vuelta_Y | 817 | 64639 | Accessories | 319 | 64739 | Baton_Q | 283 |
| 64277 | Rollip7035_MP | 318 | 64532 | Accessories | 817 | | | 321 | 64740 | Baton_Q | 283 |
| 64278 | Rollip7035_PC | 322 | 64533 | Accessories | 817 | 64640 | Accessories | 775 | 64741 | Baton_P | 282 |
| 64279 | Rollip7035_PC | 322 | 64534 | Accessories | 817 | 64641 | Accessories | 775 | 64742 | Baton_P | 282 |
| 64280 | Accessories | 319 | 64536 | Accessories | 817 | 64642 | Dirigo_FL2 | 776 | 64743 | Baton_P | 282 |
| 64282 | Rollip7035_MP | 318 | 64537 | Accessories | 817 | 64643 | Dirigo_FL2 | 776 | 64744 | Baton_P | 282 |
| 64283 | Rollip7035_MP | 318 | 64538 | Accessories | 817 | 64644 | Dirigo_M2 Master | 774 | 64745 | Baton_Q | 283 |
| 64284 | Rollip7035_MP | 318 | 64539 | Accessories | 817 | 64645 | Dirigo_M2 Master | 774 | 64746 | Baton_Q | 283 |
| 64285 | Rollip7035_MP | 318 | 64540 | Cell | 134 | 64646 | Dirigo_M2 Slave | 774 | 64747 | Baton_R | 283 |
| 64286 | Rollip7035_MP | 318 | 64541 | Cell | 134 | 64647 | Dirigo_M2 Slave | 774 | 64749 | Baton_R | 283 |
| 64287 | Rollip7035_MP | 318 | 64542 | Cell | 135 | 64648 | Dirigo_M1 Slave | 777 | | | |
| 64288 | Rollip7035_PC | 322 | 64543 | Cell | 135 | | | 317 | 64754 | Baton_P | 282 |
| 64289 | Rollip7035_PC | 322 | 64543 | Cell | 135 | 64649 | Accessories | 319 | 64755 | Baton_P | 282 |
| | | 315 | 64544 | Cell | 135 | | | 321 | 64756 | Baton_Q | 283 |
| 64297 | Accessories | 321 | 64545 | Cell | 135 | | | 317 | 64757 | Baton_Q | 283 |
| | | 315 | 64546 | Gypsum_Cell | 132 | 64660 | Accessories | 319 | 64758 | Accessories | 651 |
| 64298 | Accessories | 321 | 64547 | Gypsum_Cell | 132 | | | 321 | 64759 | Ryo | 650 |
| | | 315 | 64548 | Gypsum_Cell | 133 | 64661 | Accessories | 775 | 64760 | Ryo | 650 |
| 64299 | Accessories | 321 | 64549 | Gypsum_Cell | 133 | 64662 | Accessories | 775 | 64761 | Ryo | 650 |
| 64300 | Peak-Maxi_DL | 673 | 64550 | Gypsum_Cell | 133 | 64663 | Accessories | 775 | 64762 | Ryo | 651 |
| 64301 | Peak-Maxi_DL | 673 | 64551 | Gypsum_Cell | 133 | 64664 | Dirigo_M2 IN-Corner | 774 | 64763 | Ryo | 651 |
| 64302 | Peak-Maxi_DL | 673 | 64560 | Cem_W | 502 | 64665 | Dirigo_M2 IN-Corner | 774 | 64764 | Ryo | 651 |
| 64328 | Accessories | 249 | 64561 | Cem_W | 502 | 64666 | Dirigo_M2 IN-Corner | 774 | | | 317 |
| 64329 | Accessories | 249 | 64562 | Cem_W | 502 | 64667 | Dirigo_M2 OUT-Corner | 774 | 64776 | Accessories | 319 |
| 64338 | Accessories | 249 | 64563 | Cem_W | 503 | 64668 | Dirigo_M2 OUT-Corner | 774 | | | 321 |
| 64339 | Accessories | 249 | 64564 | Cem_C | 502 | 64669 | Dirigo_M2 OUT-Corner | 774 | 64782 | Baton_P | 282 |
| 64348 | Accessories | 249 | 64570 | Tour_PD | 238 | 64670 | Accessories | 249 | 64783 | Baton_P | 282 |
| 64349 | Accessories | 249 | 64571 | Tour_PD | 238 | 64671 | Accessories | 249 | 64784 | Baton_P | 282 |
| 64358 | Accessories | 249 | 64572 | Tour_PD | 238 | 64673 | Accessories | 249 | 64785 | Baton_P | 282 |
| 64359 | Accessories | 249 | 64573 | Tour_PD | 238 | 64682 | Tour_PU | 240 | 64786 | Baton_P | 282 |
| 64360 | Tour_Q | 244 | 64575 | Accessories | 249 | 64683 | Tour_PU | 240 | 64787 | Baton_P | 282 |
| 64361 | Tour_Q | 244 | 64577 | Tour_PI | 239 | 64685 | Tour_PU | 240 | 64788 | Peak | 672 |
| 64362 | Tour_Q | 244 | 64578 | Accessories | 248 | 64686 | Tour_PU | 240 | 64789 | Peak | 672 |
| 64363 | Tour_QD | 245 | 64579 | Tour_PI | 239 | 64687 | Tour_PU | 240 | 64790 | Peak | 672 |
| 64364 | Tour_QD | 245 | 64580 | Accessories | 248 | 64689 | Tour_PU | 240 | 64791 | Peak | 672 |
| 64365 | Tour_QD | 245 | 64581 | Tour_PI | 239 | 64690 | Tour_PU | 240 | 64792 | Peak | 672 |
| 64368 | Accessories | 249 | 64583 | Tour_PU | 240 | 64691 | Tour_PU | 240 | 64793 | Peak | 672 |
| 64369 | Accessories | 249 | 64584 | Tour_PU | 240 | 64693 | Tour_PU | 240 | 64794 | Peak | 672 |
| 64370 | Tour_Q | 244 | 64585 | Tour_PU | 240 | 64694 | Tour_PU | 240 | 64795 | Peak | 672 |
| 64371 | Tour_Q | 244 | 64586 | Accessories | 248 | 64695 | Tour_PU | 240 | 64796 | Peak | 672 |
| 64372 | Tour_Q | 244 | 64587 | Tour_PU | 240 | 64697 | Tour_PU | 240 | 64804 | Fled_E | 452 |
| 64373 | Tour_QD | 245 | 64588 | Accessories | 248 | | | 315 | 64814 | Fled_E | 452 |
| 64374 | Tour_QD | 245 | 64589 | Accessories | 775 | 64698 | Accessories | 321 | 64824 | Fled_P | 453 |
| 64375 | Tour_QD | 245 | 64590 | Dirigo_FL1 Steel | 776 | | | 315 | 64834 | Fled_P | 453 |
| 64378 | Accessories | 249 | 64591 | Dirigo_M1 Master | 777 | 64699 | Accessories | 321 | 64844 | Fled_O | 453 |
| 64379 | Accessories | 249 | 64592 | Accessories | 775 | | | 321 | 64854 | Fled_O | 453 |
| 64388 | Accessories | 249 | 64593 | Accessories | 775 | 64700 | Puro | 663 | 65002 | Accessories | 503 |
| 64389 | Accessories | 249 | 64594 | Dirigo_FL2 | 776 | 64701 | Puro | 663 | 65003 | Fylo+ Recessed_3 | 366 |
| 64398 | Accessories | 249 | 64595 | Dirigo_M2 Master | 774 | 64715 | Puro | 663 | 65004 | Fylo+ Recessed_3 | 366 |
| 64399 | Accessories | 249 | 64597 | Dirigo_M2 Slave | 774 | 64716 | Puro | 663 | 65005 | Accessories | 503 |
| 64505 | Cem_WF | 503 | 64610 | Puro | 663 | 64717 | Puro | 663 | 65006 | Fylo+Recessed_2 | 366 |
| | | | 64611 | Puro | 663 | 64718 | Puro | 663 | 65007 | Fylo+Recessed_2 | 366 |
| | | | | | | 64719 | Puro | 663 | | | |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|------------------|------|-------|--------------|------|-------|-------------|------|-------|-------------|------|
| 65008 | Accessories | 368 | 65100 | Tour_PI | 239 | 65200 | Rollip70_MC | 310 | 65250 | Rollip35_MP | 316 |
| | | 369 | 65101 | Tour_PI | 239 | 65201 | Rollip70_MC | 310 | 65251 | Rollip35_MP | 316 |
| 65009 | Fylo+Recessed_4 | 367 | 65103 | Tour_PI | 239 | 65202 | Rollip70_MC | 310 | 65252 | Rollip35_MP | 316 |
| 65010 | Fylo+Recessed_4 | 367 | 65104 | Tour_PI | 239 | 65203 | Rollip70_MC | 310 | 65253 | Rollip35_MP | 316 |
| | | 368 | 65105 | Tour_PI | 239 | 65204 | Rollip35_MC | 308 | 65254 | Rollip35_MP | 316 |
| 65011 | Accessories | 369 | 65107 | Tour_PI | 239 | 65205 | Rollip35_MC | 308 | 65255 | Rollip35_MP | 316 |
| 65012 | Fylo+Recessed_5 | 367 | 65108 | Tour_PI | 239 | 65206 | Rollip35_MC | 308 | 65256 | Rollip35_PC | 322 |
| 65013 | Fylo+Recessed_5 | 367 | 65109 | Tour_PI | 239 | 65207 | Rollip35_MC | 308 | 65257 | Rollip35_PC | 322 |
| | | 368 | 65111 | Tour_PI | 239 | | | 311 | 65258 | Rollip35_PC | 322 |
| 65014 | Accessories | 369 | 65112 | Tour_PD | 238 | 65208 | Accessories | 319 | 65259 | Rollip35_PC | 322 |
| 65015 | Fylo+Surface_1 | 368 | 65113 | Tour_PD | 238 | | | 311 | 65260 | Rollip35_MS | 314 |
| 65016 | Fylo+Surface_1 | 368 | 65115 | Tour_PD | 238 | 65209 | Accessories | 319 | 65261 | Rollip35_MS | 314 |
| 65018 | Fylo+Surface_2 | 368 | 65116 | Tour_PD | 238 | | | 311 | 65262 | Rollip35_MS | 314 |
| 65019 | Fylo+Surface_2 | 368 | 65117 | Tour_PD | 238 | 65210 | Accessories | 319 | 65263 | Rollip35_MS | 314 |
| 65021 | Fylo+Surface_3 | 368 | 65119 | Tour_PD | 238 | | | 311 | 65264 | Rollip35_MS | 314 |
| 65022 | Fylo+Surface_3 | 368 | 65120 | Tour_PD | 238 | 65211 | Accessories | 319 | 65265 | Rollip35_MS | 314 |
| 65023 | Accessories | 783 | 65121 | Tour_PD | 238 | | | 309 | 65266 | Rollip35_MS | 314 |
| 65024 | Fylo+Surface_4 | 368 | 65123 | Tour_PD | 238 | 65212 | Accessories | 314 | 65267 | Rollip35_MS | 314 |
| 65025 | Fylo+Surface_4 | 368 | 65124 | Tour_PD | 238 | | | 317 | 65270 | Rollip35_PC | 322 |
| 65026 | Accessories | 783 | 65125 | Tour_PD | 238 | | | 309 | 65271 | Rollip35_PC | 322 |
| 65027 | Fylo+ Recessed_1 | 366 | 65127 | Tour_PD | 238 | 65213 | Accessories | 314 | 65272 | Rollip35_MP | 316 |
| 65028 | Fylo+ Recessed_1 | 366 | 65128 | Tour_PD | 238 | | | 317 | 65273 | Rollip35_MP | 316 |
| 65032 | Fylo+ Recessed_1 | 366 | 65129 | Tour_PD | 238 | | | 309 | 65274 | Rollip35_MP | 316 |
| 65035 | Accessories | 783 | 65130 | Tour_PD | 238 | 65214 | Accessories | 314 | 65275 | Rollip35_MP | 316 |
| 65036 | Fylo+Out | 782 | 65131 | Tour_PD | 238 | | | 317 | 65276 | Rollip35_MP | 316 |
| 65037 | Fylo+Out | 782 | 65132 | Tour_PI | 239 | | | 309 | 65277 | Rollip35_MP | 316 |
| 65038 | Accessories | 783 | 65133 | Tour_PI | 239 | 65215 | Accessories | 314 | 65278 | Rollip35_MP | 316 |
| 65039 | Fylo+Out | 782 | 65134 | Tour_PI | 239 | | | 317 | 65279 | Rollip35_MP | 316 |
| 65040 | Fylo+Out | 782 | 65135 | Tour_PU | 240 | 65216 | Rollip35_C | 312 | 65280 | Rollip35_PC | 322 |
| 65045 | Fylo+Recessed_2 | 366 | 65136 | Tour_PU | 240 | 65217 | Rollip35_C | 312 | 65281 | Rollip35_PC | 322 |
| 65046 | Fylo+ Recessed_3 | 366 | 65137 | Tour_PU | 240 | | | 311 | 65282 | Rollip35_MP | 316 |
| 65047 | Fylo+Recessed_4 | 367 | 65138 | Tour_PU | 240 | 65218 | Accessories | 311 | 65283 | Rollip35_MP | 316 |
| 65048 | Fylo+Recessed_5 | 367 | 65141 | Accessories | 249 | | | 309 | 65284 | Rollip35_MP | 316 |
| 65049 | Fylo+Surface_1 | 368 | 65142 | Accessories | 248 | 65219 | Accessories | 309 | 65285 | Rollip35_MP | 316 |
| 65053 | Fylo+Surface_2 | 368 | 65143 | Accessories | 248 | 65220 | Rollip70_MC | 310 | 65286 | Rollip35_MP | 316 |
| | | 366 | 65144 | Accessories | 248 | 65221 | Rollip70_MC | 310 | 65287 | Rollip35_MP | 316 |
| | | 366 | 65145 | Accessories | 248 | 65222 | Rollip70_MC | 310 | 65288 | Rollip35_MP | 316 |
| 65054 | Accessories | 367 | 65148 | Accessories | 248 | 65223 | Rollip70_MC | 310 | 65289 | Rollip35_MP | 316 |
| | | 368 | 65149 | Accessories | 248 | 65225 | Rollip70_C | 312 | | | 317 |
| | | 369 | 65150 | Accessories | 248 | 65226 | Rollip70_C | 312 | 65290 | Accessories | 319 |
| | | 366 | 65151 | Accessories | 248 | 65228 | Rollip70_C | 312 | | | 321 |
| | | 367 | 65152 | Accessories | 248 | 65229 | Rollip70_C | 312 | 65291 | Accessories | 314 |
| 65055 | Accessories | 368 | 65153 | Accessories | 248 | 65231 | Rollip70_MC | 310 | | | 317 |
| | | 369 | 65154 | Accessories | 248 | 65232 | Rollip70_MC | 310 | 65292 | Rollip35_MS | 314 |
| 65058 | Fylo+Surface_3 | 368 | 65155 | Accessories | 248 | 65233 | Rollip35_MC | 308 | 65293 | Rollip35_MS | 314 |
| 65059 | Fylo+Surface_4 | 368 | 65158 | Accessories | 248 | | | 309 | 65294 | Rollip35_MS | 314 |
| 65063 | Peak-Maxi_L | 673 | 65159 | Accessories | 248 | 65234 | Accessories | 314 | 65295 | Rollip35_MS | 314 |
| 65064 | Peak-Maxi_L | 673 | 65160 | Accessories | 248 | | | 317 | 65296 | Rollip35_MS | 314 |
| 65065 | Peak-Maxi_L | 673 | 65161 | Accessories | 248 | | | 309 | 65297 | Rollip35_MS | 314 |
| 65072 | Peak-Maxi | 672 | 65180 | Fylo+ | 365 | 65235 | Accessories | 314 | 65298 | Rollip35_MS | 314 |
| 65073 | Peak-Maxi | 672 | 65181 | Fylo+ | 365 | | | 317 | 65299 | Rollip35_MS | 314 |
| 65074 | Peak-Maxi | 672 | | | 365 | 65236 | Accessories | 311 | 65300 | Tour_D | 241 |
| 65075 | Accessories | 673 | 65182 | Accessories | 369 | 65237 | Accessories | 311 | 65301 | Tour_D | 241 |
| 65076 | Accessories | 673 | | | 365 | 65238 | Accessories | 311 | 65302 | Tour_D | 241 |
| 65077 | Accessories | 673 | 65183 | Accessories | 369 | 65239 | Accessories | 311 | 65304 | Tour_D | 241 |
| 65078 | Accessories | 673 | | | 365 | 65240 | Rollip35_MP | 316 | 65305 | Tour_D | 241 |
| 65082 | Accessories | 673 | 65184 | Accessories | 369 | 65241 | Rollip35_MP | 316 | 65306 | Tour_D | 241 |
| 65083 | Peak-Maxi_W | 673 | | | 369 | 65242 | Rollip35_MP | 316 | 65307 | Tour_D | 241 |
| 65084 | Peak-Maxi_W | 673 | 65187 | Fylo+ | 365 | 65243 | Rollip35_MP | 316 | 65308 | Tour_D | 241 |
| 65085 | Peak-Maxi_W | 673 | 65190 | Cell_S | 277 | 65244 | Rollip35_MP | 316 | 65310 | Tour_D | 241 |
| 65090 | Fylo+Out | 782 | 65191 | Cell_S | 277 | 65245 | Rollip35_MP | 316 | 65311 | Tour_D | 241 |
| 65093 | Fylo+Out | 782 | 65192 | Cell_S | 277 | 65246 | Rollip35_MP | 316 | 65312 | Tour_D | 241 |
| 65094 | Accessories | 783 | 65193 | Cell_S | 277 | 65247 | Rollip35_MP | 316 | 65313 | Tour_D | 241 |
| 65097 | Accessories | 368 | 65197 | Peak-Maxi_DL | 673 | 65248 | Rollip35_MP | 316 | 65314 | Tour_D | 241 |
| | | 369 | 65198 | Peak-Maxi_DL | 673 | 65249 | Rollip35_MP | 316 | 65316 | Tour_D | 241 |
| | | | 65199 | Peak-Maxi_DL | 673 | | | | | | |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-------------|------|-------|-------------|------|-------|---------------|------|-------|---------------------|------|
| 65317 | Tour_D | 241 | 65391 | Accessories | 234 | 65459 | Rollip35_C | 312 | 65524 | Rollip7035_MP | 318 |
| 65318 | Tour_D | 241 | | | 235 | 65460 | Rollip35_C | 312 | 65525 | Rollip60_MS | 315 |
| 65319 | Tour_D | 241 | 65392 | Opti-pole | 667 | 65461 | Rollip70_C | 312 | 65526 | Rollip60_MS | 315 |
| 65320 | Tour_D | 241 | 65393 | Opti-pole | 667 | 65462 | Rollip70_C | 312 | 65527 | Rollip60_MS | 315 |
| 65322 | Tour_D | 241 | 65394 | Opti-pole | 667 | 65463 | Rollip70_C | 312 | 65528 | Rollip60_MS | 315 |
| 65323 | Tour_D | 241 | 65395 | Opti-pole | 667 | 65464 | Rollip70_C | 312 | 65529 | Rollip60_MS | 315 |
| 65324 | Accessories | 248 | 65396 | Opti-pole | 667 | 65465 | Rollip35_MP | 316 | 65530 | Rollip60_MS | 315 |
| 65325 | Accessories | 248 | 65397 | Opti-pole | 667 | 65466 | Rollip35_MP | 316 | 65531 | Rollip60_MS | 315 |
| 65326 | Accessories | 248 | 65398 | Accessories | 248 | 65467 | Rollip35_MP | 316 | 65532 | Rollip60_MS | 315 |
| 65327 | Accessories | 248 | 65399 | Accessories | 248 | 65468 | Rollip35_MP | 316 | 65533 | Rollip60_MS | 315 |
| 65328 | Accessories | 248 | 65400 | Peak-Maxi_L | 673 | 65469 | Rollip35_MP | 316 | 65534 | Rollip60_MS | 315 |
| 65329 | Accessories | 248 | 65401 | Peak-Maxi_L | 673 | 65470 | Rollip35_MP | 316 | 65535 | Rollip60_MS | 315 |
| 65332 | Accessories | 248 | 65402 | Peak-Maxi_L | 673 | 65471 | Rollip35_MP | 316 | 65536 | Rollip60_MS | 315 |
| 65333 | Accessories | 248 | 65403 | Peak | 672 | 65472 | Rollip35_MP | 316 | 65537 | Rollip60_MS | 315 |
| 65334 | Accessories | 248 | 65404 | Peak | 672 | 65473 | Rollip35_MP | 316 | 65538 | Rollip60_MS | 315 |
| 65335 | Accessories | 248 | 65405 | Peak | 672 | 65474 | Rollip35_MP | 316 | 65539 | Rollip60_MS | 315 |
| 65336 | Accessories | 248 | 65406 | Peak-Maxi | 672 | 65475 | Rollip35_MP | 316 | 65540 | Rollip60_MS | 315 |
| 65337 | Accessories | 248 | 65407 | Peak-Maxi | 672 | 65476 | Rollip35_MP | 316 | 65541 | Rollip60_MP | 320 |
| 65338 | Accessories | 248 | 65408 | Peak-Maxi | 672 | 65477 | Rollip35_MP | 316 | 65542 | Rollip60_MP | 320 |
| 65339 | Accessories | 248 | 65409 | Peak-Maxi_W | 673 | 65478 | Rollip35_MP | 316 | 65543 | Rollip60_MP | 320 |
| 65340 | Accessories | 248 | 65410 | Peak-Maxi_W | 673 | 65479 | Rollip35_MP | 316 | 65544 | Rollip60_MP | 320 |
| 65341 | Accessories | 248 | 65411 | Peak-Maxi_W | 673 | 65480 | Rollip35_MP | 316 | 65545 | Rollip60_MP | 320 |
| 65344 | Accessories | 248 | 65412 | Accessories | 248 | 65481 | Rollip35_MP | 316 | 65546 | Rollip60_MP | 320 |
| 65345 | Accessories | 248 | 65413 | Accessories | 248 | 65482 | Rollip35_MP | 316 | 65547 | Rollip60_MP | 320 |
| 65346 | Accessories | 248 | 65414 | Accessories | 248 | 65483 | Rollip35_MP | 316 | 65548 | Rollip60_MP | 320 |
| 65347 | Accessories | 248 | 65416 | Accessories | 248 | 65484 | Rollip35_MP | 316 | 65549 | Rollip60_MP | 320 |
| 65349 | Accessories | 248 | 65417 | Accessories | 248 | 65485 | Rollip35_MP | 316 | 65550 | Rollip60_MP | 320 |
| 65350 | Tour_CD | 234 | 65418 | Accessories | 248 | 65486 | Rollip35_MP | 316 | 65551 | Rollip60_MP | 320 |
| 65351 | Tour_CD | 234 | 65419 | Accessories | 248 | 65487 | Rollip35_MP | 316 | 65552 | Rollip60_MP | 320 |
| 65352 | Tour_CD | 234 | 65420 | Tour_R | 232 | 65488 | Rollip35_MP | 316 | 65553 | Rollip60_MP | 320 |
| 65354 | Tour_CD | 234 | 65421 | Tour_R | 232 | 65489 | Rollip35_MP | 316 | 65554 | Rollip60_MP | 320 |
| 65355 | Tour_CD | 234 | 65422 | Tour_R | 232 | 65490 | Rollip35_MP | 316 | 65555 | Rollip60_MP | 320 |
| 65356 | Tour_CD | 234 | 65424 | Tour_R | 232 | 65491 | Rollip35_MP | 316 | 65556 | Rollip60_MP | 320 |
| 65357 | Tour_CD | 234 | 65425 | Tour_R | 232 | 65492 | Rollip35_MP | 316 | 65557 | Rollip60_MP | 320 |
| 65358 | Tour_CD | 234 | 65426 | Tour_R | 232 | 65493 | Rollip35_MP | 316 | 65558 | Rollip60_MP | 320 |
| 65360 | Tour_CD | 234 | 65427 | Tour_R | 232 | 65494 | Rollip35_MP | 316 | 65559 | Rollip60_MP | 320 |
| 65361 | Tour_CD | 234 | 65428 | Tour_R | 232 | 65495 | Rollip35_MP | 316 | 76659 | Pound Shaper Dist. | 179 |
| 65362 | Tour_CD | 234 | 65430 | Tour_R | 232 | 65496 | Rollip35_MP | 316 | 76660 | Pound Shaper Dist. | 179 |
| 65363 | Tour_CD | 234 | 65431 | Tour_R | 232 | 65497 | Rollip35_MS | 314 | 76661 | Pound Shaper | 179 |
| 65364 | Tour_CD | 234 | 65432 | Tour_R | 232 | 65498 | Rollip35_MS | 314 | 76662 | Pound Shaper | 179 |
| 65366 | Tour_CD | 234 | 65433 | Tour_R | 232 | 65499 | Rollip35_MS | 314 | 76663 | Pound Shaper Dist. | 180 |
| 65367 | Tour_CD | 234 | 65434 | Tour_R | 232 | 65500 | Rollip35_MS | 314 | 76664 | Pound Shaper Dist. | 180 |
| 65368 | Tour_CI | 235 | 65436 | Tour_R | 232 | 65501 | Rollip35_MS | 314 | 76665 | Pound Shaper | 180 |
| 65369 | Tour_CI | 235 | 65437 | Tour_R | 232 | 65502 | Rollip35_MS | 314 | 76666 | Pound Shaper | 180 |
| 65370 | Tour_CI | 235 | 65438 | RollipPRO | 304 | 65503 | Rollip35_MS | 314 | 76667 | Pound Shaper Dist. | 181 |
| 65372 | Tour_CI | 235 | 65439 | RollipPRO | 304 | 65504 | Rollip35_MS | 314 | 76668 | Pound Shaper Dist. | 181 |
| 65373 | Tour_CI | 235 | 65440 | RollipPRO | 304 | 65505 | Rollip35_MS | 314 | 76669 | Pound Shaper | 181 |
| 65374 | Tour_CI | 235 | 65441 | RollipPRO | 304 | 65506 | Rollip35_MS | 314 | 76670 | Pound Shaper | 181 |
| 65375 | Tour_CI | 235 | 65442 | RollipPRO_C | 305 | 65507 | Rollip35_MS | 314 | 76739 | Navata Pound Sha.D. | 211 |
| 65376 | Tour_CI | 235 | 65443 | RollipPRO_C | 305 | 65508 | Rollip35_MS | 314 | 76740 | Navata Pound Sha.D. | 211 |
| 65378 | Tour_CI | 235 | 65444 | Rollip35_MC | 308 | 65509 | Rollip35_MS | 314 | 76741 | Navata Pound Sha.D. | 211 |
| 65379 | Tour_CI | 235 | 65445 | Rollip35_MC | 308 | 65510 | Rollip35_MS | 314 | 76742 | Navata Pound Sha. | 211 |
| 65380 | Tour_CI | 235 | 65446 | Rollip35_MC | 308 | 65511 | Rollip35_MS | 314 | 76743 | Navata Pound Sha. | 211 |
| 65381 | Tour_CI | 235 | 65447 | Rollip35_MC | 308 | 65512 | Rollip35_MS | 314 | 76744 | Navata Pound Sha. | 211 |
| 65382 | Tour_CI | 235 | 65448 | Rollip35_MC | 308 | 65513 | Rollip7035_MP | 318 | 77048 | Optus_T | 190 |
| 65384 | Tour_CI | 235 | 65449 | Rollip70_MC | 310 | 65514 | Rollip7035_MP | 318 | 77049 | Optus_T | 190 |
| 65385 | Tour_CI | 235 | 65450 | Rollip70_MC | 310 | 65515 | Rollip7035_MP | 318 | 77050 | Optus_T | 190 |
| | | 234 | 65451 | Rollip70_MC | 310 | 65516 | Rollip7035_MP | 318 | 77051 | Optus_T | 190 |
| 65386 | Accessories | 235 | 65452 | Rollip70_MC | 310 | 65517 | Rollip7035_MP | 318 | 77052 | Optus_T | 190 |
| | | 234 | 65453 | Rollip70_MC | 310 | 65518 | Rollip7035_MP | 318 | 77053 | Optus_T | 190 |
| 65387 | Accessories | 235 | 65454 | Rollip70_MC | 310 | 65519 | Rollip7035_MP | 318 | 77054 | Optus_T | 191 |
| | | 234 | 65455 | Rollip70_MC | 310 | 65520 | Rollip7035_MP | 318 | 77055 | Optus_T | 191 |
| 65389 | Accessories | 235 | 65456 | Rollip70_MC | 310 | 65521 | Rollip7035_MP | 318 | 77056 | Optus_T | 191 |
| | | 234 | 65457 | Rollip70_MC | 310 | 65522 | Rollip7035_MP | 318 | 77057 | Optus_T | 191 |
| 65390 | Accessories | 235 | 65458 | Rollip70_MC | 310 | 65523 | Rollip7035_MP | 318 | 77058 | Optus_T | 191 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|------------|------|-------|-------------|------|-------|----------------|------|-------|--------------|------|
| 77059 | Optus_T | 191 | 80049 | Quantum_RJ | 36 | 80373 | Loro_RJ | 73 | 80454 | Suelo_R Pro | 564 |
| 77060 | Optus_T | 192 | 80050 | Quantum_RJ | 36 | 80374 | Loro_RJ | 73 | 80455 | Suelo_RJ | 565 |
| 77061 | Optus_T | 192 | 80051 | Quantum_RJ | 36 | 80375 | Loro_RJ | 73 | 80456 | Suelo_RJ | 565 |
| 77062 | Optus_T | 192 | 80052 | Quantum_RJ | 36 | 80376 | Loro_RJ | 73 | 80457 | Suelo_RJ | 565 |
| 77063 | Optus_T | 192 | 80053 | Quantum_RJ | 36 | 80377 | Loro_RJ | 73 | 80476 | Vos_QJ | 28 |
| 77064 | Optus_T | 192 | 80054 | Quantum_RJ | 36 | 80383 | Periskop | 798 | 80477 | Vos_QJ | 28 |
| 77065 | Optus_T | 192 | 80055 | Quantum_RJ | 36 | 80384 | Periskop | 798 | 80478 | Vos_QJ | 28 |
| 77066 | Optus_T | 193 | 80056 | Quantum_RJ | 36 | 80385 | Periskop | 798 | 80479 | Vos_QJ | 28 |
| 77067 | Optus_T | 193 | 80057 | Quantum_RJ | 36 | 80386 | Periskop | 798 | 80488 | Vos_QJ | 28 |
| 77068 | Optus_T | 193 | 80058 | Quantum_RJ | 36 | 80387 | Illuminator | 154 | 80489 | Vos_QJ | 28 |
| 77069 | Optus_T | 193 | 80059 | Quantum_RJ | 36 | 80388 | Illuminator | 154 | 80490 | Vos_QJ | 28 |
| 77070 | Optus_T | 193 | 80060 | Quantum_RJ | 36 | 80389 | Illuminator | 154 | 80491 | Vos_QJ | 28 |
| 77071 | Optus_T | 193 | 80061 | Quantum_RJ | 36 | 80390 | Illuminator | 154 | 80546 | Suelo_R | 566 |
| 77072 | Optus_W2 | 196 | 80062 | Quantum_RJ | 36 | 80391 | Rubber 2D | 891 | 80547 | Suelo_R | 566 |
| 77073 | Optus_W2 | 196 | 80063 | Quantum_RJ | 36 | 80392 | Rubber 2D | 891 | 80548 | Suelo_RX | 570 |
| 77074 | Optus_W2 | 196 | 80064 | Quantum_RJ | 36 | 80393 | Rubber 2D | 891 | 80549 | Suelo_RX | 570 |
| 77075 | Optus_W2 | 196 | 80065 | Quantum_RJ | 36 | 80394 | Rubber 3D | 892 | 80550 | Suelo_R | 566 |
| 77076 | Optus_W2 | 196 | 80066 | Quantum_RJ | 36 | 80395 | Rubber 3D | 892 | 80551 | Suelo_R | 566 |
| 77077 | Optus_W2 | 196 | 80067 | Quantum_RJ | 36 | 80396 | Rubber 3D | 892 | 80552 | Suelo_RX | 570 |
| 77078 | Optus_W3 | 196 | 80068 | Quantum_RJ | 36 | 80397 | Rubber 3D | 892 | 80553 | Suelo_RX | 570 |
| 77079 | Optus_W3 | 196 | 80069 | Quantum_RJ | 36 | 80398 | Rubber 3D | 892 | 80554 | Suelo_R | 566 |
| 77080 | Optus_W3 | 196 | 80070 | Quantum_RJ | 36 | 80399 | Rubber 3D | 892 | 80555 | Suelo_R | 566 |
| 77081 | Optus_W3 | 196 | 80071 | Quantum_RJ | 37 | 80400 | Rubber 3D | 892 | 80556 | Suelo_RX | 571 |
| 77082 | Optus_W3 | 196 | 80072 | Quantum_RJ | 37 | 80401 | Rubber 3D | 892 | 80557 | Suelo_RX | 571 |
| 77083 | Optus_W3 | 196 | 80073 | Quantum_RJ | 37 | 80402 | Rubber 3D | 892 | 80558 | Suelo_R Pro | 568 |
| 80009 | Quantum_R | 34 | 80074 | Quantum_RJ | 37 | 80403 | Rubber 3D RGBW | 892 | 80559 | Suelo_R Pro | 568 |
| 80010 | Quantum_R | 34 | 80075 | Quantum_RJ | 37 | 80404 | Rubber 3D RGBW | 892 | 80560 | Suelo_R Pro | 568 |
| 80011 | Quantum_R | 34 | 80076 | Quantum_RJ | 37 | 80409 | Rubber 2D | 891 | 80561 | Suelo_RX Pro | 571 |
| 80012 | Quantum_R | 34 | 80105 | AntonX | 105 | 80410 | Rubber 2D | 891 | 80562 | Suelo_RX Pro | 571 |
| 80013 | AntonX | 105 | 80106 | AntonX | 105 | 80411 | Rubber 2D | 891 | 80563 | Suelo_RX Pro | 571 |
| 80014 | AntonX | 105 | 80107 | AntonX | 105 | 80412 | Rubber 2D | 891 | 80564 | Suelo_R Pro | 568 |
| 80015 | AntonX | 105 | 80108 | AntonX | 105 | 80413 | Rubber 2D | 891 | 80565 | Suelo_R Pro | 568 |
| 80016 | AntonX | 105 | 80109 | Cob40_RJ | 87 | 80414 | Rubber 2D | 891 | 80566 | Suelo_R Pro | 568 |
| 80017 | Quantum_R | 34 | 80110 | Cob40_RJ | 87 | 80415 | Rubber 3D_PRO | 880 | 80567 | Suelo_RX Pro | 571 |
| 80018 | Quantum_R | 34 | 80244 | Cob40_R | 86 | 80416 | Rubber 3D_PRO | 880 | 80568 | Suelo_RX Pro | 571 |
| 80019 | Quantum_R | 34 | 80245 | Cob40_R | 86 | 80417 | Rubber 3D_PRO | 880 | 80569 | Suelo_RX Pro | 571 |
| 80020 | Quantum_R | 34 | 80314 | Nautilus_RP | 868 | 80418 | Accessories | 881 | 80570 | Suelo_R Pro | 568 |
| 80021 | Quantum_R | 34 | 80338 | Illuminator | 152 | | | 894 | 80571 | Suelo_R Pro | 568 |
| 80022 | Quantum_R | 34 | 80346 | Loro_QJ | 76 | 80419 | Accessories | 881 | 80572 | Suelo_R Pro | 568 |
| 80023 | Quantum_R | 34 | 80347 | Loro_QJ | 76 | | | 894 | 80573 | Suelo_RX Pro | 572 |
| 80024 | Quantum_R | 34 | 80348 | Loro_QJ | 76 | | | 562 | 80574 | Suelo_RX Pro | 572 |
| 80025 | Quantum_R | 34 | 80349 | Loro_QJ | 76 | 80432 | Suelo_R | 871 | 80575 | Suelo_RX Pro | 572 |
| 80026 | Quantum_R | 34 | 80350 | Loro_QJ | 76 | | | 562 | 80576 | Suelo_RJ Pro | 569 |
| 80027 | Quantum_R | 34 | 80351 | Loro_QJ | 76 | 80433 | Suelo_R Pro | 871 | 80577 | Suelo_RXJ | 572 |
| 80028 | Quantum_R | 34 | 80352 | Loro_QJ | 76 | | | 562 | 80578 | Suelo_RJ Pro | 569 |
| 80029 | Quantum_R | 35 | 80353 | Loro_QJ | 76 | 80434 | Suelo_R Pro | 871 | 80579 | Suelo_RXJ | 572 |
| 80030 | Quantum_R | 35 | 80354 | Loro_QJ | 76 | 80435 | Suelo_RX Pro | 570 | 80580 | Suelo_RJ Pro | 569 |
| 80031 | Quantum_R | 35 | 80355 | Loro_QJ | 76 | 80436 | Suelo_RX Pro | 570 | 80581 | Suelo_RXJ | 572 |
| 80032 | Quantum_R | 35 | 80356 | Loro_QJ | 76 | 80437 | Suelo_RX Pro | 570 | 80582 | Orma_I | 604 |
| 80033 | Quantum_R | 35 | 80357 | Loro_QJ | 76 | 80438 | Suelo_RX Pro | 570 | 80583 | Orma_I | 604 |
| 80034 | Quantum_R | 35 | 80358 | Loro_QJ | 76 | 80439 | Suelo_R Pro | 563 | 80584 | Orma_I | 604 |
| 80035 | Quantum_R | 35 | 80359 | Loro_QJ | 76 | 80440 | Suelo_R Pro | 563 | 80585 | Orma_I | 604 |
| 80036 | Quantum_R | 35 | 80360 | Loro_QJ | 76 | 80441 | Suelo_R Pro | 563 | 80586 | Orma_I | 604 |
| 80037 | Quantum_R | 35 | 80361 | Loro_QJ | 76 | 80442 | Suelo_R Pro | 563 | 80587 | Orma_I | 604 |
| 80038 | Quantum_R | 35 | 80362 | Loro_QJ | 77 | 80443 | Suelo_R | 564 | 80588 | Orma_I | 604 |
| 80039 | Quantum_R | 35 | 80363 | Loro_QJ | 77 | 80444 | Suelo_R | 564 | 80589 | Orma_I | 604 |
| 80040 | Quantum_R | 35 | 80364 | Loro_QJ | 77 | 80445 | Suelo_R | 564 | 80590 | Orma_I | 604 |
| 80041 | Quantum_R | 35 | 80365 | Loro_QJ | 77 | 80446 | Suelo_R | 564 | 80591 | Epitax | 61 |
| 80042 | Quantum_R | 35 | 80366 | Loro_QJ | 77 | 80447 | Suelo_R | 564 | 80592 | Epitax | 61 |
| 80043 | Quantum_R | 35 | 80367 | Loro_QJ | 77 | 80448 | Suelo_R | 564 | 80595 | Epitax | 61 |
| 80044 | Quantum_R | 35 | 80368 | Loro_QJ | 77 | 80449 | Suelo_R Pro | 564 | 80596 | Epitax | 61 |
| 80045 | Quantum_R | 35 | 80369 | Loro_QJ | 77 | 80450 | Suelo_R Pro | 564 | 80599 | Epitax | 62 |
| 80046 | Quantum_R | 35 | 80370 | Loro_RJ | 73 | 80451 | Suelo_R Pro | 564 | 80600 | Epitax | 62 |
| 80047 | Quantum_RJ | 36 | 80371 | Loro_RJ | 73 | 80452 | Suelo_R Pro | 564 | 80603 | Epitax | 62 |
| 80048 | Quantum_RJ | 36 | 80372 | Loro_RJ | 73 | 80453 | Suelo_R Pro | 564 | 80604 | Epitax | 62 |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|--------------|------|-------|---------------|------|-------|---------|------|-------|--------------|------|
| 80605 | Envelope_1 | 520 | 80723 | Vos_R | 21 | 80833 | Loro_Q | 74 | 80906 | Loro_QJ | 77 |
| 80607 | Suelo_RX | 574 | 80724 | Vos_R | 21 | 80834 | Loro_Q | 74 | 80990 | Track system | 202 |
| 80608 | Suelo_RX | 574 | 80725 | Vos_R | 21 | 80835 | Loro_Q | 75 | 80991 | Track system | 202 |
| 80609 | Suelo_RX | 575 | 80726 | Vos_Q | 27 | 80836 | Loro_Q | 75 | 80992 | Track system | 202 |
| 80610 | Suelo_RX | 575 | 80727 | Vos_Q | 27 | 80837 | Loro_Q | 75 | 80993 | Track system | 202 |
| 80611 | Suelo_RX Pro | 574 | 80728 | Vos_Q | 27 | 80838 | Loro_Q | 75 | 80994 | Track system | 202 |
| 80612 | Suelo_RX Pro | 574 | 80729 | Vos_Q | 27 | 80839 | Loro_Q | 75 | 80995 | Track system | 202 |
| 80613 | Suelo_RXJ | 575 | 80730 | Rubber 3D_PRO | 880 | 80840 | Loro_Q | 75 | 80999 | Track system | 202 |
| 80614 | Suelo_RX | 576 | 80731 | Rubber 3D_PRO | 880 | 80841 | Loro_Q | 75 | 81000 | Track system | 202 |
| 80615 | Suelo_RX | 576 | | | 881 | 80842 | Loro_Q | 75 | 81002 | Track system | 202 |
| 80616 | Suelo_RX | 576 | 80733 | Accessories | 894 | 80843 | Loro_RJ | 72 | 81003 | Track system | 202 |
| 80617 | Suelo_RXJ | 576 | | | 881 | 80844 | Loro_RJ | 72 | 81005 | Track system | 203 |
| 80618 | Portik_Q | 479 | 80734 | Accessories | 894 | 80845 | Loro_RJ | 72 | 81006 | Track system | 203 |
| 80619 | Portik_Q | 479 | 80744 | Epitax | 60 | 80846 | Loro_RJ | 72 | 81007 | Track system | 203 |
| 80620 | Portik_Q | 479 | 80745 | Epitax | 60 | 80847 | Loro_RJ | 72 | 81008 | Track system | 203 |
| 80621 | Portik_Q | 479 | 80746 | Epitax | 60 | 80848 | Loro_RJ | 72 | 81009 | Track system | 203 |
| 80622 | Portik_Q | 479 | 80747 | Epitax | 60 | 80849 | Loro_RJ | 72 | 81012 | Track system | 203 |
| 80623 | Portik_Q | 479 | 80748 | Epitax | 61 | 80850 | Loro_RJ | 72 | 81013 | Track system | 203 |
| 80624 | Portik_Q | 479 | 80749 | Epitax | 61 | 80851 | Loro_RJ | 72 | 81014 | Track system | 203 |
| 80625 | Portik_Q | 479 | 80750 | Epitax | 61 | 80852 | Loro_RJ | 72 | 81015 | Track system | 203 |
| 80630 | Epitax | 60 | 80751 | Epitax | 61 | 80853 | Loro_RJ | 72 | 81018 | Track system | 203 |
| 80631 | Epitax | 60 | 80752 | Epitax | 62 | 80854 | Loro_RJ | 72 | 81019 | Track system | 203 |
| 80632 | Epitax | 60 | 80753 | Epitax | 62 | 80855 | Loro_RJ | 72 | 81021 | Track system | 203 |
| 80633 | Epitax | 60 | 80757 | Epitax_J | 63 | 80856 | Loro_RJ | 72 | 81022 | Track system | 203 |
| 80634 | Epitax | 60 | 80758 | Epitax_J | 63 | 80857 | Loro_RJ | 72 | 81024 | Track system | 203 |
| 80635 | Epitax | 60 | 80759 | Epitax_J | 63 | 80858 | Loro_RJ | 72 | 81025 | Track system | 203 |
| 80636 | Epitax | 60 | 80760 | Epitax_J | 63 | 80859 | Loro_RJ | 73 | 81026 | Track system | 203 |
| 80637 | Epitax | 60 | 80787 | Loro_R | 70 | 80860 | Loro_RJ | 73 | 81033 | Track system | 202 |
| 80638 | Epitax | 61 | 80788 | Loro_R | 70 | 80861 | Loro_RJ | 73 | 81034 | Track system | 202 |
| 80639 | Epitax | 61 | 80789 | Loro_R | 70 | 80862 | Loro_RJ | 73 | 81036 | Track system | 202 |
| 80640 | Epitax | 61 | 80790 | Loro_R | 70 | 80863 | Loro_RJ | 73 | 81037 | Track system | 202 |
| 80641 | Epitax | 61 | 80791 | Loro_R | 70 | 80864 | Loro_RJ | 73 | 81039 | Track system | 202 |
| 80642 | Epitax_J | 63 | 80792 | Loro_R | 70 | 80865 | Loro_RJ | 73 | 81040 | Track system | 202 |
| 80643 | Epitax_J | 63 | 80793 | Loro_R | 70 | 80866 | Loro_RJ | 73 | 81042 | Track system | 202 |
| 80644 | Epitax_J | 63 | 80794 | Loro_R | 70 | 80867 | Loro_RJ | 73 | 81043 | Track system | 202 |
| 80645 | Epitax_J | 63 | 80795 | Loro_R | 70 | 80868 | Loro_RJ | 73 | 81045 | Track system | 202 |
| 80646 | Epitax_J | 63 | 80796 | Loro_R | 70 | 80869 | Loro_RJ | 73 | 81046 | Track system | 202 |
| 80647 | Epitax_J | 63 | 80797 | Loro_R | 70 | 80870 | Loro_RJ | 73 | 81048 | Track system | 202 |
| 80648 | Epitax_J | 63 | 80798 | Loro_R | 70 | 80871 | Loro_RJ | 73 | 81049 | Track system | 202 |
| 80649 | Epitax_J | 63 | 80799 | Loro_R | 70 | 80872 | Loro_RJ | 73 | 81051 | Track system | 202 |
| 80658 | Loro_Q | 75 | 80800 | Loro_R | 70 | 80873 | Loro_RJ | 73 | 81052 | Track system | 202 |
| 80659 | Loro_Q | 75 | 80801 | Loro_R | 70 | 80874 | Loro_RJ | 73 | 81054 | Track system | 202 |
| 80660 | Loro_Q | 75 | 80802 | Loro_R | 70 | 80883 | Loro_QJ | 76 | 81055 | Track system | 202 |
| 80661 | Loro_Q | 75 | 80803 | Loro_R | 71 | 80884 | Loro_QJ | 76 | 81057 | Track system | 202 |
| 80670 | Loro_R | 71 | 80804 | Loro_R | 71 | 80885 | Loro_QJ | 76 | 81058 | Track system | 202 |
| 80671 | Loro_R | 71 | 80805 | Loro_R | 71 | 80886 | Loro_QJ | 76 | 81060 | Track system | 202 |
| 80672 | Loro_R | 71 | 80806 | Loro_R | 71 | 80887 | Loro_QJ | 76 | 81061 | Track system | 202 |
| 80673 | Loro_R | 71 | 80807 | Loro_R | 71 | 80888 | Loro_QJ | 76 | 81063 | Track system | 202 |
| 80688 | Loro_Q | 75 | 80808 | Loro_R | 71 | 80889 | Loro_QJ | 76 | 81064 | Track system | 202 |
| 80689 | Loro_Q | 75 | 80809 | Loro_R | 71 | 80890 | Loro_QJ | 76 | 81066 | Track system | 202 |
| 80690 | Loro_Q | 75 | 80810 | Loro_R | 71 | 80891 | Loro_QJ | 76 | 81067 | Track system | 202 |
| 80691 | Loro_Q | 75 | 80819 | Loro_Q | 74 | 80892 | Loro_QJ | 76 | 81069 | Track system | 203 |
| 80702 | Loro_R | 71 | 80820 | Loro_Q | 74 | 80893 | Loro_QJ | 76 | 81070 | Track system | 203 |
| 80703 | Loro_R | 71 | 80821 | Loro_Q | 74 | 80894 | Loro_QJ | 76 | 81072 | Track system | 203 |
| 80704 | Loro_R | 71 | 80822 | Loro_Q | 74 | 80895 | Loro_QJ | 76 | 81073 | Track system | 203 |
| 80705 | Loro_R | 71 | 80823 | Loro_Q | 74 | 80896 | Loro_QJ | 76 | 81075 | Track system | 203 |
| 80706 | Loro_RJ | 72 | 80824 | Loro_Q | 74 | 80897 | Loro_QJ | 76 | 81076 | Track system | 203 |
| 80707 | Loro_RJ | 72 | 80825 | Loro_Q | 74 | 80898 | Loro_QJ | 76 | 81078 | Track system | 203 |
| 80708 | Loro_RJ | 72 | 80826 | Loro_Q | 74 | 80899 | Loro_QJ | 77 | 81079 | Track system | 203 |
| 80709 | Loro_RJ | 72 | 80827 | Loro_Q | 74 | 80900 | Loro_QJ | 77 | 81081 | Track system | 203 |
| 80710 | Loro_RJ | 72 | 80828 | Loro_Q | 74 | 80901 | Loro_QJ | 77 | 81082 | Track system | 203 |
| 80711 | Loro_RJ | 72 | 80829 | Loro_Q | 74 | 80902 | Loro_QJ | 77 | 81084 | Track system | 203 |
| 80712 | Loro_RJ | 72 | 80830 | Loro_Q | 74 | 80903 | Loro_QJ | 77 | 81085 | Track system | 203 |
| 80713 | Loro_RJ | 72 | 80831 | Loro_Q | 74 | 80904 | Loro_QJ | 77 | 81086 | Track system | 203 |
| 80722 | Vos_R | 21 | 80832 | Loro_Q | 74 | 80905 | Loro_QJ | 77 | 81087 | Track system | 203 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-----------------|------|-------|-------------|------|-------|------------|------|-------|-------------------|------|
| 81088 | Track system | 203 | 81195 | Orma_A | 599 | 81260 | Warp_RJ | 50 | 81330 | Paseo_L | 748 |
| 81089 | Suelo_R | 564 | 81196 | Orma_A | 599 | 81261 | Warp_RJ | 50 | 81331 | Paseo_L | 748 |
| 81090 | Suelo_R | 564 | 81197 | Orma_A | 599 | 81262 | Warp_RJ | 50 | 81332 | Paseo_L | 748 |
| 81091 | Track system | 203 | 81198 | Orma_A | 599 | 81263 | Warp_RJ | 50 | 81333 | Paseo_L | 748 |
| 81093 | Track system | 203 | 81199 | Orma_IJ | 606 | 81264 | Warp_RJ | 50 | 81337 | Paseo_PIXEL | 851 |
| 81094 | Track system | 203 | 81200 | Orma_IJ | 606 | 81265 | Warp_RJ | 50 | 81338 | Paseo_PIXEL | 851 |
| 81095 | Track system | 203 | 81201 | Orma_IJ | 606 | 81266 | Vos_RJ | 22 | 81339 | Envelope_W | 520 |
| 81097 | Bond_PRO | 661 | 81202 | Orma_IJ | 606 | 81267 | Vos_RJ | 22 | 81340 | Envelope_W | 520 |
| 81098 | Bond_PRO | 661 | 81203 | Orma_IJ | 607 | 81268 | Vos_RJ | 22 | 81341 | Envelope_W | 520 |
| 81099 | Bond_PRO | 661 | 81204 | Orma_IJ | 607 | 81269 | Vos_RJ | 22 | 81342 | Envelope_W | 520 |
| 81100 | Bond_PRO | 661 | 81205 | Orma_AJ | 600 | 81270 | Vos_QJ | 28 | 81343 | Envelope_W | 521 |
| 81101 | Bond_PRO | 661 | 81206 | Orma_AJ | 600 | 81271 | Vos_QJ | 28 | 81344 | Envelope_W | 521 |
| 81102 | Bond_PRO | 661 | 81207 | Orma_AJ | 600 | 81272 | Vos_QJ | 28 | 81351 | Cob40_R | 86 |
| 81103 | Bond_PRO | 661 | 81208 | Orma_AJ | 600 | 81273 | Vos_QJ | 28 | 81352 | Cob40_R | 86 |
| 81104 | Bond_PRO | 661 | 81209 | Orma_AJ | 601 | 81274 | Vos_RJ | 22 | 81367 | Periskop | 798 |
| 81105 | Bond_PRO | 661 | 81210 | Orma_AJ | 601 | 81275 | Vos_RJ | 22 | 81368 | Periskop | 798 |
| 81106 | Bond_PRO | 661 | 81211 | Orma_IL | 608 | 81276 | Vos_RJ | 22 | 81369 | Periskop | 798 |
| 81107 | Bond_PRO | 661 | 81212 | Orma_IL | 608 | 81277 | Vos_RJ | 22 | 81370 | Periskop | 798 |
| 81108 | Bond_PRO | 661 | 81213 | Orma_IL | 608 | 81278 | Vos_QJ | 28 | 81371 | Portik_R | 478 |
| 81109 | Suelo_RX | 574 | 81214 | Orma_IL | 608 | 81279 | Vos_QJ | 28 | 81372 | Portik_R | 478 |
| 81110 | Suelo_RX | 575 | 81215 | Orma_IL | 609 | 81280 | Vos_QJ | 28 | 81373 | Portik_R | 478 |
| 81111 | Suelo_RXJ | 575 | 81216 | Orma_IL | 609 | 81281 | Vos_QJ | 28 | 81374 | Portik_R | 478 |
| 81114 | Vos_RJ | 22 | 81217 | Orma_AL | 602 | 81282 | Vos_RJ | 22 | 81375 | Portik_Q | 479 |
| 81115 | Vos_RJ | 22 | 81218 | Orma_AL | 602 | 81283 | Vos_RJ | 22 | 81376 | Portik_Q | 479 |
| 81118 | Vos_RJ | 22 | 81219 | Orma_AL | 602 | 81285 | Vos_RJ | 22 | 81377 | Portik_Q | 479 |
| 81119 | Vos_RJ | 22 | 81220 | Orma_AL | 602 | 81286 | Vos_QJ | 28 | 81378 | Portik_Q | 479 |
| 81122 | Vos_RJ | 22 | 81221 | Orma_AL | 603 | 81287 | Vos_QJ | 28 | | | |
| 81123 | Vos_RJ | 22 | 81222 | Orma_AL | 603 | 81288 | Vos_QJ | 28 | 81410 | Ink system Cables | 346 |
| 81126 | Vos_RJ | 22 | 81223 | Orma_C | 472 | 81289 | Vos_QJ | 28 | | | |
| 81127 | Vos_RJ | 22 | 81224 | Orma_C | 472 | 81290 | Envelope_W | 521 | | | |
| 81160 | Periskop Narrow | 795 | 81225 | Orma_C | 472 | 81291 | Envelope_W | 521 | 81411 | Ink system Cables | 346 |
| 81161 | Periskop Narrow | 795 | 81226 | Orma_C | 472 | 81292 | Envelope_W | 521 | | | |
| 81162 | Periskop Narrow | 795 | 81227 | Orma_C | 472 | 81293 | Envelope_W | 521 | 81413 | Accessories | 356 |
| 81163 | Periskop Narrow | 795 | 81228 | Orma_C | 472 | 81294 | Envelope_W | 521 | 81414 | Accessories | 356 |
| 81164 | Periskop Narrow | 796 | 81229 | Orma_C | 473 | 81295 | Envelope_W | 521 | 81416 | Accessories | 356 |
| 81165 | Periskop Narrow | 796 | 81230 | Orma_C | 473 | 81296 | Optiwall | 515 | 81417 | Accessories | 356 |
| 81166 | Periskop Narrow | 796 | 81231 | Orma_C | 473 | 81297 | Optiwall | 515 | 81418 | Accessories | 358 |
| 81167 | Periskop Narrow | 796 | 81232 | Orma_C | 473 | 81298 | Optiwall | 515 | 81419 | Accessories | 358 |
| 81168 | Periskop Narrow | 798 | 81233 | Orma_C | 473 | 81299 | Optiwall | 515 | 81420 | Accessories | 358 |
| 81169 | Periskop Narrow | 798 | 81234 | Orma_C | 473 | 81300 | Optiwall | 515 | 81421 | Accessories | 358 |
| 81170 | Periskop Narrow | 798 | 81235 | Orma_C | 474 | 81301 | Optiwall | 515 | 81422 | Accessories | 359 |
| 81171 | Periskop Narrow | 798 | 81236 | Orma_C | 474 | 81302 | Optiwall | 515 | 81423 | Accessories | 359 |
| 81172 | Orma_I | 604 | 81237 | Orma_C | 474 | 81303 | Optiwall | 515 | 81424 | Accessories | 356 |
| 81173 | Orma_I | 604 | 81238 | Orma_C | 474 | 81304 | Optiwall | 515 | 81425 | Accessories | 359 |
| 81174 | Orma_I | 604 | 81239 | Orma_C | 474 | 81305 | Optiwall | 515 | 81426 | Accessories | 346 |
| 81175 | Orma_I | 605 | 81240 | Orma_C | 474 | 81306 | Optiwall | 515 | 81427 | Accessories | 359 |
| 81176 | Orma_I | 605 | 81241 | Orma_CJ | 472 | 81307 | Optiwall | 515 | 81430 | Accessories | 346 |
| 81177 | Orma_I | 605 | 81242 | Orma_CJ | 472 | 81308 | Gardener | 804 | 81447 | Archiline PRO_W | 720 |
| 81178 | Orma_I | 605 | 81243 | Orma_CJ | 473 | 81309 | Gardener | 804 | 81448 | Archiline PRO_W | 720 |
| 81179 | Orma_I | 605 | 81244 | Orma_CJ | 473 | 81310 | Gardener | 804 | 81449 | Archiline PRO_W | 720 |
| 81180 | Orma_I | 605 | 81245 | Orma_CJ | 474 | 81311 | Gardener | 804 | 81450 | Archiline PRO_W | 720 |
| 81181 | Orma_A | 598 | 81246 | Orma_CJ | 474 | 81312 | Gardener | 804 | 81451 | Archiline PRO_W | 720 |
| 81182 | Orma_A | 598 | 81247 | Ice-cut | 378 | 81313 | Gardener | 804 | 81452 | Archiline PRO_W | 720 |
| 81183 | Orma_A | 598 | 81248 | Ice-cut | 378 | 81314 | Gardener | 804 | 81453 | Xenia_A | 732 |
| 81184 | Orma_A | 598 | 81249 | Ice-cut | 378 | 81315 | Gardener | 804 | 81454 | Xenia_A | 732 |
| 81185 | Orma_A | 598 | 81250 | Ice-cut | 378 | 81320 | Vos_RJ | 22 | 81455 | Xenia_A | 732 |
| 81186 | Orma_A | 598 | 81251 | Ice-cut | 378 | 81321 | Orma_I | 604 | 81456 | Xenia_A | 732 |
| 81187 | Orma_A | 598 | 81252 | Ice-cut | 378 | 81322 | Orma_A | 598 | 81457 | Xenia_A | 732 |
| 81188 | Orma_A | 598 | 81253 | Ice-cut | 378 | 81323 | Step | 387 | 81458 | Xenia_A | 732 |
| 81189 | Orma_A | 598 | 81254 | Ice-cut | 378 | 81324 | Step | 387 | 81459 | Xenia_A | 732 |
| 81190 | Orma_A | 598 | 81255 | Ice-Cut66_F | 763 | 81325 | Step | 387 | 81460 | Xenia_A | 732 |
| 81191 | Orma_A | 598 | 81256 | Ice-Cut66_F | 763 | 81326 | Step | 387 | 81461 | Xenia_AL | 733 |
| 81192 | Orma_A | 598 | 81257 | Ice-Cut66_F | 763 | 81327 | Step | 387 | 81462 | Xenia_AL | 733 |
| 81193 | Orma_A | 599 | 81258 | Warp_RJ | 50 | 81328 | Paseo_L | 748 | 81463 | Xenia_AL | 733 |
| 81194 | Orma_A | 599 | 81259 | Warp_RJ | 50 | 81329 | Paseo_L | 748 | 81464 | Xenia_AL PRO | 734 |
| | | | | | | | | | 81465 | Xenia_A PRO | 734 |
| | | | | | | | | | 81466 | Xenia_A PRO | 734 |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|------------------|------|-------|--------------|------|-------|-----------------|------|-------|-----------------|------|
| 81467 | Xenia_A PRO | 734 | 81542 | Periskop | 798 | 81627 | Pound_T | 172 | 81734 | Suelo_RX | 576 |
| 81468 | Xenia_A PRO | 734 | 81543 | Periskop | 798 | 81628 | Pound_T | 172 | 81735 | Suelo_RXJ | 576 |
| 81469 | Beret_R | 614 | 81544 | Periskop | 798 | 81629 | Pound_T | 172 | 81736 | Alcor_Q | 628 |
| 81470 | Beret_R | 614 | 81545 | Periskop | 798 | 81630 | Pound_T | 172 | 81737 | Suelo_RX | 576 |
| 81471 | Beret_X | 614 | 81546 | Periskop | 798 | 81631 | Pound_T | 172 | 81740 | Suelo_RX | 574 |
| 81473 | Clivo_2 | 811 | 81547 | Periskop | 798 | 81632 | Pound_T | 172 | 81741 | Suelo_RX | 574 |
| 81474 | Clivo_SL | 811 | 81548 | Periskop | 798 | 81633 | Pound_T | 172 | 81742 | Suelo_RX | 575 |
| 81475 | Suelo_Telescopic | 580 | 81549 | Periskop | 798 | 81634 | Pound_T | 172 | 81743 | Suelo_RX | 575 |
| 81476 | Suelo_Telescopic | 580 | 81550 | Play_Quantum | 140 | 81635 | Pound_T | 172 | 81744 | Suelo_RX Pro | 574 |
| 81477 | Giotto_P | 82 | 81551 | Play_Quantum | 140 | 81636 | Pound_T | 172 | 81745 | Suelo_RX Pro | 574 |
| 81478 | Giotto_P | 82 | 81552 | Play_Quantum | 140 | 81637 | Pound_T | 172 | 81746 | Suelo_RX | 576 |
| 81479 | Giotto_P | 82 | 81553 | Play_Quantum | 140 | 81638 | Pound_T | 172 | 81747 | Suelo_RX | 576 |
| 81480 | Giotto_P | 82 | 81554 | Vedette_Q | 493 | 81639 | Pound_T | 172 | 81748 | Suelo_RX | 576 |
| 81483 | Archiline_Twin | 823 | 81574 | Vedette_Q | 493 | 81640 | Pound_T | 172 | 81749 | Suelo_RX | 576 |
| 81484 | Archiline_Twin | 823 | 81575 | Vedette_Q | 493 | 81647 | Optus_T | 190 | 81750 | Alcor_Q | 628 |
| 81485 | Warp_R | 46 | 81576 | Vedette_Q | 493 | 81648 | Optus_T | 190 | 81751 | Alcor_Q | 628 |
| 81486 | Warp_R | 46 | 81577 | Vedette_Q | 493 | 81648 | Optus_T | 190 | 81752 | Pound_T | 173 |
| 81487 | Warp_R | 46 | 81578 | Vedette_Q | 493 | 81655 | Optus_T | 190 | 81753 | Pound_T | 173 |
| 81488 | Warp_R | 46 | 81579 | Vedette_Q | 493 | 81656 | Optus_T | 190 | 81754 | Pound_T | 173 |
| 81489 | Warp_R | 46 | 81580 | Vedette_Q | 493 | 81657 | Optus_T | 190 | 81755 | Pound_T | 173 |
| 81490 | Warp_R | 46 | 81581 | Vedette_Q | 493 | 81658 | Optus_T | 190 | 81756 | Pound_T | 173 |
| 81491 | Warp_R | 46 | 81582 | Vedette_Q | 493 | 81659 | Optus_T | 190 | 81757 | Pound_T | 173 |
| 81492 | Warp_R | 46 | 81583 | Vedette_Q | 493 | 81660 | Optus_T | 190 | 81784 | Periskop RGBW | 798 |
| 81493 | Periskop RGBW | 795 | 81584 | Vedette_Q | 493 | 81661 | Optus_EX | 147 | 81785 | Periskop RGBW | 798 |
| 81494 | Periskop RGBW | 795 | 81585 | Vedette_Q | 493 | 81662 | Optus_EX | 147 | 81786 | Periskop RGBW | 798 |
| 81495 | Periskop RGBW | 795 | 81586 | Vedette_Q | 493 | 81663 | Optus_EX | 147 | 81787 | Periskop RGBW | 798 |
| 81496 | Periskop RGBW | 795 | 81587 | Vedette_Q | 493 | 81664 | Optus_EX | 147 | 81788 | Periskop Narrow | 794 |
| 81497 | Periskop RGBW | 796 | 81588 | Vedette_Q | 493 | 81665 | Optus_EX | 147 | 81789 | Periskop Narrow | 794 |
| 81498 | Periskop RGBW | 796 | 81589 | Vedette_Q | 493 | 81666 | Optus_EX | 147 | 81790 | Periskop Narrow | 794 |
| 81499 | Periskop RGBW | 796 | 81590 | Archiline_A | 710 | 81667 | Optus_EX | 147 | 81791 | Periskop Narrow | 794 |
| 81500 | Periskop RGBW | 796 | 81591 | Archiline_F | 706 | 81668 | Optus_EX | 147 | 81808 | Pound_T | 173 |
| 81501 | Gardener RGBW | 805 | 81592 | Archiline_F | 706 | 81669 | Optus_EX | 147 | 81809 | Pound_T | 173 |
| 81502 | Gardener RGBW | 805 | 81593 | Archiline_F | 706 | 81670 | Optus_EX | 147 | 81810 | Pound_T | 173 |
| 81503 | Gardener RGBW | 805 | 81594 | Archiline_F | 706 | 81671 | Optus_EX | 147 | 81811 | Pound_T | 173 |
| 81504 | Gardener RGBW | 805 | 81595 | Archiline_F | 706 | 81672 | Optus_EX | 147 | 81812 | Pound_T | 173 |
| 81505 | Gardener RGBW | 805 | 81596 | Archiline_F | 706 | 81673 | Archiline_PRO_I | 714 | 81813 | Pound_T | 173 |
| 81506 | Gardener RGBW | 805 | 81597 | Archiline_I | 712 | 81674 | Archiline_PRO_I | 714 | 81814 | Optus_T | 191 |
| 81507 | Gardener RGBW | 805 | 81598 | Archiline_I | 712 | 81675 | Archiline_PRO_I | 714 | 81815 | Optus_T | 191 |
| 81508 | Gardener RGBW | 805 | 81599 | Archiline_I | 712 | 81676 | Archiline_PRO_I | 714 | 81816 | Optus_T | 191 |
| 81509 | Envelope_W | 521 | 81600 | Archiline_I | 712 | 81677 | Archiline_PRO_I | 714 | 81817 | Optus_T | 191 |
| 81510 | Envelope_W | 521 | 81601 | Archiline_I | 712 | 81678 | Archiline_PRO_I | 714 | 81818 | Optus_T | 191 |
| 81511 | Envelope_W | 521 | 81602 | Archiline_I | 712 | 81679 | Archiline_PRO_I | 714 | 81819 | Optus_T | 191 |
| 81512 | Envelope_W | 521 | 81603 | Archiline_A | 710 | 81680 | Archiline_PRO_I | 714 | 81828 | Electronics | 957 |
| 81513 | Archiline_W | 718 | 81604 | Archiline_A | 710 | 81687 | Xenia_A PRO | 734 | 81829 | Electronics | 957 |
| 81518 | Play_Quantum | 140 | 81605 | Archiline_A | 710 | 81688 | Xenia_A PRO | 734 | 81830 | Electronics | 957 |
| 81519 | Play_Quantum | 140 | 81606 | Archiline_A | 710 | 81689 | Xenia_A PRO | 734 | 81831 | Electronics | 957 |
| 81520 | Play_Quantum | 140 | 81607 | Archiline_A | 710 | 81690 | Xenia_A PRO | 734 | 81835 | Electronics | 957 |
| 81521 | Play_Quantum | 140 | 81608 | Archiline_A | 710 | 81691 | Footpad Flat | 639 | 81836 | Electronics | 957 |
| 81522 | Play_S | 140 | 81609 | Archiline_A | 710 | 81692 | Suelo_I Focus | 581 | 81838 | Guardian | 465 |
| 81526 | Play_Navata | 140 | 81610 | Archiline_W | 718 | 81693 | Suelo Focus | 581 | 81839 | Guardian | 465 |
| 81527 | Play_Navata | 140 | 81611 | Archiline_W | 718 | 81695 | Xenia_W | 726 | 81840 | Guardian_J | 465 |
| 81528 | Play_Navata | 140 | 81612 | Archiline_W | 718 | 81696 | Xenia_W | 726 | 81841 | Guardian | 466 |
| 81529 | Play_Navata | 140 | 81613 | Archiline_W | 718 | 81702 | Xenia_W PRO | 729 | 81842 | Guardian | 466 |
| 81530 | Play_Navata | 140 | 81614 | Archiline_W | 718 | 81703 | Xenia_W PRO | 729 | 81844 | Guardian | 466 |
| 81531 | Play_Navata | 140 | 81615 | Archiline_W | 718 | 81704 | Xenia_W PRO | 729 | 81845 | Guardian | 466 |
| 81532 | Play_Navata | 140 | 81616 | Archiline_W | 718 | 81705 | Xenia_W PRO | 729 | 81846 | Guardian | 466 |
| 81533 | Play_Navata | 140 | 81617 | Archiline_W | 718 | 81706 | Xenia_W PRO | 729 | 81848 | Guardian | 466 |
| 81534 | Paly_P | 141 | 81618 | Archiline_W | 718 | 81713 | Xenia_W PRO | 729 | 81849 | Guardian_J | 466 |
| 81535 | Paly_P | 141 | 81619 | Suelo_RDX | 577 | 81714 | Xenia_W PRO | 729 | 81850 | Guardian_J | 466 |
| 81536 | Paly_P | 141 | 81620 | Suelo_RDX | 577 | 81715 | Xenia_W PRO | 729 | 81851 | Portik_R | 478 |
| 81537 | Paly_P | 141 | 81621 | Xenia_A | 732 | 81716 | Xenia_W PRO | 729 | 81852 | Portik_R | 478 |
| 81538 | Play_Giotto | 141 | 81622 | Xenia_A | 732 | 81717 | Suelo_R | 566 | 81853 | Portik_R | 478 |
| 81539 | Play_Giotto | 141 | 81623 | Xenia_AL | 733 | 81718 | Suelo_RX | 570 | 81854 | Portik_R | 478 |
| 81540 | Play_Giotto | 141 | 81624 | Xenia_A PRO | 734 | 81719 | Suelo_RX | 574 | 81855 | Portik_R | 478 |
| 81541 | Play_Giotto | 141 | 81625 | Pound_T | 172 | 81732 | Suelo_RX | 576 | 81856 | Portik_R | 478 |
| | | | 81626 | Pound_T | 172 | 81733 | Suelo_RX | 576 | | | |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-------------|------|-------|--------------------|------|-------|--------------------|------|-------|---------------------|------|
| 81857 | Portik_R | 478 | 81938 | Guardian_J | 467 | 82086 | Rollip60_MP | 320 | 82229 | Pound_T | 175 |
| 81858 | Portik_R | 478 | 81943 | Fasim | 620 | 82087 | Rollip60_MP | 320 | 82230 | Pound_T | 175 |
| 81865 | Rollip60_MS | 315 | 81944 | Fasim_J | 620 | 82088 | Rollip60_MP | 320 | 82231 | Pound_T | 175 |
| 81866 | Rollip60_MS | 315 | 81945 | Narcissus | 807 | 82089 | Rollip60_MP | 320 | 82232 | Pound_T | 175 |
| 81867 | Guardian | 467 | 81946 | Prolamp | 821 | 82090 | Rollip60_MP | 320 | 82235 | Optus_T | 190 |
| 81868 | Guardian | 467 | 81947 | Prolamp | 821 | 82091 | Rollip60_MP | 320 | 82236 | Optus_T | 190 |
| 81870 | Guardian | 467 | 81948 | Prolamp | 821 | 82092 | Rollip60_MP | 320 | 82237 | Optus_T | 190 |
| 81871 | Guardian | 467 | 81949 | Prolamp RGBW | 821 | 82093 | Rollip60_MP | 320 | 82238 | Optus_T | 190 |
| 81872 | Guardian | 467 | 81950 | Prolamp RGBW | 821 | 82094 | Rollip60_MP | 320 | 82239 | Optus_T | 190 |
| 81874 | Guardian | 467 | 81951 | Prolamp RGBW | 821 | 82095 | Rollip60_MP | 320 | 82240 | Optus_T | 190 |
| 81875 | Guardian_J | 467 | 81954 | Pound_T SuperSpot | 173 | 82096 | Rollip60_MP | 320 | 82243 | Optus_T | 193 |
| 81876 | Guardian_J | 467 | 81955 | Pound_T SuperSpot | 173 | 82097 | Rollip60_PC | 323 | 82244 | Optus_T | 193 |
| 81877 | Portik_R | 478 | 81956 | Ribbon Plus | 900 | 82098 | Rollip60_PC | 323 | 82245 | Optus_T | 193 |
| 81878 | Portik_R | 478 | 81957 | Ribbon Plus | 900 | 82099 | Rollip60_PC | 323 | 82246 | Optus_T | 193 |
| 81879 | Portik_R | 478 | 81958 | Ribbon Plus | 900 | 82100 | Rollip60_PC | 323 | 82247 | Optus_Ww | 194 |
| 81880 | Portik_R | 478 | 81959 | PU_C Plus | 902 | 82101 | Rollip60_MP | 320 | 82248 | Optus_Ww | 194 |
| 81881 | Portik_Q | 479 | 81960 | PU_C Plus | 902 | 82102 | Rollip60_MP | 320 | 82249 | Optus_Ww | 194 |
| 81882 | Portik_Q | 479 | 81961 | PU_C Plus | 902 | 82103 | Rollip60_MP | 320 | 82250 | Optus_Ww | 194 |
| 81883 | Portik_Q | 479 | 81962 | PU_C Plus | 902 | 82104 | Rollip60_MP | 320 | 82251 | Optus_Ww | 194 |
| 81884 | Portik_Q | 479 | 81963 | PU_C Plus | 902 | 82105 | Pound Focus | 178 | 82252 | Optus_Ww | 194 |
| 81885 | Portik_R | 478 | 81964 | PU_C Plus | 902 | 82106 | Pound Focus | 178 | 82253 | Optus_Ww | 194 |
| 81886 | Portik_R | 478 | 81965 | PU_C PLUS RGBW | 903 | 82107 | Pound Focus | 178 | 82254 | Optus_Ww | 194 |
| 81887 | Portik_R | 478 | 81987 | Pound Focus | 176 | 82108 | Pound Focus | 178 | 82257 | RollipPRO | 304 |
| 81888 | Portik_R | 478 | 81988 | Pound Focus | 176 | 82109 | Pound Focus | 178 | 82258 | Skylum_Q | 254 |
| 81889 | Portik_Q | 479 | 81989 | Pound Focus | 176 | 82110 | Pound Focus | 178 | 82259 | Skylum_Q | 254 |
| 81890 | Portik_Q | 479 | 81990 | Pound Focus | 176 | 82113 | Pound Shaper | 179 | 82260 | Skylum_Q | 254 |
| 81891 | Portik_Q | 479 | 81991 | Pound Focus | 176 | 82114 | Pound Shaper Dist. | 179 | 82261 | Skylum_Q | 254 |
| 81892 | Portik_Q | 479 | 81992 | Pound Focus | 176 | 82119 | Pound Shaper | 181 | 82262 | Skylum_Q | 254 |
| 81893 | Guardian | 465 | 81995 | Pound_Wall | 273 | 82120 | Pound Shaper | 181 | 82263 | Skylum_Q | 254 |
| 81894 | Guardian | 465 | 81996 | Pound_Wall | 273 | 82121 | Pound Shaper Dist. | 181 | 82264 | Tour_Cell_C | 233 |
| 81895 | Guardian_J | 465 | 81997 | Pound_Wall | 273 | 82122 | Pound Shaper Dist. | 181 | 82265 | Tour_Cell_C | 233 |
| 81896 | Guardian | 466 | 81998 | Pound_Wall | 273 | 82135 | Rubber 2D | 891 | 82266 | Suelo_Brass | 582 |
| 81897 | Guardian | 466 | 81999 | Pound_Wall | 273 | 82136 | Rubber 2D | 891 | 82267 | Suelo_Brass | 582 |
| 81899 | Guardian | 466 | 82000 | Pound_Wall | 273 | 82137 | Rubber 2D | 891 | 82268 | Suelo_Brass | 582 |
| 81900 | Guardian | 466 | 82003 | Pound_S | 272 | 82138 | Rubber 2D | 891 | 82269 | Suelo_Brass | 582 |
| 81901 | Guardian | 466 | 82004 | Pound_S | 272 | 82139 | Rubber 2D | 891 | 82290 | Clear_MC | 327 |
| 81903 | Guardian | 466 | 82005 | Pound_S | 272 | 82140 | Rubber 2D | 891 | 82291 | Clear_MC | 327 |
| 81904 | Guardian_J | 466 | 82006 | Pound_S | 272 | 82141 | Rubber 2D | 891 | 82292 | Clear_MC | 327 |
| 81905 | Guardian_J | 466 | 82007 | Pound_S | 272 | 82142 | Rubber 2D | 891 | 82293 | Clear_MC | 327 |
| 81906 | Guardian | 467 | 82008 | Pound_S | 272 | 82143 | Rubber 2D | 891 | 82294 | Clear_MC | 327 |
| 81907 | Guardian | 467 | 82055 | Pound_Wall Focus | 273 | 82147 | Rubber 2D_mini | 890 | 82295 | Clear_MC | 327 |
| 81909 | Guardian | 467 | 82056 | Pound_Wall Focus | 273 | 82148 | Rubber 2D_mini | 890 | 82298 | Tour_Cell_P | 242 |
| 81910 | Guardian | 467 | 82057 | Pound_Wall Focus | 273 | 82149 | Rubber 2D_mini | 890 | 82299 | Tour_Cell_P | 242 |
| 81911 | Guardian | 467 | 82058 | Pound_Wall Focus | 273 | 82150 | Rubber 2D_mini | 890 | 82300 | Tour_Cell_P | 242 |
| 81913 | Guardian | 467 | 82059 | Pound_Wall Focus | 273 | 82151 | Rubber 2D_mini | 890 | 82301 | Tour_Cell_P | 242 |
| 81914 | Guardian_J | 467 | 82060 | Pound_Wall Focus | 273 | 82152 | Rubber 2D_mini | 890 | 82302 | Archiline_FJ | 707 |
| 81915 | Guardian_J | 467 | 82063 | Pound_S Focus | 272 | 82153 | Rubber 2D_mini | 890 | 82303 | Archiline_FJ | 707 |
| 81916 | Guardian | 465 | 82064 | Pound_S Focus | 272 | 82154 | Rubber 2D_mini | 890 | 82304 | Archiline_FJ | 707 |
| 81917 | Guardian | 465 | 82065 | Pound_S Focus | 272 | 82155 | Rubber 2D_mini | 890 | 82305 | Archiline_FJ | 707 |
| 81918 | Guardian_J | 465 | 82066 | Pound_S Focus | 272 | 82198 | Accessories | 894 | 82306 | Archiline_FJ | 707 |
| 81919 | Guardian | 466 | 82067 | Pound_S Focus | 272 | 82199 | Accessories | 894 | 82307 | Archiline_FJ | 707 |
| 81920 | Guardian | 466 | 82068 | Pound_S Focus | 272 | 82202 | Accessories | 894 | 82308 | Archiline_IJ | 713 |
| 81922 | Guardian | 466 | 82071 | Pound Shaper | 179 | 82208 | Rubber 3D | 892 | 82309 | Archiline_IJ | 713 |
| 81923 | Guardian | 466 | 82072 | Pound Shaper Dist. | 179 | 82211 | Rubber 3D | 892 | 82310 | Archiline_IJ | 713 |
| 81924 | Guardian | 466 | 82075 | Giotto_RF | 83 | 82216 | Rubber 3D Optics | 893 | 82311 | Archiline_IJ | 713 |
| 81926 | Guardian | 466 | 82076 | Giotto_RF | 83 | 82217 | Rubber 3D Optics | 893 | 82312 | Archiline_IJ | 713 |
| 81927 | Guardian_J | 466 | 82077 | Giotto_RF | 83 | 82218 | Rubber 3D Optics | 893 | 82313 | Archiline_IJ | 713 |
| 81928 | Guardian_J | 466 | 82078 | Giotto_RF | 83 | 82219 | Rubber 3D Optics | 893 | 82326 | Xenia_A PRO MicroL. | 739 |
| 81929 | Guardian | 467 | 82079 | Rollip60_MS | 315 | 82220 | Rubber 3D Optics | 893 | 82327 | Xenia_A PRO MicroL. | 739 |
| 81930 | Guardian | 467 | 82080 | Rollip60_MS | 315 | 82221 | Rubber 3D Optics | 893 | 82328 | Xenia_A PRO MicroL. | 739 |
| 81932 | Guardian | 467 | 82081 | Rollip60_MS | 315 | 82222 | Fasim | 619 | 82329 | Xenia_A PRO MicroL. | 739 |
| 81933 | Guardian | 467 | 82082 | Rollip60_MS | 315 | 82223 | Fasim | 619 | 82330 | Xenia_A PRO MicroL. | 739 |
| 81934 | Guardian | 467 | 82083 | Rollip60_MS | 315 | 82224 | Fasim | 619 | 82331 | Xenia_A PRO MicroL. | 739 |
| 81936 | Guardian | 467 | 82084 | Rollip60_MS | 315 | 82227 | Pound_T | 175 | 82332 | Xenia_A PRO MicroL. | 739 |
| 81937 | Guardian_J | 467 | 82085 | Rollip60_MP | 320 | 82228 | Pound_T | 175 | 82333 | Xenia_A PRO MicroL. | 739 |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|--------------------|------|-------|--------------|------|-------|---------------------|------|-------|---------------------|------|
| 82334 | Xenia_A PRO MicroL | 739 | 82448 | Pound Focus | 178 | 82526 | Orma_IJ | 607 | 82601 | Cell_Ww | 136 |
| 82339 | Illuminator | 153 | 82449 | Pound Focus | 178 | 82527 | Suelo_R Pro | 562 | 82602 | Cell_Ww | 136 |
| 82340 | Illuminator | 153 | 82452 | Orma_CJ | 473 | 82528 | Suelo_R Pro | 562 | 82603 | Cell_SWw | 277 |
| 82341 | Illuminator | 154 | 82453 | Orma_CJ | 473 | 82529 | Suelo_R Pro | 563 | 82604 | Cell_SWw | 277 |
| 82342 | Illuminator | 154 | 82454 | Orma_CJ | 474 | 82530 | Suelo_R Pro | 563 | 82605 | Cell_SWw | 277 |
| 82353 | Pound_BC | 182 | 82455 | Orma_CJ | 474 | 82531 | Suelo_R Pro | 563 | 82606 | Cell_SWw | 277 |
| 82354 | Pound_BC | 182 | 82456 | Orma_IJ | 606 | 82532 | Suelo_R Pro | 563 | 82607 | Pound_T | 173 |
| 82355 | Pound_BC | 182 | 82457 | Orma_IJ | 606 | 82533 | Suelo_RJ | 565 | 82608 | Pound_T | 173 |
| 82356 | Pound_BC | 182 | 82458 | Orma_IJ | 607 | 82534 | Suelo_RJ | 565 | 82609 | Pound_T | 173 |
| 82357 | Pound_BC | 182 | 82459 | Orma_IJ | 607 | 82535 | Suelo_R Pro | 568 | 82610 | Pound_T | 173 |
| 82358 | Pound_BC | 182 | 82460 | Orma_AJ | 600 | 82536 | Suelo_R Pro | 568 | 82611 | Pound_T | 173 |
| 82359 | Pound_BS | 183 | 82461 | Orma_AJ | 600 | 82537 | Suelo_R Pro | 568 | 82612 | Pound_T | 173 |
| 82360 | Pound_BS | 183 | 82462 | Orma_AJ | 601 | 82538 | Suelo_RX Pro | 570 | 82619 | Eyelet_R | 441 |
| 82361 | Pound_BS | 183 | 82463 | Orma_AJ | 601 | 82539 | Suelo_RX Pro | 570 | 82620 | Eyelet_R | 441 |
| 82362 | Pound_BS | 183 | 82464 | Fasim | 619 | 82540 | Suelo_RX Pro | 570 | 82621 | Eyelet_R | 441 |
| 82363 | Pound_BS | 183 | 82467 | Vos_Ww | 24 | 82541 | Suelo_RX Pro | 570 | 82622 | Eyelet_Q | 441 |
| 82364 | Pound_BS | 183 | 82468 | Vos_Ww | 24 | 82542 | Suelo_RX Pro | 572 | 82623 | Eyelet_Q | 441 |
| 82365 | Pound_BS | 183 | 82469 | Vos_Ww | 24 | 82543 | Suelo_RX Pro | 572 | 82624 | Eyelet_Q | 441 |
| 82366 | Pound_BS | 183 | 82470 | Vos_Ww | 24 | 82544 | Suelo_RX Pro | 572 | 82629 | Navata Pound Sha. | 211 |
| 82367 | Pound_BS | 183 | 82473 | Cob40_R | 86 | 82545 | Suelo_RXJ | 572 | 82630 | Navata Pound Sha. | 211 |
| 82368 | Pound_BS | 183 | 82474 | Cob40_R | 86 | 82546 | Suelo_RX Pro | 574 | 82631 | Navata Pound Sha.D. | 211 |
| 82369 | Pound_BS | 183 | 82475 | Cob40_R | 86 | 82547 | Suelo_RX Pro | 574 | 82632 | Navata Pound Sha.D. | 211 |
| 82370 | Pound_BS | 183 | 82476 | Cob40_R | 86 | 82548 | Suelo_RX Pro | 574 | 82637 | Astropek_Blade | 637 |
| 82375 | Optus_T | 193 | 82477 | Cob40_RJ | 87 | 82549 | Suelo_RX Pro | 574 | 82638 | Astropek_Blade | 637 |
| 82376 | Optus_T | 193 | 82478 | Cob40_RJ | 87 | 82550 | Suelo_RXJ | 575 | 82639 | Alcor_R Blade | 629 |
| 82377 | Optus_T | 193 | 82479 | Cob40_RJ | 87 | 82553 | Xenia_AF PRO MicroL | 740 | 82640 | Alcor_R Blade | 629 |
| 82378 | Optus_T | 193 | 82480 | Cob40_RJ | 87 | 82554 | Xenia_AF PRO MicroL | 740 | 82642 | MK68_R | 873 |
| 82379 | Optus_T | 193 | 82481 | Xenia_ALF | 736 | 82555 | Xenia_AF PRO MicroL | 740 | 82644 | MK68_R | 873 |
| 82380 | Optus_T | 193 | 82482 | Xenia_ALF | 736 | 82556 | Xenia_AF PRO MicroL | 740 | 82646 | MK68_R | 873 |
| 82381 | Optus_T | 193 | 82483 | Xenia_ALF | 736 | 82557 | Xenia_AF PRO MicroL | 740 | 82648 | MK68_R | 873 |
| 82382 | Optus_T | 193 | 82484 | Xenia_ALF | 736 | 82562 | Xenia_AF PRO MicroL | 740 | 82650 | MK68_Q | 873 |
| 82383 | Navata_Optus | 210 | 82485 | Xenia_ALF | 736 | 82563 | Xenia_AF PRO MicroL | 740 | 82652 | MK68_Q | 873 |
| 82384 | Navata_Optus | 210 | 82486 | Xenia_AF | 736 | 82564 | Xenia_AF PRO MicroL | 740 | 82654 | MK68_Q | 873 |
| 82385 | Navata_Optus | 210 | 82487 | Xenia_AF | 736 | 82565 | Xenia_AF PRO MicroL | 740 | 82656 | MK68_Q | 873 |
| 82386 | Navata_Optus | 210 | 82488 | Xenia_AF | 736 | 82570 | Rollip60_MS | 315 | 82657 | Orma_F | 590 |
| 82389 | Navata_Optus | 210 | 82489 | Xenia_AF | 736 | 82571 | Rollip60_MS | 315 | 82658 | Orma_F | 590 |
| 82390 | Navata_Optus | 210 | 82490 | Xenia_AF | 736 | 82572 | Rollip60_MS | 315 | 82659 | Orma_F | 590 |
| 82391 | Navata_Optus | 210 | 82491 | Xenia_AF | 735 | 82573 | Rollip60_MS | 315 | 82660 | Orma_F | 590 |
| 82392 | Navata_Optus | 210 | 82492 | Xenia_AF | 735 | 82574 | Rollip60_MS | 315 | 82661 | Orma_F | 590 |
| 82395 | Navata_Optus | 210 | 82493 | Xenia_AF | 735 | 82575 | Rollip60_MS | 315 | 82662 | Orma_F | 590 |
| 82396 | Navata_Optus | 210 | 82494 | Xenia_AF | 735 | 82576 | Rollip60_MP | 320 | 82663 | Orma_FJ | 592 |
| 82397 | Navata_Optus | 210 | 82495 | Xenia_AF | 735 | 82577 | Rollip60_MP | 320 | 82664 | Orma_FJ | 592 |
| 82398 | Navata_Optus | 210 | 82496 | Xenia_AF PRO | 737 | 82578 | Rollip60_MP | 320 | 82665 | Orma_FO | 596 |
| 82406 | Pound_T | 175 | 82497 | Xenia_AF PRO | 737 | 82579 | Rollip60_MP | 320 | 82666 | Orma_FO | 596 |
| 82407 | Pound_T | 175 | 82498 | Xenia_AF PRO | 737 | 82580 | Rollip60_MP | 320 | 82667 | Orma_FL | 594 |
| 82408 | Pound_T | 175 | 82499 | Xenia_AF PRO | 737 | 82581 | Rollip60_MP | 320 | 82668 | Orma_FL | 594 |
| 82409 | Pound_T | 175 | 82500 | Xenia_AF PRO | 737 | 82582 | Rollip60_MP | 320 | 82669 | Orma_F | 591 |
| 82410 | Pound_T | 175 | 82505 | Xenia_AF PRO | 738 | 82583 | Rollip60_MP | 320 | 82670 | Orma_F | 591 |
| 82411 | Pound_T | 175 | 82506 | Xenia_AF PRO | 738 | 82584 | Rollip60_MP | 320 | 82671 | Orma_F | 591 |
| 82412 | Pound_T | 175 | 82507 | Xenia_AF PRO | 738 | 82585 | Rollip60_MP | 320 | 82672 | Orma_F | 591 |
| 82413 | Pound_T | 175 | 82508 | Xenia_AF PRO | 738 | 82586 | Rollip60_MP | 320 | 82673 | Orma_F | 591 |
| 82414 | Pound_T | 175 | 82512 | Quara_R | 536 | 82587 | Rollip60_MP | 320 | 82674 | Orma_F | 591 |
| 82415 | Pound_T | 175 | 82513 | Quara_Q | 538 | 82588 | Rollip60_PC | 323 | 82675 | Orma_FJ | 592 |
| 82416 | Pound_T | 175 | 82514 | Quara_QI | 538 | 82589 | Rollip60_PC | 323 | 82676 | Orma_FJ | 592 |
| 82417 | Pound_T | 175 | 82515 | Vedette_Q | 492 | 82590 | Rollip60_PC | 323 | 82677 | Orma_FJ | 592 |
| 82422 | Pound Focus | 176 | 82516 | Vedette_Q | 492 | 82591 | Rollip60_PC | 323 | 82678 | Orma_FJ | 592 |
| 82423 | Pound Focus | 176 | 82517 | Vedette_Q | 492 | 82592 | Rollip60_MP | 320 | 82679 | Orma_FO | 596 |
| 82438 | Pound Focus | 176 | 82518 | Vedette_Q | 492 | 82593 | Rollip60_MP | 320 | 82680 | Orma_FO | 596 |
| 82439 | Pound Focus | 176 | 82519 | Vedette_Q | 493 | 82594 | Rollip60_MP | 320 | 82681 | Orma_FL | 595 |
| 82440 | Pound Focus | 176 | 82520 | Vedette_Q | 493 | 82595 | Rollip60_MP | 320 | 82682 | Orma_FL | 595 |
| 82441 | Pound Focus | 176 | 82521 | Orma_IJ | 606 | 82596 | Xenia_Pixel | 847 | 82683 | Orma_F | 591 |
| 82444 | Pound Focus | 178 | 82522 | Orma_IJ | 606 | 82597 | Xenia_Pixel | 847 | 82684 | Orma_F | 591 |
| 82445 | Pound Focus | 178 | 82523 | Orma_IJ | 606 | 82598 | Rollip60_MS | 315 | 82685 | Orma_F | 591 |
| 82446 | Pound Focus | 178 | 82524 | Orma_IJ | 606 | 82599 | Rollip60_MS | 315 | 82686 | Orma_F | 591 |
| 82447 | Pound Focus | 178 | 82525 | Orma_IJ | 607 | 82600 | Cell_Ww | 136 | 82687 | Orma_F | 591 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-------------------|------|-------|-----------------|------|-------|-----------------|------|-------|---------------------|------|
| 82688 | Orma_F | 591 | 82753 | Tour_Track | 246 | 82818 | Vedette_R | 489 | 82909 | Navata_Optus | 210 |
| 82689 | Orma_FJ | 593 | 82754 | Tour_Track | 246 | 82819 | Vedette_R | 489 | 82912 | Navata Pound Sha.D. | 211 |
| 82690 | Orma_FJ | 593 | 82755 | Tour_Track | 246 | 82820 | Vedette_R | 489 | 82913 | Navata Pound Sha. | 211 |
| 82691 | Orma_FJ | 593 | 82756 | Tour_Track | 246 | 82821 | Vedette_R | 489 | 82914 | Ink system_L | 347 |
| 82692 | Orma_FJ | 593 | 82757 | Tour_Projectors | 246 | 82822 | Vedette_R | 489 | 82916 | Ink system_L | 347 |
| 82693 | Orma_FO | 596 | 82758 | Tour_Projectors | 246 | 82823 | Mini Albatros_M | 334 | 82918 | Ink system_L UGR | 347 |
| 82694 | Orma_FO | 596 | 82759 | Tour_Projectors | 246 | 82824 | Mini Albatros_M | 334 | 82920 | Ink system_L UGR | 347 |
| 82695 | Orma_FL | 595 | 82760 | Tour_Projectors | 246 | 82825 | Mini Albatros_M | 335 | 82922 | Ink system_SP | 349 |
| 82696 | Orma_FL | 595 | 82761 | Xenia_Blade_A | 837 | 82826 | Mini Albatros_M | 335 | 82926 | Ink system_P | 348 |
| 82697 | Orma_F | 590 | 82762 | Xenia_Blade_AL | 837 | 82827 | Mini Albatros_M | 334 | 82928 | Ink system_LP | 348 |
| 82698 | Orma_F | 590 | 82763 | Vedette_Q | 490 | 82828 | Mini Albatros_M | 334 | 82930 | Ink system_LP | 348 |
| 82699 | Orma_FL | 594 | 82764 | Vedette_Q | 490 | 82829 | Mini Albatros_M | 335 | 82932 | Ink system_LP UGR | 348 |
| 82700 | Orma_FL | 594 | 82765 | Vedette_Q | 490 | 82830 | Accessories | 335 | 82934 | Orma_IJ | 606 |
| 82701 | Clip_Hm | 543 | 82766 | Vedette_Q | 490 | 82831 | Emy | 266 | 82935 | Orma_IJ | 606 |
| 82702 | Clip_Hm | 543 | 82767 | Vedette_Q | 490 | 82832 | Emy | 266 | 82940 | Cell_Ww | 136 |
| 82703 | Clip_Hm | 543 | 82768 | Vedette_Q | 491 | 82833 | Emy | 266 | 82941 | Cell_Ww | 136 |
| 82704 | Clip | 543 | 82769 | Vedette_Q | 491 | 82834 | Mini Albatros | 334 | 82942 | Cell_Ww | 136 |
| 82705 | Clip | 543 | 82770 | Vedette_Q | 491 | 82835 | Mini Albatros | 334 | 82944 | Ink system_LP UGR | 348 |
| 82706 | Clip | 543 | 82771 | Vedette_Q | 491 | 82836 | Mini Albatros | 334 | 82946 | Ink system_L | 346 |
| 82707 | Clip | 543 | 82772 | Vedette_Q | 491 | 82837 | Mini Albatros | 334 | 82947 | Ink system_L | 346 |
| 82708 | Clip | 543 | 82773 | Vedette_R | 488 | 82838 | Mini Albatros_M | 334 | 82948 | Ink system_L | 346 |
| 82709 | Clip | 543 | 82774 | Vedette_R | 488 | 82839 | Mini Albatros_M | 334 | 82949 | Ink system_L | 346 |
| 82710 | Clip_Hm | 543 | 82775 | Vedette_R | 488 | 82840 | Mini Albatros_M | 335 | 82950 | Ink system_L | 346 |
| 82711 | Xenia_A PRO | 733 | 82776 | Vedette_R | 488 | 82841 | Mini Albatros_M | 335 | 82951 | Ink system_L | 346 |
| 82712 | Xenia_AF PRO | 737 | 82777 | Vedette_R | 488 | 82842 | Mini Albatros_M | 334 | 83002 | Accessories | 915 |
| 82713 | Suelo_RXJ | 578 | 82778 | Vedette_R | 489 | 82843 | Mini Albatros_M | 334 | 83003 | Accessories | 915 |
| 82714 | Suelo_RXJ | 578 | 82779 | Vedette_R | 489 | 82844 | Mini Albatros_M | 335 | 83004 | Accessories | 915 |
| 82715 | Suelo_RXJ | 578 | 82780 | Vedette_R | 489 | 82845 | Mini Albatros_M | 335 | 83006 | Accessories | 915 |
| 82716 | Suelo_RXJ | 578 | 82781 | Vedette_R | 489 | 82846 | Accessories | 894 | 83007 | Electronics | 924 |
| 82717 | Suelo_RXJ | 578 | 82782 | Vedette_R | 489 | 82847 | Accessories | 894 | 83008 | Electronics | 929 |
| 82718 | Suelo_RXJ | 578 | 82783 | Vedette_Q | 490 | 82865 | Quantum_R | 34 | 83009 | Electronics | 940 |
| 82719 | Suelo_RXJ | 578 | 82784 | Vedette_Q | 490 | 82866 | Quantum_R | 34 | | | 942 |
| 82720 | Suelo_RXJ | 578 | 82785 | Vedette_Q | 490 | 82867 | Quantum_R | 34 | 83010 | Electronics | 950 |
| 82721 | Suelo_RFJ | 579 | 82786 | Vedette_Q | 490 | 82868 | Quantum_R | 34 | | | 951 |
| 82722 | Suelo_RFJ | 579 | 82787 | Vedette_Q | 490 | 82869 | Quantum_R | 34 | 83012 | Electronics | 942 |
| 82723 | Suelo_RXJ | 578 | 82788 | Vedette_Q | 491 | 82870 | Quantum_R | 34 | | | 942 |
| 82724 | Suelo_RFJ | 579 | 82789 | Vedette_Q | 491 | 82871 | Quantum_R | 34 | 83013 | Electronics | 950 |
| 82725 | Tour_Cell_P | 242 | 82790 | Vedette_Q | 491 | 82872 | Quantum_R | 34 | | | 951 |
| 82726 | Tour_Cell_P | 242 | 82791 | Vedette_Q | 491 | 82873 | Quantum_R | 34 | 83015 | Electronics | 942 |
| 82727 | Tour_Cell_C | 233 | 82792 | Vedette_Q | 491 | 82874 | Quantum_R | 34 | 83016 | Electronics | 922 |
| 82728 | Creek Accessories | 218 | 82793 | Vedette_R | 488 | 82875 | Quantum_R | 34 | 83017 | Electronics | 922 |
| 82729 | Creek Accessories | 218 | 82794 | Vedette_R | 488 | 82876 | Quantum_R | 34 | 83018 | Electronics | 934 |
| 82730 | Creek Accessories | 218 | 82795 | Vedette_R | 488 | 82877 | Quantum_R | 35 | 83019 | Electronics | 934 |
| 82731 | Creek Optus | 219 | 82796 | Vedette_R | 488 | 82878 | Quantum_R | 35 | 83020 | Accessories | 873 |
| 82732 | Creek Optus | 219 | 82797 | Vedette_R | 488 | 82879 | Quantum_R | 35 | 83034 | Accessories | 894 |
| 82733 | Creek Optus | 219 | 82798 | Vedette_R | 489 | 82880 | Quantum_R | 35 | 83036 | Accessories | 611 |
| 82734 | Creek Optus | 219 | 82799 | Vedette_R | 489 | 82881 | Quantum_R | 35 | 83037 | Accessories | 611 |
| 82735 | Creek Optus | 219 | 82800 | Vedette_R | 489 | 82882 | Quantum_R | 35 | 83038 | Accessories | 611 |
| 82736 | Creek Optus | 219 | 82801 | Vedette_R | 489 | 82883 | Quantum_R | 35 | 83039 | Accessories | 611 |
| 82737 | Optus_EX | 146 | 82802 | Vedette_R | 489 | 82884 | Quantum_R | 35 | 83040 | Accessories | 611 |
| 82738 | Optus_EX | 146 | 82803 | Vedette_Q | 490 | 82885 | Quantum_R | 35 | | | 356 |
| 82739 | Optus_EX | 146 | 82804 | Vedette_Q | 490 | 82886 | Quantum_R | 35 | 83041 | Electronics | 935 |
| 82740 | Optus_EX | 146 | 82805 | Vedette_Q | 490 | 82887 | Quantum_R | 35 | | | 356 |
| 82741 | Step66 | 531 | 82806 | Vedette_Q | 490 | 82888 | Quantum_R | 35 | 83042 | Electronics | 935 |
| 82742 | Step66 | 531 | 82807 | Vedette_Q | 490 | 82895 | Optus_T | 191 | 83048 | Accessories | 467 |
| 82743 | Step66 | 531 | 82808 | Vedette_Q | 491 | 82896 | Optus_T | 191 | 83049 | Accessories | 715 |
| 82744 | Step66 | 531 | 82809 | Vedette_Q | 491 | 82897 | Optus_T | 191 | 83053 | Navata Base | 212 |
| 82745 | Step66 | 531 | 82810 | Vedette_Q | 491 | 82898 | Optus_T | 191 | 83054 | Navata Base | 212 |
| 82746 | Step66 | 531 | 82811 | Vedette_Q | 491 | 82899 | Optus_T | 191 | 83055 | Navata Base | 212 |
| 82747 | Step66 | 531 | 82812 | Vedette_Q | 491 | 82900 | Optus_T | 191 | 83058 | Electronics | 929 |
| 82748 | Step66 | 531 | 82813 | Vedette_R | 488 | 82902 | Navata_Optus | 210 | 83059 | Electronics | 929 |
| 82749 | Mini Albatros | 334 | 82814 | Vedette_R | 488 | 82903 | Navata_Optus | 210 | 83060 | Electronics | 929 |
| 82750 | Mini Albatros | 334 | 82815 | Vedette_R | 488 | 82905 | Navata_Optus | 210 | 83061 | Electronics | 929 |
| 82751 | Mini Albatros | 334 | 82816 | Vedette_R | 488 | 82906 | Navata_Optus | 210 | 83062 | Electronics | 934 |
| 82752 | Mini Albatros | 334 | 82817 | Vedette_R | 488 | 82908 | Navata_Optus | 210 | 83063 | Accessories | 22 |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-----------------|------|-------|----------------|------|-------|-----------------|------|-------|--------------------|------|
| 83064 | Accessories | 22 | 83155 | Accessories | 539 | 83524 | Astropek_Blade | 637 | 83657 | Ribbon | 906 |
| 83065 | Accessories | 22 | 83158 | Accessories | 677 | 83579 | Quara_R | 536 | 83658 | Ribbon | 906 |
| 83066 | Electronics | 929 | 83159 | Electronics | 928 | 83580 | Quara_R | 536 | 83659 | Ribbon | 906 |
| 83067 | Trunking system | 339 | 83160 | Accessories | 877 | 83581 | Quara_R | 536 | 83675 | Beriel | 429 |
| 83068 | Accessories | 340 | 83161 | Accessories | 877 | 83582 | Quara_R | 395 | 83676 | Beriel | 429 |
| 83069 | Accessories | 340 | 83162 | Accessories | 757 | 83583 | Quara_Q | 538 | 83677 | Beriel | 429 |
| 83096 | Accessories | 583 | 83168 | Navata Base | 212 | 83584 | Quara_Q | 538 | 83678 | Beriel | 428 |
| 83097 | Accessories | 583 | 83169 | Navata Base | 212 | 83585 | Quara_Q | 538 | 83679 | Beriel | 428 |
| 83098 | Accessories | 583 | 83170 | Navata Base | 212 | 83586 | Quara_Q | 395 | 83680 | Beriel | 428 |
| 83100 | Electronics | 938 | 83171 | Navata Base | 212 | 83589 | Xenia_AF RGBW | 737 | 83681 | Beriel | 427 |
| 83101 | Electronics | 938 | 83172 | Navata Base | 212 | 83590 | Xenia_AF RGBW | 737 | 83682 | Beriel | 427 |
| 83102 | Electronics | 938 | 83173 | Navata Base | 212 | 83601 | Envelope_R | 520 | 83683 | Beriel | 427 |
| 83103 | Electronics | 938 | 83174 | Navata Base | 212 | 83602 | Envelope_R | 520 | 83685 | Portik_R | 478 |
| 83104 | Electronics | 922 | 83175 | Navata Base | 212 | 83603 | Envelope_R | 520 | 83686 | Portik_R | 478 |
| 83105 | Electronics | 922 | 83176 | Navata Base | 212 | 83604 | Envelope_R | 520 | 83687 | Portik_R | 478 |
| 83106 | Electronics | 922 | 83177 | Electronics | 951 | 83606 | Alcor_R | 627 | 83688 | Portik_R | 478 |
| 83107 | Electronics | 922 | 83178 | Electronics | 951 | 83607 | Alcor_R | 627 | 83689 | Portik_Q | 479 |
| 83108 | Modus_M Caps | 294 | 83179 | Electronics | 943 | 83608 | Alcor_R | 627 | 83690 | Portik_Q | 479 |
| | | 295 | 83183 | Accessories | 912 | 83609 | Alcor_R | 627 | 83691 | Portik_Q | 479 |
| 83109 | Modus_M Caps | 294 | 83184 | Accessories | 912 | 83610 | Alcor_Q | 628 | 83692 | Portik_Q | 479 |
| | | 295 | 83186 | Accessories | 359 | 83611 | Alcor_Q | 628 | 83693 | Portik_R | 478 |
| 83110 | Modus_M Caps | 294 | 83187 | Electronics | 950 | 83612 | Alcor_Q | 628 | 83694 | Portik_R | 478 |
| | | 295 | 83188 | Accessories | 741 | 83613 | Envelope_1 | 520 | 83695 | Portik_R | 478 |
| 83111 | Electronics | 925 | | | 837 | 83614 | Cicada | 497 | 83696 | Portik_R | 478 |
| 83112 | Electronics | 925 | 83189 | Electronics | 922 | 83615 | Cicada | 497 | 83697 | Portik_Q | 479 |
| 83113 | Electronics | 925 | 83192 | Electronics | 955 | 83616 | Cicada | 497 | 83698 | Portik_Q | 479 |
| 83114 | Electronics | 925 | 83193 | Electronics | 954 | 83617 | Cicada | 497 | 83699 | Portik_Q | 479 |
| 83115 | Electronics | 949 | 83194 | Electronics | 939 | 83618 | Cicada | 497 | 83700 | Portik_Q | 479 |
| 83116 | Electronics | 949 | 83195 | Electronics | 939 | 83619 | Cicada | 497 | 83712 | Modus_M Master | 294 |
| 83118 | Electronics | 949 | 83196 | Electronics | 939 | 83620 | Cicada | 497 | 83713 | Modus_M Master | 294 |
| 83119 | Electronics | 949 | 83197 | Accessories | 867 | 83621 | Cicada | 497 | 83714 | Modus_M Master | 294 |
| 83120 | Electronics | 930 | 83198 | Accessories | 867 | 83622 | Cicada | 497 | 83715 | Modus_M Master | 294 |
| 83121 | Electronics | 930 | 83199 | Accessories | 849 | 83623 | Cicada | 497 | 83716 | Modus_M Slave | 294 |
| 83122 | Electronics | 926 | 83200 | Accessories | 849 | 83624 | Cicada | 497 | 83717 | Modus_M Slave | 294 |
| 83123 | Accessories | 769 | 83201 | Accessories | 849 | 83625 | Cicada | 497 | 83718 | Modus_M Slave | 294 |
| 83124 | Accessories | 769 | 83202 | Accessories | 849 | 83626 | Cicada | 497 | 83719 | Modus_M Slave | 294 |
| 83125 | Accessories | 769 | | | 294 | 83627 | Cicada | 497 | 83720 | Modus_M Cell | 297 |
| 83126 | Accessories | 769 | 83221 | Accessories | 295 | 83628 | Cicada | 497 | 83721 | Modus_M Cell_Ww | 297 |
| 83129 | Accessories | 912 | | | 294 | 83629 | Cicada | 497 | 83722 | Modus_M Micropris. | 296 |
| 83130 | Accessories | 913 | 83222 | Accessories | 295 | 83630 | Orma_IM | 528 | 83723 | Modus_M Micropris. | 296 |
| 83131 | Accessories | 916 | | | 295 | 83631 | Orma_AM | 527 | 83724 | Modus_M Micropris. | 296 |
| | | 912 | 83225 | Electronics | 922 | 83632 | Orma_IM | 528 | 83725 | Modus_M Acc. | 297 |
| 83132 | Accessories | 913 | 83226 | Electronics | 922 | 83633 | Orma_AM | 527 | 83726 | Modus_M Acc. | 297 |
| | | 916 | 83227 | Electronics | 923 | 83634 | Orma_IM | 528 | 83727 | Modus_M Acc. | 297 |
| 83133 | Accessories | 912 | 83228 | Electronics | 923 | 83635 | Orma_AM | 527 | 83728 | Modus_M Acc. | 297 |
| 83135 | Accessories | 913 | 83235 | Accessories | 611 | 83636 | Orma_IM | 528 | 83729 | Modus_M Acc. | 297 |
| 83136 | Accessories | 916 | 83243 | Electronics | 952 | 83637 | Orma_AM | 527 | 83730 | Modus_M Projectors | 296 |
| 83137 | Accessories | 912 | 83244 | Electronics | 952 | 83638 | Orma_IM | 528 | 83731 | Modus_M Projectors | 296 |
| 83138 | Accessories | 912 | 83249 | Accessories | 203 | 83639 | Orma_AM | 527 | 83732 | Modus_M Optus_EX | 296 |
| 83139 | Accessories | 912 | 83250 | Accessories | 203 | 83640 | Orma_IM | 528 | | | 294 |
| 83140 | Accessories | 865 | 83336 | Track system | 202 | 83641 | Orma_AM | 527 | 83733 | Modus_M Corner | 295 |
| 83141 | Accessories | 865 | 83337 | Track system | 202 | 83642 | Orma_IB | 839 | 83734 | Modus_M Complete | 298 |
| 83142 | Accessories | 865 | 83338 | Track system | 202 | 83643 | Orma_IB | 839 | 83735 | Modus_M Complete | 298 |
| 83143 | Electronics | 926 | 83339 | Track system | 202 | 83644 | Orma_AB | 839 | 83736 | Modus_M Master | 294 |
| 83144 | Electronics | 952 | 83340 | Track system | 202 | 83645 | Orma_AB | 839 | 83737 | Modus_M Master | 294 |
| 83145 | Electronics | 952 | 83341 | Track system | 202 | 83646 | Rollip60_MP | 320 | 83738 | Modus_M Master | 294 |
| 83146 | Electronics | 948 | 83343 | Accessories | 197 | 83647 | Rollip60_MP | 320 | 83739 | Modus_M Master | 294 |
| 83147 | Electronics | 948 | 83344 | Accessories | 197 | 83648 | Rollip60_MP | 320 | 83740 | Modus_M Slave | 294 |
| 83148 | Electronics | 956 | 83345 | Accessories | 197 | 83649 | Rollip60_MP | 320 | 83741 | Modus_M Slave | 294 |
| 83149 | Electronics | 957 | 83347 | Accessories | 197 | 83651 | Trunking system | 338 | 83742 | Modus_M Slave | 294 |
| 83150 | Electronics | 957 | 83348 | Accessories | 197 | 83652 | Trunking system | 338 | 83743 | Modus_M Slave | 294 |
| 83151 | Electronics | 957 | 83349 | Accessories | 197 | 83653 | Trunking system | 338 | 83744 | Modus_M Cell | 297 |
| 83152 | Electronics | 957 | 83350 | Accessories | 197 | 83654 | Trunking system | 338 | 83745 | Modus_M Cell_Ww | 297 |
| 83153 | Accessories | 350 | 83521 | Alcor_R Blade | 629 | 83655 | Trunking system | 338 | 83746 | Modus_M Micropris. | 296 |
| 83154 | Electronics | 938 | 83522 | Astropek_Blade | 637 | 83656 | Trunking system | 339 | 83747 | Modus_M Micropris. | 296 |
| | | | 83523 | Alcor_R Blade | 629 | | | | | | |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|--------------------|------|-------|------------------|------|-------|--------------------|------|-------|-------------------|------|
| 83748 | Modus_M Micropris. | 296 | 83811 | Pound_T | 174 | 83880 | Blum | 684 | 83956 | Ink system_SP | 355 |
| 83749 | Modus_M Acc. | 297 | 83812 | Pound_T | 174 | 83881 | Blum Flower | 685 | 83957 | Ink system_SP | 355 |
| 83750 | Modus_M Acc. | 297 | 83813 | Modus_M Complete | 298 | 83882 | Blum Flower | 685 | 83958 | Ink system_SP F. | 355 |
| 83751 | Modus_M Acc. | 297 | 83814 | Modus_M Complete | 298 | 83883 | Accessories | 685 | 83959 | Ink system_SP | 355 |
| 83752 | Modus_M Acc. | 297 | 83815 | Modus_M MasterDW | 295 | 83884 | Accessories | 685 | 83960 | Ink system_P | 354 |
| 83753 | Modus_M Acc. | 297 | 83816 | Modus_M MasterDW | 295 | 83885 | Thin66 | 760 | 83961 | Ink system_LP | 354 |
| 83754 | Modus_M Projectors | 296 | 83817 | Modus_M MasterDW | 295 | 83886 | Thin66 | 760 | 83962 | Ink system_LP | 354 |
| 83755 | Modus_M Projectors | 296 | 83818 | Modus_M MasterDW | 295 | 83887 | Thin66 | 760 | 83963 | Ink system_LP UGR | 354 |
| 83756 | Modus_M Optus_EX | 296 | 83819 | Modus_M Slave DW | 295 | 83888 | Thin66 | 760 | 83964 | Ink system_LP UGR | 354 |
| 83757 | Modus_M Corner | 295 | 83820 | Modus_M Slave DW | 295 | 83889 | Thin66 | 760 | 83965 | Ink system_LP | 354 |
| 83758 | Modus_M Complete | 298 | 83821 | Modus_M Slave DW | 295 | 83890 | Thin66 | 760 | 83966 | Ink system_LP | 354 |
| 83759 | Modus_M Complete | 298 | 83822 | Modus_M Slave DW | 295 | 83891 | Thin66 | 760 | 83968 | Ink system_L | 347 |
| 83760 | Modus_M Micropris. | 296 | 83823 | Pound_T | 174 | 83892 | Thin66 | 760 | 83969 | Ink system_L | 347 |
| 83761 | Modus_M Micropris. | 296 | 83824 | Pound_T | 174 | 83893 | Cell_Ww_Track | 199 | 83970 | Ink system_L UGR | 347 |
| 83762 | Modus_M Micropris. | 296 | 83825 | Pound_T | 174 | 83894 | Cell_Ww_Track | 199 | 83971 | Ink system_L UGR | 347 |
| 83763 | Lino | 691 | 83826 | Pound_T | 174 | 83899 | Pound Shaper Dist. | 180 | 83972 | Ink system_L | 347 |
| 83764 | Warp_R PRO | 47 | 83827 | Pound Focus | 177 | 83900 | Pound Shaper Dist. | 180 | 83973 | Ink system_L | 347 |
| 83765 | Warp_R PRO | 47 | 83828 | Pound Focus | 177 | 83901 | Pound Shaper | 180 | 83974 | Ink system_L | 347 |
| 83766 | Warp_R PRO | 47 | 83829 | Pound Focus | 177 | 83902 | Pound Shaper | 180 | 83975 | Ink system_SP | 349 |
| 83767 | Warp_R PRO | 47 | 83830 | Pound Focus | 177 | 83909 | Optus_T | 192 | 83976 | Ink system_SP | 349 |
| 83768 | Warp_R PRO | 47 | 83831 | Pound Focus | 177 | 83910 | Optus_T | 192 | 83977 | Ink system_SP F. | 349 |
| 83769 | Warp_R PRO | 47 | 83832 | Pound Focus | 177 | 83911 | Optus_T | 192 | 83978 | Ink system_SP | 349 |
| 83770 | Warp_R PRO | 47 | 83833 | Pound Focus | 177 | 83912 | Optus_T | 192 | 83979 | Ink system_P | 348 |
| 83771 | Warp_R PRO | 47 | 83834 | Pound Focus | 177 | 83913 | Optus_T | 192 | 83980 | Ink system_LP | 348 |
| 83772 | Warp_R PRO | 47 | 83835 | Pound Focus | 177 | 83914 | Optus_T | 192 | 83981 | Ink system_LP | 348 |
| 83773 | Warp_R PRO | 47 | 83836 | Pound Focus | 177 | 83915 | Optus_T | 192 | 83982 | Ink system_LP UGR | 348 |
| 83774 | Warp_R PRO | 47 | 83837 | Modus_M Complete | 298 | 83916 | Optus_T | 192 | 83983 | Ink system_LP UGR | 348 |
| 83775 | Warp_R PRO | 47 | 83838 | Modus_M Complete | 298 | 83917 | Optus_T | 192 | 83987 | Ink system_L | 346 |
| 83776 | Suelo_RFJ | 579 | 83839 | Pound Focus | 177 | 83918 | Optus_T | 192 | 83988 | Ink system_L | 346 |
| 83777 | Suelo_RFJ | 579 | 83840 | Pound Focus | 177 | 83919 | Optus_T | 192 | 83989 | Ink system_L | 346 |
| 83778 | Suelo_RFJ | 579 | 83842 | Modus_M MasterDW | 295 | 83920 | Optus_T | 192 | 83990 | Ink system_L | 346 |
| 83779 | Suelo_RFJ | 579 | 83843 | Modus_M MasterDW | 295 | 83921 | Optus_Ww | 194 | 83991 | Ink system_L | 346 |
| 83780 | Suelo_RFJ | 579 | 83844 | Modus_M MasterDW | 295 | 83922 | Optus_Ww | 194 | 83992 | Ink system_L | 346 |
| 83781 | Suelo_RFJ | 579 | 83845 | Modus_M MasterDW | 295 | 83923 | Optus_Ww | 194 | 83993 | Ink system_L | 352 |
| 83782 | Modus_M Master | 294 | 83846 | Modus_M Slave DW | 295 | 83924 | Optus_Ww | 194 | 83994 | Ink system_L | 352 |
| 83783 | Modus_M Master | 294 | 83847 | Modus_M Slave DW | 295 | 83925 | Suelo_RX | 578 | 83995 | Ink system_L UGR | 352 |
| 83784 | Modus_M Master | 294 | 83848 | Modus_M Slave DW | 295 | 83926 | Suelo_RX | 578 | 83996 | Ink system_L UGR | 352 |
| 83785 | Modus_M Master | 294 | 83849 | Modus_M Slave DW | 295 | 83927 | Suelo_RX | 578 | 83997 | Ink system_SP | 355 |
| 83786 | Modus_M Slave | 294 | 83851 | Prolamp | 820 | 83928 | Suelo_RX | 578 | 83998 | Ink system_SP | 355 |
| 83787 | Modus_M Slave | 294 | 83852 | Prolamp | 820 | 83929 | Suelo_RX | 578 | 83999 | Ink system_SP F. | 355 |
| 83788 | Modus_M Slave | 294 | 83853 | Prolamp | 820 | 83930 | Suelo_RX | 578 | 84000 | Ink system_SP | 355 |
| 83789 | Modus_M Slave | 294 | 83854 | Prolamp | 820 | 83931 | Suelo_RF | 579 | 84001 | Ink system_P | 354 |
| 83790 | Modus_M Corner | 295 | 83855 | Prolamp | 820 | 83932 | Suelo_RF | 579 | 84002 | Ink system_LP | 354 |
| 83791 | Modus_M MasterDW | 295 | 83856 | Prolamp | 820 | 83933 | Suelo_RF | 579 | 84003 | Ink system_LP | 354 |
| 83792 | Modus_M MasterDW | 295 | 83859 | Skin_F | 769 | 83934 | Suelo_RF | 579 | 84004 | Ink system_LP UGR | 354 |
| 83793 | Modus_M MasterDW | 295 | 83860 | Skin_F | 769 | 83935 | Suelo_RF | 579 | 84005 | Ink system_LP UGR | 354 |
| 83794 | Modus_M MasterDW | 295 | 83861 | Skin_S | 769 | 83936 | Suelo_RF | 579 | 84010 | Accessories | 358 |
| 83795 | Modus_M Slave DW | 295 | 83862 | Skin_F | 769 | 83937 | Suelo_RX | 578 | 84011 | Accessories | 358 |
| 83796 | Modus_M Slave DW | 295 | 83863 | Skin_F | 769 | 83938 | Suelo_RX | 578 | 84012 | Accessories | 350 |
| 83797 | Modus_M Slave DW | 295 | 83864 | Skin_S | 769 | 83939 | Suelo_RF | 579 | 84013 | Accessories | 350 |
| 83798 | Modus_M Slave DW | 295 | 83865 | Skin_FL | 769 | 83940 | Suelo_RF | 579 | 84014 | Accessories | 350 |
| 83799 | Pound_T | 174 | 83866 | Skin_F | 768 | 83941 | Suelo_RX | 578 | 84015 | Accessories | 350 |
| 83800 | Pound_T | 174 | 83867 | Skin_F | 768 | 83942 | Suelo_RF | 579 | 84016 | Ink system Cables | 350 |
| 83801 | Pound_T | 174 | 83868 | Skin_S | 768 | 83943 | Ink system_L | 347 | 84017 | Accessories | 358 |
| 83802 | Pound_T | 174 | 83869 | Skin_F | 768 | 83944 | Ink system_L | 347 | 84018 | Accessories | 356 |
| 83803 | Pound_T | 174 | 83870 | Skin_F | 768 | 83945 | Ink system_L | 347 | 84023 | Woofer_R | 449 |
| 83804 | Pound_T | 174 | 83871 | Skin_S | 768 | 83946 | Ink system_SP | 349 | 84024 | Woofer_RX | 449 |
| 83805 | Pound_T | 174 | 83872 | Skin_FL | 768 | 83947 | Ink system_SP F. | 349 | 84025 | Nautilus_RP | 868 |
| 83806 | Pound_T | 174 | 83873 | Skin_Y | 768 | 83948 | Ink system_SP | 349 | 84026 | Nautilus_RP | 868 |
| 83807 | Pound_T | 174 | 83874 | Intake_PRO | 525 | 83949 | Ink system_LP | 348 | 84027 | Nautilus_RP | 869 |
| 83808 | Pound_T | 174 | 83875 | Blum | 684 | 83950 | Ink system_LP | 348 | 84028 | Nautilus_RP | 869 |
| 83809 | Pound_T | 174 | 83876 | Blum | 684 | 83952 | Ink system_L | 352 | 84029 | Nautilus_RP | 869 |
| 83810 | Pound_T | 174 | 83877 | Blum Flower | 685 | 83953 | Ink system_L | 352 | 84030 | Nautilus_RP | 869 |
| | | | 83878 | Blum Flower | 685 | 83954 | Ink system_L UGR | 352 | 84031 | Nautilus_RF | 864 |
| | | | 83879 | Blum | 684 | 83955 | Ink system_L UGR | 352 | | | |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|------------------|------|-------|----------|------|-------|------------------|------|-------|-----------------|------|
| 84032 | Nautilus_RF | 864 | 84100 | Warp_Q | 53 | 84165 | Pound_T | 173 | 84285 | Arcada Pro | 833 |
| 84033 | Nautilus_RF | 864 | 84101 | Warp_Q | 53 | 84166 | Pound_T | 173 | 84286 | Arcada Pro | 833 |
| 84034 | Nautilus_RF | 864 | 84102 | Warp_Q | 53 | 84167 | Pound_T | 173 | 84287 | Arcada Pro | 833 |
| 84035 | Nautilus_RF | 866 | 84103 | Warp_Q | 53 | 84168 | Pound_T | 173 | 84288 | Arcada Pro | 833 |
| 84036 | Nautilus_RF | 866 | 84104 | Warp_Q | 53 | 84169 | Skylum_Q PRO | 255 | | | 393 |
| 84037 | Nautilus_RF | 865 | 84105 | Warp_Q | 53 | 84170 | Skylum_Q PRO | 255 | | | 414 |
| 84038 | Nautilus_RF | 865 | 84106 | Warp_Q | 53 | 84171 | Skylum_Q PRO | 255 | 84335 | Accessories | 433 |
| 84039 | Nautilus_RF | 865 | 84107 | Warp_RJ | 50 | 84184 | Nail_W | 495 | | | 433 |
| 84040 | Nautilus_RF | 865 | 84108 | Warp_RJ | 50 | 84185 | Nail_W | 495 | | | 389 |
| 84041 | Nautilus_RF | 866 | 84109 | Warp_RJ | 50 | 84186 | Nail_W | 495 | | | 393 |
| 84042 | Nautilus_RF | 867 | 84110 | Warp_RJ | 50 | 84187 | Nail_W | 495 | | | 419 |
| 84043 | Nautilus_RF | 866 | 84111 | Loro_R | 70 | 84188 | Nail_W | 495 | 84336 | Accessories | 421 |
| 84044 | Nautilus_RF | 867 | 84112 | Loro_R | 70 | 84189 | Nail | 677 | | | 521 |
| 84045 | Xenia_AF PRO | 738 | 84113 | Loro_R | 70 | 84190 | Nail | 677 | | | 545 |
| 84046 | Xenia_AF PRO | 738 | 84114 | Loro_R | 70 | 84191 | Nail | 677 | | | 547 |
| 84047 | Xenia_W RGBW | 727 | 84115 | Loro_R | 70 | 84192 | Nail | 677 | 84337 | Accessories | 401 |
| 84048 | Xenia_W RGBW | 727 | 84116 | Loro_R | 70 | 84193 | Nautilus_RP | 868 | | | 395 |
| 84049 | Xenia_W PRO | 730 | 84117 | Loro_R | 70 | 84194 | Nautilus_RP | 868 | | | 539 |
| 84050 | Xenia_W PRO | 730 | 84118 | Loro_R | 70 | 84195 | Ribbon | 907 | 84338 | Accessories | 539 |
| 84051 | Xenia_A RGBW | 733 | 84119 | Loro_R | 71 | 84196 | Ribbon | 907 | | | 541 |
| 84052 | Xenia_A RGBW | 733 | 84120 | Loro_R | 71 | 84197 | Ribbon RGBW | 907 | 84341 | Accessories | 629 |
| 84053 | Xenia_A PRO RGBW | 735 | 84121 | Loro_R | 71 | 84198 | Ribbon RGBW | 907 | | | 401 |
| 84054 | Xenia_A PRO RGBW | 735 | 84122 | Loro_R | 71 | 84199 | Giotto_R | 82 | 84349 | Accessories | 435 |
| 84055 | Paseo_L | 750 | 84123 | Loro_R | 71 | 84200 | Giotto_R | 82 | | | 912 |
| 84056 | Paseo_L | 750 | 84124 | Loro_R | 71 | 84201 | Giotto_R | 82 | 84446 | Accessories | 912 |
| 84057 | Paseo_L | 750 | 84125 | Loro_R | 71 | 84202 | Giotto_R | 82 | 84447 | Accessories | 912 |
| 84058 | Paseo_X | 753 | 84126 | Loro_R | 71 | 84203 | Giotto_R | 82 | 84448 | Accessories | 913 |
| 84059 | Paseo_X | 753 | 84127 | Loro_Q | 74 | 84204 | Giotto_R | 82 | 84449 | Accessories | 913 |
| 84060 | Thin66 RGBW | 760 | 84128 | Loro_Q | 74 | 84205 | Giotto_R | 82 | 84450 | Accessories | 912 |
| 84061 | Thin66 RGBW | 760 | 84129 | Loro_Q | 74 | 84206 | Giotto_R | 82 | 84451 | Accessories | 912 |
| 84062 | Thin66 RGBW | 760 | 84130 | Loro_Q | 74 | 84207 | Woofers_RX | 111 | 84454 | Accessories | 912 |
| 84063 | Thin66 RGBW | 760 | 84131 | Loro_Q | 74 | 84208 | Woofers_RX | 111 | 84455 | Accessories | 912 |
| 84064 | Thin66 RGBW | 760 | 84132 | Loro_Q | 74 | 84209 | Woofers_R | 110 | 84456 | Accessories | 916 |
| 84065 | Thin66 RGBW | 760 | 84133 | Loro_Q | 74 | 84210 | Woofers_R | 110 | 84457 | Accessories | 916 |
| 84066 | Thin66 RGBW | 760 | 84134 | Loro_Q | 74 | 84211 | Woofers_R | 110 | 84522 | Shaker | 801 |
| 84067 | Thin66 RGBW | 760 | 84135 | Loro_Q | 75 | 84212 | Rodix | 877 | 84523 | Shaker | 801 |
| 84071 | Envelope_R | 520 | 84136 | Loro_Q | 75 | 84213 | Rodix | 877 | 84524 | Shaker | 801 |
| 84072 | Envelope_R | 520 | 84137 | Loro_Q | 75 | 84214 | Paseo Dark | 750 | 84525 | Shaker | 801 |
| 84073 | Accessories | 350 | 84138 | Loro_Q | 75 | 84215 | Paseo Dark | 750 | 84526 | Shaker | 801 |
| 84074 | Accessories | 350 | 84139 | Loro_Q | 75 | 84216 | Paseo Dark | 750 | 84527 | Shaker | 801 |
| 84075 | Quara_R | 536 | 84140 | Loro_Q | 75 | 84217 | Paseo_PIXEL | 851 | 84528 | Shaker | 801 |
| 84076 | Quara_R | 536 | 84141 | Loro_Q | 75 | 84218 | Paseo_PIXEL | 851 | 84529 | Shaker | 801 |
| 84077 | Quara_R | 536 | 84142 | Loro_Q | 75 | 84219 | Ribbon | 906 | 84530 | Shaker | 801 |
| 84078 | Quara_F | 537 | 84143 | Loro_RJ | 73 | 84220 | Ribbon | 906 | 84531 | Shaker | 801 |
| 84079 | Rollip_PC | 449 | 84144 | Loro_RJ | 73 | 84221 | Ribbon | 906 | 84532 | Shaker | 801 |
| 84080 | Rollip_PC | 449 | 84145 | Loro_RJ | 73 | 84222 | Ribbon | 906 | 84533 | Shaker | 801 |
| 84081 | Rollip_PC | 449 | 84146 | Loro_RJ | 73 | 84228 | Woofers_RX | 111 | 84534 | Shaker | 801 |
| 84082 | Rollip_PC | 449 | 84147 | Loro_RJ | 73 | 84229 | Woofers_RX | 111 | 84535 | Shaker | 801 |
| 84083 | Warp_R | 43 | 84148 | Loro_RJ | 73 | 84230 | Woofers_R | 110 | 84536 | Shaker | 801 |
| 84084 | Warp_R | 43 | 84149 | Loro_RJ | 73 | 84231 | Woofers_R | 110 | 84537 | Iris67 | 814 |
| 84085 | Warp_R | 43 | 84150 | Loro_RJ | 73 | 84232 | Woofers_R | 110 | 84538 | Iris67 | 814 |
| 84086 | Warp_R | 43 | 84151 | Loro_QJ | 76 | 84255 | Modus_M Complete | 298 | 84539 | Iris67 | 814 |
| 84087 | Warp_R | 43 | 84152 | Loro_QJ | 76 | 84256 | Modus_M Complete | 298 | 84540 | Iris67 | 814 |
| 84088 | Warp_R | 43 | 84153 | Loro_QJ | 76 | 84257 | Modus_M Complete | 298 | 84541 | Iris67 | 814 |
| 84089 | Warp_R | 43 | 84154 | Loro_QJ | 76 | 84258 | Modus_M Complete | 298 | 84542 | Iris67 | 814 |
| 84090 | Warp_R | 43 | 84155 | Loro_QJ | 77 | 84270 | Skylum_Q PRO | 255 | 84543 | Iris67 | 814 |
| 84091 | Warp_R | 46 | 84156 | Loro_QJ | 77 | 84271 | Skylum_Q PRO | 255 | 84544 | Iris67 | 814 |
| 84092 | Warp_R | 46 | 84157 | Loro_QJ | 77 | 84272 | Skylum_Q PRO | 255 | 84545 | Iris67 | 814 |
| 84093 | Warp_R | 46 | 84158 | Loro_QJ | 77 | 84273 | Skylum_Q | 254 | 84546 | Iris67 | 814 |
| 84094 | Warp_R | 46 | 84159 | Optus_EX | 147 | 84274 | Skylum_Q | 254 | 84547 | Iris67 | 814 |
| 84095 | Warp_Q | 52 | 84160 | Optus_EX | 147 | 84275 | Skylum_Q | 254 | 84548 | Iris67 | 814 |
| 84096 | Warp_Q | 52 | 84161 | Optus_EX | 148 | 84276 | Skylum_Q | 254 | 84549 | Iris67 Elliptic | 815 |
| 84097 | Warp_Q | 52 | 84162 | Optus_EX | 148 | 84277 | Skylum_Q | 254 | 84550 | Iris67 Elliptic | 815 |
| 84098 | Warp_Q | 52 | 84163 | Optus_EX | 148 | 84278 | Skylum_Q | 254 | 84551 | Iris67 Elliptic | 815 |
| 84099 | Warp_Q | 53 | 84164 | Optus_EX | 148 | 84283 | Arcada Pro | 833 | 84552 | Iris67 Elliptic | 815 |
| | | | | | | 84284 | Arcada Pro | 833 | 84553 | Iris67 Elliptic | 815 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-----------------|------|-------|-------------|------|-------|----------|------|-------|-------------|------|
| 84554 | Iris67 Elliptic | 815 | | | 393 | 86097 | Alcor_AI | 631 | 89045 | Accessories | 741 |
| 84555 | Iris67 Elliptic | 815 | | | 419 | 86100 | Alcor_AI | 630 | 89046 | Accessories | 741 |
| 84556 | Iris67 Elliptic | 815 | 84915 | Accessories | 521 | 86101 | Alcor_AI | 631 | 89047 | Accessories | 741 |
| 84557 | Iris67 Elliptic | 815 | | | 545 | 86104 | Alcor_AI | 630 | 89119 | Accessories | 910 |
| 84558 | Iris67 Elliptic | 815 | | | 547 | 86105 | Alcor_AI | 631 | 89121 | Accessories | 910 |
| 84559 | Iris67 Elliptic | 815 | | | 409 | 86402 | Quara_R | 395 | 89122 | Accessories | 911 |
| 84560 | Iris67 Elliptic | 815 | 84916 | Accessories | 414 | 86407 | Picrol | 421 | 89123 | Accessories | 910 |
| 84561 | Clivo_2 | 811 | | | 433 | 86408 | Picrol | 421 | 89124 | Accessories | 911 |
| 84562 | Clivo_2 | 811 | | | 393 | 86460 | Quara_F | 537 | 89125 | Accessories | 910 |
| 84563 | Clivo_2 | 811 | | | 409 | 86562 | Quara_Q | 538 | 89144 | Electronics | 924 |
| 84564 | Clivo_SL | 811 | 84917 | Accessories | 414 | 86563 | Quara_Q | 538 | 89145 | Electronics | 924 |
| 84565 | Clivo_SL | 811 | | | 433 | 86564 | Quara_Q | 395 | 89146 | Electronics | 924 |
| 84566 | Clivo_SL | 811 | | | 539 | 86612 | Nitum_R | 417 | 89147 | Electronics | 924 |
| 84626 | Electronics | 933 | | | 583 | 86613 | Nitum_R | 417 | | | 445 |
| | | 932 | 84918 | Accessories | 615 | 86614 | Nitum_Q | 418 | 89148 | Accessories | 936 |
| | | 944 | | | 629 | 86615 | Nitum_Q | 418 | 89149 | Electronics | 936 |
| 84700 | Electronics | 945 | 84928 | Accessories | 621 | 86674 | Nitum_R | 417 | 89150 | Electronics | 936 |
| | | 950 | 84932 | Accessories | 583 | 86675 | Nitum_Q | 418 | | | 445 |
| | | 951 | 84933 | Accessories | 583 | 86679 | Ilamt | 401 | 89151 | Electronics | 936 |
| 84701 | Electronics | 932 | | | 583 | 86707 | Aspho_R | 413 | | | 944 |
| 84787 | Electronics | 933 | 84935 | Accessories | 633 | 86708 | Aspho_R | 413 | 89175 | Electronics | 944 |
| 84829 | Electronics | 931 | | | 583 | 86717 | Vissa_R | 399 | 89176 | Electronics | 944 |
| 84863 | Accessories | 960 | 84936 | Accessories | 633 | 86718 | Vissa_R | 399 | 89177 | Electronics | 944 |
| 84864 | Accessories | 960 | 84952 | Accessories | 399 | 86719 | Vissa_Q | 399 | 89179 | Electronics | 940 |
| | | 950 | 84954 | Accessories | 433 | 86720 | Vissa_Q | 399 | | | 742 |
| | | 951 | 84955 | Accessories | 421 | 86730 | Aspho_R | 413 | | | 754 |
| | | 952 | 84956 | Accessories | 421 | 86731 | Aspho_R | 413 | 89186 | Accessories | 952 |
| | | 953 | 84992 | Accessories | 789 | 86787 | Astropek | 636 | | | 956 |
| 84865 | Electronics | 954 | 84994 | Accessories | 961 | 86788 | Astropek | 636 | | | 742 |
| | | 955 | 84995 | Accessories | 399 | 86789 | Astropek | 636 | 89187 | Accessories | 754 |
| | | 956 | 85001 | Aspho_R | 412 | 86881 | Nitum_R | 417 | | | 954 |
| | | 962 | 85002 | Aspho_R | 412 | 86882 | Nitum_Q | 418 | | | 742 |
| 84866 | Accessories | 960 | 85004 | Aspho_Q | 414 | 86883 | Nitum_R | 417 | 89188 | Accessories | 754 |
| 84867 | Accessories | 960 | 85005 | Aspho_Q | 414 | 86884 | Nitum_Q | 418 | | | 761 |
| | | 952 | 85013 | Aspho_R | 412 | 87067 | Calypto | 435 | | | 763 |
| 84869 | Electronics | 961 | 85014 | Aspho_R | 412 | 87068 | Calypto | 435 | | | 742 |
| | | 961 | 85016 | Aspho_Q | 414 | 87214 | Aspho_R | 413 | 89189 | Accessories | 754 |
| 84870 | Accessories | 961 | 85017 | Aspho_Q | 414 | 87215 | Aspho_R | 413 | | | 954 |
| 84871 | Accessories | 961 | 85025 | Aspho_R | 412 | 87323 | Elin | 430 | | | 742 |
| 84872 | Accessories | 960 | 85026 | Aspho_R | 412 | 87324 | Beriel | 426 | | | 754 |
| 84873 | Accessories | 960 | 85028 | Aspho_Q | 414 | 87325 | Beriel | 426 | 89190 | Accessories | 761 |
| 84874 | Accessories | 960 | 85029 | Aspho_Q | 414 | 87330 | Gude | 432 | | | 763 |
| 84875 | Accessories | 960 | 85043 | Nitum_R | 417 | 87332 | Gude | 432 | | | 837 |
| 84876 | Accessories | 960 | 85044 | Nitum_R | 417 | 87335 | Gude | 432 | 89223 | Accessories | 903 |
| 84885 | Accessories | 961 | 85045 | Nitum_Q | 418 | 87337 | Elin | 430 | | | 909 |
| 84887 | Accessories | 960 | 85046 | Nitum_Q | 418 | 87340 | Elin | 430 | 89359 | Electronics | 940 |
| 84888 | Accessories | 960 | 85059 | Nitum_R | 417 | 87350 | Ture | 431 | | | 742 |
| | | 583 | 85060 | Nitum_R | 417 | 87353 | Ture | 431 | 89361 | Accessories | 754 |
| | | 629 | 85061 | Nitum_Q | 418 | 87356 | Ture | 431 | | | 761 |
| 84890 | Accessories | 815 | 85062 | Nitum_Q | 418 | 87600 | Alcor_R | 626 | 89362 | Accessories | 761 |
| | | 811 | 85335 | Bibok | 409 | 87601 | Alcor_R | 626 | | | 954 |
| | | 815 | 85542 | Quara_R | 536 | 87602 | Alcor_R | 626 | 89365 | Accessories | 962 |
| 84892 | Accessories | 960 | 85543 | Quara_R | 536 | 87603 | Alcor_R | 626 | | | 801 |
| 84893 | Accessories | 961 | 85575 | Bibok | 409 | 87604 | Alcor_R | 626 | 89371 | Accessories | 805 |
| 84894 | Accessories | 961 | 85947 | Aspho_R | 412 | 87605 | Alcor_R | 626 | | | 811 |
| 84895 | Accessories | 961 | 85948 | Aspho_R | 412 | 87988 | Quara_R | 536 | | | |
| | | 583 | 85949 | Aspho_R | 412 | 87989 | Quara_Q | 538 | | | |
| 84900 | Accessories | 629 | 85950 | Aspho_Q | 414 | 88417 | Aspho_R | 412 | | | |
| | | 393 | 85951 | Aspho_Q | 414 | 88418 | Aspho_R | 412 | | | |
| | | 419 | 85959 | Aspho_R | 412 | 88421 | Nitum_R | 417 | | | |
| 84901 | Accessories | 421 | 85960 | Aspho_R | 412 | 88422 | Nitum_Q | 418 | | | |
| | | 433 | 85962 | Aspho_Q | 414 | 88423 | Nitum_R | 417 | | | |
| 84902 | Accessories | 423 | 85963 | Aspho_Q | 414 | 88424 | Nitum_Q | 418 | | | |
| 84906 | Accessories | 621 | 85976 | Bibok | 409 | 88568 | Nitum_R | 417 | | | |
| | | | 85979 | Bibok | 409 | 88569 | Nitum_Q | 418 | | | |
| | | | 86096 | Alcor_AI | 630 | | | | | | |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-----------------|------|-------|-----------------|------|-------|---------|------|-------|---------|------|
| | | 21 | 90463 | Archiline PRO_W | 720 | 90612 | Warp_R | 46 | 90683 | Vos_R | 21 |
| | | 22 | 90495 | Tee_1 | 444 | 90613 | Warp_R | 46 | 90684 | Vos_Q | 27 |
| | | 27 | 90496 | Tee_1 | 444 | 90620 | Vos_Q | 26 | 90685 | Vos_Q | 27 |
| | | 28 | 90497 | Tee_1 | 444 | 90621 | Vos_Q | 26 | 90686 | Vos_Q | 27 |
| | | 86 | 90498 | Tee_1 | 444 | 90622 | Vos_R | 20 | 90687 | Vos_Q | 27 |
| 89373 | Accessories | 87 | 90499 | Tee_1 | 444 | 90623 | Vos_R | 20 | 90688 | Vos_R | 21 |
| | | 104 | 90500 | Tee_1 | 444 | 90624 | Vos_Q | 26 | 90689 | Vos_R | 21 |
| | | 105 | 90501 | Tee_1 | 444 | 90625 | Vos_Q | 26 | 90690 | Vos_R | 21 |
| | | 106 | 90502 | Tee_1 | 444 | 90626 | Vos_R | 20 | 90691 | Vos_R | 21 |
| | | 107 | 90503 | Tee_1 | 444 | 90627 | Vos_R | 20 | 90720 | Warp_R | 42 |
| | | 455 | 90504 | Tee_1 | 444 | 90628 | Vos_Q | 26 | 90721 | Warp_R | 42 |
| | | 473 | 90505 | Tee_1 | 444 | 90629 | Vos_Q | 26 | 90722 | Warp_R | 42 |
| | | 21 | 90506 | Tee_1 | 444 | 90630 | Vos_Q | 26 | 90723 | Warp_R | 42 |
| | | 22 | 90507 | Tee_2 | 444 | 90631 | Vos_Q | 26 | 90724 | Warp_Q | 52 |
| | | 27 | 90508 | Tee_2 | 444 | 90632 | Vos_R | 20 | 90725 | Warp_Q | 52 |
| | | 28 | 90509 | Tee_2 | 444 | 90633 | Vos_R | 20 | 90726 | Warp_Q | 52 |
| 89374 | Accessories | 86 | 90510 | Tee_2 | 444 | 90634 | Vos_R | 20 | 90727 | Warp_Q | 52 |
| | | 87 | 90511 | Tee_2 | 444 | 90635 | Vos_R | 20 | 90728 | Warp_Q | 52 |
| | | 104 | 90512 | Tee_2 | 444 | 90636 | Vos_Q | 26 | 90729 | Warp_Q | 52 |
| | | 105 | 90513 | Tee_2 | 444 | 90637 | Vos_Q | 26 | 90730 | Warp_Q | 52 |
| | | 106 | 90514 | Tee_2 | 444 | 90638 | Vos_R | 20 | 90731 | Warp_Q | 52 |
| | | 107 | 90515 | Tee_2 | 444 | 90639 | Vos_R | 20 | 90732 | Warp_Q | 52 |
| | | 473 | 90516 | Tee_2 | 444 | 90640 | Vos_Q | 26 | 90733 | Warp_Q | 52 |
| 89408 | Electronics | 931 | 90517 | Tee_2 | 444 | 90641 | Vos_Q | 26 | 90734 | Warp_Q | 52 |
| 89419 | Electronics | 936 | 90518 | Tee_2 | 444 | 90642 | Vos_Q | 26 | 90735 | Warp_Q | 52 |
| 89420 | Electronics | 936 | 90519 | Periskop | 794 | 90643 | Vos_Q | 26 | 90736 | Warp_Q | 52 |
| 89421 | Electronics | 936 | 90520 | Periskop | 794 | 90644 | Vos_R | 20 | 90737 | Warp_Q | 52 |
| 89422 | Electronics | 936 | 90521 | Periskop | 794 | 90645 | Vos_R | 20 | 90738 | Warp_Q | 52 |
| 89423 | Electronics | 936 | 90522 | Periskop | 794 | 90646 | Vos_R | 20 | 90739 | Warp_Q | 52 |
| 89488 | Electronics | 940 | 90542 | Warp_R | 42 | 90647 | Vos_R | 20 | 90740 | Warp_R | 42 |
| | | 881 | 90543 | Warp_R | 42 | 90648 | Vos_Q | 26 | 90741 | Warp_R | 42 |
| 89548 | Accessories | 895 | 90544 | Warp_R | 42 | 90649 | Vos_Q | 26 | 90742 | Warp_R | 42 |
| 89629 | Accessories | 911 | 90545 | Warp_R | 42 | 90650 | Vos_R | 20 | 90743 | Warp_R | 42 |
| 89630 | Accessories | 911 | 90546 | Warp_R | 42 | 90651 | Vos_R | 20 | 90744 | Warp_R | 42 |
| 90403 | Clivo_SL | 811 | 90547 | Warp_R | 42 | 90652 | Vos_Q | 26 | 90745 | Warp_R | 42 |
| 90404 | Clivo_SL | 811 | 90548 | Warp_R | 42 | 90653 | Vos_Q | 26 | 90746 | LV44_RD | 115 |
| 90406 | Vos_Q | 26 | 90549 | Warp_R | 42 | 90654 | Vos_Q | 26 | 90747 | LV44_RD | 115 |
| 90407 | Vos_Q | 26 | 90550 | Warp_R | 43 | 90655 | Vos_Q | 26 | 90748 | Warp_R | 42 |
| 90408 | Vos_R | 20 | 90551 | Warp_R | 43 | 90656 | Vos_R | 20 | 90749 | Warp_R | 42 |
| 90409 | Vos_R | 20 | 90552 | Warp_R | 43 | 90657 | Vos_R | 20 | 90750 | Warp_R | 42 |
| 90410 | Vos_Q | 26 | 90553 | Warp_R | 43 | 90658 | Vos_R | 20 | 90751 | Warp_R | 42 |
| 90411 | Vos_Q | 26 | 90554 | Quantum_R | 34 | 90659 | Vos_R | 20 | 90752 | Warp_R | 42 |
| 90412 | Vos_R | 20 | 90555 | Quantum_R | 34 | 90660 | Vos_Q | 27 | 90753 | Warp_R | 42 |
| 90413 | Vos_R | 20 | 90556 | Quantum_R | 34 | 90661 | Vos_Q | 27 | 90754 | Warp_Q | 52 |
| 90414 | Vos_Q | 26 | 90557 | Quantum_R | 34 | 90662 | Vos_R | 21 | 90755 | Warp_Q | 52 |
| 90415 | Vos_Q | 26 | 90558 | Quantum_R | 34 | 90663 | Vos_R | 21 | 90756 | Warp_Q | 52 |
| 90416 | Vos_R | 20 | 90559 | Quantum_R | 34 | 90664 | Vos_Q | 27 | 90757 | Warp_Q | 52 |
| 90417 | Vos_R | 20 | 90560 | Quantum_R | 34 | 90665 | Vos_Q | 27 | 90758 | Warp_Q | 52 |
| 90418 | Vos_Q | 26 | 90561 | Quantum_R | 34 | 90666 | Vos_Q | 27 | 90759 | Warp_Q | 52 |
| 90419 | Vos_Q | 26 | 90562 | Quantum_R | 35 | 90667 | Vos_Q | 27 | 90760 | Warp_Q | 52 |
| 90420 | Vos_R | 20 | 90563 | Quantum_R | 35 | 90668 | Vos_R | 21 | 90761 | Warp_Q | 52 |
| 90421 | Vos_R | 20 | 90564 | Quantum_R | 35 | 90669 | Vos_R | 21 | 90762 | Warp_R | 43 |
| 90428 | Vos_Q | 27 | 90565 | Quantum_R | 35 | 90670 | Vos_R | 21 | 90763 | Warp_R | 43 |
| 90429 | Vos_Q | 27 | 90566 | Quantum_RJ | 36 | 90671 | Vos_R | 21 | 90764 | Warp_R | 43 |
| 90430 | Vos_R | 21 | 90567 | Quantum_RJ | 36 | 90672 | Vos_Q | 27 | 90765 | Warp_R | 43 |
| 90431 | Vos_R | 21 | 90568 | Quantum_RJ | 36 | 90673 | Vos_Q | 27 | 90766 | Warp_R | 43 |
| 90438 | Vos_Q | 27 | 90569 | Quantum_RJ | 36 | 90674 | Vos_R | 21 | 90767 | Warp_R | 43 |
| 90439 | Vos_Q | 27 | 90570 | Quantum_RJ | 36 | 90675 | Vos_R | 21 | 90768 | Warp_Q | 52 |
| 90440 | Vos_R | 21 | 90571 | Quantum_RJ | 36 | 90676 | Vos_Q | 27 | 90769 | Warp_Q | 52 |
| 90441 | Vos_R | 21 | 90572 | Quantum_RJ | 36 | 90677 | Vos_Q | 27 | 90770 | Warp_Q | 52 |
| 90458 | Archiline PRO_W | 720 | 90573 | Quantum_RJ | 36 | 90678 | Vos_Q | 27 | 90771 | Warp_Q | 52 |
| 90459 | Archiline PRO_W | 720 | 90574 | Quantum_RJ | 37 | 90679 | Vos_Q | 27 | 90772 | Warp_Q | 52 |
| 90460 | Archiline PRO_W | 720 | 90575 | Quantum_RJ | 37 | 90680 | Vos_R | 21 | 90773 | Warp_Q | 52 |
| 90461 | Archiline PRO_W | 720 | 90609 | Quantum_R | 35 | 90681 | Vos_R | 21 | 90774 | Warp_Q | 52 |
| 90462 | Archiline PRO_W | 720 | 90610 | Quantum_R | 35 | 90682 | Vos_R | 21 | 90775 | Warp_Q | 52 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|---------|------|--------|-----------------|------|-------|-----------------|------|-------|------------------|------|
| 90776 | Warp_R | 43 | 90849 | Warp_RY | 48 | 90950 | Accessories | 340 | 91777 | LV44_RD | 114 |
| 90777 | Warp_R | 43 | 90850 | Warp_RY | 48 | 90952 | Trunking system | 339 | 91778 | LV44_RD | 114 |
| 90778 | Warp_R | 43 | 90851 | Warp_RY | 48 | 91200 | Elin | 430 | 91779 | LV44_RD | 114 |
| 90779 | Warp_R | 43 | 90852 | Warp_QY | 54 | 91204 | Loro_R | 70 | 91780 | LV44_RD | 114 |
| 90780 | Warp_R | 43 | 90853 | Warp_QY | 54 | 91205 | Loro_R | 70 | 91781 | LV44_RD | 115 |
| 90781 | Warp_R | 43 | 90854 | Warp_QY | 54 | 91206 | Loro_R | 70 | 91783 | LV44_RD | 115 |
| 90782 | Warp_Q | 53 | 90855 | Warp_QY | 54 | 91207 | Loro_R | 70 | 91896 | Anton_R | 103 |
| 90783 | Warp_Q | 53 | 90856 | Warp_QY | 54 | 91208 | Loro_Q | 74 | 91926 | Warp_R | 46 |
| 90784 | Warp_Q | 53 | 90857 | Warp_QY | 54 | 91209 | Loro_Q | 74 | 91927 | Warp_R | 46 |
| 90785 | Warp_Q | 53 | 90858 | Warp_QY | 54 | 91210 | Loro_Q | 74 | 83841 | Pixie_PIXEL | 849 |
| 90786 | Warp_Q | 53 | 90859 | Warp_QY | 54 | 91211 | Loro_Q | 74 | 91992 | Rada_R | 124 |
| 90787 | Warp_Q | 53 | 90860 | Warp_RY | 48 | 91214 | Eyelet65_R | 789 | 91996 | Rada_R | 124 |
| 90788 | Warp_Q | 53 | 90861 | Warp_RY | 48 | 91215 | Eyelet65_R | 789 | 92000 | Rada_R | 124 |
| 90789 | Warp_Q | 53 | 90862 | Warp_RY | 48 | 91216 | Eyelet65_R | 789 | 92004 | Rada_R | 124 |
| 90790 | Warp_R | 46 | 90863 | Warp_RY | 48 | 91217 | Eyelet65_Q | 789 | 92023 | Archicove | 374 |
| 90791 | Warp_R | 46 | 90864 | Warp_RY | 48 | 91219 | Eyelet65_Q | 789 | 92025 | Archicove | 374 |
| 90792 | Warp_R | 46 | 90865 | Warp_RY | 48 | 91220 | Eyelet65_Q | 789 | 92038 | Archiline_W | 718 |
| 90793 | Warp_R | 46 | 90866 | Warp_RY | 48 | 91229 | Illuminator | 154 | 92040 | Archiline_W | 718 |
| 90794 | Warp_R | 46 | 90867 | Warp_RY | 48 | 91230 | Illuminator | 154 | 92042 | Archiline_W | 718 |
| 90795 | Warp_R | 46 | 90868 | Warp_QY | 54 | 91328 | Baton_R | 283 | 92044 | Archiline_W | 718 |
| 90796 | Warp_Q | 53 | 90869 | Warp_QY | 54 | 91330 | Baton_Q | 283 | 92046 | Archiline_I | 712 |
| 90797 | Warp_Q | 53 | 90870 | Warp_QY | 54 | 91339 | Aspho_Q | 414 | 92047 | Archiline_I | 712 |
| 90798 | Warp_Q | 53 | 90871 | Warp_QY | 54 | 91340 | Aspho_R | 412 | 92048 | Archiline_I | 712 |
| 90799 | Warp_Q | 53 | 90872 | Warp_QY | 54 | 91341 | Aspho_Q | 414 | 92049 | Archiline_F | 706 |
| 90800 | Warp_Q | 53 | 90873 | Warp_QY | 54 | 91343 | Aspho_Q | 414 | 92050 | Archiline_F | 706 |
| 90801 | Warp_Q | 53 | 90874 | Warp_QY | 54 | 91344 | Aspho_R | 412 | 92051 | Archiline_F | 706 |
| 90802 | Warp_Q | 53 | 90875 | Warp_QY | 54 | 91345 | Aspho_Q | 414 | 92052 | Archiline_A | 710 |
| 90803 | Warp_Q | 53 | 90876 | Warp_RY | 49 | 91346 | Aspho_R | 412 | 92054 | Archiline_A | 710 |
| 90812 | Warp_RY | 48 | 90877 | Warp_RY | 49 | 91347 | Aspho_Q | 414 | 92056 | Archiline_A | 710 |
| 90813 | Warp_RY | 48 | 90878 | Warp_RY | 49 | 91348 | Bibok | 409 | 92061 | Beret_R | 614 |
| 90814 | Warp_RY | 48 | 90879 | Warp_RY | 49 | 91349 | Bibok | 409 | 92065 | Beret_R | 614 |
| 90815 | Warp_RY | 48 | 90880 | Warp_RY | 49 | 91350 | Bibok | 409 | 92066 | Beret_R | 614 |
| 90816 | Warp_RY | 48 | 90881 | Warp_RY | 49 | 91352 | Aspho_R | 413 | 92067 | Beret_R | 614 |
| 90817 | Warp_RY | 48 | 90882 | Warp_RY | 49 | 91354 | Aspho_R | 413 | 92068 | Beret_R | 614 |
| 90818 | Warp_RY | 48 | 90883 | Warp_RY | 49 | 91362 | Aspho_R | 413 | 92069 | Beret_Q | 615 |
| 90819 | Warp_RY | 48 | 90884 | Warp_QY | 55 | 91364 | Picrol | 421 | 92070 | Archiline_W RGBW | 719 |
| 90820 | Warp_QY | 54 | 90885 | Warp_QY | 55 | 91365 | Picrol | 421 | 92072 | Archiline_W RGBW | 719 |
| 90821 | Warp_QY | 54 | 90886 | Warp_QY | 55 | 91366 | Bibok | 409 | 92074 | Archiline_W RGBW | 719 |
| 90822 | Warp_QY | 54 | 90887 | Warp_QY | 55 | 91398 | Cob20_RX | 100 | 92076 | Beret_Q | 615 |
| 90823 | Warp_QY | 54 | 90888 | Warp_QY | 55 | 91402 | Cob20_RX | 100 | 92077 | Beret_Q | 615 |
| 90824 | Warp_QY | 54 | 90889 | Warp_QY | 55 | 91410 | Cob20_RX | 100 | 92078 | Archiline_W RGBW | 719 |
| 90825 | Warp_QY | 54 | 90890 | Warp_QY | 55 | 91414 | Cob20_RX | 100 | 92080 | Archiline_I RGBW | 713 |
| 90826 | Warp_QY | 54 | 90891 | Warp_QY | 55 | 91422 | Alcor_AI | 632 | 92081 | Archiline_I RGBW | 713 |
| 90827 | Warp_QY | 54 | 90903 | Trunking system | 338 | 91423 | Alcor_AI | 632 | 92082 | Archiline_I RGBW | 713 |
| 90828 | Warp_RY | 48 | 90905 | Trunking system | 338 | 91424 | Alcor_AI | 632 | 92083 | Archiline_F RGBW | 707 |
| 90829 | Warp_RY | 48 | 90905E | Trunking system | 338 | 91425 | Alcor_AI | 633 | 92084 | Archiline_F RGBW | 707 |
| 90830 | Warp_RY | 48 | 90907 | Trunking system | 338 | 91426 | Alcor_AI | 633 | 92088 | Beret_Q | 615 |
| 90831 | Warp_RY | 48 | 90909 | Trunking system | 338 | 91427 | Alcor_AI | 633 | 92092 | Beret_Q | 615 |
| 90832 | Warp_RY | 48 | 90911 | Trunking system | 338 | 91596 | Myia | 841 | 92093 | Archiline_F RGBW | 707 |
| 90833 | Warp_RY | 48 | 90913 | Trunking system | 338 | 91597 | Myia | 841 | 92100 | Archiline_A RGBW | 711 |
| 90834 | Warp_RY | 48 | 90915 | Trunking system | 338 | 91598 | Myia | 841 | 92104 | Archiline_A RGBW | 711 |
| 90835 | Warp_RY | 48 | 90917 | Trunking system | 338 | 91599 | Vedette_Q | 492 | 92108 | Archiline_A RGBW | 711 |
| 90836 | Warp_QY | 54 | 90919 | Trunking system | 339 | 91600 | Vedette_Q | 492 | 92112 | Archiline_W | 718 |
| 90837 | Warp_QY | 54 | 90921 | Trunking system | 339 | 91601 | Vedette_Q | 492 | 92114 | Archiline_W | 718 |
| 90838 | Warp_QY | 54 | 90923 | Trunking system | 339 | 91602 | Vedette_Q | 492 | 92118 | Archiline_W | 718 |
| 90839 | Warp_QY | 54 | 90925 | Trunking system | 339 | 91749 | Loro_R | 70 | 92120 | Archiline_W | 718 |
| 90840 | Warp_QY | 54 | 90927 | Trunking system | 339 | 91750 | Loro_R | 70 | 92124 | Archiline_I | 712 |
| 90841 | Warp_QY | 54 | 90929 | Trunking system | 339 | 91751 | Loro_R | 70 | 92125 | Archiline_I | 712 |
| 90842 | Warp_QY | 54 | 90931 | Trunking system | 339 | 91752 | Loro_R | 70 | 92126 | Archiline_I | 712 |
| 90843 | Warp_QY | 54 | 90933 | Trunking system | 339 | 91753 | Loro_Q | 74 | 92127 | Archiline_F | 706 |
| 90844 | Warp_RY | 48 | 90935 | Trunking system | 339 | 91754 | Loro_Q | 74 | 92128 | Archiline_F | 706 |
| 90845 | Warp_RY | 48 | 90943 | Accessories | 340 | 91755 | Loro_Q | 74 | 92129 | Archiline_F | 706 |
| 90846 | Warp_RY | 48 | 90944 | Accessories | 340 | 91756 | Loro_Q | 74 | 92132 | Archiline_A | 710 |
| 90847 | Warp_RY | 48 | 90945 | Accessories | 340 | 91769 | LV44_RD | 114 | 92134 | Archiline_A | 710 |
| 90848 | Warp_RY | 48 | 90946 | Accessories | 340 | 91776 | LV44_RD | 114 | 92136 | Archiline_A | 710 |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-------------------|------|-------|----------|------|-------|---------------|------|-------|---------------|------|
| 92138 | Archiline_FL | 708 | 93132 | Beret_2Q | 615 | 93995 | Paseo_L | 749 | 96659 | Concentrica_Q | 623 |
| 92139 | Archiline_FL | 708 | 93133 | Beret_2Q | 615 | 94020 | Xenia_W | 726 | 96660 | Concentrica_Q | 623 |
| 92142 | Archiline_FL | 708 | 93134 | Beret_2Q | 615 | 94021 | Paseo_L | 749 | 96661 | Concentrica_Q | 623 |
| 92143 | Archiline_FL RGBW | 708 | 93138 | Beret_2Q | 615 | 94022 | Paseo_L | 749 | 96740 | Ice-Cut66 | 763 |
| 92144 | Archiline_FL RGBW | 708 | 93139 | Beret_2Q | 615 | 94023 | Xenia_W | 726 | 96741 | Ice-Cut66 | 763 |
| 92145 | Archiline_FL RGBW | 708 | 93140 | Beret_2Q | 615 | 94059 | Concentrica_Q | 623 | 96742 | Ice-Cut66 | 763 |
| 92203 | Clivo | 811 | 93141 | Suelo_R | 563 | 94060 | Concentrica_Q | 623 | 96801 | Cob44_R | 90 |
| 92204 | Clivo | 811 | 93354 | Cob44_Q | 91 | 94061 | Concentrica_Q | 623 | 96802 | Cob44_R | 90 |
| 92238 | Quara_QI | 538 | 93355 | Cob44_Q | 91 | 94110 | Archicove | 374 | 96803 | Cob44_RJ | 90 |
| 92239 | Quara_QI | 538 | 93407 | Loro_RJ | 72 | 94115 | Archicove | 374 | 96804 | Cob44_RJ | 90 |
| 92240 | Quara_QI | 538 | 93411 | Loro_RJ | 72 | 94137 | Zalex | 617 | 96809 | Cob20_R | 96 |
| 92256 | Picrol | 421 | 93413 | Loro_RJ | 72 | 94138 | Zalex | 617 | 96813 | Cob20_R | 96 |
| 92258 | Picrol | 421 | 93418 | Loro_RJ | 72 | 94167 | Ardilla66 | 505 | 96819 | Cob20_R | 97 |
| 92259 | Picrol | 421 | 93422 | Loro_RJ | 73 | 94168 | Ardilla66 | 505 | 96827 | Cob20_Q | 98 |
| 92260 | Sand_R | 547 | 93428 | Loro_RJ | 73 | 94169 | Ardilla66 | 505 | 96831 | Cob20_Q | 98 |
| 92262 | Sand_R | 547 | 93429 | Loro_RJ | 73 | 94170 | Ardilla66 | 505 | 96837 | Cob20_Q | 99 |
| 92271 | Clip_R | 544 | 93431 | Loro_RJ | 73 | 94204 | Ardilla66 | 505 | 96916 | Footpad Flat | 639 |
| 92272 | Clip_R | 544 | 93443 | Loro_RJ | 72 | 94208 | Ardilla66 | 505 | 96966 | Envelope_4 | 389 |
| 92273 | Clip_R | 544 | 93444 | Loro_RJ | 72 | 94209 | Ardilla66 | 505 | 96968 | Envelope_4 | 389 |
| 92281 | Clip_R | 544 | 93446 | Loro_RJ | 72 | 94214 | Ardilla66 | 505 | 96969 | Envelope_4 | 389 |
| 92282 | Clip_R | 544 | 93449 | Loro_RJ | 72 | 94215 | Ardilla66 | 505 | 96971 | Envelope_2 | 389 |
| 92283 | Clip_R | 544 | 93450 | Loro_RJ | 73 | 94223 | Ardilla66 | 505 | 96973 | Envelope_2 | 389 |
| 92285 | Beriel | 426 | 93451 | Loro_RJ | 73 | 94224 | Ardilla66 | 505 | 96974 | Envelope_2 | 389 |
| 92291 | Clip_Q | 545 | 93452 | Loro_RJ | 73 | 94411 | Ardilla66 | 505 | 96976 | Envelope_1 | 389 |
| 92292 | Clip_Q | 545 | 93460 | Loro_RJ | 73 | 94415 | Fasim | 620 | 96976 | Envelope_1 | 520 |
| 92293 | Clip_Q | 545 | 93508 | Quara_R | 395 | 94586 | Anton_R | 104 | 96977 | Envelope_1 | 520 |
| 92301 | Clip_Q | 545 | 93513 | Quara_R | 395 | 94592 | Anton_RJ | 107 | 96978 | Envelope_1 | 389 |
| 92302 | Clip_Q | 545 | 93515 | Quara_R | 395 | 94659 | Fasim | 620 | 96978 | Envelope_1 | 520 |
| 92303 | Clip_Q | 545 | 93516 | Quara_R | 395 | 95068 | Periskop RGB | 794 | 96979 | Envelope_1 | 389 |
| 92311 | Clip_X | 544 | 93517 | Quara_Q | 395 | 95126 | Periskop RGB | 794 | 96979 | Envelope_1 | 520 |
| 92312 | Clip_X | 544 | 93518 | Quara_Q | 395 | 95141 | Periskop RGB | 794 | 96984 | Eyelet_R | 441 |
| 92313 | Clip_X | 544 | 93519 | Quara_Q | 395 | 95151 | Narcissus | 807 | 96985 | Eyelet_R | 441 |
| 92316 | Petit_R | 391 | 93520 | Quara_Q | 395 | 95152 | Narcissus | 807 | 96986 | Eyelet_R | 441 |
| 92318 | Petit_R | 391 | 93521 | Dot_R | 397 | 95330 | Periskop RGB | 794 | 97044 | Ghilea | 423 |
| 92320 | Petit_R | 391 | 93522 | Dot_Q | 397 | 95346 | Periskop | 795 | 97045 | Ghilea | 423 |
| 92322 | Petit_R | 391 | 93566 | Ilamt | 401 | 95347 | Periskop | 795 | 97047 | Ghilea | 423 |
| 92324 | Petit_Q | 391 | 93594 | Xenia_W | 728 | 95348 | Periskop | 795 | 97048 | Vedette_Q | 492 |
| 92326 | Petit_Q | 391 | 93595 | Xenia_W | 728 | 95349 | Periskop | 795 | 97049 | Vedette_Q | 492 |
| 92328 | Petit_Q | 391 | 93596 | Xenia_W | 728 | 95366 | Periskop | 796 | 97050 | Vedette_Q | 492 |
| 92330 | Petit_Q | 391 | 93605 | Xenia_W | 728 | 95368 | Periskop | 796 | 97051 | Vedette_Q | 492 |
| 92405 | Petit_R | 392 | 93688 | Xenia_W | 726 | 95370 | Periskop | 796 | 97052 | Vedette_Q | 492 |
| 92407 | Petit_R | 392 | 93689 | Xenia_W | 726 | 95378 | Periskop | 796 | 97053 | Vedette_Q | 492 |
| 92409 | Petit_R | 392 | 93690 | Xenia_W | 728 | 95436 | Ice-cut_F | 379 | 97054 | Vedette_Q | 492 |
| 92411 | Petit_R | 392 | 93691 | Xenia_W | 728 | 95437 | Ice-cut_F | 379 | 97055 | Vedette_Q | 492 |
| 92413 | Petit_Q | 392 | 93755 | Xenia_W | 728 | 95438 | Ice-cut_F | 379 | 97065 | Loop66 | 843 |
| 92415 | Petit_Q | 392 | 93785 | Xenia_W | 728 | 95454 | Arcada | 832 | 97066 | Loop66 | 843 |
| 92417 | Petit_Q | 392 | 93786 | Xenia_W | 726 | 95458 | Arcada | 832 | 97067 | Loop66 | 843 |
| 92419 | Petit_Q | 392 | 93825 | Xenia_W | 726 | 95474 | Orma_FO | 596 | 97071 | Clivo_2 | 811 |
| 92432 | Rada_Q | 126 | 93828 | Xenia_W | 726 | 95475 | Orma_FO | 596 | 97072 | Clivo_2 | 811 |
| 92434 | Rada_Q | 126 | 93829 | Xenia_W | 726 | 95476 | Orma_FO | 596 | 97073 | Clivo_2 | 811 |
| 92513 | Cut_R | 541 | 93832 | Cob44_R | 90 | 95612 | Arcada | 832 | 97086 | Ilamt66 | 401 |
| 92514 | Cut_R | 541 | 93833 | Cob44_R | 90 | 95616 | Arcada | 832 | 97088 | Ilamt66 | 401 |
| 92558 | Cut_Q | 541 | 93834 | Cob44_RJ | 90 | 95619 | Arcada | 832 | 97090 | LV54_RS | 117 |
| 92559 | Cut_Q | 541 | 93835 | Cob44_RJ | 90 | 95623 | Arcada | 832 | 97092 | LV54_RS | 117 |
| 92619 | Per | 507 | 93836 | Cob44_Q | 91 | 95749 | Arcada | 832 | 97094 | LV54_RS | 117 |
| 92620 | Per | 507 | 93839 | Cob44_Q | 91 | 95750 | Arcada | 832 | 97096 | LV54_QS | 118 |
| 92621 | Per | 507 | 93840 | Cob44_QJ | 91 | 95751 | Arcada | 832 | 97098 | LV54_QS | 118 |
| 92622 | Per | 507 | 93843 | Cob44_QJ | 91 | 95822 | Ice-cut_F | 379 | 97100 | LV54_QS | 118 |
| 92671 | Quara_RI | 536 | 93844 | Cob44_QJ | 91 | 96150 | Paseo_L | 748 | 97119 | LV54_RS | 117 |
| 92672 | Quara_QI | 538 | 93847 | Cob44_QJ | 91 | 96151 | Paseo_L | 748 | 97130 | Cob20_R | 97 |
| 92681 | Chim | 533 | 93854 | Rada_R | 125 | 96152 | Paseo_L | 748 | 97167 | Envelope_W | 520 |
| 93099 | Accessories | 583 | 93862 | Rada_R | 125 | 96196 | Paseo_X | 753 | 97169 | Envelope_W | 520 |
| 93126 | Beret_R | 614 | 93986 | Ilamt | 401 | 96197 | Paseo_X | 753 | 97170 | Envelope_W | 520 |
| 93127 | Beret_R | 614 | 93988 | Ilamt | 401 | 96634 | Anton_R | 103 | 97172 | Envelope_W | 520 |
| 93128 | Beret_R | 614 | 93994 | Paseo_L | 749 | 96635 | Anton_R | 104 | 97185 | Vedette_Q | 492 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-------------|------|-------|-------------|------|-------|-------------|------|-------|-------------|------|
| 97186 | Vedette_Q | 492 | 98017 | Ribbon RGB | 907 | 98435 | Accessories | 756 | | | 61 |
| 97187 | Vedette_Q | 492 | 98025 | Dropper RGB | 908 | | | 124 | 98533 | Accessories | 63 |
| 97188 | Vedette_Q | 492 | 98033 | Silicone_C | 909 | | | 125 | | | 64 |
| 97189 | Ghilea | 423 | 98042 | Silicone_C | 909 | | | 126 | | | 61 |
| 97255 | Paseo_X | 753 | 98049 | Accessories | 421 | 98436 | Accessories | 924 | 98534 | Accessories | 63 |
| 97256 | Paseo_X | 753 | 98050 | Accessories | 539 | | | 925 | | | 64 |
| 97270 | Gardener | 804 | 98060 | Accessories | 875 | | | 926 | | | 61 |
| 97271 | Gardener | 804 | 98077 | Ribbon | 906 | | | 927 | 98535 | Accessories | 63 |
| 97272 | Gardener | 804 | 98078 | Ribbon | 906 | | | 936 | | | 64 |
| 97315 | Sub | 875 | 98083 | Ribbon | 906 | | | 742 | | | 62 |
| 97317 | Sub | 875 | 98084 | Ribbon | 906 | 98437 | Accessories | 754 | 98536 | Accessories | 63 |
| 97336 | Eyelet_Q | 441 | 98092 | Dropper | 908 | | | 761 | | | 64 |
| 97337 | Eyelet_Q | 441 | 98111 | Accessories | 521 | | | 763 | | | 62 |
| 97338 | Eyelet_Q | 441 | | | 807 | 98464 | Accessories | 756 | 98537 | Accessories | 63 |
| 97353 | Alcor_R | 627 | 98112 | Accessories | 811 | 98465 | Accessories | 756 | | | 64 |
| 97354 | Alcor_R | 627 | | | 815 | 98466 | Accessories | 755 | | | 62 |
| 97355 | Alcor_R | 627 | | | 583 | 98467 | Accessories | 755 | 98538 | Accessories | 63 |
| 97356 | Alcor_R | 627 | 98121 | Accessories | 633 | 98468 | Accessories | 755 | | | 64 |
| 97357 | Loop66 | 843 | | | 583 | 98469 | Accessories | 755 | 98548 | Ribbon DW | 907 |
| 97387 | Gardener | 804 | 98122 | Accessories | 633 | 98470 | Accessories | 755 | | | 799 |
| 97402 | Anton_RJ | 106 | 98133 | Accessories | 617 | 98471 | Accessories | 755 | 98549 | Accessories | 801 |
| 97404 | Anton_RJ | 106 | 98134 | Accessories | 617 | 98472 | Accessories | 755 | | | 799 |
| 97418 | Anton_R | 103 | | | 951 | 98473 | Accessories | 755 | 98551 | Accessories | 910 |
| 97427 | Anton_RJ | 107 | 98140 | Electronics | 951 | 98474 | Accessories | 755 | | | 910 |
| 97611 | Paseo_X | 753 | | | 721 | 98475 | Accessories | 757 | 98552 | Accessories | 910 |
| 97612 | Paseo_X | 753 | 98146 | Accessories | 820 | | | 742 | 98553 | Accessories | 755 |
| 97673 | Paseo_L | 748 | | | 821 | | | 754 | 98554 | Accessories | 755 |
| 97674 | Paseo_L | 748 | | | 721 | 98493 | Accessories | 950 | 98556 | Ribbon | 906 |
| 97675 | Paseo_L | 748 | 98147 | Accessories | 820 | | | 954 | 98568 | Ribbon | 906 |
| 97695 | Loro_R | 70 | | | 821 | | | 954 | 98570 | Ribbon | 906 |
| 97696 | Loro_R | 70 | | | 875 | | | 742 | 98572 | Dropper | 908 |
| 97697 | Loro_R | 70 | 98148 | Accessories | 881 | 98494 | Accessories | 754 | 98574 | Dropper | 908 |
| 97698 | Loro_R | 70 | | | 742 | 98496 | Accessories | 525 | 98577 | Accessories | 525 |
| 97699 | Loro_Q | 74 | | | 754 | 98497 | Accessories | 525 | 98624 | Accessories | 789 |
| 97700 | Loro_Q | 74 | 98149 | Accessories | 761 | | | 61 | | | 799 |
| 97701 | Loro_Q | 74 | | | 763 | 98499 | Accessories | 63 | 98635 | Ribbon Plus | 900 |
| 97702 | Loro_Q | 74 | | | 610 | | | 64 | 98636 | Ribbon Plus | 900 |
| 97710 | HV44 | 119 | 98291 | Accessories | 610 | | | 62 | 98637 | Ribbon Plus | 900 |
| 97711 | HV44 | 119 | 98292 | Accessories | 610 | 98500 | Accessories | 63 | 98638 | Ribbon Plus | 900 |
| 97712 | HV44 | 119 | 98355 | Accessories | 755 | | | 64 | 98639 | Ribbon Plus | 900 |
| 97714 | Intake_L | 525 | 98356 | Accessories | 755 | | | 60 | 98640 | Ribbon Plus | 900 |
| 97715 | Inatle_L | 525 | 98357 | Accessories | 755 | 98501 | Accessories | 64 | 98653 | Accessories | 849 |
| 97730 | HV44 | 119 | 98367 | Accessories | 756 | | | 61 | 98654 | Accessories | 849 |
| 97731 | HV44 | 119 | 98368 | Accessories | 756 | | | 64 | 98655 | Accessories | 849 |
| 97732 | HV44 | 119 | 98369 | Accessories | 756 | 98502 | Accessories | 64 | 98659 | Accessories | 849 |
| 97797 | Beret_X | 614 | 98373 | Accessories | 909 | | | 83 | | | 721 |
| 97798 | Beret_X | 614 | 98374 | Accessories | 756 | | | 154 | 98660 | Accessories | 821 |
| 97799 | Beret_X | 614 | 98375 | Accessories | 756 | 98507 | Accessories | 156 | | | 721 |
| 97800 | Beret_X | 614 | 98376 | Accessories | 756 | | | 154 | 98661 | Accessories | 821 |
| 97801 | Beret_X | 614 | 98379 | Accessories | 910 | | | 156 | | | 582 |
| 97846 | Ice-cut_F | 379 | 98383 | Accessories | 910 | 98508 | Accessories | 154 | | | 721 |
| 97847 | Ice-cut_F | 379 | 98384 | Accessories | 910 | | | 156 | 98662 | Accessories | 799 |
| 97848 | Ice-cut_F | 379 | 98395 | Accessories | 916 | 98509 | Accessories | 156 | | | 821 |
| 97849 | Ice-cut_F | 379 | | | 379 | 98513 | Accessories | 811 | | | 582 |
| 97920 | Loro_R | 70 | 98398 | Accessories | 763 | 98514 | Accessories | 801 | | | 721 |
| 97921 | Loro_R | 70 | | | 917 | 98527 | Accessories | 64 | 98663 | Accessories | 799 |
| 97924 | Loro_R | 70 | 98402 | Accessories | 623 | | | 60 | | | 821 |
| 97925 | Loro_R | 70 | 98418 | Accessories | 916 | 98528 | Accessories | 64 | 98669 | Accessories | 789 |
| 97940 | Loro_Q | 74 | 98419 | Accessories | 916 | | | 60 | 98671 | Accessories | 715 |
| 97941 | Loro_Q | 74 | 98420 | Accessories | 916 | 98529 | Accessories | 64 | 98672 | Accessories | 715 |
| 97944 | Loro_Q | 74 | | | 334 | | | 61 | 98673 | Accessories | 715 |
| 97945 | Loro_Q | 74 | 98428 | Accessories | 335 | 98530 | Accessories | 64 | 98675 | Accessories | 721 |
| 98009 | Accessories | 533 | | | 334 | | | 61 | 98676 | Accessories | 721 |
| 98011 | Ribbon | 906 | 98429 | Accessories | 335 | 98531 | Accessories | 64 | 98677 | Accessories | 721 |
| 98012 | Ribbon | 906 | | | 335 | | | 61 | 98699 | Accessories | 375 |
| | | | 98430 | Accessories | 755 | 98532 | Accessories | 64 | 98713 | Accessories | 375 |
| | | | 98434 | Accessories | 756 | | | | | | |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|-------------|------|-------|-------------|------|-------|-------------|------|-------|-------------|------|
| 98716 | Accessories | 375 | 98915 | Accessories | 915 | 98985 | Electronics | 956 | 99307 | Electronics | 924 |
| 98724 | Accessories | 715 | 98916 | Accessories | 914 | | | 962 | 99308 | Electronics | 947 |
| 98725 | Accessories | 715 | 98917 | Accessories | 914 | 98986 | Accessories | 962 | | | 922 |
| 98726 | Accessories | 715 | 98918 | Accessories | 914 | 98989 | Accessories | 961 | | | 938 |
| 98771 | Accessories | 757 | 98919 | Accessories | 914 | | | 881 | 99309 | Electronics | 939 |
| 98772 | Accessories | 757 | 98920 | Accessories | 914 | 98990 | Accessories | 895 | | | 946 |
| 98773 | Accessories | 757 | 98921 | Accessories | 914 | | | 961 | | | 947 |
| 98774 | PU_C Plus | 902 | 98922 | Accessories | 914 | 98991 | Accessories | 961 | | | 948 |
| 98775 | PU_C Plus | 902 | 98925 | Accessories | 912 | 98992 | Accessories | 397 | 99310 | Electronics | 946 |
| 98776 | PU_C Plus | 902 | 98928 | Accessories | 912 | | | 742 | 99311 | Electronics | 947 |
| 98777 | PU_C Plus | 902 | 98929 | Accessories | 912 | 98993 | Accessories | 754 | 99330 | Electronics | 928 |
| 98778 | PU_C Plus | 902 | 98930 | Accessories | 912 | | | 742 | | | 934 |
| 98779 | PU_C Plus | 902 | 98931 | Accessories | 912 | 98994 | Accessories | 754 | | | 941 |
| 98781 | Accessories | 375 | 98932 | Accessories | 912 | 99000 | Accessories | 911 | 99331 | Electronics | 945 |
| 98782 | Accessories | 742 | 98934 | Accessories | 912 | 99001 | Accessories | 911 | | | 950 |
| 98783 | Accessories | 742 | 98936 | Accessories | 912 | 99002 | Accessories | 960 | | | 951 |
| 98784 | Accessories | 742 | 98937 | Accessories | 915 | 99045 | Electronics | 953 | 99332 | Electronics | 943 |
| 98785 | Accessories | 742 | 98938 | Accessories | 915 | 99046 | Electronics | 953 | 99333 | Electronics | 950 |
| 98836 | Accessories | 756 | 98939 | Accessories | 915 | | | 721 | 99340 | Electronics | 937 |
| 98837 | Accessories | 756 | 98940 | Accessories | 915 | 99057 | Accessories | 820 | 99341 | Electronics | 923 |
| 98838 | Accessories | 756 | | | 912 | | | 821 | 99342 | Electronics | 937 |
| 98839 | Accessories | 756 | 98941 | Accessories | 913 | 99074 | Electronics | 935 | 99344 | Electronics | 928 |
| 98840 | Accessories | 756 | | | 916 | | | 934 | 99345 | Electronics | 928 |
| 98841 | Accessories | 756 | | | 912 | 99077 | Electronics | 935 | | | 954 |
| 98842 | Accessories | 756 | 98942 | Accessories | 913 | | | 925 | 99346 | Electronics | 956 |
| 98843 | Accessories | 756 | | | 916 | 99093 | Electronics | 925 | | | 961 |
| 98844 | Accessories | 756 | | | 912 | 99105 | Electronics | 925 | 99353 | Accessories | 960 |
| 98845 | Accessories | 756 | 98943 | Accessories | 913 | 99106 | Electronics | 925 | | | 456 |
| 98876 | Accessories | 755 | | | 916 | 99112 | Electronics | 925 | 99355 | Electronics | 958 |
| 98877 | Accessories | 623 | | | 912 | 99115 | Electronics | 927 | | | 910 |
| 98878 | Accessories | 375 | 98944 | Accessories | 913 | 99126 | Electronics | 924 | 99357 | Accessories | 910 |
| 98879 | Accessories | 375 | | | 913 | 99128 | Electronics | 924 | 99358 | Accessories | 910 |
| 98885 | Accessories | 915 | 98945 | Ribbon Plus | 900 | 99129 | Electronics | 924 | 99360 | Electronics | 926 |
| 98886 | Accessories | 915 | 98946 | Ribbon Plus | 900 | 99135 | Electronics | 925 | 99361 | Electronics | 927 |
| 98887 | Accessories | 915 | 98947 | Accessories | 903 | 99141 | Electronics | 926 | 99362 | Electronics | 929 |
| 98888 | Accessories | 915 | 98948 | Ribbon Plus | 900 | 99146 | Electronics | 925 | 99370 | Electronics | 924 |
| 98889 | Accessories | 915 | 98949 | Accessories | 741 | 99147 | Electronics | 925 | | | 932 |
| 98890 | Accessories | 915 | 98950 | Accessories | 395 | 99175 | Electronics | 937 | | | 944 |
| 98891 | Accessories | 912 | 98951 | Accessories | 742 | 99176 | Electronics | 937 | 99371 | Electronics | 945 |
| 98892 | Accessories | 912 | 98952 | Accessories | 742 | 99177 | Electronics | 937 | | | 950 |
| 98893 | Accessories | 913 | 98953 | Accessories | 742 | 99179 | Electronics | 937 | | | 951 |
| 98894 | Accessories | 913 | 98954 | Accessories | 912 | 99181 | Electronics | 937 | 99372 | Electronics | 932 |
| 98895 | Accessories | 913 | 98955 | Accessories | 912 | 99183 | Electronics | 937 | 99373 | Electronics | 929 |
| 98896 | Accessories | 913 | 98956 | Accessories | 916 | 99184 | Electronics | 953 | | | 931 |
| 98897 | Accessories | 913 | 98957 | Accessories | 715 | 99185 | Electronics | 937 | | | 934 |
| | | 913 | 98964 | Accessories | 903 | 99186 | Electronics | 937 | | | 944 |
| 98898 | Accessories | 914 | 98965 | Accessories | 913 | 99195 | Electronics | 924 | 99374 | Electronics | 945 |
| | | 913 | 98966 | Accessories | 799 | 99198 | Electronics | 924 | | | 950 |
| 98899 | Accessories | 914 | 98967 | Accessories | 799 | | | 742 | | | 951 |
| | | 913 | 98968 | Accessories | 799 | | | 754 | 99375 | Electronics | 924 |
| 98900 | Accessories | 914 | 98969 | Accessories | 799 | 99216 | Accessories | 761 | 99376 | Electronics | 924 |
| | | 913 | 98970 | Accessories | 799 | | | 763 | 99377 | Electronics | 924 |
| 98901 | Accessories | 913 | 98971 | Accessories | 799 | | | 837 | 99379 | Accessories | 961 |
| 98902 | Accessories | 913 | 98972 | Accessories | 445 | 99229 | Accessories | 960 | 99381 | Electronics | 956 |
| 98903 | Accessories | 916 | 98973 | Accessories | 445 | 99231 | Accessories | 763 | 99382 | Electronics | 956 |
| 98904 | Accessories | 916 | 98974 | Accessories | 445 | 99232 | Accessories | 763 | 99383 | Electronics | 956 |
| 98905 | Accessories | 916 | 98975 | Accessories | 445 | 99234 | Electronics | 953 | 99384 | Electronics | 956 |
| 98906 | Accessories | 914 | 98976 | Accessories | 445 | 99235 | Electronics | 953 | 99385 | Electronics | 956 |
| 98907 | Accessories | 914 | 98977 | Accessories | 445 | 99237 | Accessories | 960 | 99386 | Electronics | 956 |
| 98908 | Accessories | 915 | 98978 | Accessories | 445 | 99239 | Electronics | 925 | 83220 | Electronics | 954 |
| 98909 | Accessories | 915 | 98979 | Accessories | 445 | 99243 | Electronics | 924 | 99388 | Electronics | 954 |
| 98910 | Accessories | 915 | 98980 | Accessories | 445 | 99260 | Electronics | 924 | 99390 | Accessories | 962 |
| 98911 | Accessories | 915 | 98981 | Accessories | 445 | 99261 | Electronics | 925 | 99479 | Accessories | 149 |
| 98912 | Accessories | 915 | 98982 | Accessories | 445 | 99262 | Electronics | 927 | 99485 | Accessories | 152 |
| 98913 | Accessories | 915 | 98983 | Accessories | 445 | 99269 | Electronics | 937 | 99486 | Accessories | 152 |
| 98914 | Accessories | 915 | | | | 99278 | Electronics | 951 | 99487 | Accessories | 152 |

codes index

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|-------|---------------|------|-------|------------------|------|-------|-------------------|------|-------|-------------|------|
| 99488 | Accessories | 152 | 99598 | Silicone_C | 909 | 99723 | Electronics | 934 | | | 149 |
| 99489 | Accessories | 152 | 99600 | Silicone_C | 909 | | | 935 | | | 185 |
| 99490 | Accessories | 152 | 99602 | Silicone_C | 909 | 99725 | Electronics | 933 | | | 213 |
| 99491 | Accessories | 153 | 99608 | Ribbon | 906 | 99726 | Electronics | 938 | 99781 | Accessories | 220 |
| 99492 | Accessories | 153 | 99610 | Ribbon | 906 | 99727 | Electronics | 939 | | | 247 |
| 99494 | Accessories | 153 | 99612 | Ribbon | 906 | 99728 | Electronics | 938 | | | 275 |
| 99495 | Accessories | 153 | 99620 | Silicone_C | 909 | 99729 | Electronics | 939 | | | 149 |
| 99497 | Accessories | 155 | 99622 | Silicone_C | 909 | 99730 | Electronics | 928 | | | 185 |
| 99498 | Accessories | 155 | 99628 | Dropper | 908 | 99731 | Electronics | 928 | | | 213 |
| 99499 | Accessories | 155 | 99630 | Dropper | 908 | 99732 | Electronics | 927 | 99782 | Accessories | 220 |
| 99500 | Accessories | 155 | 99632 | Dropper | 908 | 99733 | Electronics | 927 | | | 247 |
| 99501 | Accessories | 155 | | | 529 | 99734 | Electronics | 924 | | | 275 |
| 99502 | Accessories | 155 | 99650 | Accessories | 610 | 99735 | Electronics | 924 | | | 149 |
| 99503 | Accessories | 445 | | | 529 | 99738 | Electronics | 928 | | | 185 |
| 99504 | Accessories | 445 | 99651 | Accessories | 610 | 99739 | Electronics | 927 | | | 197 |
| 99505 | Accessories | 445 | | | 529 | 99740 | Electronics | 924 | 99783 | Accessories | 213 |
| 99506 | Accessories | 445 | 99652 | Accessories | 610 | 99741 | Electronics | 944 | | | 220 |
| 99510 | Accessories | 149 | 99657 | Electronics | 955 | 99742 | Electronics | 944 | | | 247 |
| | | 881 | 99658 | Electronics | 955 | 99743 | Electronics | 944 | | | 275 |
| 99520 | Accessories | 895 | | | 956 | 99744 | Accessories | 521 | | | 941 |
| | | 895 | 99660 | Electronics | 935 | 99745 | Accessories | 521 | | | 944 |
| 99521 | Accessories | 895 | 99670 | Ribbon Plus RGBW | 901 | 99746 | Accessories | 789 | 99784 | Electronics | 950 |
| 99536 | Accessories | 894 | 99671 | Ribbon Plus WT | 901 | 99747 | Accessories | 583 | | | 951 |
| 99537 | Accessories | 894 | 99672 | Ribbon Plus DW | 901 | 99748 | Accessories | 721 | | | 941 |
| 99538 | Accessories | 895 | 99673 | Accessories | 467 | 99749 | Accessories | 474 | | | 950 |
| 99539 | Accessories | 895 | 99674 | Accessories | 467 | 99750 | Accessories | 474 | | | 951 |
| 99540 | Electronics | 945 | 99675 | Accessories | 467 | 99752 | Play Outer-casing | 139 | | | 954 |
| 99541 | Accessories | 894 | | | 545 | 99753 | Play Outer-casing | 139 | | | 941 |
| 99542 | Accessories | 903 | 99676 | Accessories | 583 | 99754 | Play Outer-casing | 139 | 99786 | Electronics | 945 |
| 99543 | Rubber 3D_PRO | 880 | | | 583 | 99755 | Play caps | 139 | | | 943 |
| 99544 | Rubber 3D_PRO | 880 | 99677 | Accessories | 871 | 99756 | Play caps | 139 | 99787 | Electronics | 943 |
| 99545 | Rubber 3D_PRO | 880 | 99678 | Accessories | 871 | 99760 | Accessories | 715 | 99794 | Accessories | 583 |
| 99549 | Accessories | 894 | 99679 | Accessories | 871 | 99761 | Accessories | 741 | | | 149 |
| | | 152 | 99680 | Accessories | 583 | 99762 | Accessories | 741 | | | 185 |
| 99550 | Accessories | 157 | 99681 | Accessories | 583 | 99763 | Accessories | 741 | | | 197 |
| | | 155 | 99682 | Electronics | 932 | 99764 | Accessories | 741 | 99795 | Accessories | 213 |
| 99551 | Accessories | 157 | 99683 | Electronics | 933 | 99765 | Accessories | 741 | | | 220 |
| | | 152 | 99684 | Accessories | 583 | 99766 | Accessories | 741 | | | 247 |
| 99552 | Accessories | 157 | 99685 | Accessories | 583 | 99767 | Accessories | 741 | | | 275 |
| | | 155 | 99688 | Accessories | 895 | 99771 | Accessories | 715 | | | 149 |
| 99553 | Accessories | 157 | 99689 | Accessories | 895 | | | 185 | | | 185 |
| | | 152 | 99692 | Accessories | 895 | 99773 | Accessories | 275 | | | 197 |
| 99554 | Accessories | 157 | 99693 | Accessories | 895 | | | 185 | | | 213 |
| | | 155 | 99694 | Electronics | 945 | 99774 | Accessories | 275 | 99796 | Accessories | 220 |
| 99555 | Accessories | 157 | 99695 | Electronics | 945 | | | 185 | | | 247 |
| | | 266 | 99696 | Electronics | 945 | 99775 | Accessories | 275 | | | 275 |
| | | 529 | | | 942 | | | 185 | | | 149 |
| 99560 | Accessories | 610 | 99700 | Electronics | 943 | 99776 | Accessories | 275 | | | 185 |
| | | 154 | | | 942 | | | 185 | | | 197 |
| 99561 | Accessories | 156 | 99701 | Electronics | 943 | 99777 | Accessories | 275 | | | 213 |
| | | 154 | | | 942 | 99778 | Accessories | 742 | 99797 | Accessories | 220 |
| 99562 | Accessories | 156 | 99702 | Electronics | 943 | | | 149 | | | 247 |
| | | 529 | | | 944 | | | 185 | | | 275 |
| 99563 | Accessories | 610 | 99703 | Electronics | 944 | | | 213 | | | 149 |
| | | 529 | 99708 | Electronics | 930 | 99779 | Accessories | 220 | | | 185 |
| 99564 | Accessories | 610 | 99709 | Electronics | 930 | | | 247 | | | 197 |
| | | 274 | 99710 | Electronics | 930 | | | 275 | | | 275 |
| 99569 | Accessories | 955 | 99711 | Electronics | 930 | | | 149 | 99798 | Accessories | 213 |
| 99575 | Electronics | 955 | 99712 | Electronics | 930 | | | 185 | | | 220 |
| 99576 | Electronics | 955 | 99713 | Electronics | 930 | | | 197 | | | 247 |
| 99577 | Electronics | 955 | 99714 | Electronics | 927 | | | 275 | | | 275 |
| 99578 | Electronics | 957 | 99715 | Electronics | 928 | 99780 | Accessories | 213 | | | |
| 99579 | Electronics | 957 | 99716 | Electronics | 936 | | | 220 | | | |
| 99584 | Accessories | 266 | 99717 | Electronics | 925 | | | 247 | | | |
| 99588 | Dropper | 908 | 99718 | Electronics | 925 | | | 275 | | | |
| 99590 | Dropper | 908 | 99721 | Electronics | 928 | | | | | | |
| 99592 | Dropper | 908 | 99722 | Electronics | 943 | | | | | | |

| CODE | Product | Page | CODE | Product | Page | CODE | Product | Page | CODE | Product | Page |
|--------------|-------------|------|--------------|-------------|------|--------------|-------------------|------|----------------|-------------|------|
| | | 149 | | | 148 | | | 742 | 99940 | Navata Base | 212 |
| | | 185 | | | 184 | 99879 | Accessories | 754 | 99941 | Navata Base | 212 |
| | | 197 | | | 213 | | | 86 | 99943 | Navata Base | 212 |
| 99799 | Accessories | 213 | 99828 | Accessories | 220 | 99888 | Accessories | 87 | 99954 | Accessories | 249 |
| | | 220 | | | 247 | | | 86 | 99955 | Accessories | 249 |
| | | 247 | | | 274 | 99889 | Accessories | 87 | 99956 | Accessories | 249 |
| | | 275 | | | 148 | | | 87 | 99957 | Accessories | 249 |
| 99800 | Accessories | 309 | | | 184 | 99890 | Accessories | 86 | 99958 | Accessories | 249 |
| 99801 | Accessories | 311 | | | 213 | | | 87 | 99959 | Accessories | 249 |
| 99802 | Accessories | 799 | 99829 | Accessories | 220 | 99891 | Accessories | 86 | 99960 | Accessories | 249 |
| 99803 | Accessories | 583 | | | 247 | | | 87 | 99961 | Accessories | 249 |
| 99804 | Accessories | 583 | | | 274 | 99892 | Accessories | 86 | 99962 | Accessories | 249 |
| | | 184 | 99830 | Accessories | 715 | | | 87 | 99963 | Accessories | 249 |
| 99805 | Accessories | 274 | | | 315 | 99893 | Accessories | 86 | 99964 | Accessories | 249 |
| | | 184 | 99840 | Accessories | 321 | | | 87 | 99965 | Accessories | 249 |
| 99806 | Accessories | 274 | | | 149 | 99896 | Accessories | 153 | 99966 | Accessories | 249 |
| | | 184 | | | 197 | | | 157 | 99967 | Accessories | 249 |
| 99807 | Accessories | 274 | 99841 | Accessories | 213 | 99897 | Accessories | 157 | 99968 | Accessories | 249 |
| | | 148 | | | 220 | | | 266 | 99970 | Accessories | 266 |
| | | 157 | | | 149 | 99898 | Accessories | 86 | 99971 | Accessories | 266 |
| | | 184 | 99842 | Accessories | 197 | | | 87 | 99972 | Accessories | 741 |
| 99808 | Accessories | 197 | | | 213 | 99899 | Accessories | 87 | 99976 | Accessories | 917 |
| | | 213 | | | 220 | | | 86 | 99977 | Accessories | 917 |
| | | 220 | | | 148 | 99900 | Accessories | 87 | 99978 | Accessories | 917 |
| | | 247 | | | 197 | | | 86 | 99979 | Accessories | 917 |
| | | 274 | 99843 | Accessories | 213 | 99901 | Accessories | 87 | | | |
| | | 148 | | | 220 | | | 86 | 99981 | Accessories | 153 |
| | | 157 | | | 148 | 99902 | Accessories | 87 | | | 157 |
| | | 184 | 99844 | Accessories | 213 | | | 86 | 99982 | Accessories | 315 |
| | | 197 | | | 220 | 99903 | Accessories | 87 | | | 321 |
| 99809 | Accessories | 213 | 99847 | Accessories | 20 | | | 86 | 99983 | Accessories | 912 |
| | | 220 | | | 21 | 99904 | Accessories | 87 | 99984 | Accessories | 912 |
| | | 247 | | | 20 | | | 913 | 99986 | Accessories | 912 |
| | | 274 | 99848 | Accessories | 21 | 99905 | Accessories | 913 | 99988 | Accessories | 912 |
| | | 148 | | | 21 | 99906 | Accessories | 913 | 99989 | Accessories | 914 |
| | | 157 | 99849 | Accessories | 21 | 99907 | Accessories | 913 | 99998 | Accessories | 915 |
| | | 184 | 99850 | Accessories | 387 | 99908 | Accessories | 913 | 99999 | Accessories | 916 |
| | | 197 | | | 185 | 99910 | Accessories | 916 | | | 457 |
| 99810 | Accessories | 197 | 99853 | Accessories | 212 | 99911 | Accessories | 916 | KIT0014 | Electronics | 959 |
| | | 213 | | | 529 | 99912 | Accessories | 741 | KIT0027 | Electronics | 945 |
| | | 220 | 99855 | Accessories | 610 | | | 741 | | | |
| | | 247 | | | 529 | 99913 | Accessories | 741 | | | |
| | | 274 | 99856 | Accessories | 610 | 99914 | Accessories | 741 | | | |
| | | 741 | | | 839 | 99915 | Accessories | 741 | | | |
| 99818 | Accessories | 837 | 99857 | Accessories | 529 | 99916 | Accessories | 741 | | | |
| 99819 | Accessories | 801 | | | 610 | | | 837 | | | |
| 99820 | Accessories | 741 | 99860 | Accessories | 327 | 99917 | Accessories | 837 | | | |
| 99821 | Accessories | 741 | 99861 | Accessories | 327 | | | 741 | | | |
| | | 721 | 99862 | Accessories | 327 | 99918 | Accessories | 741 | | | |
| 99822 | Accessories | 820 | 99863 | Accessories | 327 | 99919 | Accessories | 741 | | | |
| | | 721 | 99864 | Accessories | 327 | | | 155 | | | |
| 99823 | Accessories | 820 | 99865 | Accessories | 327 | 99920 | Accessories | 157 | | | |
| | | 721 | 99866 | Accessories | 327 | | | 155 | | | |
| 99824 | Accessories | 820 | 99867 | Accessories | 327 | 99921 | Accessories | 157 | | | |
| | | 721 | 99868 | Accessories | 327 | | | 610 | | | |
| 99825 | Accessories | 820 | 99869 | Accessories | 327 | 99922 | Accessories | 610 | | | |
| | | 721 | 99870 | Accessories | 327 | | | 610 | | | |
| 99826 | Accessories | 820 | 99871 | Accessories | 327 | 99923 | Accessories | 610 | | | |
| | | 148 | 99872 | Accessories | 327 | | | 610 | | | |
| | | 184 | 99873 | Accessories | 327 | 99924 | Accessories | 610 | | | |
| 99827 | Accessories | 213 | 99874 | Accessories | 327 | 99925 | Accessories | 610 | | | |
| | | 220 | 99875 | Accessories | 327 | 99926 | Accessories | 741 | | | |
| | | 247 | 99876 | Accessories | 327 | 99927 | Creek Accessories | 218 | | | |
| | | 274 | 99877 | Accessories | 327 | 99928 | Creek Accessories | 218 | | | |
| | | | 99878 | Accessories | 327 | 99929 | Creek Accessories | 218 | | | |
| | | | | | | 99931 | Accessories | 531 | | | |
| | | | | | | 99932 | Accessories | 837 | | | |
| | | | | | | 99933 | Accessories | 837 | | | |
| | | | | | | 99935 | Navata Base | 212 | | | |
| | | | | | | 99936 | Navata Base | 212 | | | |
| | | | | | | 99938 | Navata Base | 212 | | | |

Addresses

Linea Light HQ Italy

via della Fornace, 59 z.i.
31023 Castelmolin di Resana (TV) - Italy
Phone: +39 0423 7868
Fax: +39 0423 786900
info@linealight.com

Linea Light Milano

via Morimondo, 26 int. 17G
20143 Milano - Italy
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@linealight.com

Linea Light Roma

Via La Spezia, 34
00182 Roma - Italy
Phone: +39 06 68589134
info@linealightroma.com

Linea Light UK

Suite 109 - The Business Design Centre
52 Upper Street - Islington N10QH
London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light France

Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light Deutschland

Aktienstraße 214
45473 Mülheim Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light USA - Inter Lux

3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Russia

Design Center Artplay
Nizhnyaya Syromyatnicheskaya 10/2 enter B,
3rd floor, office 14
105120 Moscow - Russia Federation
Phone: +7 495 639 9941
info@linealight.ru

Linea Light Spain

C/ Longares, 48
28022 Madrid - Spain
Phone: +34 912534773
gestion@linealight.com

Linea Light Singapore

21 Kaki Bukit Place, 5th Fl.
Eunos Techpark Singapore
416199 Singapore
Phone: +65-6908 5758
info.sg@linealight.com

Linea Light GCC

Jumeirah Lake Towers
JBC2 - 35th Floor Cluster V - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Asia - Pacific

No. 7, Nanyi Huayuan Road, Industry Avenue,
528478 Xiaolan Town, Zhongshan City,
Guangdong Province - China
Phone: +86 760 87618355
info@linealight.com.cn

Art direction

Linea Light Group Marketing Dept.

Printed in Italy

May 2022

Photography and post production

Matteo Lavazza Seranto photography studio

Mural illustration

Emanuele Nicoletti Serra

Architectural Drawings

Mario Cappelletto

Furniture

Faram 1957


Thanks to

Martino Lorenzon for artwork on page 167

And



linealight.com

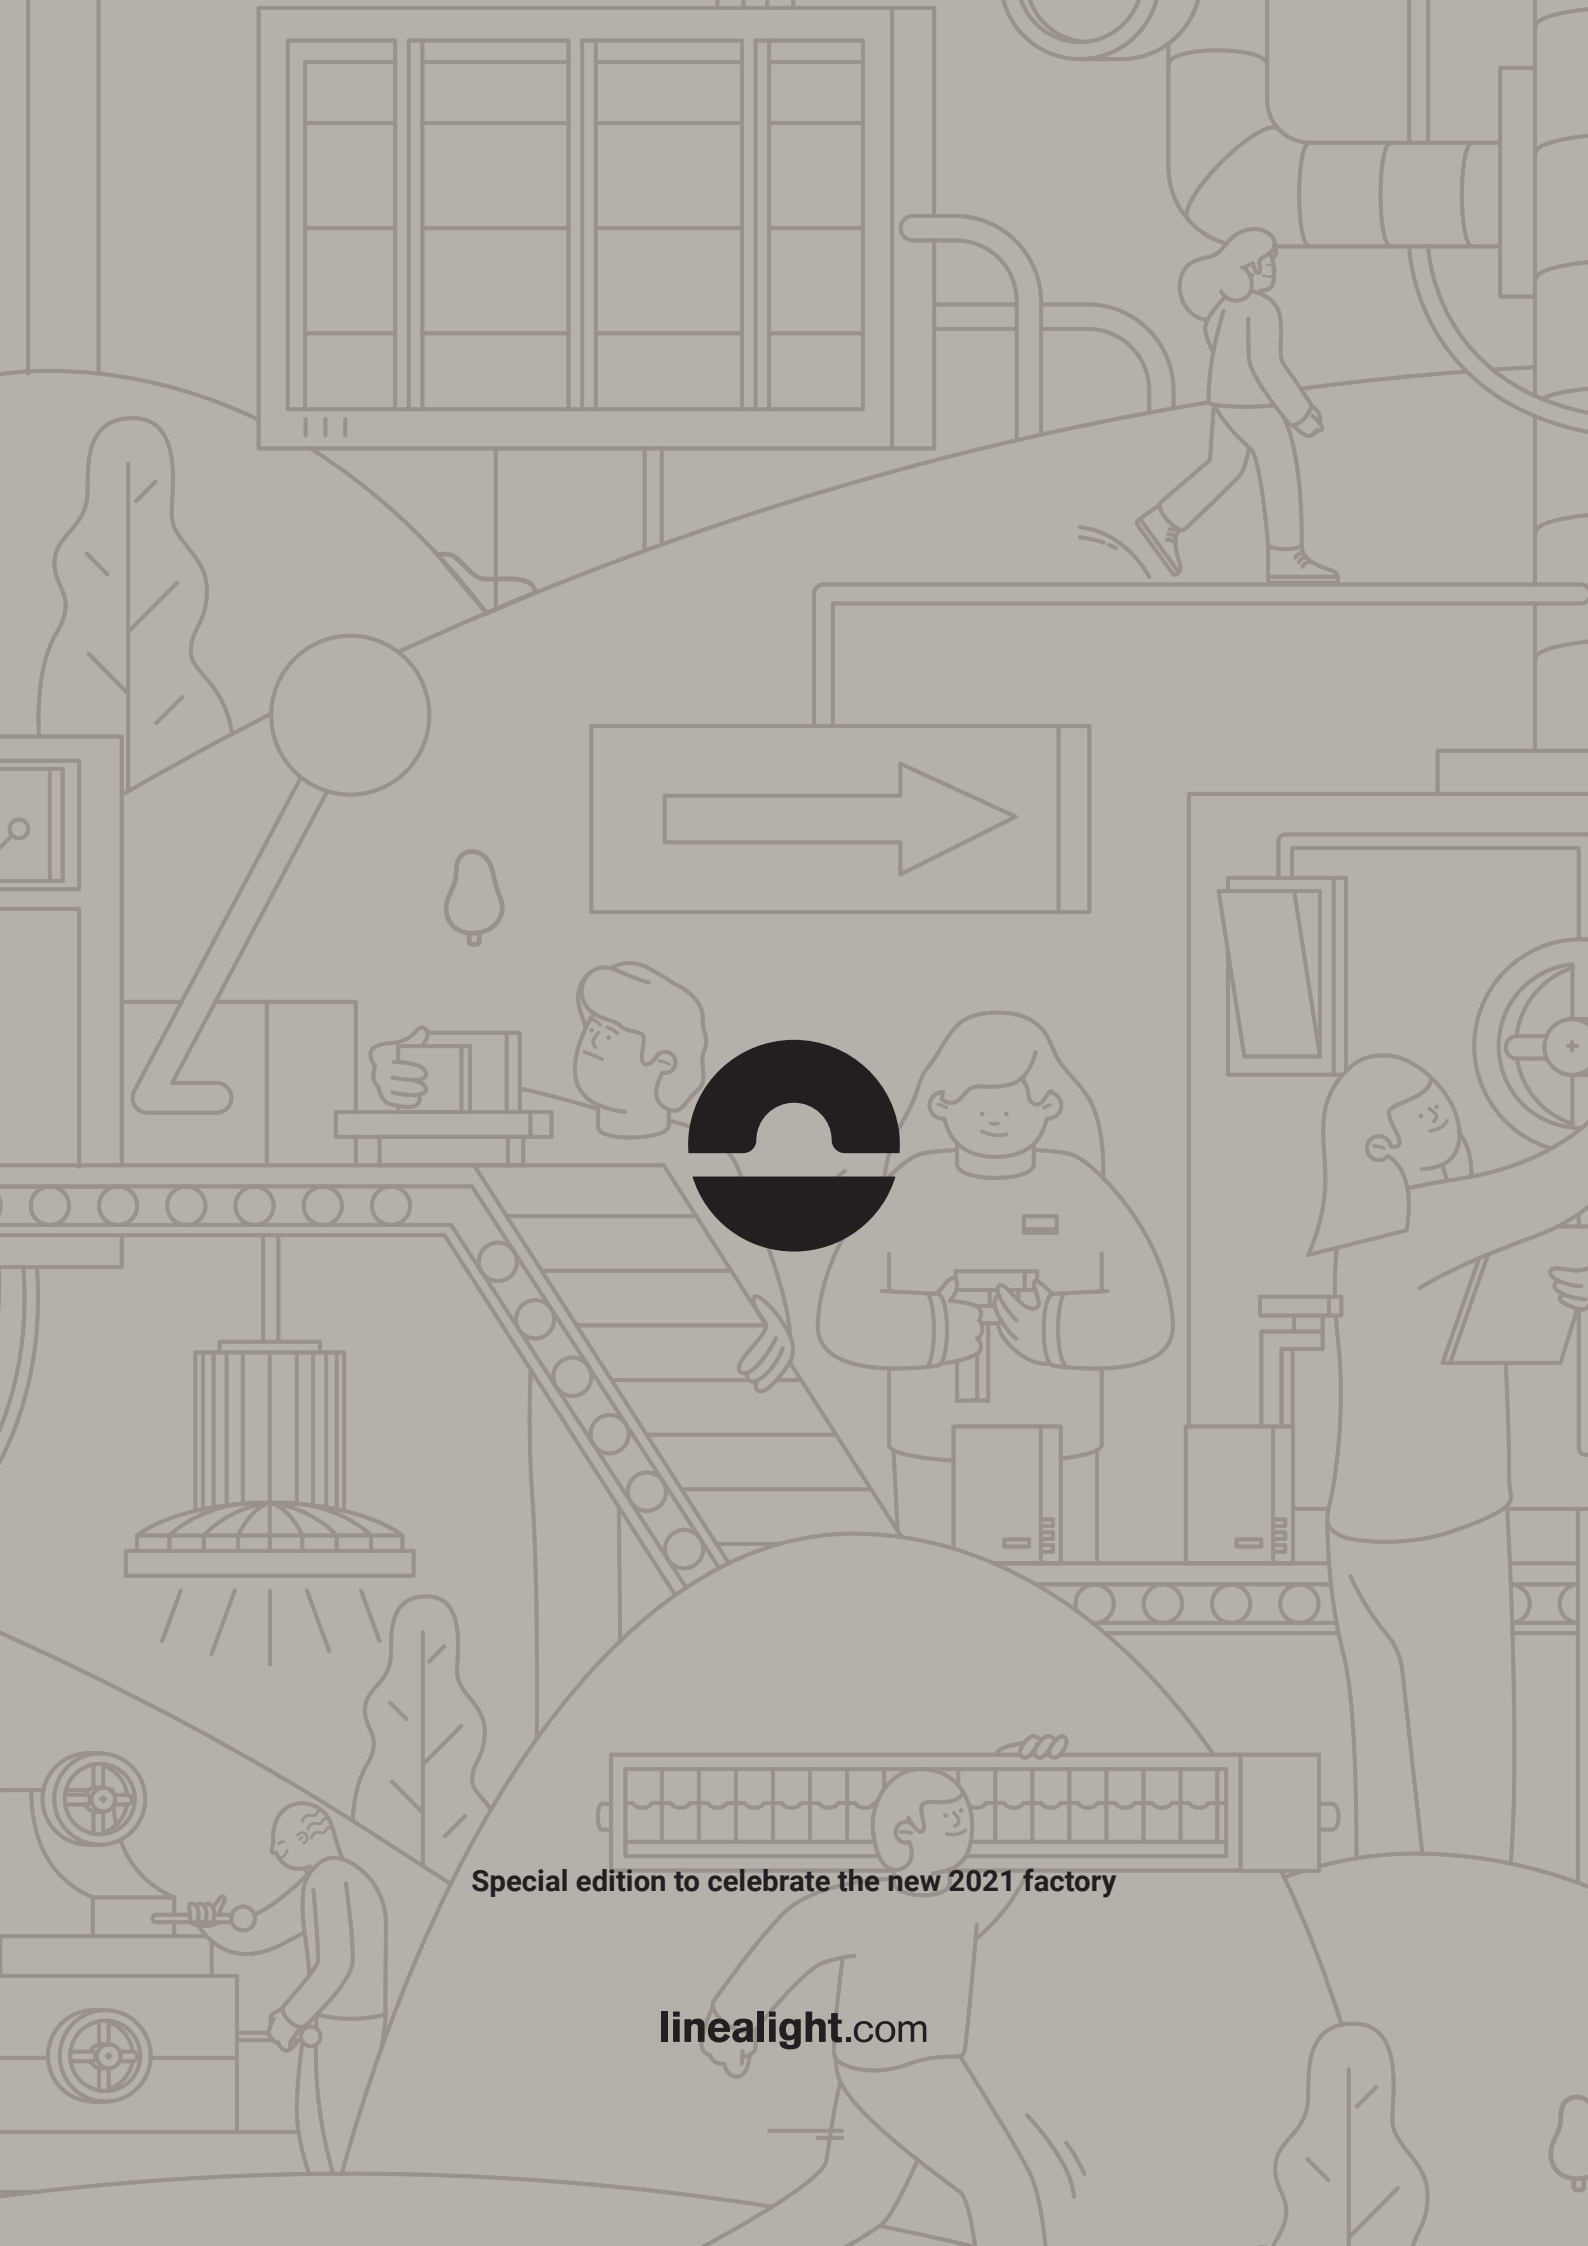

Special edition to celebrate the new 2021 factory

linealight.com